


9. Exploded View

DLT-26C2



DLT-26C3

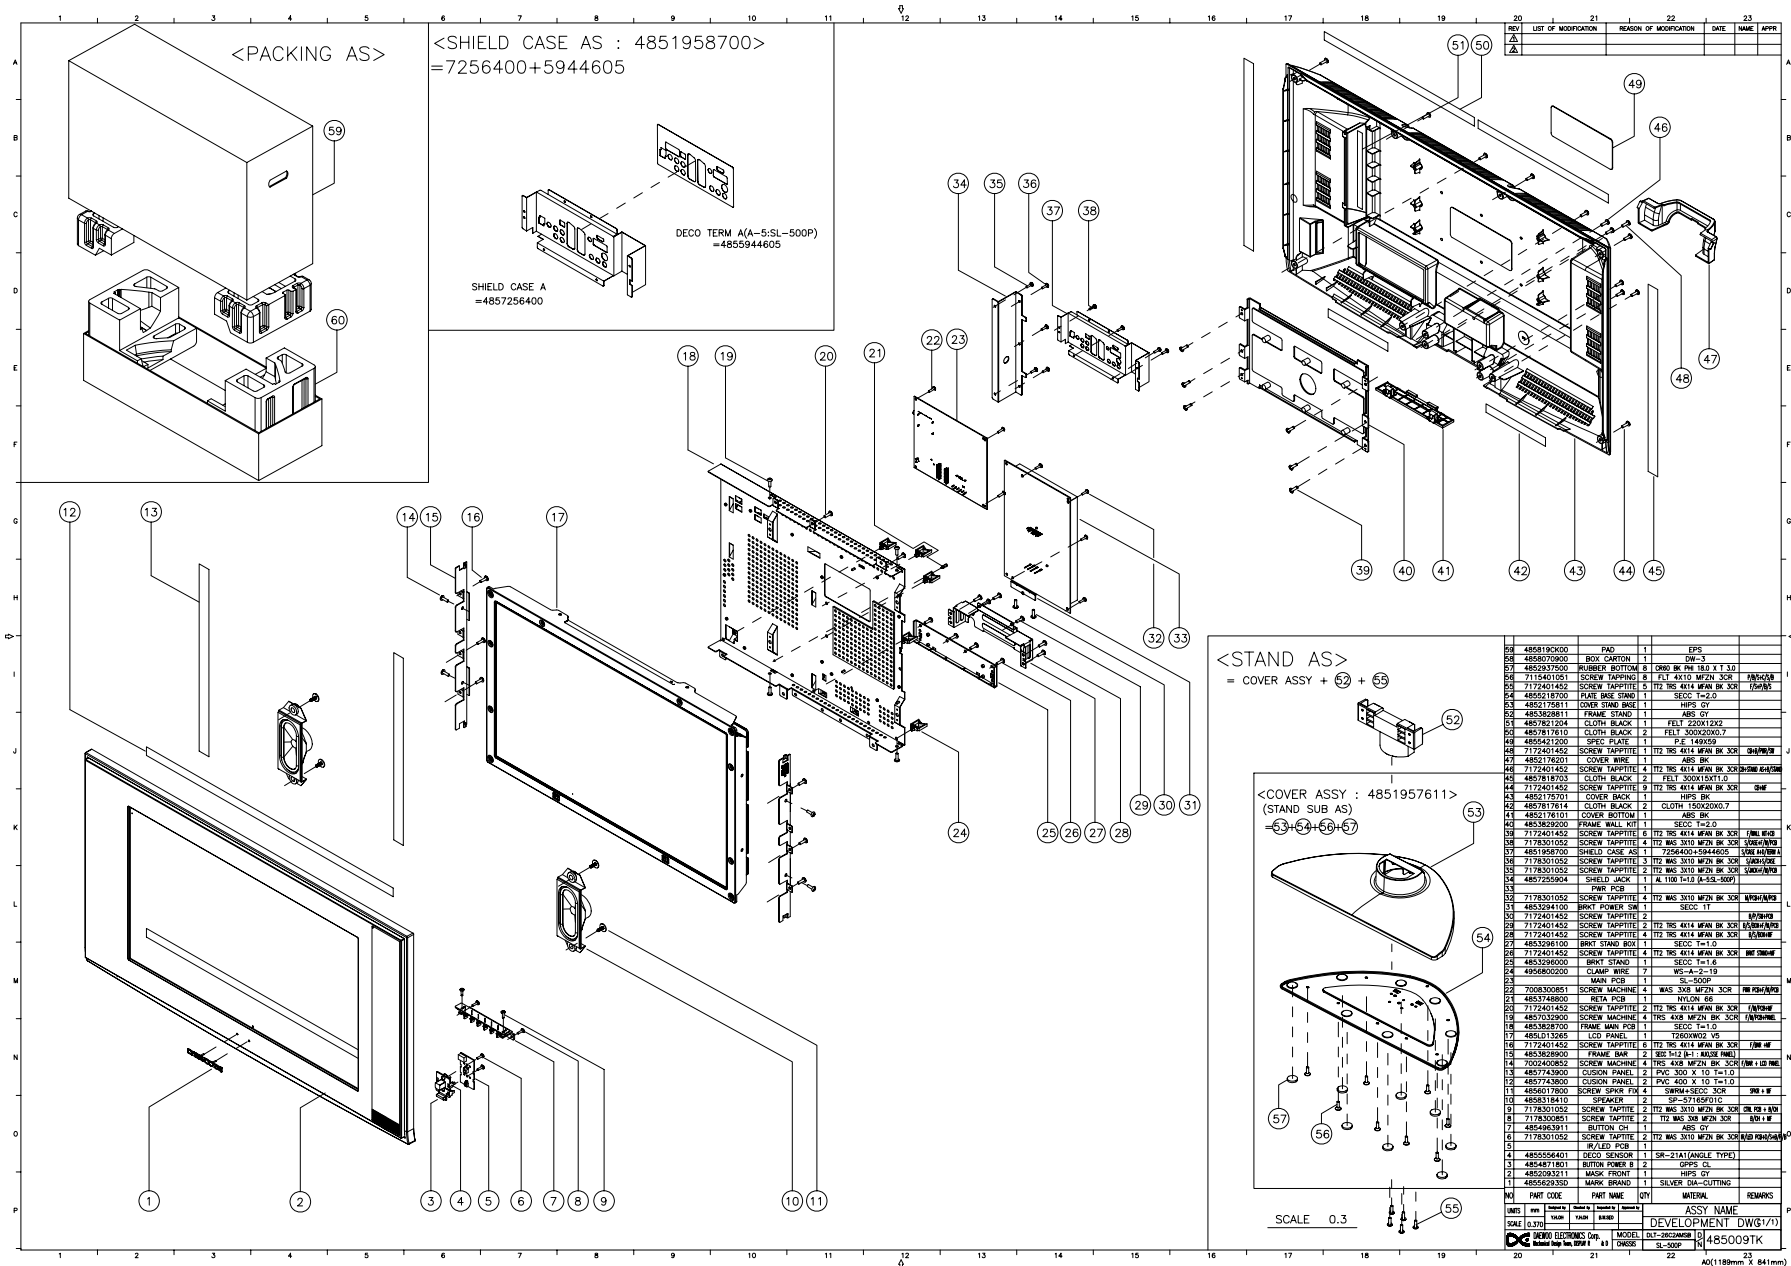


R1	R2	R3
NO.	LIST OF MODIFICATION	REASON OF MODIFICATION
DATE	NAME	APPROV
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	9	9
10	10	10
11	11	11
12	12	12
13	13	13
14	14	14
15	15	15
16	16	16
17	17	17
18	18	18
19	19	19
20	20	20
21	21	21
22	22	22
23	23	23
24	24	24
25	25	25
26	26	26
27	27	27
28	28	28
29	29	29
30	30	30
31	31	31
32	32	32
33	33	33
34	34	34
35	35	35
36	36	36
37	37	37
38	38	38
39	39	39
40	40	40
41	41	41
42	42	42
43	43	43
44	44	44
45	45	45
46	46	46
47	47	47
48	48	48
49	49	49
50	50	50
51	51	51
52	52	52
53	53	53
54	54	54
55	55	55
56	56	56
57	57	57
58	58	58
59	59	59
60	60	60
61	61	61
62	62	62
63	63	63
64	64	64
65	65	65
66	66	66
67	67	67
68	68	68
69	69	69
70	70	70
71	71	71
72	72	72
73	73	73
74	74	74
75	75	75
76	76	76
77	77	77
78	78	78
79	79	79
80	80	80
81	81	81
82	82	82
83	83	83
84	84	84
85	85	85
86	86	86
87	87	87
88	88	88
89	89	89
90	90	90
91	91	91
92	92	92
93	93	93
94	94	94
95	95	95
96	96	96
97	97	97
98	98	98
99	99	99
100	100	100

Technical drawing showing a side view of a mechanical component with various dimensions and callouts. Dimensions include 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600, 650, 700, 750, 800, 850, 900, 950, 1000, 1050, 1100, 1150, 1200, 1250, 1300, 1350, 1400, 1450, 1500, 1550, 1600, 1650, 1700, 1750, 1800, 1850, 1900, 1950, 2000, 2050, 2100, 2150, 2200, 2250, 2300, 2350, 2400, 2450, 2500, 2550, 2600, 2650, 2700, 2750, 2800, 2850, 2900, 2950, 3000, 3050, 3100, 3150, 3200, 3250, 3300, 3350, 3400, 3450, 3500, 3550, 3600, 3650, 3700, 3750, 3800, 3850, 3900, 3950, 4000, 4050, 4100, 4150, 4200, 4250, 4300, 4350, 4400, 4450, 4500, 4550, 4600, 4650, 4700, 4750, 4800, 4850, 4900, 4950, 5000, 5050, 5100, 5150, 5200, 5250, 5300, 5350, 5400, 5450, 5500, 5550, 5600, 5650, 5700, 5750, 5800, 5850, 5900, 5950, 6000, 6050, 6100, 6150, 6200, 6250, 6300, 6350, 6400, 6450, 6500, 6550, 6600, 6650, 6700, 6750, 6800, 6850, 6900, 6950, 7000, 7050, 7100, 7150, 7200, 7250, 7300, 7350, 7400, 7450, 7500, 7550, 7600, 7650, 7700, 7750, 7800, 7850, 7900, 7950, 8000, 8050, 8100, 8150, 8200, 8250, 8300, 8350, 8400, 8450, 8500, 8550, 8600, 8650, 8700, 8750, 8800, 8850, 8900, 8950, 9000, 9050, 9100, 9150, 9200, 9250, 9300, 9350, 9400, 9450, 9500, 9550, 9600, 9650, 9700, 9750, 9800, 9850, 9900, 9950, 10000, 10050, 10100, 10150, 10200, 10250, 10300, 10350, 10400, 10450, 10500,

Exploded View

DLT-32C2

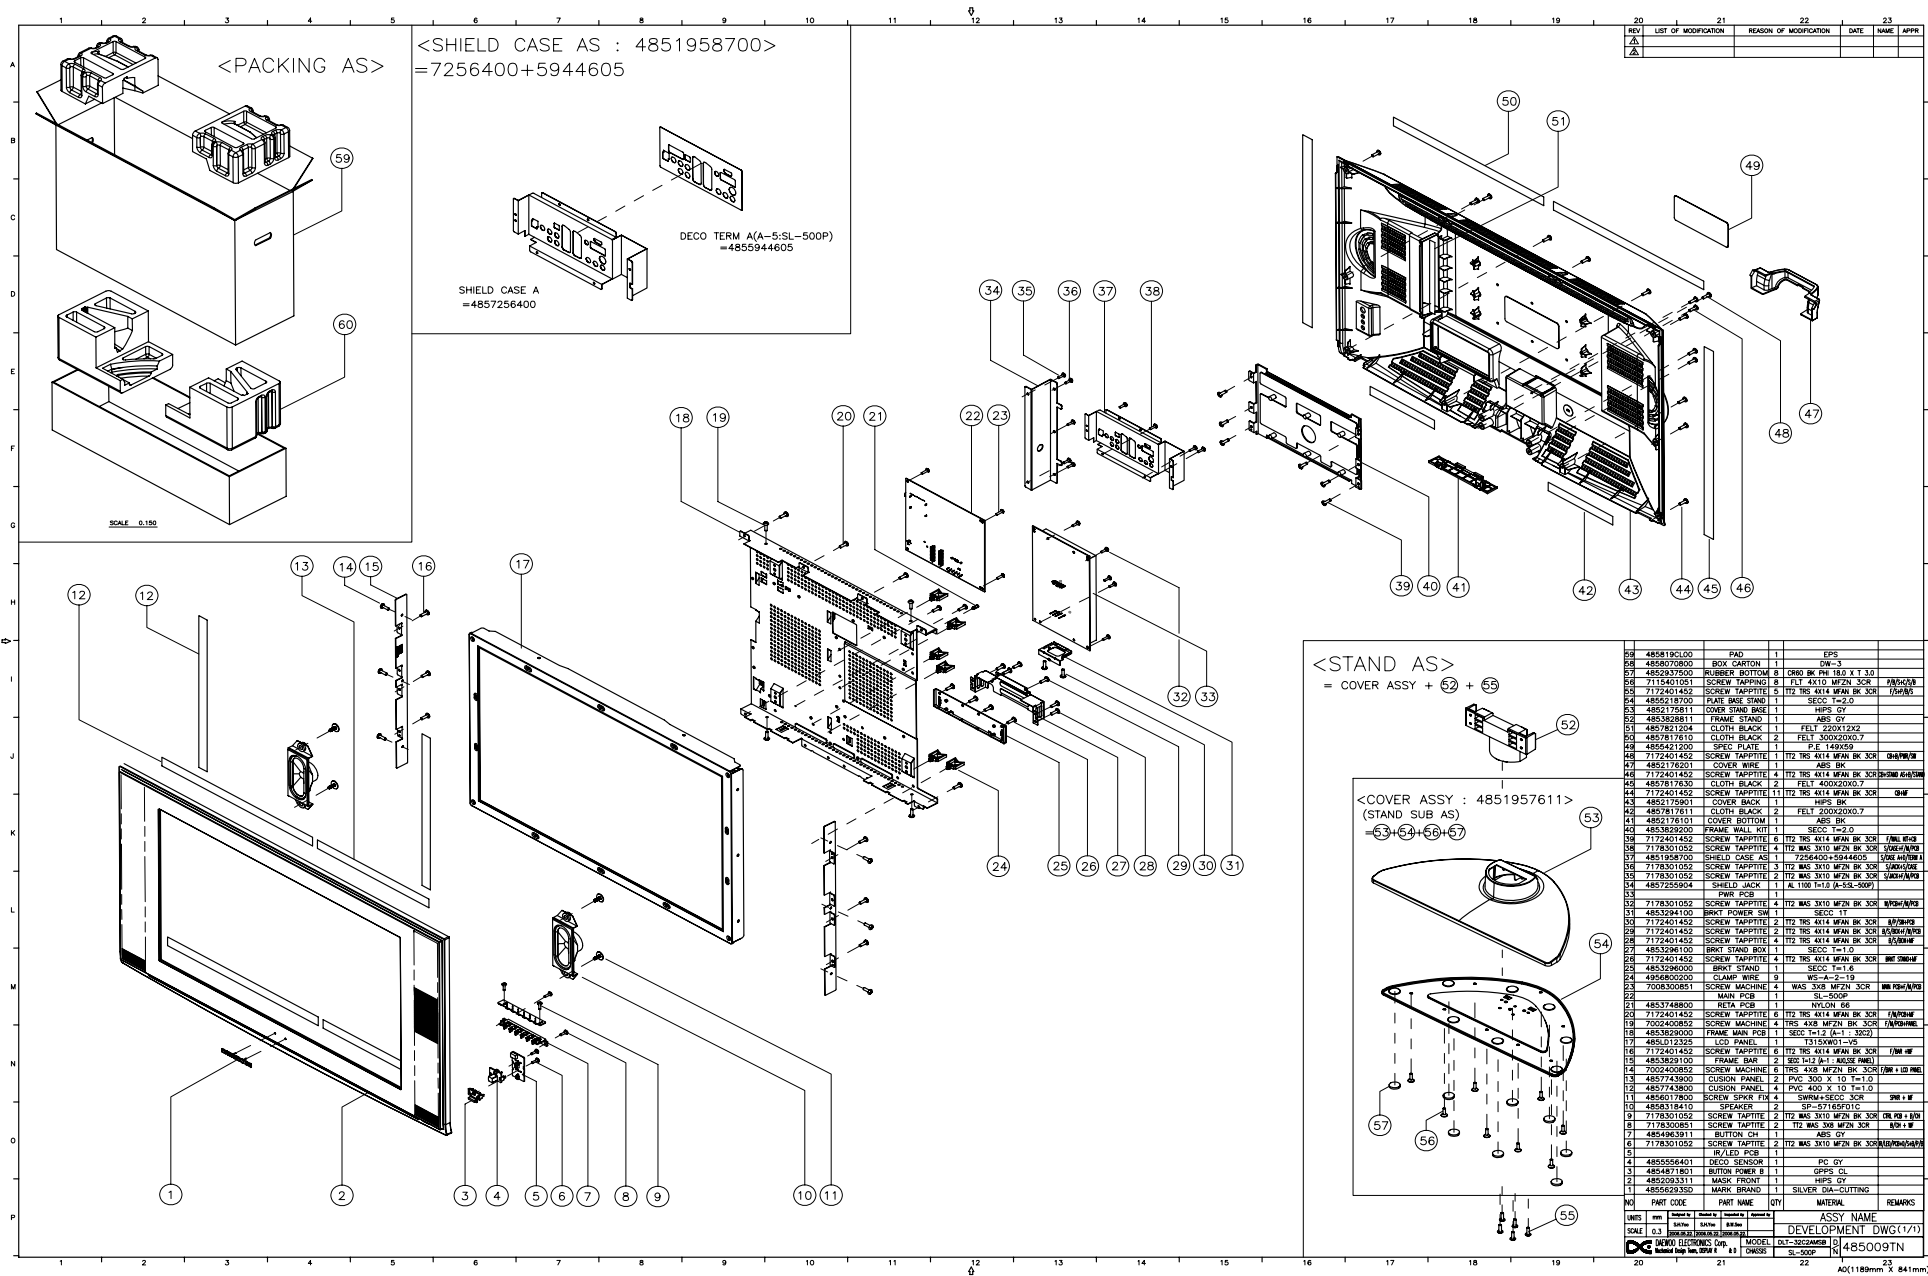


DLT-32C3




Exploded View

DLT-32C5

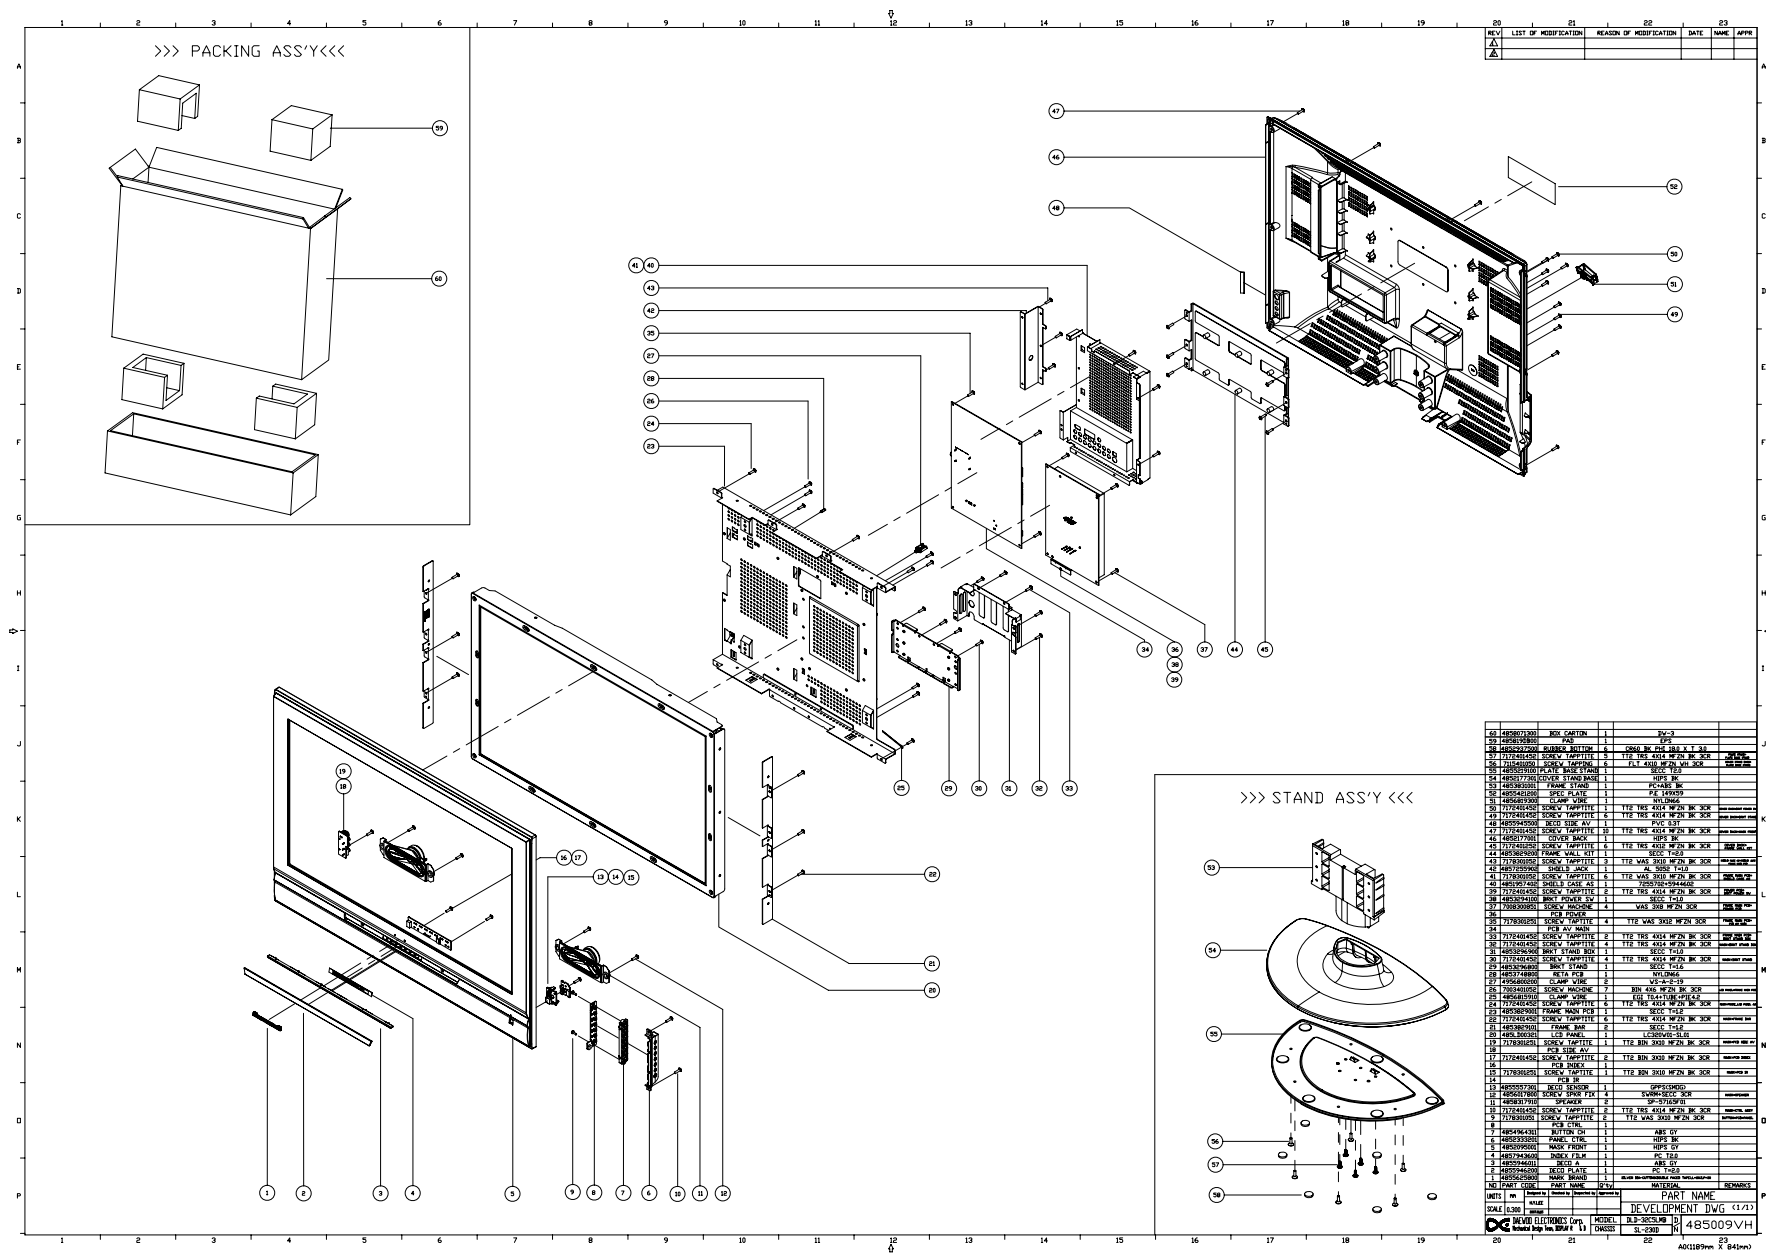


Exploded View

DLT-32C6

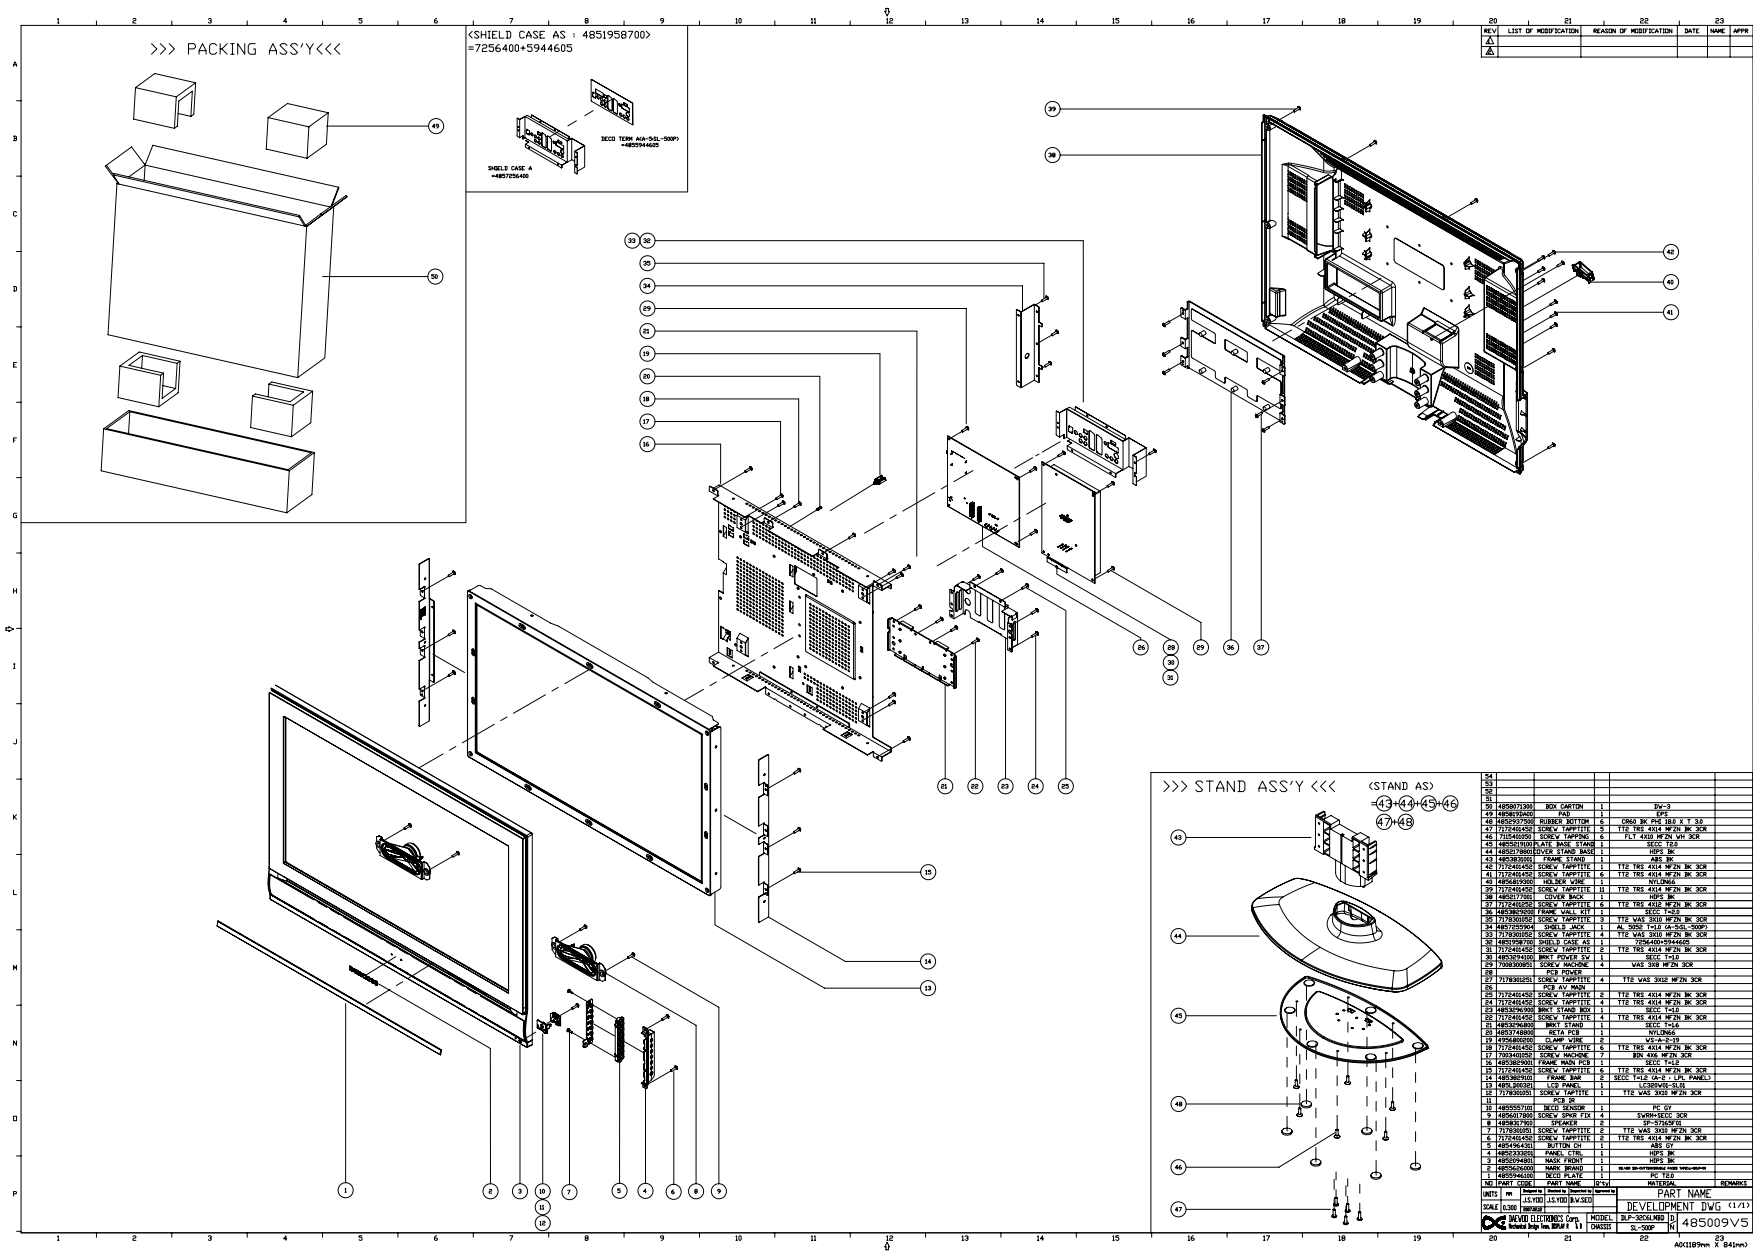


Exploded View

DLT-32C7

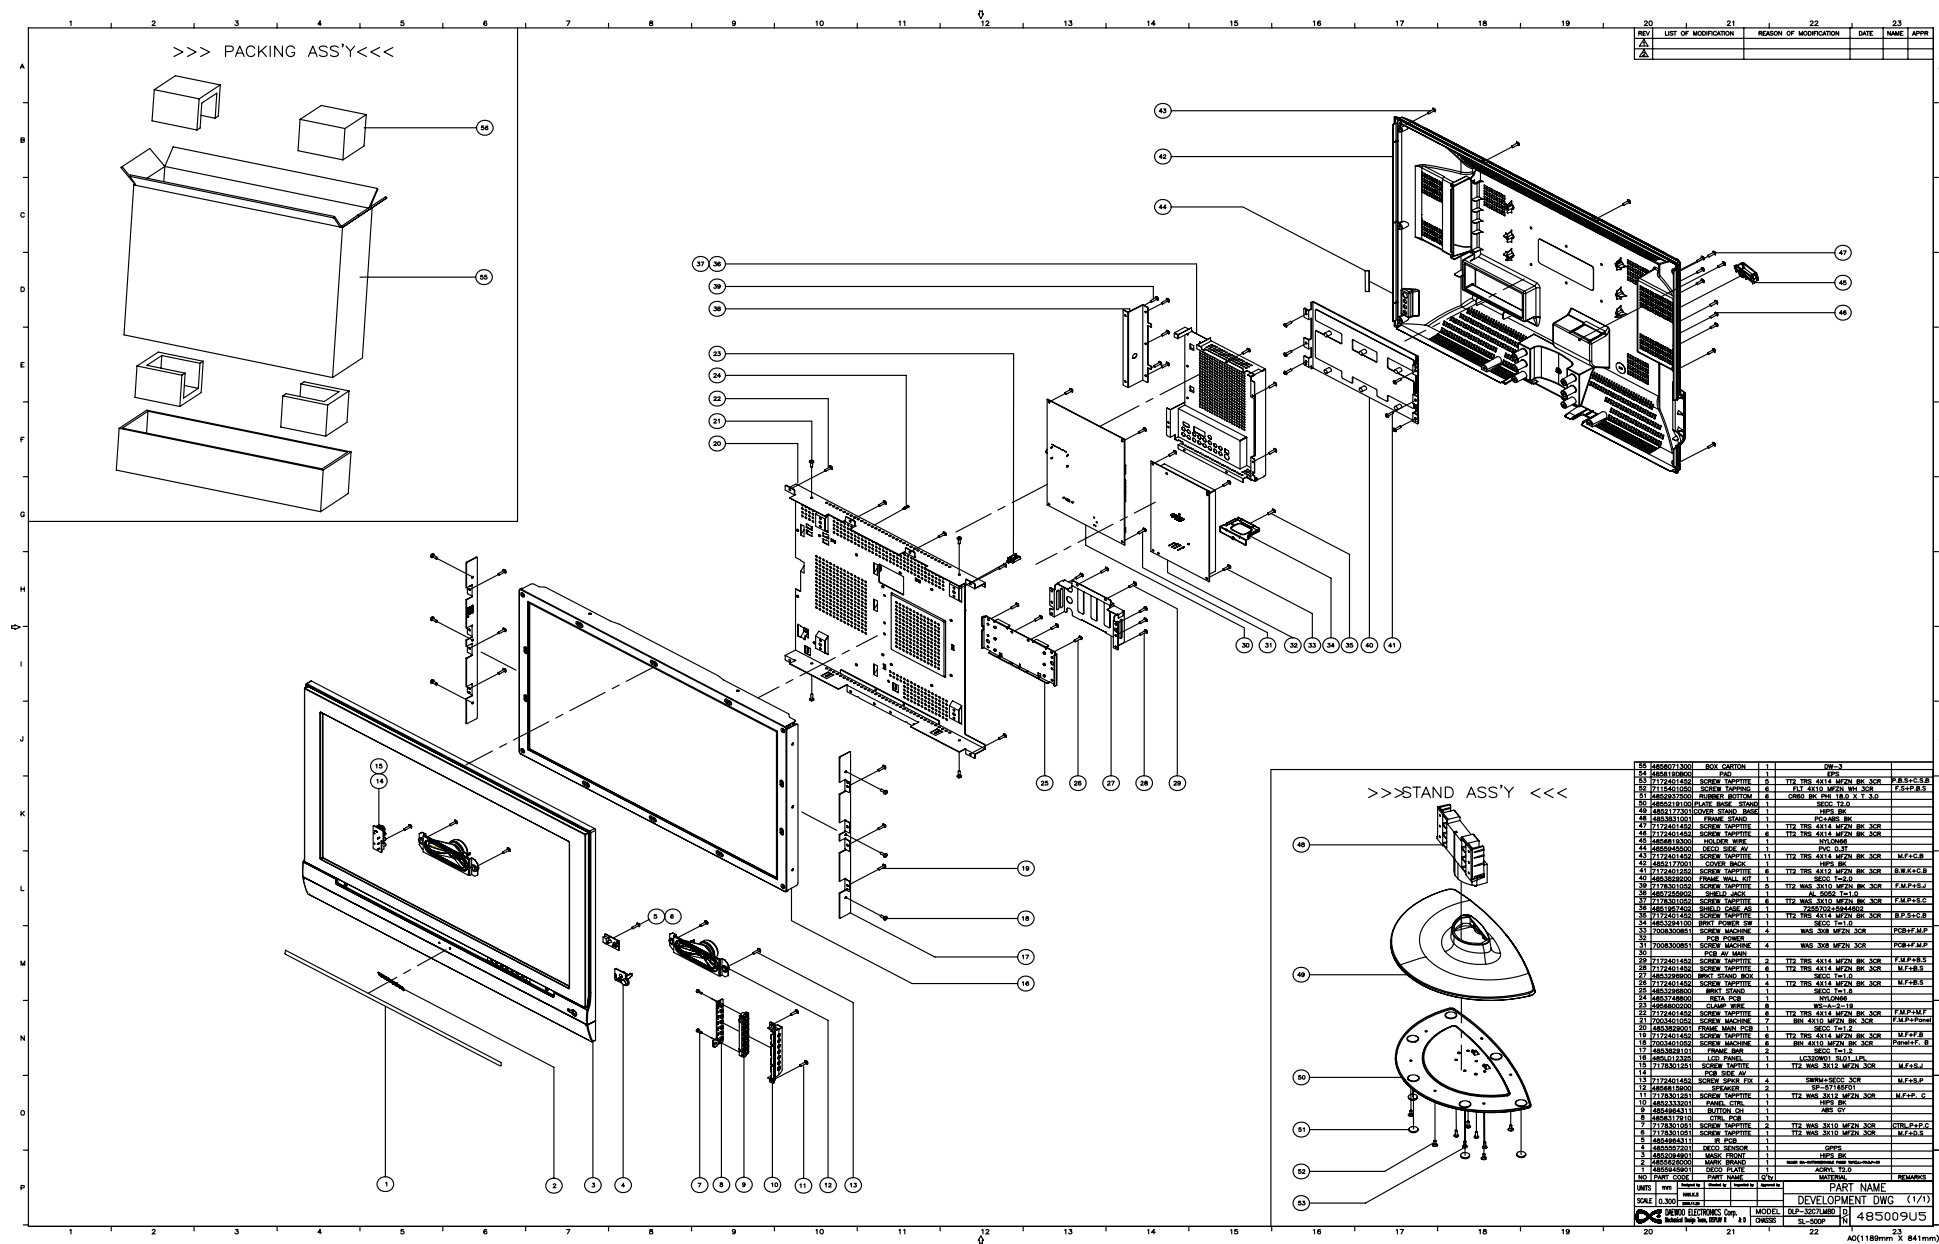


Exploded View

DLT-37C3

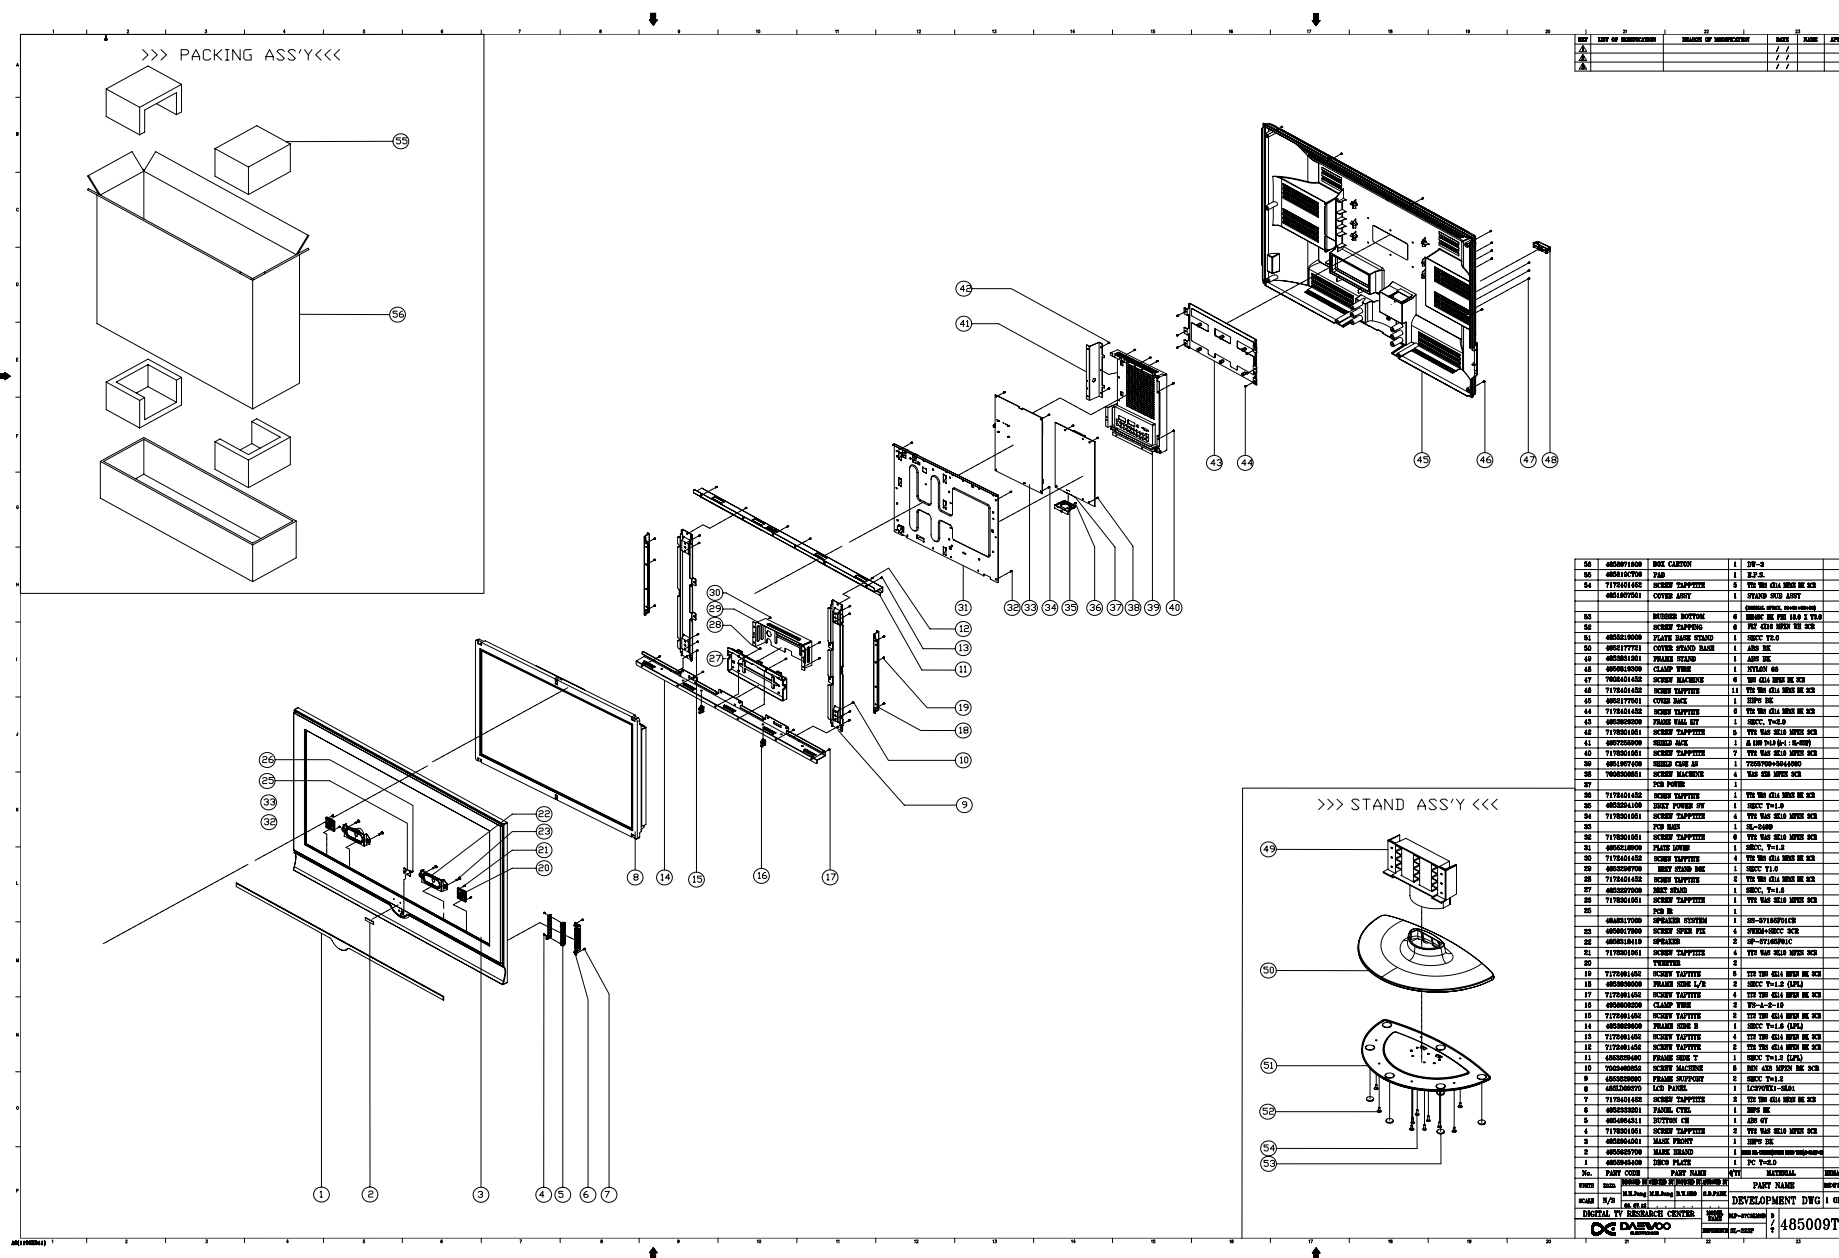

Exploded View

DLT-37C7

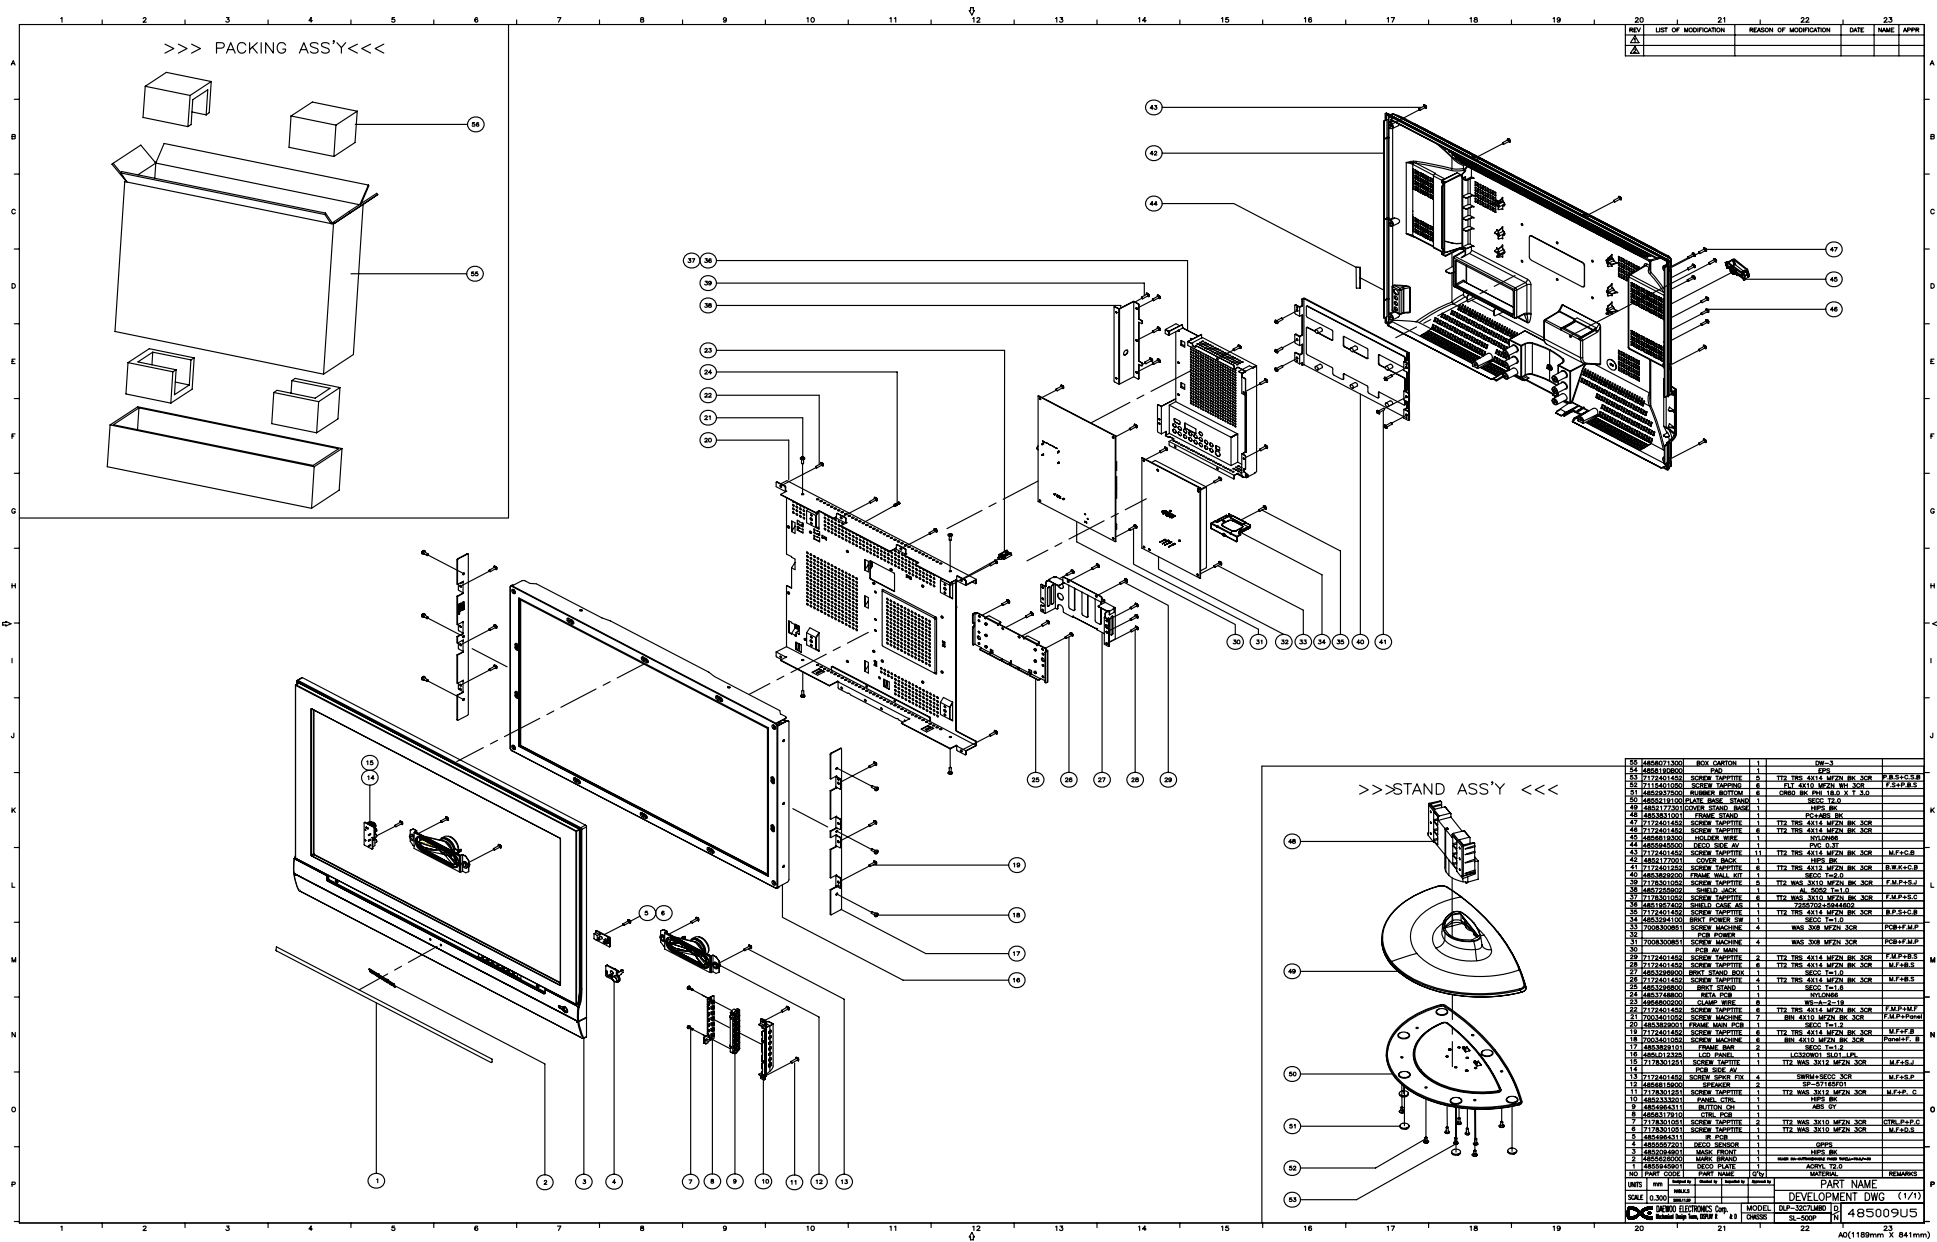

10. Service part list

DLT-26C2

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ100	485655J12	TRANSMITTER REMOCON	R-55J12(AAA)
ZZ110	PTACPWG233	ACCESSORY AS	DLT-32C6LMBD
60	4850Q00910	BATTERY	R03/NN
M212	4852176101	COVER BOTTOM	ABS BK
M681	4856819300	CLAMP WIRE	NYLON 66
M821	4858219401	BAG INSTRUCTION	L.D.P.E T.0.05X280X47
M861	485862100	MANUAL INSTRUCTION	ENGLISH
P801A	48599PM005	CORD POWER AS	UK LP-61L+LS-60=2.0M
ZZ120	PTBCSHG117	COVER BACK AS	DLP-26C2AMSB
M211	4852175701	COVER BACK	HIPS BK
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M211B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M211C	4857817610	CLOTH BLACK	FELT 300X20X0.7
M211D	4857818703	CLOTH BLACK	FELT T1.0 L=300 W=15
M211E	4857817614	CLOTH BLACK	CLOTH 150X20X0.7
M211F	4857821204	CLOTH BLACK	FELT 220X12X2
M213	4852176201	COVER WIRE	ABS BK
M322	4853829200	FRAME WALL KIT	SECC T=2.0
M322A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
ZZ130	PTPKCPG117	PACKING AS	DLP-26C2AMSB
M681	4856812400	BAND PP AUTO	T1.1XW17MMXL770M
M801	4858070900	BOX CARTON	DW-3
M811	485819CK00	PAD	EPS
M822	4858215601	BAG P.E	PE FOAM 10.5x1600x12
ZZ140	PTCACAG261	CABINET AS	DLT-26C2SMDB
J10A	48590004160	CABLE LVDS	1001-31FC-N+FH10002-
M191	4851958700	SHIELD CASE AS	7256400+5944605
M201E	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M201F	4856815910	CLAMP WIRE	EGI T0.4+TUBE+PIE 4.
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M211B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M211C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M321	4853296000	BRKT STAND	SECC T=1.6
M321A	7172401252	SCREW TAPPTITE	TT2 TRS 4X12 MFZN BK
M322	4853296100	BRKT STAND BOX	SECC T=1.0
M322A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M322B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M381C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M381G	7002400852	SCREW MACHINE	TRS 4X8 MFZN BK 3CR
M382	4853828900	FRAME BAR	SECC T=1.2 (A-1 : AU
M382A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M382B	7002400852	SCREW MACHINE	TRS 4X8 MFZN BK 3CR
M491B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M541	4855421200	SPEC PLATE	P.E 149X59
M551	4855557101	DECO SENSOR	PC GY
M551A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK
M592	4855944702	DECO TERM B	PVC T0.25 (SL-500T)
M721A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK
M723	4857255905	SHIELD JACK	AL 1100 T=1.0 (A-6 :
M723A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK
M723B	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK
P803B	4850714S05	CONNECTOR	2002ZHS-14+2002ZHS-1
V901	485LD16261	LCD PANEL	LTA260W3-L01
V902	4850M14410	MODULE POWER	FEL-3226H
ZZ200	PTFMSJG117	MASK FRONT AS	DLP-26C2AMSB
M201	4852093211	MASK FRONT	HIPS GY
M201A	4857743800	CUSION PANEL	PVC 400 X 10 T=1.0
M201B	4857743900	CUSION PANEL	PVC 300 X 10 T=1.0
M561	48556293SD	MARK BRAND	SILVER DIA-CUTTING
ZZ210	PTSPPWG261	SPEAKER AS	DLT-26C2SMDB
P4A	4850703S82	CONNECTOR	SMH250-03+YRT205+YRT
P5A	4850702N34	CONNECTOR	SMH250-02+YRT205+YRT
SP01	4858318410	SPEAKER	SP-57165F01C
SP01A	4856017800	SCREW SPKR FIX	SWRM+SECC 3CR
SP02	4858318410	SPEAKER	SP-57165F01C
SP02A	4856017800	SCREW SPKR FIX	SWRM+SECC 3CR
ZZ250	PTSNSWG117	STAND AS	DLP-26C2AMSB
M191	4851957611	COVER ASSY	C2 STAND SUB ASSY

LOC	PART CODE	PART NAME	DESCRIPTION
M384	4853828811	FRAME STAND	ABS GY
M521A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
ZZ290	PTMPMSG261	PCB MAIN MANUAL AS	DLT-26C2SMDB
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
CON1	4859200440	CONN PCMCIA	PC68PRA5513XZ
JP1	4859112950	JACK SCART	DSSM-0378 STR
JP10	4859105340	JACK S-VHS	DSW-10 (STRAIGHT)
JP11	4859117450	JACK PIN	DPSS-0173S(3P ST SHI
JP2	4859112950	JACK SCART	DSSM-0378 STR
JP3	4859117550	JACK PIN	DPSE-0375S
JP4	4859102340	JACK PHONE	SPJ-358H(3.5 STRAIGH
JP6	4859200160	CONN D-SUB	SHF-015-B111-22(BR2-
JP7	97P6316100	JACK HEAD PHONE	DHSE-9959
JP8	4859201170	CONN OPTICAL SENSOR	OJ107A-T050-SHS
JP9	4859201460	CONN D-SUB 9P	SHRA0209011
M325	4853294100	BRKT POWER SW	SECC 1T
M325A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK
M381	4853828700	FRAME MAIN PCB	SECC T=1.0
M381A	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK
M381B	7008300851	SCREW MACHINE	WAS 3X8 MFZN 3CR
M381C	4956800200	CLAMP WIRE	WS-A-2-19
M381D	4853748800	RETA PCB	NYLON 66
P13A	4850705S34	CONNECTOR	20017HR-05+12505HS-0
P14A	4850706S49	CONNECTOR	20017HR-06+12505HS-0
P4	4859284420	CONN WAFER	SMW250-03
P5	4859240520	CONN WAFER	SMW250-02
P6	4859285020	CONN WAFER	SMW250-09
P6A	4850709S21	CONNECTOR	SMH250-09+SMH250-09+
P7	4859284920	CONN WAFER	SMW250-08
P8A	4850704S86	CONNECTOR	YH025-04+YH025-04+UL
P9	4859295520	CONN WAFER	4602-02MV2-60-1 PLUG
TU1	4859731230	TUNER DIGITAL	TD1318AF/IHP-3(DV-IF
U10	125L8005PC	IC FLASH MEMORY	MX25L8005PC-15G 8M 8
U11	1M24C32BN6	IC EEPROM	M24C32WRN6
U3	1M24C04BN6	IC EEPROM	M24C04WRN6
U31	14C64WBNG6	IC EEPROM	M24C64-WBN6
X2	5XJ14R31AE	CRYSTAL QUARTZ	HC-49/S 14.31818MHZ
Z1	5PK9650M—	FILTER SAW	K9650M
Z2	5PK3953M—	FILTER SAW	K3953M
ZZ200	PTMPJ2G261	PCB MAIN CHIP B AS	DLT-26C2SMDB
C10	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C100	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C105	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C12	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C13	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C132	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C136	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C14	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C145	HCB0105KBA	C CHIP CERA	10V X7R 1MF K 1608
C15	HCBK472KBA	C CHIP CERA	50V X7R 4700PF K 160
C16	HCBK472KBA	C CHIP CERA	50V X7R 4700PF K 160
C164	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C166	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 16
C168	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 16
C17	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C171	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C172	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C176	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C177	HCB0105KBA	C CHIP CERA	10V X7R 1MF K 1608
C182	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C183	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C184	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C185	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C186	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C187	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C58	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 160
C60	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 160
C61	HCF474ZBA	C CHIP CERA	Y5V 16V 0.47MF Z 160
C63	HQCK391JBA	C CHIP CERA	50V CH 390PF J 1608
C66	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C7	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C8	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C82	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C83	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C84	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C85	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C86	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C87	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C90	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C94	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C95	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C96	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C97	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
R1	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R102	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R103	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R105	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R109	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R11	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R110	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R111	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R113	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R117	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R118	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R121	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R122	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R13	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R131	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R135	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R14	HRFT431JBA	R CHIP	1/10 430 OHM J 1608
R145	HRFT391FBA	R CHIP	1/10 390 OHM F 1608
R16	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R2	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R204	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R208	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R209	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R210	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R217	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R229	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R232	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R237	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R238	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R241	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R243	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R245	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R256	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R259	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R262	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R27	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R271	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R283	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R286	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R287	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R288	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R290	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R291	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R292	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R293	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R294	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R295	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R3	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R300	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R301	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R302	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R303	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R305	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R306	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R307	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R309	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R310	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R311	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R313	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R314	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R317	HRF4473JEA	R CHIP	1/4 47K OHM J 3216
R318	HRF4103JEA	R CHIP	1/4W 10K OHM J 3216
R337	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R339	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R340	HRFT361JBA	R CHIP	1/10 360 OHM J 1608
R343	HRFT241JBA	R CHIP	1/10 240 OHM J 1608
R344	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R347	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R348	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R35	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R352	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R36	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R365	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R367	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R37	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R38	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R383	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R384	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R385	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R386	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R387	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R39	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R397	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R398	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R399	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R4	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R40	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R400	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R401	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R402	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R407	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R418	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R419	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R421	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R422	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R424	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R425	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R426	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R427	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R429	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R435	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R436	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R437	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R438	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R44	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R444	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R454	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R455	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R457	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R481	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R482	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R483	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R484	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R485	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R486	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R488	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R489	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R490	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R496	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R497	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R498	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R5	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R501	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R502	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R507	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R508	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R509	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R510	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R511	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R514	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R515	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R516	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R517	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R518	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R519	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R52	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R59	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R6	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R61	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R7	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R709	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R716	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R735	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R82	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R88	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R98	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
Z2200	PTMPJ0G261	PCB MAIN (RHU) AS	DLT-26C2SMD B
CE30	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20
CE31	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20
CE36	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20
CE45	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20
CE56	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)
CE57	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)
CE58	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)
CE74	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X2
Z2200	PTMPJ0G261	PCB MAIN M-10 AS	DLT-26C2SMD B
P1	485923172S	CONN WAFER	YW025-04 (STICK)
P8	485923172S	CONN WAFER	YW025-04 (STICK)
Z2200	PTMPJ0G261	PCB MAIN RADIAL AS	DLT-26C2SMD B
C199	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP
C215	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP
CE1	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) T
CE10	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE100	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE11	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11)
CE12	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE13	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE14	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE15	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE16	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE17	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE18	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE19	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE2	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) T
CE20	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE21	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE22	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE24	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE25	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE26	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE27	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE28	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)
CE3	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE32	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5
CE33	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)

LOC	PART CODE	PART NAME	DESCRIPTION
CE34	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11)
CE35	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE37	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE38	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)
CE39	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)
CE4	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE40	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE41	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE42	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5
CE43	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)
CE44	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11)
CE46	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE47	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11)
CE5	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE51	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE52	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE53	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.
CE54	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE55	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE59	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE6	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE60	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE61	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE62	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE63	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X1
CE64	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE65	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) T
CE66	CEXF1C101A	C ELECTRO	16V RSM 100MF 6X7 TP
CE67	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.
CE68	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE69	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE7	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE70	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE700	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE701	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE702	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE71	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE72	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE73	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE75	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE76	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE77	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.
CE78	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE79	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE8	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X1
CE80	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE81	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE82	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE83	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE84	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE85	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE86	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE87	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE88	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11)
CE89	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X1
CE9	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE90	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X1
CE91	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X1
CE92	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5
CE93	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) T
CE94	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) T
CE95	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11)
CE96	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11)
CE97	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE98	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
CE99	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11)
L28	5CPX829K—	COIL PEAKING	8.2UH K (RADIAL)
SW1	5S50101Z90	SW TACT	THV502GDA

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
U15	1K1A7042AP	IC RESET	KIA7042AP
U70	1K1A7042AP	IC RESET	KIA7042AP
U9	1K1A7042AP	IC RESET	KIA7042AP
X1	5XE4R0000C	CRYSTAL QUARTZ	HC-49IU 4.000MHZ 20P
Z3	5PXXT5R5MB	FILTER CERA	XT 5.5MHZ-TP
ZZ200	PTMPJAG261	PCB MAIN AXIAL AS	DLT-26C2SMDB
ZZ200	PTMPJ1G261	PCB MAIN CHIP A AS	DLT-26C2SMDB
110	2193220010	SOLDER CREAM(PB-FREE)	LST309-M(SN+3.0AG)0.
A001	4859816093	PCB MAIN	234X288(1X1)T1.6
C1	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C101	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C102	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C103	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C104	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C106	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C107	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C108	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C109	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C11	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C110	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C111	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C112	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C113	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C114	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C115	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C116	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C117	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C118	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C119	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C120	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C121	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C122	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C123	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C124	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C125	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C126	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C127	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C128	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C130	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C131	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C133	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C134	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C135	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C137	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C138	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C139	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C140	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C141	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C142	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C143	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C144	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C146	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C147	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C148	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C149	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 16
C151	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C153	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C154	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C155	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C156	HCDF225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C157	HCDF225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C158	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C159	HCDF225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C160	HCDF225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C161	HCDF225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C162	HCDF225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C169	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C170	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C173	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C174	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
C175	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C18	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C180	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C181	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C2	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C204	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C21	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C222	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C225	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C228	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 160
C23	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C232	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C233	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 160
C24	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C243	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C244	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 160
C245	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C25	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C26	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C27	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C273	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C274	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C28	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C284	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C287	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C29	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C295	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C296	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C300	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C305	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C352	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C353	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C4	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C42	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C43	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C44	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C45	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C46	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C5	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C50	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 160
C52	HCF474ZBA	C CHIP CERA	Y5V 16V 0.47MF Z 160
C55	HCB224KBA	C CHIP CERA	25V X7R 0.22MF K 160
C56	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C57	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 160
C6	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C64	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 160
C67	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C68	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C69	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C70	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C700	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C701	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 160
C702	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 160
C71	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C72	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C73	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C74	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C75	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C76	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C77	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C78	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C79	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 160
C80	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C81	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C88	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C89	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C9	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C91	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C92	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C93	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C98	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C99	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
D13	DBAV99ML-B	DIODE CHIP	BAV99ML
D14	DBAV99ML-B	DIODE CHIP	BAV99ML
D15	DBAV99ML-B	DIODE CHIP	BAV99ML
D31	DMMBD1204B	DIODE CHIP	MMBD1204
D32	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D33	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D34	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D35	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D36	DMMBD1204B	DIODE CHIP	MMBD1204
D37	DBAV99ML-B	DIODE CHIP	BAV99ML
D38	DBAV99ML-B	DIODE CHIP	BAV99ML
D39	DBAV99ML-B	DIODE CHIP	BAV99ML
D40	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D41	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D44	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D45	DMMBD1204B	DIODE CHIP	MMBD1204
D46	DMMBD1204B	DIODE CHIP	MMBD1204
D48	DFM405—C	DIODE CHIP	FM405
D49	DFM405—C	DIODE CHIP	FM405
D50	DBAV99ML-B	DIODE CHIP	BAV99ML
D51	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D52	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D53	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D54	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D55	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D56	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D70	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D71	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
JP5	4859201360	CONN HDMI	51V019S-36WT-A1R
L1	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L10	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L11	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L12	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L13	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L14	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L15	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L16	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L17	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L19	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L2	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L20	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L21	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L23	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L24	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L25	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L26	HLC470KECE	L CHIP COIL	47UH K 1280
L27	HLC470KECE	L CHIP COIL	47UH K 1280
L29	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L3	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L30	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L31	HLC470KECE	L CHIP COIL	47UH K 1280
L32	HLC100J00A	L CHIP COIL	10UH NLC322522
L33	HLC100J00A	L CHIP COIL	10UH NLC322522
L34	HLC470KECE	L CHIP COIL	47UH K 1280
L35	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L36	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L37	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L38	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L39	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L4	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L40	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L41	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L42	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L43	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L44	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L45	HLC479K05C	L CHIP COIL	4.7UH K NLC3225227
L46	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012

LOC	PART CODE	PART NAME	DESCRIPTION
L47	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L49	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L5	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L50	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L58	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L59	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L6	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L60	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L61	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L62	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L63	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L64	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L65	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L66	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L67	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L68	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L69	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L7	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L70	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L71	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L72	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L73	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L74	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L75	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L76	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L8	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L9	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
P13	4859295120	CONN WAFER	12505WS-05A00
P14	4859295220	CONN WAFER	12505WS-06A00
P3	4859293820	CONN WAFER	GT121-31P-TD-A 31P S
Q1	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q10	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q11	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q12	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q13	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q14	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q15	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q16	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q17	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q18	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q19	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q2	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q20	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q21	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q26	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q27	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q3	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q4	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q5	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q6	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q7	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q8	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
R10	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R100	HRFT184JBA	R CHIP	1/10 180K OHM J 1608
R101	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R104	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R107	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R108	HRFT681JBA	R CHIP	1/10 680 OHM J 1608
R112	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R114	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R115	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R116	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R119	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R120	HRFT201JBA	R CHIP	1/10 200 OHM J 1608
R123	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R124	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R126	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R128	HRFT101JBA	R CHIP	1/10 100 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R129	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R130	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R133	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R136	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R137	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R138	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R139	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R140	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
R142	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R143	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R144	HRFT105JBA	R CHIP	1/10 1M OHM J 1608
R146	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R147	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R148	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R149	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R15	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R150	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R151	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R152	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R153	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R154	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R155	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R156	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R157	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R158	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R159	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R160	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R161	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R162	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R163	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R164	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R165	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R166	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R167	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R168	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R169	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R17	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R170	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R171	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R172	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R173	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R174	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R175	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R176	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R177	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R179	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R18	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R181	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R182	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R183	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R184	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R185	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R186	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R187	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R188	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R189	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R19	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R190	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R191	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R192	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R193	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R194	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R195	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R196	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R197	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R198	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R199	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R20	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R200	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R201	HRFT101JBA	R CHIP	1/10 100 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R202	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R203	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R205	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R21	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R211	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R212	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R214	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R215	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R216	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R218	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R219	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R22	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R220	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R224	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R228	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R23	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R231	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R24	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R244	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R246	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R247	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R248	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R249	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R25	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R250	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R251	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R252	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R253	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R254	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R26	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R260	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R261	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R265	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R267	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R269	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R270	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R272	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R273	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R274	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R275	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R276	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R277	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R278	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R280	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R281	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R282	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R284	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R285	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R289	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R29	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R296	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R297	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R298	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R299	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R30	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R304	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R308	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R31	HRFT822JBA	R CHIP	1/10 8.2K OHM J 1608
R312	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R315	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R316	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R32	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R320	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R33	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R333	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R334	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R335	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R336	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R341	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R342	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R345	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R346	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R349	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R350	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R351	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R354	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R355	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R356	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R357	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R358	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R359	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R360	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R362	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R363	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R364	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R368	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R370	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R371	HRFT122JBA	R CHIP	1/10 1.2K OHM J 1608
R372	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R373	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R374	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R375	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R376	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R377	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R378	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R379	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R388	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R389	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R390	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R391	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R393	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R394	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R396	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R405	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R406	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R408	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R409	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R41	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R410	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R411	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R412	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R413	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R416	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R417	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R42	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R420	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R423	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R428	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R43	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R430	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R431	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R432	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R433	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R434	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R439	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R440	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R441	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R442	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R443	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R448	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R449	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R45	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R450	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R451	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R452	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R453	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R456	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R458	HRFT750JBA	R CHIP	1/10 75 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R46	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R460	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R465	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R469	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R47	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R473	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R477	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R478	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R479	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R48	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R480	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R487	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R49	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R491	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R492	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R493	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R494	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R495	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R499	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R50	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R500	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R503	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R504	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R505	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R506	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R51	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R512	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R513	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R522	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R523	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R524	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R525	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R526	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R527	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R528	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R529	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R53	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R530	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R531	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R532	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R533	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R534	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R535	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R54	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R540	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R541	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R542	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R543	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R56	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R57	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R58	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R60	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R600	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R601	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R602	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R603	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R604	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R605	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R606	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R607	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R62	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R63	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R64	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R65	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R66	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R67	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R68	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R69	HRFT100JBA	R CHIP	1/10 10 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R70	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R701	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R702	HRFT133JBA	R CHIP	1/10 13K OHM J 1608
R703	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R704	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R706	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R707	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R71	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R710	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R711	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R712	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R713	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R714	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R715	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R717	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R72	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R721	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R722	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R723	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R724	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R725	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R726	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R727	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R728	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R729	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R73	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R730	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R731	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R732	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R733	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R734	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R74	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R75	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R76	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R77	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R78	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R79	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R8	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R80	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R81	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R83	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R84	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R85	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R86	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R87	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R89	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R9	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R90	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R91	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R92	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R93	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R94	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R95	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R96	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R97	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R99	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RP1	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP10	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP11	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP12	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP13	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP14	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP16	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP17	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP18	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP19	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP2	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP20	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP3	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP4	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216

LOC	PART CODE	PART NAME	DESCRIPTION
RP7	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP8	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
RP9	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 321
U1	1WM8521HCD	IC CHIP STREO DAC	WM8521HC
U12	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U13	1TDA1308TC	IC CHIP HEDPHONE DRI	TDA1308T
U14	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U16	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U18	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U19	1G9171863C	IC CHIP REGULATOR	G9117-18T63U 1.8V SO
U2	1CD74HC52D	IC CHIP LOGIC	CD74HC4052M96
U20	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 3
U21	1G9117T63C	IC CHIP REGULATOR	G9117T63U ADJ SOT-22
U22	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SO
U23	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 3
U24	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SO
U25	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U26	1G9117T63C	IC CHIP REGULATOR	G9117T63U ADJ SOT-22
U27	1G108433TD	IC CHIP REGULATOR	GT1084-33T53UF 3.3V
U28	1G108418TD	IC CHIP REGULATOR	G1084-18T53UF 1.8V T
U29	1S281632DD	IC CHIP SDRAM	K4S281632F-UC75
U30	1NX8314HSQ	IC CHIP MEDIA PROCES	PNX8314HS
U33	1320ET70NQ	IC CHIP FLASH MEMORY	M29W320ET70N6E
U34	1ST232CD-Q	IC CHIP DRIVE	ST232CD
U35	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U36	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U37	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U38	1A1334BTS	IC CHIP AUDIO DAC	UDA1334BTS
U39	110046AHTD	IC CHIP CHANNEL DECO	TDA10046AHT
U40	1C1MAXSP2Q	IC CHIP DE-SCRAMBLER	CIMAX-SP2
U41	1ST890BDR	IC CHIP CURRENT SWIT	ST890BDR
U42	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U43	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U44	1C245APW-D	IC CHIP TRANSCEIVER	74LVC245APW
U5	1TDA9886T	IC CHIP IF	TDA9886T
U6	128164SB5D	IC CHIP DDR SDRAM	V58C2128164SB15 128M
U7	TFDS4953-C	FET CHIP	FDS4953 SO-8 -30V -5
U8	1T96889LDQ	IC CHIP MICOM(+VIDEO	MST96889LD
X5	5227R000TF	CRYSTAL OSCILLATOR	4P 27.000MHZ 50PPM (
ZZ310	PTUNSWG261	PCB UNION AS	DLT-26C2SMDB
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
IC703	1TSOP34838	IC PREAMP	TSOP34838SJ
LED1	DSPR39MVW-	LED	SPR-39MVW (DUAL)
M481	4854871801	BUTTON POWER B	GPPS CL
M481A	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK
M491	4854963911	BUTTON CH	ABS GY
M491A	7178300851	SCREW TAPPTITE	TT2 WAS 3X8 MFZN 3CR
M491B	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK
M551	4855556401	DECO SENSOR	PC GY
M551A	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK
P911A	4859299720	CONN WAFER	20017WR-05A
P912A	4859299820	CONN WAFER	20017WR-06A
ZZ200	PTUNJRG261	PCB UNION RADIAL AS	DLT-26C2SMDB
SW201	5S50101Z90	SW TACT	THVV502GDA
SW202	5S50101Z90	SW TACT	THVV502GDA
SW203	5S50101Z90	SW TACT	THVV502GDA
SW204	5S50101Z90	SW TACT	THVV502GDA
SW205	5S50101Z90	SW TACT	THVV502GDA
SW206	5S50101Z90	SW TACT	THVV502GDA
SW207	5S50101Z90	SW TACT	THVV502GDA
ZZ200	PTUNJAG261	PCB UNION AXIAL AS	DLT-26C2SMDB
510	2TM14006LB	TAPE MASKING	3M #232 6.0X2000M
520	2TM10006LB	TAPE MASKING	3M #232-MAP-C 6.2X20
A002	4859815360	PCB UNION	246X197 D1B
C996	CCZ1H104Z	C CERA	50V F 0.1MF Z AXL(16
R901	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R902	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J

Service part list

[illegible]

Service part list

DLT-32C1

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ100	48B565J12	TRANSMITTER REMOCON	R-55J12(AAA)
ZZ110	PTACPWG233	ACCESSORY AS	DLT-32C6LMBD
60	4850Q00910	BATTERY	R03/NN
M212	4852176101	COVER BOTTOM	ABS BK
M681	4856819300	CLAMP WIRE	NYLON 66
M821	4858219401	BAG INSTRUCTION	L.D.P.E T0.05X280X470
M861	4858662100	MANUAL INSTRUCTION	ENGLISH
P801A	48599PM005	CORD POWER AS	UK LP-61L+LS-60=2.0M(CORE)
ZZ120	PTBCSHG155	COVER BACK AS	DLP-32C1AMR
M211	4852177001	COVER BACK	HIPS BK
M211D	4857818702	CLOTH BLACK	FELT T0.7 L=350 W=15
M384	4853829200	FRAME WALL KIT	SECC T=2.0
M384A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
ZZ130	PTPKCPG155	PACKING AS	DLP-32C1AMR
M681	4856812400	BAND PP AUTO	T1.1XW17MMXL770M
M801	4858071300	BOX CARTON	DW-3
M811	485819CQ00	PAD	EPS
M822	4858215701	BAG P.E	PE FOAM t0.5x1050x950
ZZ140	PTCACAG344	CABINET AS	DLT-32C1LFR
J10A	4859006760	CABLE LVDS	LPL:FMW1214A-31A+FH10001-30+32C6LMBD=250
M191	4851958700	SHIELD CASE AS	7256400+5944605
M191A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M201B	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
M201D	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M207A	2242070701	SHEET MICRO FIBER	180X180 T=0.7
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M211B	7172401652	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK 3CR
M211C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M321	4853296800	BRKT STAND	SECC T1.6
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M322	4853296900	BRKT STAND BOX	SECC T1.0
M322A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M322B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M381E	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M382	4853829102	FRAME BAR	SECC T=1.2(A-2 FINAL LPL PANEL)
M382B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M491B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M541	4855421200	SPEC PLATE	P.E 149X59
M723	4857255905	SHIELD JACK	AL 1100 T=1.0 (A-6: SL-500T)
M723A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723B	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
P803B	4850714505	CONNECTOR	2002HS-14+2002HS-14(B)+ULW=200
V901	485LD16322	LCD PANEL	LC320WX3-SLE1
V902	4850M14410	MODULE POWER	FEL-3226H
ZZ200	PTFMSJG342	MASK FRONT AS	DLP-32C1LFR
M201	4852093801	MASK FRONT	HIPS BK
M231	4852333301	PANEL FRONT	ABS+PMMA BK
M231A	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK 3CR
M231B	4857943200	PROTECTOR FILM	PE FILM (EVA) 52WX200MX0.05T
M561	4855626000	MARK BRAND	*SILVER DIA-CUTTING(DOUBLEFACED TAPE
M591	4855944900	DECO PLATE	PC T2.0
ZZ210	PTSPPWG233	SPEAKER AS	DLT-32C6LMBD
P4A	4850703S82	CONNECTOR	SMH250-03+YRT205+YRT110+USW=700
P5A	4850702N34	CONNECTOR	SMH250-02+YRT205+YRT110+USW=700
SP01	4858318510	SPEAKER	SP-45165F01C
SP02	4858318510	SPEAKER	SP-45165F01C
ZZ220	PTNSWVG155	STAND AS	DLP-32C1AMR
M213	4852177321	COVER STAND BASE	ABS BK(URETHANE SPRAY)
M383	4853831001	FRAME STAND	ABS BK
M521	4855219100	PLATE BASE STAND	SECC T2.0
M521A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M521B	7115401051	SCREW TAPPING	FLT 4X10 MFZN 3CR
M521C	4852937500	RUBBER BOTTOM	CR60 BK PHI 18.0 X T 3.0
ZZ290	PTPMMSG233	PCB MAIN MANUAL AS	DLT-32C6LMBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3.0)
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
CON1	4859200440	CONN PCMCIA	PC68PRA5513XZ
JP1	4859112950	JACK SCART	DSSM-0378 STR

LOC	PART CODE	PART NAME	DESCRIPTION
JP10	4859105340	JACK S-VHS	DSW-10 (STRAIGHT)
JP11	4859117450	JACK PIN	DPSS-0173S(3P ST SHIELD)
JP2	4859112950	JACK SCART	DSSM-0378 STR
JP3	4859117550	JACK PIN	DPSE-0375S
JP4	4859102340	JACK PHONE	SPJ-358H(3.5 STRAIGHT)
JP6	4859200160	CONN D-SUB	SHF-015-B111-22(BR2-J0.6
JP7	97P6316100	JACK HEAD PHONE	DHSE-9959
JP8	4859201170	CONN OPTICAL SENSOR	OJ107A-T050-SHS
JP9	4859201460	CONN D-SUB 9P	SHRA0209011
M321	4853294100	BRKT POWER SW	SECC 1T
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M371	4853748800	RETA PCB	NYLON 66
M372	4856800200	CLAMP WIRE	WS-A-2-19
M381	4853829001	FRAME MAIN PCB	SECC T=1.2 (A-2 : 32C1/32C3)
M381B	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK 3CR
M381C	7008300851	SCREW MACHINE	WAS 3X8 MFZN 3CR
M381D	4856815900	CLAMP WIRE	EGI T0.4+TUBE+PIE 3.2
P13A	4850705S34	CONNECTOR	20017HR-05+12505HS-05+USW=700
P14A	4850706S49	CONNECTOR	20017HR-06+12505HS-06+USW=600
P4	4859284420	CONN WAFER	SMW250-03
P5	4859240520	CONN WAFER	SMW250-02
P6	4859285020	CONN WAFER	SMW250-09
P6A	4850709S21	CONNECTOR	SMH250-09+SMH250-09+ULW=300
P7	4859284920	CONN WAFER	SMW250-08
P8A	4850704S86	CONNECTOR	YH025-04+YH025-04+ULW=300
P9	4859295520	CONN WAFER	4602-02MV2-60-1 PLUG 2P ST
TU1	4859731230	TUNER DIGITAL	TD1318AF/IHP-3(DV-IF-H-P)
U10	125L8005PC	IC FLASH MEMORY	MX25L8005PC-15G 8M 8-DIP
U11	1M24C32B6	IC EEPROM	M24C32WRN6
U3	1M24C04B6	IC EEPROM	M24C04WRN6
U31	14C64WBN6	IC EEPROM	M24C64-WBN6
X2	5XJ14R31AE	CRYSTAL QUARTZ	HC-49S 14.31818MHZ 30PPM
Z1	5PK9650M—	FILTER SAW	K9650M
Z2	5PK3953M—	FILTER SAW	K3953M
ZZ200	PTMPJ2G233	PCB MAIN CHIP B AS	DLT-32C6LMBD
C10	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C100	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C105	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C12	HCBK220JBA	C CHIP CERA	50V CH 22PF J 1608
C13	HCBK220JBA	C CHIP CERA	50V CH 22PF J 1608
C132	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C136	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C14	HCBK220JBA	C CHIP CERA	50V CH 22PF J 1608
C145	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C15	HCBK472KBA	C CHIP CERA	50V X7R 4700PF K 1608
C16	HCBK472KBA	C CHIP CERA	50V X7R 4700PF K 1608
C164	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C166	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
C168	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
C17	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C171	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C172	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C176	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C177	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C182	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C183	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C184	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C185	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C186	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C187	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C188	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C189	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C19	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C190	HCBK153KBA	C CHIP CERA	50V X7R 0.015MF K 1608
C191	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C192	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C193	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C194	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C195	HCBK153KBA	C CHIP CERA	50V X7R 0.015MF K 1608
C197	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C94	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C95	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C96	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C97	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
R1	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R102	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R103	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R105	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R109	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R11	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R110	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R111	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R113	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R117	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R118	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R121	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R122	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R13	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R131	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R135	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R14	HRFT431JBA	R CHIP	1/10 430 OHM J 1608
R145	HRFT391FBA	R CHIP	1/10 390 OHM F 1608
R16	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R2	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R204	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R208	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R209	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R210	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R217	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R229	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R232	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R237	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R238	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R241	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R243	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R245	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R256	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R259	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R262	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R27	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R271	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R283	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R286	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R287	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R288	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R290	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R291	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R292	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R293	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R294	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R295	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R3	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R300	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R301	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R302	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R303	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R305	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R306	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R307	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R309	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R310	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R311	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R313	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R314	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R317	HRF4473JEA	R CHIP	1/4 47K OHM J 3216
R318	HRF4103JEA	R CHIP	1/4W 10K OHM J 3216
R337	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R339	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R340	HRFT361JBA	R CHIP	1/10 360 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R343	HRFT241JBA	R CHIP	1/10 240 OHM J 1608
R344	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R347	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R348	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R35	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R352	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R36	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R365	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R367	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R37	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R38	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R383	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R384	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R385	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R386	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R387	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R39	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R397	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R398	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R399	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R4	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R40	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R400	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R401	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R402	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R407	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R418	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R419	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R421	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R422	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R424	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R425	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R426	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R427	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R429	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R435	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R436	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R437	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R438	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R44	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R444	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R454	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R455	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R457	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R481	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R482	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R483	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R484	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R485	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R486	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R488	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R489	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R490	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R496	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R497	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R498	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R5	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R501	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R502	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R507	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R508	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R509	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R510	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R511	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R514	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R515	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R516	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R517	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R518	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R519	HRFT330JBA	R CHIP	1/10 33 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R52	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R59	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R6	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R61	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R7	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R709	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R716	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R735	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R82	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R88	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R98	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
Z2200	PTMPJ0G233	PCB MAIN (RHU) AS	DLT-32C6LMBD
CE30	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE31	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE36	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE45	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE56	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)TP
CE57	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)TP
CE58	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)TP
CE74	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
Z2200	PTMPJ0G233	PCB MAIN M-10 AS	DLT-32C6LMBD
P1	485923172S	CONN WAFER	YW025-04 (STICK)
P8	485923172S	CONN WAFER	YW025-04 (STICK)
Z2200	PTMPJRG233	PCB MAIN RADIAL AS	DLT-32C6LMBD
C199	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP)
C215	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP)
CE1	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CE10	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE100	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE11	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
CE12	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE13	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE14	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE15	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE16	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE17	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE18	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE19	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE2	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CE20	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE21	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE22	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE24	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE25	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE26	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE27	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE28	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE3	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE32	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE33	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE34	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
CE35	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE37	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE38	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE39	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE4	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE40	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE41	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE42	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE43	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE44	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
CE46	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE47	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE5	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE51	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE52	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE53	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
CE54	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE55	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE59	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP

LOC	PART CODE	PART NAME	DESCRIPTION
CE6	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE60	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE61	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE62	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE63	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE64	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE65	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CE66	CEXF1C101A	C ELECTRO	16V RSM 100MF 6X7 TP
CE67	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
CE68	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE69	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE7	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE70	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE700	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE701	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE702	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE71	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE72	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE73	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE75	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE76	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE77	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE78	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE79	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE8	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE80	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE81	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE82	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE83	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE84	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE85	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE86	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE87	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE88	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE89	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE9	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE90	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE91	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE92	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE93	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE94	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE95	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE96	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE97	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE98	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE99	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
L28	5CPX829K—	COIL PEAKING	8.2UH K (RADIAL)
SW1	5S50101Z90	SW TACT	THV502GDA
U15	1K1A7042AP	IC RESET	KIA7042AP
U70	1K1A7042AP	IC RESET	KIA7042AP
U9	1K1A7042AP	IC RESET	KIA7042AP
X1	5XE4R0000C	CRYSTAL QUARTZ	HC-49/U 4.000MHZ 20PPM
Z3	5PXXT5R5MB	FILTER CERA	XT 5.5MHZ-TP
Z2200	PTMPJAG233	PCB MAIN AXIAL AS	DLT-32C6LMBD
Z2200	PTMPJ1G233	PCB MAIN CHIP A AS	DLT-32C6LMBD
110	2193220010	SOLDER CREAM(PB-FREE)	LST309-M(SN+3.0AG/0.5CU)
A001	4859816093	PCB MAIN	234X288(1X1)T1.6
C1	HQCK101JBA	C CHIP CERA	50V CH 100PF J 1608
C101	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C102	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C103	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C104	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C106	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C107	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C108	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C109	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C11	HQCK220JBA	C CHIP CERA	50V CH 22PF J 1608
C110	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C111	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C112	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C113	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C114	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C115	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C116	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C117	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C118	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C119	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C120	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C121	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C122	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C123	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C124	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C125	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C126	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C127	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C128	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C130	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C131	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C133	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C134	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C135	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C137	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C138	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C139	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C140	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C141	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C142	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C143	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C144	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C146	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C147	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C148	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C149	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C151	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C153	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C154	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C155	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C156	HCDFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C157	HCDFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C158	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C159	HCDFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C160	HCDFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C161	HCDFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C162	HCDFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C169	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C170	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C173	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C174	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C175	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C18	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C180	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C181	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C2	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C204	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C21	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C222	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C225	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C228	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C23	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C232	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C233	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C24	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C243	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C244	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C245	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C25	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C26	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C27	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C273	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C274	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
C28	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C284	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C287	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C29	HCBD105KBA	C CHIP CERA	10V X7R 1MF K 1608
C295	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C296	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C300	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C305	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C352	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C353	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C4	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C42	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C43	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C44	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C45	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C46	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C5	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C50	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C52	HCF474ZBA	C CHIP CERA	Y5V 16V 0.47MF Z 1608
C55	HCBH224KBA	C CHIP CERA	25V X7R 0.22MF K 1608
C56	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C57	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C6	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C64	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C67	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C68	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C69	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C70	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C700	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C701	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
C702	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
C71	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C72	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C73	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C74	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C75	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C76	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C77	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C78	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C79	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C80	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C81	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C88	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C89	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C9	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C91	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C92	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C93	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C98	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C99	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
D13	DBAV99ML-B	DIODE CHIP	BAV99ML
D14	DBAV99ML-B	DIODE CHIP	BAV99ML
D15	DBAV99ML-B	DIODE CHIP	BAV99ML
D31	DMMBD1204B	DIODE CHIP	MMBD1204
D32	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D33	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D34	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D35	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D36	DMMBD1204B	DIODE CHIP	MMBD1204
D37	DBAV99ML-B	DIODE CHIP	BAV99ML
D38	DBAV99ML-B	DIODE CHIP	BAV99ML
D39	DBAV99ML-B	DIODE CHIP	BAV99ML
D40	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D41	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D44	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D45	DMMBD1204B	DIODE CHIP	MMBD1204
D46	DMMBD1204B	DIODE CHIP	MMBD1204
D48	DFM405—C	DIODE CHIP	FM405
D49	DFM405—C	DIODE CHIP	FM405
D50	DBAV99ML-B	DIODE CHIP	BAV99ML

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
D51	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D52	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D53	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D54	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D55	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D56	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D70	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D71	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
JP5	4859201360	CONN HDMI	51V019S-36WT-A1R
L1	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L10	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L11	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L12	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L13	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L14	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L15	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L16	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L17	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L18	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L19	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L2	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L20	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L23	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L24	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L25	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L26	HLC470KECE	L CHIP COIL	47UH K 1280
L27	HLC470KECE	L CHIP COIL	47UH K 1280
L29	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L3	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L30	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L31	HLC470KECE	L CHIP COIL	47UH K 1280
L32	HLC100J00A	L CHIP COIL	10UH NLC322522
L33	HLC100J00A	L CHIP COIL	10UH NLC322522
L34	HLC470KECE	L CHIP COIL	47UH K 1280
L35	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L36	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L37	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L38	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L39	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L4	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L40	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L41	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L42	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L43	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L44	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L45	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
L46	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L47	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L49	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L5	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L50	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L58	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L59	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L6	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L60	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L61	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L62	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L63	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L64	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L65	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L66	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L67	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L68	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L69	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L7	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L70	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L71	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L72	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L73	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L74	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S

LOC	PART CODE	PART NAME	DESCRIPTION
L75	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L76	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L8	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L9	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
P13	4859295120	CONN WAFER	12505WS-05A00
P14	4859295220	CONN WAFER	12505WS-06A00
P3	4859293820	CONN WAFER	GT121-31P-TD-A 31P ST
Q1	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q10	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q11	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q12	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q13	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q14	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q15	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q16	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q17	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q18	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q19	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q2	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q20	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q21	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q26	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q27	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q3	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q4	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q5	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q6	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q7	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q8	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
R10	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R100	HRFT184JBA	R CHIP	1/10 180K OHM J 1608
R101	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R104	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R107	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R108	HRFT681JBA	R CHIP	1/10 680 OHM J 1608
R112	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R114	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R115	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R116	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R119	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R120	HRFT201JBA	R CHIP	1/10 200 OHM J 1608
R123	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R124	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R126	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R128	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R129	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R130	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R133	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R136	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R137	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R138	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R139	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R140	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
R142	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R143	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R144	HRFT105JBA	R CHIP	1/10 1M OHM J 1608
R146	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R147	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R148	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R149	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R15	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R150	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R151	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R152	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R153	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R154	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R155	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R156	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R157	HRFT751JBA	R CHIP	1/10 750 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R158	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R159	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R160	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R161	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R162	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R163	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R164	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R165	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R166	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R167	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R168	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R169	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R170	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R171	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R171	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R172	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R173	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R174	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R175	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R176	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R177	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R179	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R18	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R181	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R182	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R183	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R184	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R185	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R186	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R187	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R188	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R189	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R19	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R190	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R191	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R192	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R193	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R194	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R195	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R196	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R197	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R198	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R199	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R20	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R200	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R201	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R202	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R203	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R205	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R21	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R211	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R212	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R214	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R215	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R216	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R218	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R219	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R22	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R220	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R224	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R228	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R23	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R231	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R24	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R244	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R246	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R247	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R248	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R249	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R25	HRFT220JBA	R CHIP	1/10 22 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R250	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R251	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R252	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R253	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R254	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R26	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R260	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R261	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R265	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R267	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R269	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R270	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R272	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R273	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R274	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R275	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R276	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R277	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R278	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R280	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R281	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R282	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R284	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R285	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R289	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R29	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R296	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R297	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R298	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R299	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R30	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R304	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R308	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R31	HRFT822JBA	R CHIP	1/10 8.2K OHM J 1608
R312	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R315	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R316	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R32	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R320	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R33	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R333	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R334	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R335	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R336	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R341	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R342	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R345	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R346	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R349	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R350	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R351	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R354	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R355	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R356	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R357	HRFT101JBA	R CHIP	1/10 10K OHM J 1608
R358	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R359	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R360	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R362	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R363	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R364	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R368	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R370	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R371	HRFT122JBA	R CHIP	1/10 1.2K OHM J 1608
R372	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R373	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R374	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R375	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R376	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R377	HRFT101JBA	R CHIP	1/10 100 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R378	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R379	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R388	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R389	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R390	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R391	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R393	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R394	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R396	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R405	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R406	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R408	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R409	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R41	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R410	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R411	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R412	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R413	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R416	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R417	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R42	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R420	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R423	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R428	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R43	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R430	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R431	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R432	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R433	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R434	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R439	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R440	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R441	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R442	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R443	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R448	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R449	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R45	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R450	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R451	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R452	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R453	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R456	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R458	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R46	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R460	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R465	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R469	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R47	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R473	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R477	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R478	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R479	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R48	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R480	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R487	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R49	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R491	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R492	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R493	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R494	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R495	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R499	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R50	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R500	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R503	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R504	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R505	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R506	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R51	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R512	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R513	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R522	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R523	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R524	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R525	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R526	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R527	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R528	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R529	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R53	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R530	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R531	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R532	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R533	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R534	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R535	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R54	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R540	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R541	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R542	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R543	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R56	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R57	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R58	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R60	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R600	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R601	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R602	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R603	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R604	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R605	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R606	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R607	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R62	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R63	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R64	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R65	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R66	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R67	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R68	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R69	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R70	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R701	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R702	HRFT133JBA	R CHIP	1/10 13K OHM J 1608
R703	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R704	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R706	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R707	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R71	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R710	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R711	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R712	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R713	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R714	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R715	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R717	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R72	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R721	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R722	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R723	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R724	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R725	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R726	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R727	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R728	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R729	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R73	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R730	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R731	HRFT000JBA	R CHIP	1/10 0 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R732	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R733	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R734	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R74	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R75	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R76	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R77	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R78	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R79	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R8	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R80	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R81	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R83	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R84	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R85	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R86	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R87	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R89	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R9	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R90	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R91	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R92	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R93	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R94	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R95	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R96	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R97	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R99	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RP1	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP10	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP11	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP12	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP13	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP14	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP16	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP17	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP18	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP19	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP2	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP20	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP3	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP4	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP7	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP8	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP9	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
U1	1WM8521HCD	IC CHIP STREO DAC	WM8521HC
U12	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U13	1TDA1308TC	IC CHIP HEDPHONE DRI	TDA1308T
U14	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U16	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U18	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U19	1G9171863C	IC CHIP REGULATOR	G9117-18T63U 1.8V SOT-223
U2	1CD74HC52D	IC CHIP LOGIC	CD74HC4052M96
U20	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5A D2PAK
U21	1G9117763C	IC CHIP REGULATOR	G9117T63U ADJ SOT-223
U22	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SOT-223
U23	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5A D2PAK
U24	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SOT-223
U25	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U26	1G9117763C	IC CHIP REGULATOR	G9117T63U ADJ SOT-223
U27	1G108433TD	IC CHIP REGULATOR	GT1084-33T53UF 3.3V TO-263
U28	1G108418TD	IC CHIP REGULATOR	G1084-18T53UF 1.8V TO-263
U29	1S281632DD	IC CHIP SDRAM	K4S281632F-UC75
U30	1NX8314HSQ	IC CHIP MEDIA PROCES	PNX8314HS
U33	1320ET70NQ	IC CHIP FLASH MEMORY	M29W320ET70N6E
U34	1ST232CD-Q	IC CHIP DRIVE	ST232CD
U35	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U36	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U37	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U38	1A1334BTSD	IC CHIP AUDIO DAC	UDA1334BTS

LOC	PART CODE	PART NAME	DESCRIPTION
U39	110046AHTD	IC CHIP CHANNEL DECO	TDA10046AHT
U40	1C1MAXSP2Q	IC CHIP DE-SCRAMBLER	CIMAX-SP2
U41	1ST8908BDR	IC CHIP CURRENT SWIT	ST8908DR
U42	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U43	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U44	1C245APW-D	IC CHIP TRANSCEIVER	74LVC245APW
U5	1TDA9886T-	IC CHIP IF	TDA9886T
U6	128164SBS5D	IC CHIP DDR SDRAM	V58C2128164SBI5 128M TSOP
U7	1TFDS4953-C	FET CHIP	FDS4953 SO-8 -30V -5A REEL
U8	1T96889LDQ	IC CHIP MICOM(+VIDEO	MST96889LD
X5	5227R000TF	CRYSTAL OSCILLATOR	4P 27.000MHZ 50PPM (BMS-873R)
ZZ330	PTUNSWG300	PCB UNION AS	DLT-32C3LMBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3.0)
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
IC291	1R24FH1B—	IC PREAMP	R24FH1B
LED2	DSPR39MVW-	LED	SPR-39MVW (DUAL)
M232	4852333201	PANEL CTRL	HIPS BK
M491	4854964311	BUTTON CH	ABS GY
M491A	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFXN 3CR
P911A	4859299720	CONN WAFER	20017WR-05A
P912B	4859299820	CONN WAFER	20017WR-06A
ZZ200	PTUNJOG300	PCB UNION RHU AS	DLT-32C3LMBD
ZZ200	PTUNJBG300	PCB UNION M-10 AS	DLT-32C3LMBD
ZZ200	PTUNJRG300	PCB UNION RADIAL AS	DLT-32C3LMBD
SW201	5S50101Z90	SW TACT	THVV502GDA
SW202	5S50101Z90	SW TACT	THVV502GDA
SW203	5S50101Z90	SW TACT	THVV502GDA
SW204	5S50101Z90	SW TACT	THVV502GDA
SW205	5S50101Z90	SW TACT	THVV502GDA
SW206	5S50101Z90	SW TACT	THVV502GDA
SW207	5S50101Z90	SW TACT	THVV502GDA
ZZ200	PTUNJAG300	PCB UNION AXIAL AS	DLT-32C3LMBD
A001	4859815360	PCB UNION	246X197 D1B
C997	CCZJ1H104Z	C CERA	50V F 0.1MF Z AXL(1608)
R901	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R902	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J
R903	RD-AZ432J-	R CARBON FILM	1/6 4.3K OHM J
R904	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R905	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J
R906	RD-AZ432J-	R CARBON FILM	1/6 4.3K OHM J
R907	RD-AZ113J-	R CARBON FILM	1/6 11K OHM J

Service part list

DLT-32C3

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ100	48B565J12	TRANSMITTER REMOCON	R-55J12(AAA)
ZZ110	PTACPWG233	ACCESSORY AS	DLT-32C6LMBD
60	4850Q00910	BATTERY	R03/NN
M212	4852176101	COVER BOTTOM	ABS BK
M681	4856819300	CLAMP WIRE	NYLON 66
M821	4858219401	BAG INSTRUCTION	L.D.P.E T0.05X280X470
M861	485862100	MANUAL INSTRUCTION	ENGLISH
P801A	48599PM005	CORD POWER AS	UK LP-61L+LS-60=2.0M(CORE)
ZZ120	PTBCSHG300	COVER BACK AS	DLT-32C3LMBD
M211	4852177001	COVER BACK	HIPS BK
M211A	4857818702	CLOTH BLACK	FELT T0.7 L=350 W=15
M384	4853829200	FRAME WALL KIT	SECC T=2.0
M384A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
ZZ130	PTPKCPG300	PACKING AS	DLT-32C3LMBD
M681	4856812400	BAND PP AUTO	T1.1XW17MMXL770M
M801	4858071300	BOX CARTON	DW-3
M811	485819CR00	PAD	EPS
M822	4858215701	BAG P.E	PE FOAM I0.5x1050x950
ZZ140	PTCACAG300	CABINET AS	DLT-32C3LMBD
J10A	4859006761	CABLE LVDS	LPL:FMW1214A-31A+FH10001-3
M191	4851958700	SHIELD CASE AS	7256400+5944605
M201B	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
M201C	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
M201E	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M201F	4856815910	CLAMP WIRE	EGI T0.4+TUBE+PIE 4.2
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M211B	7172401652	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK 3CR
M211C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M321	4853296800	BRKT STAND	SECC T1.6
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M322	4853296900	BRKT STAND BOX	SECC T1.0
M322A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M322B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M382	4853829102	FRAME BAR	SECC T=1.2(A-2 FINAL-LPL P
M382B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M491B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M541	4855421200	SPEC PLATE	P.E 149X59
M591	4855944702	DECO TERM B	PVC T0.25 (SL-500T)
M721A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723	4857255905	SHIELD JACK	AL 1100 T=1.0 (A-6 : SL-50
M723A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723B	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
P803B	4850712S11	CONNECTOR	2002HS-12S+2002HS-12S+UL
P803C	4850712S09	CONNECTOR	2002HS-12S+2002HS-12S+UL
V901	485LD00321	LCD PANEL	LC320W01-SL01
V902	4850M14410	MODULE POWER	FEL-3226H
ZZ200	PTFMSJG300	MASK FRONT AS	DLT-32C3LMBD
M201	4852093701	MASK FRONT	HIPS BK
M561	48556260SD	MARK BRAND	SILVER DIA-CUTTING(DOUBLE
M591	4855945000	DECO PLATE	PC T2.0
ZZ210	PTSPPWG233	SPEAKER AS	DLT-32C6LMBD
P4A	4850703S82	CONNECTOR	SMH250-03+YRT205+YRT110+US
PSA	4850702N34	CONNECTOR	SMH250-02+YRT205+YRT110+US
SP01	4858318510	SPEAKER	SP-45165F01C
SP02	4858318510	SPEAKER	SP-45165F01C
ZZ250	PTNSWVG300	STAND AS	DLT-32C3LMBD
M213	4852177301	COVER STAND BASE	HIPS BK
M383	4853831001	FRAME STAND	ABS BK
M383A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M521	4855219100	PLATE BASE STAND	SECC T2.0
M521A	7115401051	SCREW TAPPING	FLT 4X10 MFZN 3CR
M521C	4852937500	RUBBER BOTTOM	CR60 BK PHI 18.0 X T 3.0
ZZ270	PTUNSWG300	PCB UNION AS	DLT-32C3LMBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
IC291	1TSP034838	IC PREAMP	TSOP34838SJ
LED2	DSPR39MVW-	LED	SPR-39MVW (DUAL)
M232	4852333201	PANEL CTRL	HIPS BK

LOC	PART CODE	PART NAME	DESCRIPTION
M491	4854964311	BUTTON CH	ABS GY
M491A	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFZN 3CR
P911A	4859299720	CONN WAFER	20017WR-05A
P912B	4859299820	CONN WAFER	20017WR-06A
ZZ200	PTUNJOG300	PCB UNION RHU AS	DLT-32C3LMBD
ZZ200	PTUNJBG300	PCB UNION M-10 AS	DLT-32C3LMBD
ZZ200	PTUNJRG300	PCB UNION RADIAL AS	DLT-32C3LMBD
SW201	5S50101Z90	SW TACT	THVV502GDA
SW202	5S50101Z90	SW TACT	THVV502GDA
SW203	5S50101Z90	SW TACT	THVV502GDA
SW204	5S50101Z90	SW TACT	THVV502GDA
SW205	5S50101Z90	SW TACT	THVV502GDA
SW206	5S50101Z90	SW TACT	THVV502GDA
SW207	5S50101Z90	SW TACT	THVV502GDA
ZZ200	PTUNJAG300	PCB UNION AXIAL AS	DLT-32C3LMBD
A001	4859815360	PCB UNION	246X197 D1B
C997	CCZJ1H104Z	C CERA	50V F 0.1MF Z AXL(1608)
R901	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R902	RD-AZ152J-	R CARBON FILM	1/6 11K OHM J
R903	RD-AZ432J-	R CARBON FILM	1/6 4.3K OHM J
R904	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R905	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J
R906	RD-AZ432J-	R CARBON FILM	1/6 4.3K OHM J
R907	RD-AZ113J-	R CARBON FILM	1/6 11K OHM J
ZZ290	PTMPMSG233	PCB MAIN MANUAL AS	DLT-32C6LMBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
CON1	4859200440	CONN PCMCIA	PC68PRA5513XZ
JP1	4859112950	JACK SCART	DSSM-0378 STR
JP10	4859105340	JACK S-VHS	DSW-10 (STRAIGHT)
JP11	4859117450	JACK PIN	DPSS-0173S(3P ST SHIELD)
JP2	4859112950	JACK SCART	DSSM-0378 STR
JP3	4859117550	JACK PIN	DPSE-0375S
JP4	4959102340	JACK PHONE	SPJ-358H(3.5 STRAIGHT)
JP6	4959200160	CONN D-SUB	SHF-015-B111-22/BR2-J0.6
JP7	97P6316100	JACK HEAD PHONE	DHE-9959
JP8	4859201170	CONN OPTICAL SENSOR	OJ107A-T050-SHS
JP9	4859201460	CONN D-SUB 9P	SHRA0209011
M321	4853294100	BRKT POWER SW	SECC 1T
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M371	4853748800	RETA PCB	NYLON 66
M372	4956800200	CLAMP WIRE	WS-A-2-19
M381	4853829001	FRAME MAIN PCB	SECC T=1.2 (A-2 : 32C1/32C
M381B	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK 3CR
M381C	7008300851	SCREW MACHINE	WAS 3X8 MFZN 3CR
M381D	4856815900	CLAMP WIRE	EGI T0.4+TUBE+PIE 3.2
P13A	4850705S34	CONNECTOR	20017HR-05+12505HS-05+USW=
P14A	4850706S49	CONNECTOR	20017HR-06+12505HS-06+USW=
P4	4859284420	CONN WAFER	SMW250-03
P5	4959204520	CONN WAFER	SMW250-02
P6	4859285020	CONN WAFER	SMW250-09
P6A	4850709S21	CONNECTOR	SMH250-09+SMH250-09+ULW=30
P7	4859284920	CONN WAFER	SMW250-08
P8A	4850704S86	CONNECTOR	YH025-04+YH025-04+ULW=300
P9	4859295520	CONN WAFER	4602-02MV2-60-1 PLUG 2P ST
TU1	4859731230	TUNER DIGITAL	TD1318AFIHP-3(DV-IF-H-P)
U10	125L8005PC	IC FLASH MEMORY	MX25L8005PC-15G 8M 8-DIP
U11	1M24C32BN6	IC EEPROM	M24C32WRN6
U3	1M24C04BN6	IC EEPROM	M24C04WRN6
U31	14C64WBN6	IC EEPROM	M24C64-WBN6
X2	5XJ14R31AE	CRYSTAL QUARTZ	HC-49/S 14.31818MHZ 30PPM
Z1	5PK9650M—	FILTER SAW	K9650M
Z2	5PK3953M—	FILTER SAW	K3953M
ZZ200	PTMPJ2G233	PCB MAIN CHIP B AS	DLT-32C6LMBD
C10	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C100	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C105	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C12	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C342	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C343	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C344	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C345	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C346	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C347	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C348	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C349	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C350	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C351	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C354	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C355	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C47	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C48	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C49	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C53	HCQK200JBA	C CHIP CERA	50V CH 20PF J 1608
C54	HCBK152KBA	C CHIP CERA	50V X7R 1500PF K 1608
C58	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C60	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C61	HCF474ZBA	C CHIP CERA	Y5V 16V 0.47MF Z 1608
C63	HCQK391JBA	C CHIP CERA	50V CH 390PF J 1608
C66	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C7	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C8	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C82	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C83	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C84	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C85	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C86	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C87	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C90	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C94	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C95	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C96	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C97	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
R1	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R102	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R103	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R105	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R109	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R11	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R110	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R111	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R113	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R117	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R118	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R121	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R122	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R123	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R131	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R135	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R14	HRFT431JBA	R CHIP	1/10 430 OHM J 1608
R145	HRFT391FBA	R CHIP	1/10 390 OHM F 1608
R16	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R2	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R204	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R208	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R209	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R210	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R217	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R229	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R232	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R237	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R238	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R241	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R243	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R245	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R256	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R259	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R262	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R27	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R271	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R283	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R286	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R287	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R288	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R290	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R291	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R292	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R293	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R294	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R295	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R3	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R300	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R301	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R302	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R303	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R305	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R306	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R307	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R309	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R310	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R311	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R313	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R314	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R317	HRF4473JEA	R CHIP	1/4 47K OHM J 3216
R318	HRF4103JEA	R CHIP	1/4W 10K OHM J 3216
R337	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R339	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R340	HRFT361JBA	R CHIP	1/10 360 OHM J 1608
R343	HRFT241JBA	R CHIP	1/10 240 OHM J 1608
R344	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R347	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R348	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R35	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R352	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R36	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R365	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R367	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R37	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R38	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R383	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R384	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R385	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R386	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R387	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R39	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R397	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R398	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R399	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R4	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R40	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R400	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R401	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R402	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R407	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R418	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R419	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R421	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R422	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R424	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R425	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R426	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R427	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R429	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R435	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R436	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R437	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R438	HRFT750JBA	R CHIP	1/10 75 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R44	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R444	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R454	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R455	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R457	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R481	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R482	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R483	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R484	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R485	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R486	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R488	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R489	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R490	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R496	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R497	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R498	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R5	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R501	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R502	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R507	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R508	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R509	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R510	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R511	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R514	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R515	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R516	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R517	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R518	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R519	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R52	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R59	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R6	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R61	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R7	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R709	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R716	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R735	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R82	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R88	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R98	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
ZZ200	PTMPJ0G233	PCB MAIN (RHU) AS	DLT-32C6LMBD
CE30	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE31	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE36	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE45	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE56	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12) TP
CE57	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12) TP
CE58	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12) TP
CE74	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
ZZ200	PTMPJBG233	PCB MAIN M-10 AS	DLT-32C6LMBD
P1	485923172S	CONN WAFER	YW025-04 (STICK)
P8	485923172S	CONN WAFER	YW025-04 (STICK)
ZZ200	PTMPJRG233	PCB MAIN RADIAL AS	DLT-32C6LMBD
C199	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP)
C215	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP)
CE1	CEXF1H100V	C ELECTRO	50V RSM 10MF (5X7) TP
CE10	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE100	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE11	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
CE12	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE13	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE14	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE15	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE16	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE17	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE18	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE19	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE2	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP

LOC	PART CODE	PART NAME	DESCRIPTION
CE20	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE21	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE22	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE24	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE25	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE26	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE27	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE28	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE3	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE32	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE33	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE34	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
CE35	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE37	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE38	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE39	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE4	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE40	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE41	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE42	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE43	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE44	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
CE46	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE47	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE5	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE51	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE52	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE53	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
CE54	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE55	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE59	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE6	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE60	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE61	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE62	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE63	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE64	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE65	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CE66	CEXF1C101A	C ELECTRO	16V RSM 100MF 6X7 TP
CE67	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
CE68	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE69	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE7	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE70	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE700	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE701	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE702	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE71	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE72	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE73	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE75	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE76	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE77	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE78	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE79	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE8	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE80	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE81	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE82	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE83	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE84	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE85	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE86	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE87	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE88	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE89	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE9	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE90	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE91	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE92	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
CE93	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE94	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE95	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE96	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE97	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE98	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE99	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
L28	5CPX829K—	COIL PEAKING	8.2UH K (RADIAL)
SW1	5S50101Z90	SW TACT	THVV502GDA
U15	1K1A7042AP	IC RESET	KIA7042AP
U70	1K1A7042AP	IC RESET	KIA7042AP
U9	1K1A7042AP	IC RESET	KIA7042AP
X1	5XE4R0000C	CRYSTAL QUARTZ	234X288(1X1)T1.6
Z3	5PXT5R5MB	FILTER CERA	XT 5.5MHZ-TP
ZZ200	PTMPJAG233	PCB MAIN AXIAL AS	DLT-32C6LMBD
ZZ200	PTMPJ1G233	PCB MAIN CHIP A AS	DLT-32C6LMBD
110	2193220010	SOLDER CREAM(PB-FREE	LST309-M(SN+3.0AG/0.5CU)
A001	4859816093	PCB MAIN	
C1	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C101	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C102	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C103	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C104	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C106	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C107	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C108	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C109	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C11	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C110	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C111	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C112	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C113	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C114	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C115	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C116	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C117	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C118	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C119	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C120	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C121	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C122	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C123	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C124	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C125	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C126	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C127	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C128	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C130	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C131	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C133	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C134	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C135	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C137	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C138	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C139	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C140	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C141	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C142	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C143	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C144	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C146	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C147	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C148	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C149	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C151	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C153	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C154	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C155	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C156	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
C157	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C158	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C159	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C160	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C161	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C162	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C169	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C170	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C173	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C174	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C175	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C18	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C180	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C181	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C2	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C204	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C21	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C222	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C225	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C228	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C23	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C232	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C233	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C24	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C243	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C244	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C245	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C25	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C26	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C27	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C273	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C274	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C28	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C284	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C287	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C29	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C295	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C296	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C300	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C305	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C352	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C353	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C4	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C42	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C43	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C44	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C45	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C46	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C5	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C50	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C52	HCF474ZBA	C CHIP CERA	Y5V 16V 0.47MF Z 1608
C55	HCBH224KBA	C CHIP CERA	25V X7R 0.22MF K 1608
C56	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C57	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C6	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C64	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C67	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C68	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C69	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C70	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C700	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C701	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
C702	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
C71	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C72	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C73	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C74	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C75	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C76	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C77	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C78	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C79	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C80	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C81	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C88	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C89	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C9	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C91	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C92	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C93	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C98	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C99	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
D13	DBAV99ML-B	DIODE CHIP	BAV99ML
D14	DBAV99ML-B	DIODE CHIP	BAV99ML
D15	DBAV99ML-B	DIODE CHIP	BAV99ML
D31	DMMBD1204B	DIODE CHIP	MMBD1204
D32	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D33	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D34	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D35	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D36	DMMBD1204B	DIODE CHIP	MMBD1204
D37	DBAV99ML-B	DIODE CHIP	BAV99ML
D38	DBAV99ML-B	DIODE CHIP	BAV99ML
D39	DBAV99ML-B	DIODE CHIP	BAV99ML
D40	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D41	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D44	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D45	DMMBD1204B	DIODE CHIP	MMBD1204
D46	DMMBD1204B	DIODE CHIP	MMBD1204
D48	DFM405—C	DIODE CHIP	FM405
D49	DFM405—C	DIODE CHIP	FM405
D50	DBAV99ML-B	DIODE CHIP	BAV99ML
D51	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D52	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D53	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D54	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D55	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D56	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D70	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D71	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
JP5	4859201360	CONN HDMI	51V019S-36WT-A1R
L1	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L10	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L11	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L12	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L13	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L14	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L15	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L16	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L17	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L18	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L19	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L2	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L20	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L23	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L24	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L25	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L26	HLC470KECE	L CHIP COIL	47UH K 1280
L27	HLC470KECE	L CHIP COIL	47UH K 1280
L29	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L3	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L30	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L31	HLC470KECE	L CHIP COIL	47UH K 1280
L32	HLC100J00A	L CHIP COIL	10UH NLC322522
L33	HLC100J00A	L CHIP COIL	10UH NLC322522
L34	HLC470KECE	L CHIP COIL	47UH K 1280
L35	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L36	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L37	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012

LOC	PART CODE	PART NAME	DESCRIPTION
L38	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L39	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L4	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L40	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L41	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L42	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L43	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L44	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L45	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
L46	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L47	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L49	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L5	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L50	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L58	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L59	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L6	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L60	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L61	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L62	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L63	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L64	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L65	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L66	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L67	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L68	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L69	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L7	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L70	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L71	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L72	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L73	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L74	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L75	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L76	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L8	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L9	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
P13	4859295120	CONN WAFER	12505WS-05A00
P14	4859295220	CONN WAFER	12505WS-06A00
P3	4859293820	CONN WAFER	GT121-31P-TD-A 31P ST
Q1	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q10	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q11	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q12	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q13	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q14	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q15	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q16	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q17	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q18	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q19	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q2	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q20	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q21	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q26	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q27	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q3	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q4	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q5	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q6	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q7	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q8	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
R10	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R100	HRFT184JBA	R CHIP	1/10 180K OHM J 1608
R101	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R104	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R107	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R108	HRFT681JBA	R CHIP	1/10 680 OHM J 1608
R112	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R114	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R115	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R116	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R119	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R120	HRFT201JBA	R CHIP	1/10 200 OHM J 1608
R123	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R124	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R126	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R128	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R129	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R130	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R133	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R136	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R137	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R138	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R139	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R140	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
R142	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R143	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R144	HRFT105JBA	R CHIP	1/10 1M OHM J 1608
R146	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R147	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R148	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R149	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R15	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R150	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R151	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R152	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R153	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R154	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R155	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R156	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R157	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R158	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R159	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R160	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R161	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R162	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R163	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R164	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R165	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R166	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R167	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R168	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R169	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R17	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R170	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R171	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R172	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R173	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R174	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R175	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R176	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R177	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R179	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R18	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R181	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R182	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R183	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R184	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R185	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R186	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R187	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R188	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R189	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R19	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R190	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R191	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R192	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R193	HRFT470JBA	R CHIP	1/10 47 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R194	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R195	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R196	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R197	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R198	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R199	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R20	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R200	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R201	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R202	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R203	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R205	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R21	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R211	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R212	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R214	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R215	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R216	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R218	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R219	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R22	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R220	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R224	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R228	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R23	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R231	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R24	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R244	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R246	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R247	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R248	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R249	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R25	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R250	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R251	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R252	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R253	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R254	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R26	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R260	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R261	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R265	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R267	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R269	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R270	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R272	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R273	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R274	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R275	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R276	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R277	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R278	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R280	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R281	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R282	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R284	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R285	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R289	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R29	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R296	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R297	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R298	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R299	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R30	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R304	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R308	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R31	HRFT822JBA	R CHIP	1/10 8.2K OHM J 1608
R312	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R315	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R316	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R32	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R320	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R33	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R333	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R334	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R335	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R336	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R341	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R342	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R345	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R346	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R349	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R350	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R351	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R354	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R355	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R356	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R357	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R358	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R359	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R360	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R362	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R363	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R364	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R368	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R370	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R371	HRFT122JBA	R CHIP	1/10 1.2K OHM J 1608
R372	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R373	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R374	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R375	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R376	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R377	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R378	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R379	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R388	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R389	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R390	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R391	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R393	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R394	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R396	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R405	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R406	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R408	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R409	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R41	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R410	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R411	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R412	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R413	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R416	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R417	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R42	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R420	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R423	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R428	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R43	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R430	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R431	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R432	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R433	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R434	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R439	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R440	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R441	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R442	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R443	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R448	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R449	HRFT330JBA	R CHIP	1/10 33 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R45	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R450	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R451	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R452	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R453	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R456	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R458	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R46	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R460	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R465	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R469	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R47	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R473	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R477	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R478	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R479	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R48	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R480	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R487	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R49	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R491	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R492	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R493	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R494	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R495	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R499	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R50	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R500	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R503	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R504	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R505	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R506	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R51	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R512	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R513	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R522	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R523	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R524	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R525	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R526	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R527	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R528	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R529	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R53	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R530	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R531	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R532	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R533	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R534	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R535	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R54	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R540	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R541	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R542	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R543	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R56	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R57	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R58	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R60	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R600	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R601	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R602	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R603	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R604	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R605	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R606	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R607	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R62	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R63	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R64	HRFT100JBA	R CHIP	1/10 10 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R65	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R66	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R67	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R68	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R69	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R70	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R701	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R702	HRFT133JBA	R CHIP	1/10 13K OHM J 1608
R703	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R704	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R706	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R707	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R71	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R710	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R711	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R712	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R713	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R714	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R715	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R717	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R72	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R721	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R722	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R723	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R724	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R725	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R726	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R727	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R728	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R729	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R73	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R730	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R731	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R732	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R733	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R734	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R74	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R75	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R76	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R77	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R78	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R79	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R8	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R80	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R81	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R83	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R84	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R85	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R86	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R87	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R89	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R9	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R90	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R91	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R92	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R93	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R94	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R95	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R96	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R97	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R99	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RP1	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP10	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP11	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP12	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP13	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP14	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP16	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP17	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP18	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216

LOC	PART CODE	PART NAME	DESCRIPTION
RP19	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP2	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP20	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP3	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP4	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP7	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP8	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP9	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
U1	1WM8521HCD	IC CHIP STEREO DAC	WM8521HC
U12	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U13	1TDA1308TC	IC CHIP HEADPHONE DRI	TDA1308T
U14	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U16	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U18	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U19	1G91171863C	IC CHIP REGULATOR	G9117-18T63U 1.8V SOT-223
U2	1CD74HC52D	IC CHIP LOGIC	CD74HC4052M96
U20	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5
U21	1G9117T63C	IC CHIP REGULATOR	G9117T63U ADJ SOT-223
U22	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SOT-223
U23	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5
U24	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SOT-223
U25	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U26	1G9117T63C	IC CHIP REGULATOR	G9117T63U ADJ SOT-223
U27	1G108433TD	IC CHIP REGULATOR	G1084-33T53UF 3.3V TO-263
U28	1G108418TD	IC CHIP REGULATOR	G1084-18T53UF 1.8V TO-263
U29	1S281632DD	IC CHIP SDRAM	K4S281632F-UC75
U30	1NX8314HSQ	IC CHIP MEDIA PROCES	PNX8314HS
U33	1320ET70NQ	IC CHIP FLASH MEMORY	M29W320ET70N6E
U34	1ST232CD-Q	IC CHIP DRIVE	ST232CD
U35	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U36	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U37	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U38	1A1334BTS	IC CHIP AUDIO DAC	UDA1334BTS
U39	110046AHTD	IC CHIP CHANNEL DECO	TDA10046AHT
U40	1C1MAXSP2Q	IC CHIP DE-SCRAMBLER	CIMAX-SP2
U41	1ST890BDR	IC CHIP CURRENT SWIT	ST890BDR
U42	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U43	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U44	1C245APW-D	IC CHIP TRANSCEIVER	74LVC245APW
U5	1TDA9886T-	IC CHIP IF	TDA9886T
U6	128164SB5D	IC CHIP DDR SDRAM	V58C2128164SB15 128M TSOP
U7	TFDS4953-C	FET CHIP	FDS4953 SO-8 -30V -5A REEL
U8	1T96889LDQ	IC CHIP MICOM(+VIDEO	MST96889LD
X5	5227R000TF	CRYSTAL OSCILLATOR	4P 27.000MHZ 50PPM (BMS-87

Service part list

DLT-32C6

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ100	48B565J12	TRANSMITTER REMOCON	R-55J12(AAA)
ZZ110	PTACPWG233	ACCESSORY AS	DLT-32C6LMBD
60	4850Q00910	BATTERY	R03NN
M212	4852176101	COVER BOTTOM	ABS BK
M681	4856819300	CLAMP WIRE	NYLON 66
M821	4858219401	BAG INSTRUCTION	L.D.P.E T.0.05X280X470
M861	4.86E+08	MANUAL INSTRUCTION	ENGLISH
P801A	48599PM005	CORD POWER AS	UK LP-61L+LS-60-2.0M(CORE)
ZZ120	PTBCSHG233	COVER BACK AS	DLT-32C6LMBD
M211	4852177001	COVER BACK	HIPS BK
M211A	4857818702	CLOTH BLACK	FELT T0.7 L=350 W=15
M384	4853829200	FRAME WALL KIT	SECC T=2.0
M384A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
ZZ130	PTPKCPG233	PACKING AS	DLT-32C6LMBD
M681	4856812400	BAND PP AUTO	T1.1XW17MMXL770M
M801	4858071300	BOX CARTON	DW-3
M811	485819DA00	PAD	EPS
M822	4858215701	BAG P.E	PE FOAM t0.5x1050x950
ZZ140	PTCACAG233	CABINET AS	DLT-32C6LMBD
J10A	4859006761	CABLE LVDS	LPL:FMW1214A-31A+FH10001-3
M191	4851958700	SHIELD CASE AS	7256400+5944605
M201E	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M201F	4856815910	CLAMP WIRE	EGI T0.4+TUBE+PIE 4.2
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M211B	7172401652	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK 3CR
M211C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M321	4853296800	BRKT STAND	SECC T1.6
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M322	4853296900	BRKT STAND BOX	SECC T1.0
M322A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M322B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M382	4853829102	FRAME BAR	SECC T=1.2(A-2 FINAL LPL P
M382B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M491B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M541	4855421200	SPEC PLATE	P.E 149X59
M551	4855557101	DECO SENSOR	PC GY
M551A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
M592	4855944702	DECO TERM B	PVC T0.25 (SL-500T)
M721A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723	4857255905	SHIELD JACK	AL 1100 T=1.0 (A-6 : SL-50
M723A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723B	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
P803B	4850712S11	CONNECTOR	2002ZHS-12S+2002ZHS-12S+UL
P803C	4850712S09	CONNECTOR	2002ZHS-12S+2002ZHS-12S+UL
V901	485LD00321	LCD PANEL	LC320W01-SL01
V902	4850M14410	MODULE POWER	FEL-3226H
ZZ200	PTFMSJG233	MASK FRONT AS	DLT-32C6LMBD
M201	4852094801	MASK FRONT	HIPS BK
M561	4855626000	MARK BRAND	SILVER DIA-CUTTING(DOUBLE
M591	4855946100	DECO PLATE	PC T2.0
ZZ210	PTSPPWG233	SPEAKER AS	DLT-32C6LMBD
P4A	4850703S82	CONNECTOR	SMH250-03+YRT205+YRT110+US
P5A	4850702N34	CONNECTOR	SMH250-02+YRT205+YRT110+US
SP01	4858318510	SPEAKER	SP-45165F01C
SP02	4858318510	SPEAKER	SP-45165F01C
ZZ250	PTSNSWG233	STAND AS	DLT-32C6LMBD
M213	4852178801	COVER STAND BASE	HIPS BK
M383	4853831001	FRAME STAND	ABS BK
M383A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M521	4855219100	PLATE BASE STAND	SECC T2.0
M521A	7115401051	SCREW TAPPING	FLT 4X10 MFZN 3CR
M521C	4852937500	RUBBER BOTTOM	CR60 BK PHI 18.0 X T 3.0
ZZ290	PTMPMSG233	PCB MAIN MANUAL AS	DLT-32C6LMBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
CON1	4859200440	CONN PCMCIA	PC68PRA5513XZ
JP1	4859112950	JACK SCART	DSSM-0378 STR
JP10	4859105340	JACK S-VHS	DSW-10 (STRAIGHT)

LOC	PART CODE	PART NAME	DESCRIPTION
JP11	4859117450	JACK PIN	DPSS-0173S(3P ST SHIELD)
JP2	4859112950	JACK SCART	DSSM-0378 STR
JP3	4859117550	JACK PIN	DPSE-0375S
JP4	4959102340	JACK PHONE	SPJ-358H(3.5 STRAIGHT)
JP6	4959200160	CONN D-SUB	SHF-015-B111-22/BR2-J0.6
JP7	97P6316100	JACK HEAD PHONE	DHSE-9959
JP8	4859201170	CONN OPTICAL SENSOR	OJ107A-T050-SHS
JP9	4859201460	CONN D-SUB 9P	SHRA0209011
M321	4853294100	BRKT POWER SW	SECC 1T
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M371	4853748800	RETA PCB	NYLON 66
M372	4956800200	CLAMP WIRE	WS-A-2-19
M381	4853829001	FRAME MAIN PCB	SECC T=1.2 (A-2 : 32C1/32C
M381B	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK 3CR
M381C	7008300851	SCREW MACHINE	WAS 3X8 MFZN 3CR
M381D	4856815900	CLAMP WIRE	EGI T0.4+TUBE+PIE 3.2
P13A	4850705S34	CONNECTOR	20017HR-05+12505HS-05+USW=
P14A	4850706S49	CONNECTOR	20017HR-06+12505HS-06+USW=
P4	4859284420	CONN WAFER	SMW250-03
P5	4959240520	CONN WAFER	SMW250-02
P6	4859285020	CONN WAFER	SMW250-09
P6A	4850709S21	CONNECTOR	SMH250-09+SMH250-09+ULW=30
P7	4859284920	CONN WAFER	SMW250-08
P8A	4850704S86	CONNECTOR	YH025-04+YH025-04+ULW=300
P9	4859295520	CONN WAFER	4602-02MV2-60-1 PLUG 2P ST
TU1	4859731230	TUNER DIGITAL	TD1318AFIHP-3(DV-IF-H-P)
U10	125L8005PC	IC FLASH MEMORY	MX25L8005PC-15G 8M 8-DIP
U11	1M24C32BN6	IC EEPROM	M24C32WRN6
U3	1M24C04BN6	IC EEPROM	M24C04WRN6
U31	14C64WBN6	IC EEPROM	M24C64-WBN6
X2	5XJ14R31AE	CRYSTAL QUARTZ	HC-49/S 14.31818MHZ 30PPM
Z1	5PK9650M—	FILTER SAW	K9650M
Z2	5PK3953M—	FILTER SAW	K3953M
ZZ200	PTMPJ2G233	PCB MAIN CHIP B AS	DLT-32C6LMBD
C10	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C100	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C105	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C12	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C13	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C132	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C136	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C14	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C145	HCB0105KBA	C CHIP CERA	10V X7R 1MF K 1608
C15	HCBK472KBA	C CHIP CERA	50V X7R 4700PF K 1608
C16	HCBK472KBA	C CHIP CERA	50V X7R 4700PF K 1608
C164	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C166	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
C168	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
C17	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C171	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C172	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C176	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C177	HCB0105KBA	C CHIP CERA	10V X7R 1MF K 1608
C182	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C183	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C184	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C185	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C186	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C187	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C188	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C189	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C19	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C190	HCBK153KBA	C CHIP CERA	50V X7R 0.015MF K 1608
C191	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C192	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C193	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C194	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C195	HCBK153KBA	C CHIP CERA	50V X7R 0.015MF K 1608
C197	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C198	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C95	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C96	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C97	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
R1	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R102	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R103	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R105	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R109	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R11	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R110	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R111	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R113	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R117	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R118	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R121	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R122	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R13	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R131	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R135	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R14	HRFT431JBA	R CHIP	1/10 430 OHM J 1608
R145	HRFT391FBA	R CHIP	1/10 390 OHM F 1608
R16	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R2	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R204	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R208	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R209	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R210	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R217	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R229	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R232	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R237	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R238	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R241	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R243	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R245	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R256	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R259	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R262	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R27	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R271	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R283	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R286	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R287	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R288	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R290	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R291	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R292	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R293	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R294	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R295	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R3	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R300	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R301	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R302	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R303	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R305	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R306	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R307	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R309	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R310	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R311	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R313	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R314	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R317	HRF4473JEA	R CHIP	1/4 47K OHM J 3216
R318	HRF4403JEA	R CHIP	1/4W 10K OHM J 3216
R337	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R339	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R340	HRFT361JBA	R CHIP	1/10 360 OHM J 1608
R343	HRFT241JBA	R CHIP	1/10 240 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R344	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R347	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R348	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R35	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R352	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R36	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R365	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R367	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R37	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R38	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R383	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R384	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R385	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R386	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R387	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R39	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R397	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R398	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R399	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R4	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R40	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R400	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R401	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R402	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R407	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R418	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R419	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R421	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R422	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R424	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R425	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R426	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R427	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R429	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R435	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R436	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R437	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R438	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R44	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R444	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R454	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R455	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R457	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R481	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R482	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R483	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R484	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R485	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R486	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R488	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R489	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R490	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R496	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R497	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R498	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R5	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R501	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R502	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R507	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R508	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R509	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R510	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R511	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R514	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R515	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R516	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R517	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R518	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R519	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R52	HRFT101JBA	R CHIP	1/10 100 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R59	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R6	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R61	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R7	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R709	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R716	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R735	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R82	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R88	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R98	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
ZZ200	PTMPJG233	PCB MAIN (RHU) AS	DLT-32C6LMBD
CE30	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE31	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE36	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE45	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE56	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)TP
CE57	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)TP
CE58	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)TP
CE74	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
ZZ200	PTMPJG233	PCB MAIN M-10 AS	DLT-32C6LMBD
P1	485923172S	CONN WAFER	YW025-04 (STICK)
P8	485923172S	CONN WAFER	YW025-04 (STICK)
ZZ200	PTMPJRG233	PCB MAIN RADIAL AS	DLT-32C6LMBD
C199	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP)
C215	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP)
CE1	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CE10	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE100	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE11	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
CE12	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE13	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE14	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE15	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE16	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE17	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE18	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE19	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE2	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CE20	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE21	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE22	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE24	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE25	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE26	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE27	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE28	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE3	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE32	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE33	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE34	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
CE35	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE37	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE38	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE39	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE4	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE40	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE41	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE42	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE43	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE44	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
CE46	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE47	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE5	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE51	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE52	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE53	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
CE54	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE55	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE59	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE6	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP

LOC	PART CODE	PART NAME	DESCRIPTION
CE60	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE61	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE62	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE63	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE64	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE65	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CE66	CEXF1C101A	C ELECTRO	16V RSM 100MF 6X7 TP
CE67	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
CE68	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE69	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE7	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE70	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE700	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE701	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE702	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE71	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE72	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE73	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE75	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE76	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE77	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE78	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE79	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE8	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE80	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE81	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE82	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE83	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE84	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE85	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE86	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE87	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE88	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE89	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE9	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE90	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE91	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE92	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE93	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE94	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE95	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE96	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE97	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE98	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE99	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
L28	5CPX829K—	COIL PEAKING	8.2UH K (RADIAL)
SW1	5S50101Z90	SW TACT	THV502GDA
U15	1K1A7042AP	IC RESET	KIA7042AP
U70	1K1A7042AP	IC RESET	KIA7042AP
U9	1K1A7042AP	IC RESET	KIA7042AP
X1	5XE4R0000C	CRYSTAL QUARTZ	HC-49/U 4.000MHZ 20PPM
Z3	5PXXT5R5MB	FILTER CERA	XT 5.5MHZ-TP
ZZ200	PTMPJAG233	PCB MAIN AXIAL AS	DLT-32C6LMBD
ZZ200	PTMPJ1G233	PCB MAIN CHIP A AS	DLT-32C6LMBD
110	2193220010	SOLDER CREAM(PB-FREE)	LST309-M(SN+3.0AG/0.5CU)
A001	4859816093	PCB MAIN	234X288(1X1)T1.6
C1	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C101	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C102	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C103	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C104	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C106	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C107	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C108	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C109	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C11	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C110	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C111	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C112	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C113	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
C114	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C115	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C116	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C117	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C118	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C119	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C120	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C121	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C122	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C123	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C124	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C125	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C126	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C127	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C128	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C130	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C131	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C133	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C134	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C135	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C137	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C138	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C139	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C140	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C141	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C142	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C143	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C144	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C146	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C147	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C148	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C149	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C151	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C153	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C154	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C155	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C156	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C157	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C158	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C159	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C160	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C161	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C162	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C169	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C170	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C173	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C174	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C175	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C18	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C180	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C181	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C2	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C204	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C21	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C222	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C225	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C228	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C23	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C232	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C233	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C24	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C243	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C244	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C245	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C25	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C26	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C27	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C273	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C274	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C28	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
C284	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C287	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C29	HCB105KBA	C CHIP CERA	10V X7R 1MF K 1608
C295	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C296	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C300	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C305	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C352	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C353	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C4	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C42	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C43	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C44	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C45	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C46	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C5	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C50	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C52	HCF474ZBA	C CHIP CERA	Y5V 16V 0.47MF Z 1608
C55	HCB224KBA	C CHIP CERA	25V X7R 0.22MF K 1608
C56	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C57	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C6	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C64	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C67	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C68	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C69	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C70	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C700	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C701	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
C702	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
C71	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C72	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C73	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C74	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C75	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C76	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C77	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C78	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C79	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C80	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C81	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C88	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C89	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C9	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C91	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C92	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C93	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C98	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C99	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
D13	DBAV99ML-B	DIODE CHIP	BAV99ML
D14	DBAV99ML-B	DIODE CHIP	BAV99ML
D15	DBAV99ML-B	DIODE CHIP	BAV99ML
D31	DMMBD1204B	DIODE CHIP	MMD1204
D32	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D33	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D34	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D35	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D36	DMMBD1204B	DIODE CHIP	MMD1204
D37	DBAV99ML-B	DIODE CHIP	BAV99ML
D38	DBAV99ML-B	DIODE CHIP	BAV99ML
D39	DBAV99ML-B	DIODE CHIP	BAV99ML
D40	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D41	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D44	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D45	DMMBD1204B	DIODE CHIP	MMD1204
D46	DMMBD1204B	DIODE CHIP	MMD1204
D48	DFM405—C	DIODE CHIP	FM405
D49	DFM405—C	DIODE CHIP	FM405
D50	DBAV99ML-B	DIODE CHIP	BAV99ML
D51	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
D52	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D53	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D54	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D55	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D56	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D70	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D71	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
JP5	4859201360	CONN HDMI	51V019S-36WT-A1R
L1	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L10	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L11	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L12	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L13	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L14	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L15	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L16	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L17	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L18	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L19	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L2	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L20	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L23	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L24	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L25	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L26	HLC470KECE	L CHIP COIL	47UH K 1280
L27	HLC470KECE	L CHIP COIL	47UH K 1280
L29	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L3	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L30	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L31	HLC470KECE	L CHIP COIL	47UH K 1280
L32	HLC100J00A	L CHIP COIL	10UH NLC322522
L33	HLC100J00A	L CHIP COIL	10UH NLC322522
L34	HLC470KECE	L CHIP COIL	47UH K 1280
L35	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L36	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L37	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L38	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L39	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L4	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L40	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L41	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L42	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L43	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L44	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L45	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
L46	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L47	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L49	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L5	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L50	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L58	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L59	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L6	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L60	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L61	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L62	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L63	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L64	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L65	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L66	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L67	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L68	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L69	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L7	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L70	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L71	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L72	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L73	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L74	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L75	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S

LOC	PART CODE	PART NAME	DESCRIPTION
L76	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBY 2012
L8	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
L9	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBY 2012
P13	4859295120	CONN WAFER	12505WS-05A00
P14	4859295220	CONN WAFER	12505WS-06A00
P3	4859293820	CONN WAFER	GT121-31P-TD-A 31P ST
Q1	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q10	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q11	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q12	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q13	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q14	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q15	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q16	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q17	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q18	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q19	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q2	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q20	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q21	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q26	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q27	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q3	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q4	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q5	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q6	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q7	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q8	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
R10	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R100	HRFT184JBA	R CHIP	1/10 180K OHM J 1608
R101	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R104	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R107	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R108	HRFT681JBA	R CHIP	1/10 680 OHM J 1608
R112	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R114	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R115	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R116	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R119	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R120	HRFT201JBA	R CHIP	1/10 200 OHM J 1608
R123	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R124	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R126	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R128	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R129	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R130	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R133	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R136	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R137	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R138	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R139	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R140	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
R142	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R143	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R144	HRFT105JBA	R CHIP	1/10 1M OHM J 1608
R146	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R147	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R148	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R149	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R15	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R150	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R151	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R152	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R153	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R154	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R155	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R156	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R157	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R158	HRFT391JBA	R CHIP	1/10 390 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R159	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R160	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R161	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R162	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R163	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R164	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R165	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R166	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R167	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R168	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R169	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R17	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R170	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R171	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R172	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R173	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R174	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R175	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R176	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R177	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R179	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R18	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R181	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R182	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R183	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R184	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R185	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R186	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R187	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R188	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R189	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R19	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R190	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R191	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R192	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R193	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R194	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R195	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R196	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R197	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R198	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R199	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R20	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R200	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R201	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R202	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R203	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R205	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R21	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R211	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R212	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R214	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R215	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R216	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R218	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R219	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R22	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R220	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R224	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R228	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R23	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R231	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R24	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R244	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R246	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R247	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R248	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R249	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R25	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R250	HRFT000JBA	R CHIP	1/10 0 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R251	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R252	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R253	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R254	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R26	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R260	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R261	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R265	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R267	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R269	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R270	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R272	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R273	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R274	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R275	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R276	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R277	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R278	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R280	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R281	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R282	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R284	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R285	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R289	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R29	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R296	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R297	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R298	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R299	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R30	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R304	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R308	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R31	HRFT822JBA	R CHIP	1/10 8.2K OHM J 1608
R312	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R315	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R316	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R32	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R320	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R33	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R333	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R334	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R335	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R336	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R341	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R342	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R345	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R346	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R349	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R350	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R351	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R354	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R355	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R356	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R357	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R358	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R359	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R360	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R362	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R363	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R364	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R368	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R370	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R371	HRFT122JBA	R CHIP	1/10 1.2K OHM J 1608
R372	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R373	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R374	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R375	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R376	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R377	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R378	HRFT101JBA	R CHIP	1/10 100 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R379	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R388	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R389	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R390	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R391	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R393	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R394	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R396	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R405	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R406	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R408	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R409	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R41	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R410	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R411	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R412	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R413	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R416	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R417	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R42	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R420	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R423	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R428	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R43	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R430	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R431	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R432	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R433	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R434	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R439	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R440	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R441	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R442	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R443	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R448	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R449	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R45	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R450	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R451	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R452	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R453	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R456	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R458	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R46	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R460	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R465	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R469	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R47	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R473	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R477	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R478	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R479	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R48	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R480	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R487	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R49	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R491	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R492	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R493	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R494	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R495	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R499	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R50	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R500	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R503	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R504	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R505	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R506	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R51	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R512	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R513	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R522	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R523	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R524	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R525	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R526	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R527	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R528	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R529	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R53	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R530	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R531	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R532	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R533	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R534	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R535	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R54	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R540	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R541	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R542	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R543	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R56	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R57	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R58	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R60	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R600	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R601	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R602	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R603	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R604	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R605	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R606	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R607	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R62	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R63	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R64	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R65	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R66	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R67	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R68	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R69	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R70	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R701	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R702	HRFT133JBA	R CHIP	1/10 13K OHM J 1608
R703	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R704	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R706	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R707	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R71	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R710	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R711	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R712	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R713	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R714	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R715	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R717	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R72	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R721	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R722	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R723	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R724	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R725	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R726	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R727	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R728	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R729	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R73	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R730	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R731	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R732	HRFT000JBA	R CHIP	1/10 0 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R733	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R734	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R74	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R75	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R76	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R77	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R78	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R79	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R8	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R80	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R81	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R83	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R84	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R85	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R86	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R87	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R89	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R9	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R90	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R91	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R92	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R93	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R94	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R95	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R96	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R97	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R99	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RP1	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP10	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP11	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP12	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP13	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP14	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP16	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP17	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP18	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP19	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP2	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP20	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP3	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP4	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM 3216
RP7	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP8	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP9	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
U1	1WM8521HCD	IC CHIP STREO DAC	WM8521HC
U12	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U13	1TDA1308TC	IC CHIP HEDPHONE DRI	TDA1308T
U14	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U16	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U18	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U19	1G9171863C	IC CHIP REGULATOR	G9117-18T63U 1.8V SOT-223
U2	1CD74HC52D	IC CHIP LOGIC	CD74HC4052M96
U20	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5
U21	1G9117T63C	IC CHIP REGULATOR	G9117T63U ADJ SOT-223
U22	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SOT-223
U23	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5
U24	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SOT-223
U25	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U26	1G9117T63C	IC CHIP REGULATOR	G9117T63U ADJ SOT-223
U27	1G1084337D	IC CHIP REGULATOR	GT1084-33T53UF 3.3V TO-263
U28	1G1084187D	IC CHIP REGULATOR	G1084-18T53UF 1.8V TO-263
U29	1S281632DD	IC CHIP SDRAM	K4S281632F-UC75
U30	1NX8314HSQ	IC CHIP MEDIA PROCES	PNX8314HS
U33	1320ET70N1Q	IC CHIP FLASH MEMORY	M29WV320ET70N6E
U34	1ST232CD-Q	IC CHIP DRIVE	ST232CD
U35	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U36	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U37	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U38	1A1334BTSD	IC CHIP AUDIO DAC	UDA1334BTS
U39	110046AHTD	IC CHIP CHANNEL DECO	TDA10046AHT

LOC	PART CODE	PART NAME	DESCRIPTION
U40	1C1MAXSP2Q	IC CHIP DE-SCRAMBLER	CIMAX-SP2
U41	1ST890BDR	IC CHIP CURRENT SWIT	ST890BDR
U42	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U43	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U44	1C245APW-D	IC CHIP TRANSCEIVER	74LVC245APW
U5	1TDA9886T-	IC CHIP IF	TDA9886T
U6	128164SB5D	IC CHIP DDR SDRAM	V58C2128164SBi5 128M TSOP
U7	TFDS4953-C	FET CHIP	FDS4953 SO-8 -30V -5A REEL
U8	1T96889LDQ	IC CHIP MICOM(+VIDEO	MST96889LD
X5	5227R000TF	CRYSTAL OSCILLATOR	4P 27.000MHZ 50PPM (BMS-87
ZZ310	PTUNSWG233	PCB UNION AS	DLT-32C6LMBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
IC290	1TSOP34838	IC PREAMP	TSOP34838SJ
LED1	DSPR39MVW-	LED	SPR-39MVW (DUAL)
M232	4852333201	PANEL CTRL	HIPS BK
M491	4854964311	BUTTON CH	ABS GY
M491A	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFZN 3CR
P911A	4859299720	CONN WAFER	20017WR-05A
P912A	4859299820	CONN WAFER	20017WR-06A
ZZ200	PTUNJ2G233	PCB UNION CHIP B AS	DLT-32C6LMBD
ZZ200	PTUNJ0G233	PCB UNION RHU AS	DLT-32C6LMBD
ZZ200	PTUNJBG233	PCB UNION M-10 AS	DLT-32C6LMBD
ZZ200	PTUNJRG233	PCB UNION RADIAL AS	DLT-32C6LMBD
SW201	5S50101Z90	SW TACT	THVV502GDA
SW202	5S50101Z90	SW TACT	THVV502GDA
SW203	5S50101Z90	SW TACT	THVV502GDA
SW204	5S50101Z90	SW TACT	THVV502GDA
SW205	5S50101Z90	SW TACT	THVV502GDA
SW206	5S50101Z90	SW TACT	THVV502GDA
SW207	5S50101Z90	SW TACT	THVV502GDA
ZZ200	PTUNJAG233	PCB UNION AXIAL AS	DLT-32C6LMBD
A002	4859815360	PCB UNION	246X197 D1B
C996	CCZ11H104Z	C CERA	50V F 0.1MF Z AXL(1608)
R901	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R902	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J
R903	RD-AZ432J-	R CARBON FILM	1/6 4.3K OHM J
R904	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R905	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J
R906	RD-AZ432J-	R CARBON FILM	1/6 4.3K OHM J
R907	RD-AZ113J-	R CARBON FILM	1/6 11K OHM J

Service part list

DLT-37C3

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ100	48B565J12	TRANSMITTER REMOCON	R-55J12(AAA)
ZZ110	PTACPWG262	ACCESSORY AS	DLT-37C3LMBD
60	4850Q00910	BATTERY	R03/NN
M212	4852177601	COVER BOTTOM	HIPS BK
M681	4856819300	CLAMP WIRE	NYLON 66
M821	4858219401	BAG INSTRUCTION	L.D.P.E T0.05X280X470
M861	4.86E+08	MANUAL INSTRUCTION	ENGLISH
P801A	48599PM005	CORD POWER AS	UK LP-61L+LS-60=2.0M(CORE)
ZZ120	PTBCSHG262	COVER BACK AS	DLT-37C3LMBD
M211	4852177501	COVER BACK	HIPS BK
M211C	4855944700	DECO TERM B	PC 0.25T
M388	4853829200	FRAME WALL KIT	SECC T=2.0
M388A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
ZZ130	PTPKCPG262	PACKING AS	DLT-37C3LMBD
M801	4858071600	BOX CARTON	DW-3
M811	485819CT00	PAD	EPS
M822	4858215001	BAG P.E	PE FOAM 10.5x1200x1150
ZZ140	PTCACAG262	CABINET AS	DLT-37C3LMBD
J10A	4859006761	CABLE LVDS	LPL:FMW1214A-31A+FH10001-3
M191	4851958700	SHIELD CASE AS	7256400+5944605
M201A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M211B	7172401652	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK 3CR
M211C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M321	4853297000	BRKT STAND	SECC T1.6
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M322	4853296700	BRKT STAND BOX	SECC T1.0
M322A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M381A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M382	4853829800	FRAME SURPORT	SECC T1.2
M382A	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M383	4853829400	FRAME SIDE T	SECC T1.2 (LPL)
M383A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M383B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M384	4853829600	FRAME SIDE B	SECC T1.6 (LPL)
M384A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M384B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M384C	4856815900	CLAMP WIRE	EGI T0.4+TUBE+PIE 3.2
M385	4853830000	FRAME SIDE L/R	SECC T1.2 (LPL)
M385A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M491B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M541	4855421200	SPEC PLATE	P.E 149X59
M681	4956800200	CLAMP WIRE	WS-A-2-19
M721A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723	4857255905	SHIELD JACK	AL 1100 T=L.0 (A-6 : SL-50
M723A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
P803B	4850712S11	CONNECTOR	20022HS-12S+20022HS-12S+UL
P803C	4850712S09	CONNECTOR	20022HS-12S+20022HS-12S+UL
V901	485LD00370	LCD PANEL	LC370WX1-SL01
V902	4850M14510	MODULE POWER	FEL-37H
ZZ200	PTFMSJG262	MASK FRONT AS	DLT-37C3LMBD
M201	4852094001	MASK FRONT	HIPS BK
M201A	4857743800	CUSION PANEL	PVC 400 X 10 T=1.0
M561	4855625700	MARK BRAND	SILVER DIA-CUTTING(DOUBLE
M591	4855945400	DECO PLATE	PC T2.0
ZZ210	PTSPPWG262	SPEAKER AS	DLT-37C3LMBD
SP01	48A8317000	SPEAKER SYSTEM	SS-57165F01CR
SP01A	4856017800	SCREW SPKR FIX	SWRM+SECC 3CR
SP02	48A8317000	SPEAKER SYSTEM	SS-57165F01CR
SP02A	4856017800	SCREW SPKR FIX	SWRM+SECC 3CR
SP03A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
SP04A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
ZZ250	PTSNSWG229	STAND AS	DLV-37C3LMBS
M387	4853831201	FRAME STAND	ABS BK
M387A	7115401552	SCREW TAPPING	FLT 4X15 MFZN BK 3CR
M520	4851957501	COVER ASSY	STAND SUB ASSY (NORMAL SPR
ZZ290	PTMPMSG262	PCB MAIN MANUAL AS	DLT-37C3LMBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)

LOC	PART CODE	PART NAME	DESCRIPTION
400	2291050312	FLUX SOLVENT	S-3000
CON1	4859200440	CONN PCMCIA	PC68PRA5513XZ
JP1	4859112950	JACK SCART	DSSM-0378 STR
JP10	4859105340	JACK S-VHS	DSW-10 (STRAIGHT)
JP11	4859117450	JACK PIN	DPSS-0173S(3P ST SHIELD)
JP2	4859112950	JACK SCART	DSSM-0378 STR
JP3	4859117550	JACK PIN	DPSE-0375S
JP4	4859102340	JACK PHONE	SPJ-358H(3.5 STRAIGHT)
JP6	4859200160	CONN D-SUB	SHF-015-B111-22/BR2-J0.6
JP7	97P6316100	JACK HEAD PHONE	DHSE-9959
JP8	4859201170	CONN OPTICAL SENSOR	OJ107A-T050-SHS
JP9	4859201460	CONN D-SUB 9P	SHRA0209011
M321	4853294100	BRKT POWER SW	SECC 1T
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M371	4853748800	RETA PCB	NYLON 66
M372	4956800200	CLAMP WIRE	WS-A-2-19
M381	4855218900	PLATE LOWER	"SECC, T=1.2"
M381B	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFZN 3CR
M381C	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFZN 3CR
M381D	7008300851	SCREW MACHINE	WAS 3X8 MFZN 3CR
M381E	4856815900	CLAMP WIRE	EGI T0.4+TUBE+PIE 3.2
M381F	4956800200	CLAMP WIRE	WS-A-2-19
P13A	4850705S34	CONNECTOR	20017HR-05+12505HS-05+USW=
P14A	4850706S49	CONNECTOR	20017HR-06+12505HS-06+USW=
P4	4859284420	CONN WAFER	SMW250-03
P5	4959240520	CONN WAFER	SMW250-02
P6	4859285020	CONN WAFER	SMW250-09
PGA	4850709S21	CONNECTOR	SMH250-09+SMH250-09+ULW=30
P7	4859284920	CONN WAFER	SMW250-08
P8A	4850704S86	CONNECTOR	YH025-04+YH025-04+ULW=300
P9	4859295520	CONN WAFER	4602-02MV2-60-K PLUG 2P ST
TU1	4859731230	TUNER DIGITAL	TD1318AFIHP-3(DV+IF-H-P)
U10	125L8005PC	IC FLASH MEMORY	MX25L8005PC-15G 8M 8-DIP
U11	1M24C32BN6	IC EEPROM	M24C32WRN6
U3	1M24C04BN6	IC EEPROM	M24C04WRN6
U31	14C64WBN6	IC EEPROM	M24C64-WBN6
X2	5XJ14R31AE	CRYSTAL QUARTZ	HC-49/S 14.31818MHZ 30PPM
Z1	5PK9650M—	FILTER SAW	K9650M
Z2	5PK3953M—	FILTER SAW	K3953M
ZZ200	PTMPJ2G262	PCB MAIN CHIP B AS	DLT-37C3LMBD
C10	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C100	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C105	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C12	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C13	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C132	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C136	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C14	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C145	HCB0105KBA	C CHIP CERA	10V X7R 1MF K 1608
C15	HCBK472KBA	C CHIP CERA	50V X7R 4700PF K 1608
C16	HCBK472KBA	C CHIP CERA	50V X7R 4700PF K 1608
C164	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C166	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
C168	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
C17	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C171	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C172	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C176	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C177	HCB0105KBA	C CHIP CERA	10V X7R 1MF K 1608
C182	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C183	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C184	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C185	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C186	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C187	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C188	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C189	HCBK222KBA	C CHIP CERA	50V X7R 2200PF K 1608
C19	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C190	HCBK153KBA	C CHIP CERA	50V X7R 0.015MF K 1608
C191	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C84	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C85	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C86	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C87	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C90	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C94	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C95	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C96	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C97	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
R1	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R102	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R103	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R105	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R109	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R11	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R110	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R111	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R113	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R117	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R118	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R121	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R122	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R13	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R131	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R135	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R14	HRFT431JBA	R CHIP	1/10 430 OHM J 1608
R145	HRFT391FBA	R CHIP	1/10 390 OHM F 1608
R16	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R2	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R204	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R208	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R209	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R210	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R217	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R229	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R232	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R237	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R238	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R241	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R243	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R245	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R256	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R259	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R262	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R27	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R271	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R283	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R286	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R287	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R288	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R290	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R291	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R292	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R293	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R294	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R295	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
R3	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R300	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R301	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R302	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R303	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R305	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R306	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R307	HRFT624JBA	R CHIP	1/10 620K OHM J 1608
R309	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R310	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R311	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R313	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R314	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216

LOC	PART CODE	PART NAME	DESCRIPTION
R317	HRF4473JEA	R CHIP	1/4 47K OHM J 3216
R318	HRF4103JEA	R CHIP	1/4W 10K OHM J 3216
R337	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R339	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R340	HRFT361JBA	R CHIP	1/10 360 OHM J 1608
R343	HRFT241JBA	R CHIP	1/10 240 OHM J 1608
R344	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R347	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R348	HRFT121JBA	R CHIP	1/10 120 OHM J 1608
R35	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R352	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R36	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R365	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R367	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R37	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R38	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R383	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R384	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R385	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R386	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R387	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R39	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R397	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R398	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R399	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R4	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R40	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R400	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R401	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R402	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R407	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R418	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R419	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R421	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R422	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R424	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R425	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R426	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R427	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R429	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R435	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R436	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R437	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R438	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R44	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R444	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R454	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R455	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R457	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R481	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R482	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R483	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R484	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R485	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R486	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R488	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R489	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R490	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R496	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R497	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R498	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R5	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R501	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R502	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R507	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R508	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R509	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R510	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R511	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R514	HRFT330JBA	R CHIP	1/10 33 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R515	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R516	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R517	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R518	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R519	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R52	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R59	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R6	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R61	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R7	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R709	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R716	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R735	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R82	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R88	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R98	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
ZZ200	PTMPJ0G262	PCB MAIN (RHU) AS	DLT-37C3LMBD
CE30	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE31	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE36	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE45	CEXF1V471V	C ELECTRO	35V RSS 470MF (10X20) TP
CE56	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12) TP
CE57	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12) TP
CE58	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12) TP
CE74	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
ZZ200	PTMPJ0G262	PCB MAIN M-10 AS	DLT-37C3LMBD
P1	485923172S	CONN WAFER	YW025-04 (STICK)
P8	485923172S	CONN WAFER	YW025-04 (STICK)
ZZ200	PTMPJ0G262	PCB MAIN RADIAL AS	DLT-37C3LMBD
C199	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP)
C215	CMXL1J334J	C MYLAR	63V MEU 0.33MF J (TP)
CE1	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CE10	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE100	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE11	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
CE12	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE13	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE14	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE15	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE16	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE17	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE18	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE19	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE2	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CE20	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE21	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE22	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE24	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE25	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE26	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE27	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE28	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE3	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE32	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE33	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE34	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
CE35	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE37	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE38	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE39	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE4	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE40	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE41	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE42	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE43	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE44	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
CE46	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE47	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
CE5	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE51	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP

LOC	PART CODE	PART NAME	DESCRIPTION
CE52	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE53	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
CE54	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE55	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE59	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE6	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE60	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE61	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE62	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE63	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE64	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE65	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CE66	CEXF1C101A	C ELECTRO	16V RSM 100MF 6X7 TP
CE67	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
CE68	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE69	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE7	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE70	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE700	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE701	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE702	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CE71	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE72	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE73	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE75	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE76	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE77	CEXF1C221V	C ELECTRO	16V RSS 220MF (8X11.5) TP
CE78	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE79	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE8	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE80	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE81	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE82	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE83	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE84	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE85	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE86	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE87	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE88	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE89	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE9	CEXF1C220V	C ELECTRO	RSS 16V 22MF 5*11
CE90	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE91	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CE92	CEXF1E470V	C ELECTRO	RSS 25V 47MF 5X11 P5.0 TA
CE93	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE94	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE95	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE96	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CE97	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE98	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE99	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
L28	5CPX829K—	COIL PEAKING	8.2UH K (RADIAL)
SW1	5S50101Z90	SW TACT	THV502GDA
U15	1K1A7042AP	IC RESET	KIA7042AP
U70	1K1A7042AP	IC RESET	KIA7042AP
U9	1K1A7042AP	IC RESET	KIA7042AP
X1	5XE4R0000C	CRYSTAL QUARTZ	HC-49/U 4.000MHZ 20PPM
Z3	5PXXT5R5MB	FILTER CERA	XT 5.5MHZ-TP
ZZ200	PTMPJAG262	PCB MAIN AXIAL AS	DLT-37C3LMBD
ZZ200	PTMPJ1G262	PCB MAIN CHIP A AS	DLT-37C3LMBD
110	2193220010	SOLDER CREAM(PB-FREE)	LST309-M(SN+3.0AG/0.5CU)
A001	4859816093	PCB MAIN	234X288(1X1)T1.6
C1	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C101	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C102	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C103	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C104	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C106	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C107	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C108	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C109	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C11	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C110	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C111	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C112	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C113	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C114	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C115	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C116	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C117	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C118	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C119	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C120	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C121	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C122	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C123	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C124	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C125	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C126	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C127	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C128	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C130	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C131	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C133	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C134	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C135	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C137	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C138	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C139	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C140	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C141	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C142	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C143	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C144	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C146	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C147	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C148	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C149	HCBK473KBA	C CHIP CERA	50V X7R 0.047MF K 1608
C151	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C153	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C154	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C155	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C156	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C157	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C158	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C159	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C160	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C161	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C162	HCFD225ZBA	C CHIP CERA	10V Y5V 2.2MF Z 1608
C169	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C170	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C173	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C174	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C175	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C18	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C180	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C181	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C2	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C204	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
C21	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C222	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C225	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C228	HCBK222KBA	C CHIP CERA	50V X7R 220PF K 1608
C23	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C232	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C233	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C24	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C243	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C244	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C245	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
C25	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C26	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C27	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C273	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C274	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C28	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C284	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C287	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C29	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
C295	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C296	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C300	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C305	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C352	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C353	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C4	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C42	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C43	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C44	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C45	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C46	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
C5	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C50	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C52	HCF474ZBA	C CHIP CERA	Y5V 16V 0.47MF Z 1608
C55	HCBK224KBA	C CHIP CERA	25V X7R 0.22MF K 1608
C56	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
C57	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C6	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C64	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
C67	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C68	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C69	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C70	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C700	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C701	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
C702	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
C71	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C72	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C73	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C74	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C75	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C76	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C77	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C78	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C79	HCBK102KBA	C CHIP CERA	50V X7R 1000PF K 1608
C80	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C81	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C88	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C89	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C91	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
C9	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C92	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C93	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
C98	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
C99	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
D13	DBAV99ML-B	DIODE CHIP	BAV99ML
D14	DBAV99ML-B	DIODE CHIP	BAV99ML
D15	DBAV99ML-B	DIODE CHIP	BAV99ML
D31	DMMBD1204B	DIODE CHIP	MMBD1204
D32	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D33	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D34	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D35	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D36	DMMBD1204B	DIODE CHIP	MMBD1204
D37	DBAV99ML-B	DIODE CHIP	BAV99ML
D38	DBAV99ML-B	DIODE CHIP	BAV99ML
D39	DBAV99ML-B	DIODE CHIP	BAV99ML
D40	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D41	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D44	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
D45	DMMBD1204B	DIODE CHIP	MMBD1204
D46	DMMBD1204B	DIODE CHIP	MMBD1204
D48	DFM405—C	DIODE CHIP	FM405
D49	DFM405—C	DIODE CHIP	FM405
D50	DBAV99ML-B	DIODE CHIP	BAV99ML
D51	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D52	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
D53	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D54	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D55	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D56	DZ02W8R2VA	DIODE CHIP ZENER	Z02W8.2V
D70	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
D71	DZ02W5R6VA	DIODE CHIP ZENER	Z02W5.6V
JP5	4859201360	CONN HDMI	51V019S-36WT-A1R
L1	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L10	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L11	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L12	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L13	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L14	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L15	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L16	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L17	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L18	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L19	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L2	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L20	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L23	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L24	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L25	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L26	HLC470KECE	L CHIP COIL	47UH K 1280
L27	HLC470KECE	L CHIP COIL	47UH K 1280
L29	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L3	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L30	HLC100K03B	L CHIP COIL	10UH K NLCV25T-PF
L31	HLC470KECE	L CHIP COIL	47UH K 1280
L32	HLC100J00A	L CHIP COIL	10UH NLC322522
L33	HLC100J00A	L CHIP COIL	10UH NLC322522
L34	HLC470KECE	L CHIP COIL	47UH K 1280
L35	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
L36	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L37	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L38	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L39	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L4	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L40	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L41	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L42	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L43	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L44	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L45	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
L46	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L47	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L49	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L5	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L50	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L58	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L59	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L6	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L60	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L61	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L62	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L63	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L64	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L65	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L66	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L67	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L68	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L69	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L7	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012

LOC	PART CODE	PART NAME	DESCRIPTION
L70	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L71	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L72	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L73	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L74	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L75	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
L76	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
L8	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
L9	HFF300C00A	F CHIP FERRITE BEAD	30 OHM PBV 2012
P13	4859295120	CONN WAFER	12505WS-05A00
P14	4859295220	CONN WAFER	12505WS-06A00
P3	4859293820	CONN WAFER	GT121-31P-TD-A 31P ST
Q1	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q10	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q11	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q12	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q13	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q14	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q15	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q16	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q17	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q18	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q19	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q2	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q20	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q21	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q26	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q27	T2SA1037KB	TR CHIP	2SA1037AKT146-R
Q3	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q4	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q5	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q6	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q7	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
Q8	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
R10	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R100	HRFT184JBA	R CHIP	1/10 180K OHM J 1608
R101	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R104	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R107	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R108	HRFT681JBA	R CHIP	1/10 680 OHM J 1608
R112	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
R114	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R115	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R116	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R119	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
R12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R120	HRFT201JBA	R CHIP	1/10 200 OHM J 1608
R123	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R124	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R126	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R128	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R129	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R130	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R133	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R136	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R137	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R138	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R139	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R140	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
R142	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R143	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R144	HRFT105JBA	R CHIP	1/10 1M OHM J 1608
R146	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R147	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R148	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R149	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R15	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R150	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R151	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R152	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R153	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R154	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R155	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R156	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R157	HRFT751JBA	R CHIP	1/10 750 OHM J 1608
R158	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R159	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R160	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R161	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R162	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R163	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R164	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R165	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R166	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R167	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R168	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R169	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R17	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R170	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R171	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R172	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R173	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R174	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R175	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
R176	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R177	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R179	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R18	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R181	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R182	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R183	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R184	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R185	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R186	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R187	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R188	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R189	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R19	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R190	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R191	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R192	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R193	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R194	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
R195	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R196	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R197	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R198	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
R199	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R20	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R200	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R201	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R202	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R203	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R205	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R21	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R211	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R212	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R214	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R215	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R216	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R218	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R219	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R22	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R220	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R224	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R228	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R23	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R231	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R24	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R244	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R246	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R247	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R248	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R249	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R25	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R250	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R251	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R252	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R253	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R254	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R26	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
R260	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R261	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R265	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R267	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R269	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R270	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R272	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R273	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R274	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R275	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R276	HRFT101JBA	R CHIP	1/10 10K OHM J 1608
R277	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R278	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R280	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R281	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R282	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R284	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R285	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R289	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R29	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R296	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R297	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R298	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R299	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R30	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R304	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R308	HRF4100JEA	R CHIP	1/4W 10 OHM J 3216
R31	HRFT822JBA	R CHIP	1/10 8.2K OHM J 1608
R312	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R315	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
R316	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R32	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R320	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R33	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R333	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R334	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R335	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R336	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R341	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R342	HRFT622JBA	R CHIP	1/10 6.2K OHM J 1608
R345	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R346	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R349	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R350	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R351	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R354	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R355	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R356	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R357	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R358	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R359	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R360	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R362	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R363	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R364	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R368	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R370	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R371	HRFT122JBA	R CHIP	1/10 1.2K OHM J 1608
R372	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R373	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R374	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R375	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R376	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R377	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R378	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R379	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R388	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R389	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R390	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R391	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R393	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R394	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R396	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R405	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
R406	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R408	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R409	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R41	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R410	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R411	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R412	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R413	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
R416	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R417	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R42	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R420	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
R423	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R428	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R43	HRFT302JBA	R CHIP	1/10 3K OHM J 1608
R430	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
R431	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R432	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R433	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
R434	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R439	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R440	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R441	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R442	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R443	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R448	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R449	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R45	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R450	HRFT683JBA	R CHIP	1/10 68K OHM J 1608
R451	HRFT821JBA	R CHIP	1/10 820 OHM J 1608
R452	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R453	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R456	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R458	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R46	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R460	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R465	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R469	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
R47	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R473	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R477	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R478	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R479	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R48	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R480	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R487	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
R49	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R491	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R492	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R493	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R494	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R495	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R499	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R50	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R500	HRFT470JBA	R CHIP	1/10 47 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
R503	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R504	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R505	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R506	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R51	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R512	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R513	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R522	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R523	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R524	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R525	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R526	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R527	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R528	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R529	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R53	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R530	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R531	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R532	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R533	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R534	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R535	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R54	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R540	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R541	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R542	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R543	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
R56	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R57	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R58	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R60	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R600	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R601	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R602	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R603	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R604	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R605	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R606	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R607	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R62	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R63	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R64	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R65	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R66	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R67	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R68	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R69	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
R70	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R701	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R702	HRFT133JBA	R CHIP	1/10 13K OHM J 1608
R703	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R704	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
R706	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R707	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
R71	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R710	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
R711	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R712	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R713	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R714	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
R715	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R717	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R72	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
R721	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R722	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R723	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R724	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R725	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R726	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R727	HRFT000JBA	R CHIP	1/10 0 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
R728	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R729	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R73	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R730	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R731	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R732	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R733	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R734	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
R74	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R75	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R76	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R77	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
R78	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
R79	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R8	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R80	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R81	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R83	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R84	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R85	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R86	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R87	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R89	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R9	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R90	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
R91	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
R92	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
R93	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
R94	HRFT153JBA	R CHIP	1/10 15K OHM J 1608
R95	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
R96	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
R97	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
R99	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RP1	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM J 3216
RP10	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP11	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP12	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP13	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP14	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP16	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP17	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP18	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP19	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP2	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM J 3216
RP20	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP3	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM J 3216
RP4	HRTS8E101J	R CHIP ARRAY	1/16 8P 100 OHM J 3216
RP7	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP8	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RP9	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
U1	1WM8521HCD	IC CHIP STREO DAC	WM8521HC
U12	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U13	1TDA1308TC	IC CHIP HEDPHONE DRI	TDA1308T
U14	1TDA8931TQ	IC CHIP AUDIO AMP	TDA8931T
U16	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U18	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U19	1G9171863C	IC CHIP REGULATOR	G9117-18T63U 1.8V SOT-223
U2	1CD74HC52D	IC CHIP LOGIC	CD74HC4052M96
U20	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5
U21	1G9117763C	IC CHIP REGULATOR	G9117T63U ADJ SOT-223
U22	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SOT-223
U23	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5
U24	1G9173363C	IC CHIP REGULATOR	G9117-33T63U 3.3V SOT-223
U25	1APW1172-D	IC CHIP DC-DC CONVER	APW1172
U26	1G9117763C	IC CHIP REGULATOR	G9117T63U ADJ SOT-223
U27	1G108433TD	IC CHIP REGULATOR	GT1084-33T53UF 3.3V TO-263
U28	1G108418TD	IC CHIP REGULATOR	G1084-18T53UF 1.8V TO-263
U29	1S281632DD	IC CHIP SDRAM	K4S281632F-UC75
U30	1NX8314HSQ	IC CHIP MEDIA PROCES	PNX8314HS
U33	1320ET70NQ	IC CHIP FLASH MEMORY	M29W320ET70N6E

LOC	PART CODE	PART NAME	DESCRIPTION
U34	1ST232CD-Q	IC CHIP DRIVE	ST232CD
U35	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U36	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
U37	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
U38	1A1334BTS	IC CHIP AUDIO DAC	UDA1334BTS
U39	110046AHTD	IC CHIP CHANNEL DECO	TDA10046AHT
U40	1C1MAXSP2Q	IC CHIP DE-SCRAMBLER	CIMAX-SP2
U41	1ST890BDR	IC CHIP CURRENT SWIT	ST890BDR
U42	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U43	1VC573ADBD	IC CHIP LATCH	74LVC573ADB
U44	1C245APW-D	IC CHIP TRANSCEIVER	74LVC245APW
U5	1TDA9886T-	IC CHIP IF	TDA9886T
U6	128164SB5D	IC CHIP DDR SDRAM	V58C2128164SB5 128M TSOP
U7	TFDS4953-C	FET CHIP	FDS4953 SO-8 -30V -5A REEL
U8	1T96889LDQ	IC CHIP MICOM(+VIDEO	MST96889LD
X5	5227R000TF	CRYSTAL OSCILLATOR	4P 27.000MHZ 50PPM (BMS-87
ZZ310	PTUNSWG262	PCB UNION AS	DLT-37C3LMBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
IC291	1TSOP34838	IC PREAMP	TSOP34838SJ
LED2	DSPR39MVW-	LED	SPR-39MVW (DUAL)
M232	4852333201	PANEL CTRL	HPS BK
M491	4854964311	BUTTON CH	ABS GY
M491A	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFXN 3CR
P911A	4859299720	CONN WAFER	20017WR-05A
P912B	4859299820	CONN WAFER	20017WR-06A
ZZ200	PTUNJOG262	PCB UNION RHU AS	DLT-37C3LMBD
ZZ200	PTUNJBG262	PCB UNION M-10 AS	DLT-37C3LMBD
ZZ200	PTUNJRG262	PCB UNION RADIAL AS	DLT-37C3LMBD
SW201	5S50101Z90	SW TACT	THVV502GDA
SW202	5S50101Z90	SW TACT	THVV502GDA
SW203	5S50101Z90	SW TACT	THVV502GDA
SW204	5S50101Z90	SW TACT	THVV502GDA
SW205	5S50101Z90	SW TACT	THVV502GDA
SW206	5S50101Z90	SW TACT	THVV502GDA
SW207	5S50101Z90	SW TACT	THVV502GDA
ZZ200	PTUNJAG262	PCB UNION AXIAL AS	DLT-37C3LMBD
A001	4859815360	PCB UNION	246X197 D1B
C997	CCZJ1H104Z	C CERA	50V F 0.1MF Z AXL(1608)
R901	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R902	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J
R903	RD-AZ432J-	R CARBON FILM	1/6 4.3K OHM J
R904	85801050GY	WIRE COPPER	1/0.5 TIN COATING
R905	RD-AZ152J-	R CARBON FILM	1/6 1.5K OHM J
R906	RD-AZ432J-	R CARBON FILM	1/6 4.3K OHM J
R907	RD-AZ113J-	R CARBON FILM	1/6 11K OHM J