

7. Parts Catalog

How to use this parts catalog


The following legend is used in the parts catalog:

Asm-Index	Part number	Units/mach	Units/FRU	Description
-----------	-------------	------------	-----------	-------------

- **Asm-index:** identifies the assembly and the item in the diagram. For example, 3-1 indicates assembly 3 and the item number 1.
- **Part number:** identifies the unique number that identifies this FRU.
- **Units/mach:** refers to the number of units actually used in the machine or product.
- **Units/FRU:** refers to the number of units packaged together and identified by the part number.
- **NS:** (Not shown) in the Asm-Index column indicates that the part is procurable but is not pictured in the illustration.
- **PP:** (Parts Packet) in the parts description column indicates the part is contained in a parts packet.
- Model information used in the parts catalog.

Machine type and model	Description
4513-630	Lexmark E460dn
4513-63W 4513-6EW	Lexmark E460dw


Assembly 1: Covers

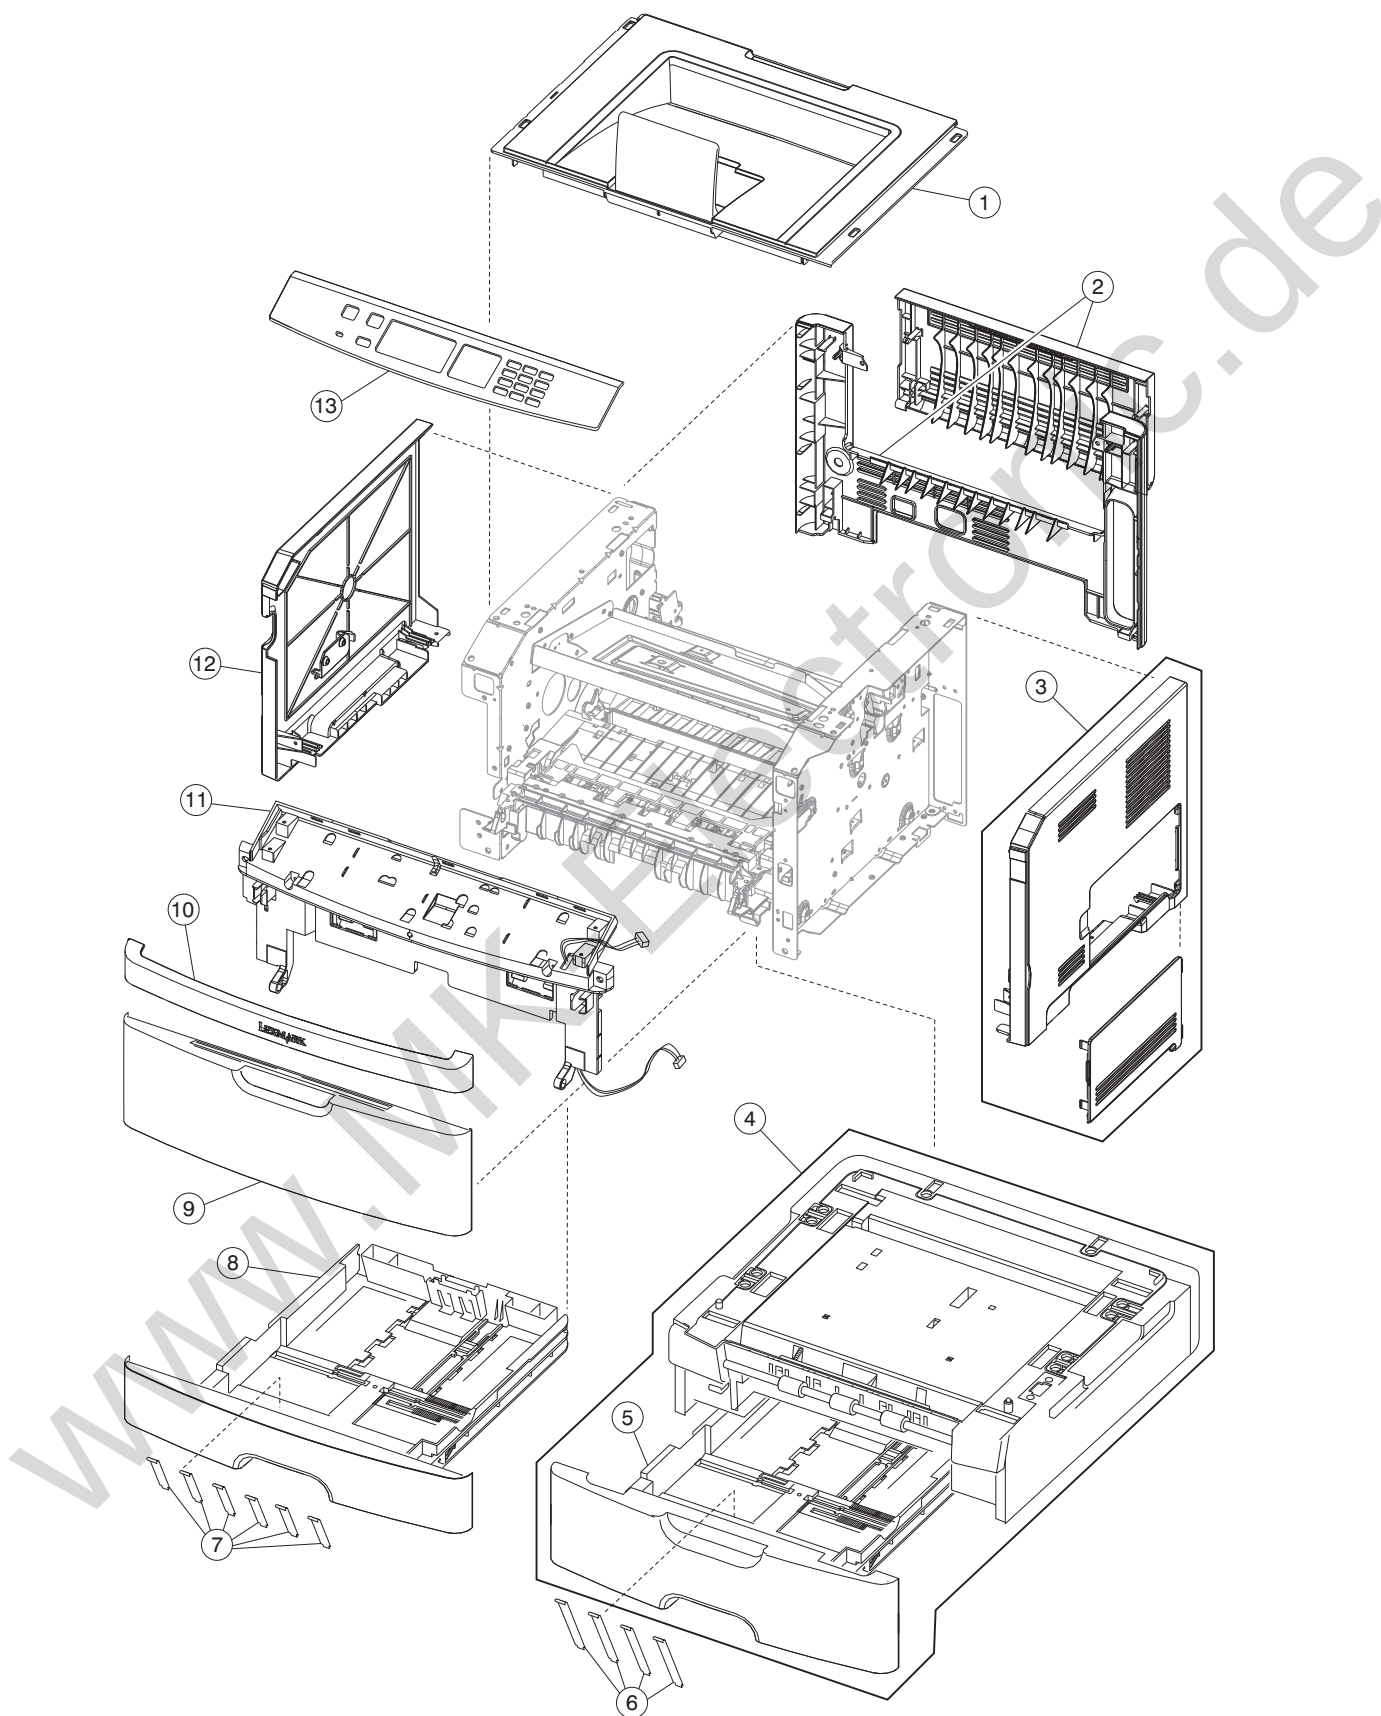

Assembly 1: Covers

Asm-Index	Part number	Units/mach	Units/FRU	Description
1-1	40X5373	1	1	Top cover assembly
2	40X5377	1	1	Rear upper and lower cover assembly
3	40X5375	1	1	Right side cover
4	40X5398	1	1	Optional 250-sheet tray
4	40X5399	1	1	Optional 550-sheet tray
5	40X5394	1	1	250-sheet (Tray 2) assembly
5	40X5395	1	1	550-sheet (Tray 2) assembly
6	40X2855	1	4	Tray 2 wear strips (550-sheet tray only)
7	40X5382	1	6	Wear strips (250-sheet trays, optional and primary)
8	40X5381	1	1	Primary tray
9	40X5379	1	1	Front door cover
10	40X5359	1	1	Nameplate cover
11	40X5378	1	1	Front access door assembly
12	40X5374	1	1	Left side cover
13	40X5357	1	1	LCD bezel cover, E460dn
13	40X5391	1	1	LCD bezel cover, E460dw


Assembly 2: Electronics

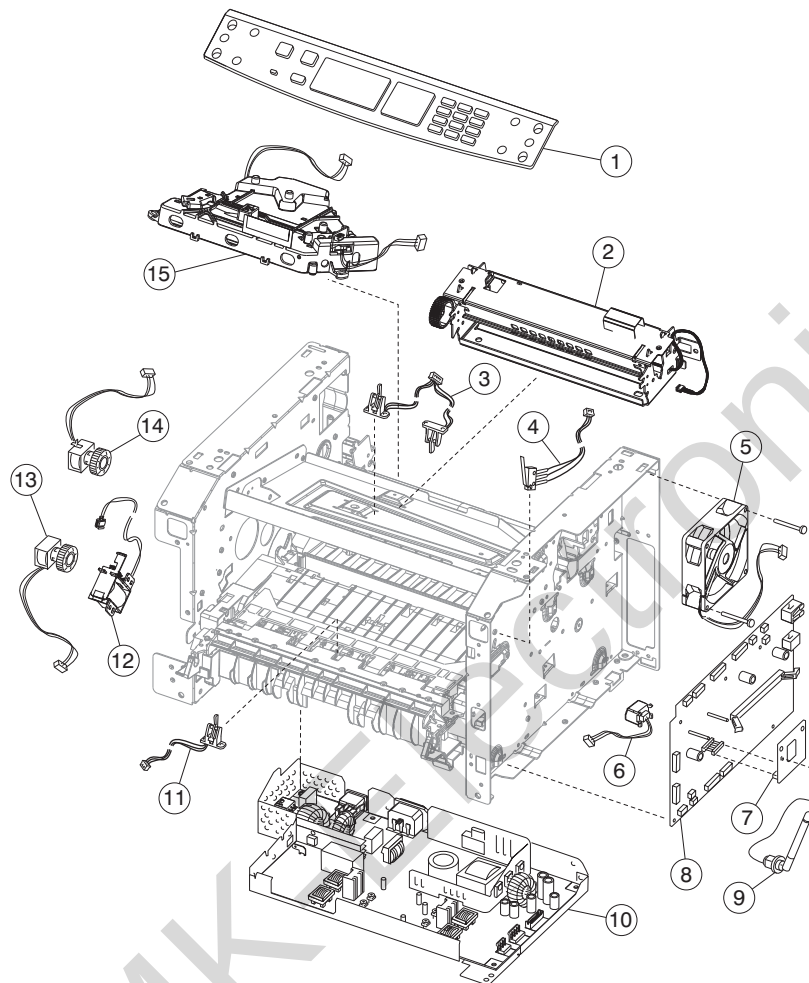

Assembly 2: Electronics

Asm-Index	Part number	Units/mach	Units/FRU	Description
2-1	40X5356	1		LCD operator panel assembly, E460dn/E460dw
2	40X5344	1		Fuser assembly, 115 V
2	40X5345	1		Fuser assembly, 230 V
2	40X5346	1		Fuser assembly, 100 V
3	40X5365	1	1	Duplex and media sensor assembly
4	40X5360	1	1	Access door open sensor assembly
5	40X5392	1	1	Cooling fan (screws included)
6	40X5385	1	1	Toner low sensor
7	40X5036	1	1	Wireless card, E460dw
8	40X5350	1	1	Controller board, E460dn
8	40X5351	1	1	Controller board, E460dw
9	40X5320	1	1	Antenna (11 inch cable)
10	40X5361	1		LVPS/HVPS card assembly, 110 V/100 V
10	40X5362	1		LVPS/HVPS card assembly, 220 V
11	40X5366	1	1	Manual input sensor assembly
12	40X5369	1	1	Manual feed solenoid
13	40X5371	1	1	MPF feed clutch
14	40X5370	1	1	Media feed (ACM) clutch
15	40X5387	1		LSU, E460dn/E460dw (printhead)

Assembly 3: Frame

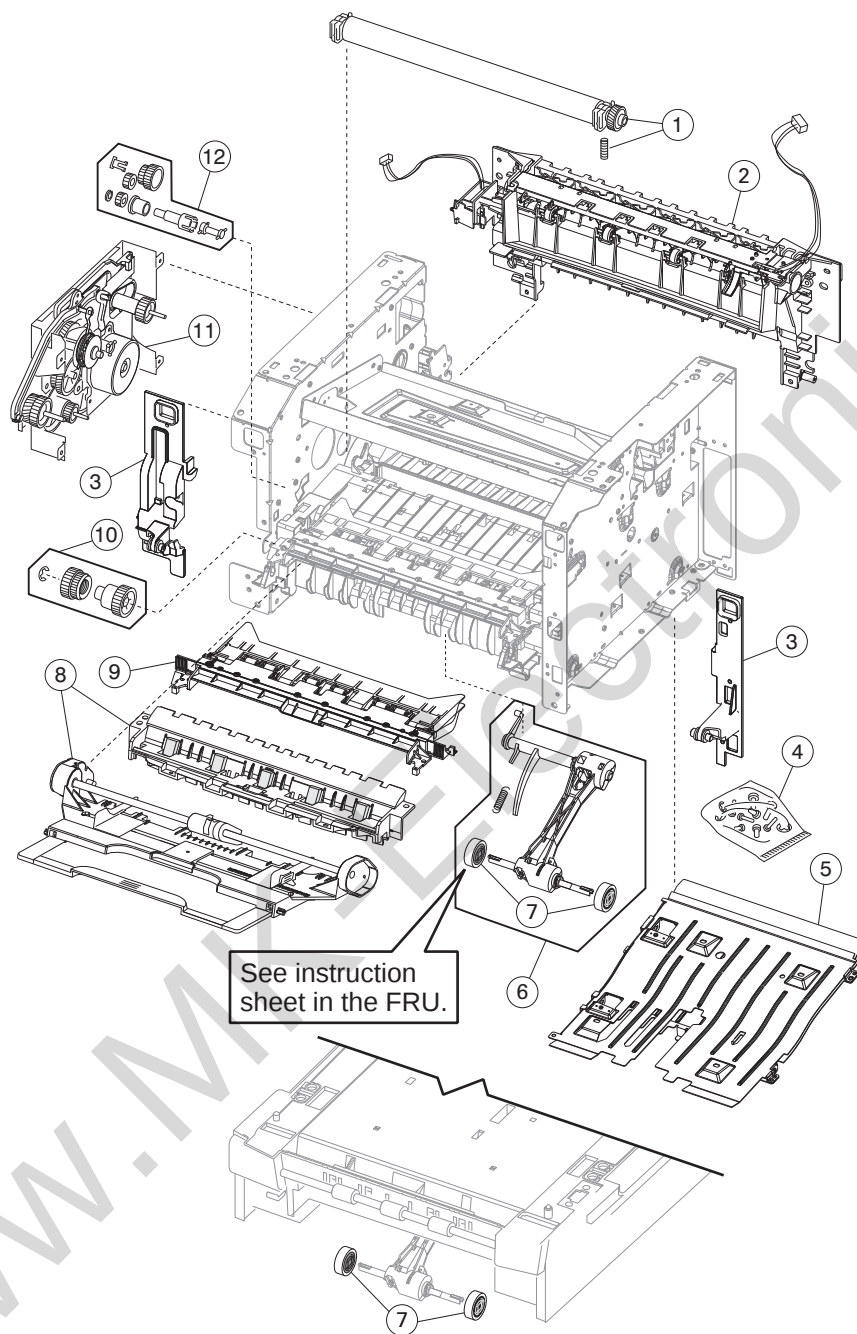

Assembly 3: Frame

Asm-Index	Part number	Units/mach	Units/FRU	Description
3-1	40X5364	1		Transfer roll, bearings, gear, spring (CBM)
2	40X5372	1		Media exit guide assembly (redrive)
3	40X5397	1	1	Front mounts
4	40X5396	N/A		Screws, miscellaneous
			4	TP2NCX3X6PF-Ni
			4	TP2C-4.0+8PF-Ni
			4	M3.0*0.5+6PF-Ni
			2	M3.0*0.5+4PF-Ni
			2	M3.5*0.6+6P-Ni
5	40X5380	1	1	Complete duplex assembly
6	40X5453	1	1	Media (ACM) drive assembly
7	40X5451	2	2	Paper feed, ACM tires
7	40X5440	1	2	Tray 2 paper feed tires
8	40X5358	1	1	MPF tray assembly
9	40X5383	1	1	Upper front frame assembly
10	40X5368	1	1	Manual feed clutch CBM
11	40X5367	1	1	Main drive gearbox (in motor)
12	40X5363	1	1	Duplex gear drive CBM
NS	40X5400	1	1	110 V maintenance kit
NS	40X5401	1	1	220 V maintenance kit
NS	40X5402	1	1	100 V maintenance kit
				Note: Kit contains the following: Fuser (40X5344, 40X5345, or 40X2802) Exit guide (40X5372) Tray 1 ACM feed tires (40X5451) Transfer roll CBM (40X5364)
NS	7470094	1		Field relocation package assembly

Assembly 4: Options

Asm-Index	Part number	Units/mach	Units/FRU	Description
NS	40X5972	1	1	Japanese font card assembly
NS	40X5970	1	1	Simplified Chinese font card assembly
NS	40X5971	1	1	Traditional Chinese font card assembly
NS	40X5969	1	1	Korean font card assembly
NS	40X5952	1	1	Print crypton card assembly
NS	40X5951	1	1	Korean KS/KSSM/KSP
NS	40X5940	1	1	Bar code and forms
NS	40X5937	1	1	128MB DIMM
NS	40X5938	1	1	256MB DIMM
NS	40X5939	1	1	512MB DIMM
NS	40X5704	1	1	256MB flash
NS	40X1367	1	1	Parallel cable, packaged (3 m) (E460dn only)
NS	40X1368	1	1	USB cable, packaged (2 m)

Assembly 5: Power cords

Asm-Index	Part number	Units/mach	Units/FRU	Description
NS	40X0297	1		Power cord, 1.8M (straight)– USA, Canada
NS	40X0278	1		Power cord, 6 foot (straight)– Europe and others
NS	40X0288	1		Power cord, 8 foot (straight)– Argentina
NS	40X0286	1		Power cord, 8 foot (straight)– United Kingdom
NS	40X0275	1		Power cord, 6 foot (straight)– Israel
NS	40X0274	1		Power cord, 6 foot (straight)– Switzerland
NS	40X0276	1		Power cord, 6 foot (straight)– South Africa
NS	40X0287	1		Power cord, 6 foot (straight)– Traditional Italy
NS	40X0279	1		Power cord, 6 foot (straight)– Denmark
NS	40X0277	1		Power cord, 6 foot (straight)– Brazil
NS	40X0282	1		Power cord, 1.8M (straight)– PRC
NS	40X0270	1		Power cord, 2.5M (straight)– Japan
NS	40X0280	1		Power cord, 1.8M (straight)– Korea
NS	40X0281	1		Power cord, 1.8M (straight)– Taiwan
NS	40X0296	1		Power cord, 1.8M (straight)– Australia

www.MK-Electronic.de

Index

A

abbreviations **1-9**
acronyms **1-9**

B

buttons
 accessing service menus **3-1**

C

Charge Roll, diagnostics mode **3-15**
compatibility **1-4**
configuration ID **3-14**
configuration menu
 accessing **3-1, 3-2**
 available menus **3-2**
 Demo Mode **3-4**
 Energy Conserve **3-5**
 Factory Defaults **3-4**
 Panel Menus **3-4**
 PPDS Emulation **3-4**
control panel **1-2**
controller card
 service check **2-21**

D

defaults
 factory defaults **3-4**
diagnostics mode **3-6**
 accessing **3-1**
 available tests **3-6**
diagnostics mode—
 EP Setup
 Charge Roll **3-15**
 EP Defaults **3-15**
 Fuser Temp **3-15**
 Gap Adjust **3-15**
 Print Contrast **3-15**
 Transfer **3-15**
 Event Log
 Clear Log **3-17**
 Display Log **3-16**
 Print Log **3-17**
 Hardware Tests
 DRAM Test **3-9**
 Printer Setup
 Configuration ID **3-14**
 Edge to Edge **3-14**
 Engine Settings **3-14**
 Model Name **3-14**
 Par S Strobe Adj **3-14**
 Registration **3-7**
DRAM Test **3-9**

E

Edge to Edge **3-14**
EP Defaults **3-15**
error log
 clear log (diagnostics mode) **3-17**
 display log (diagnostics mode) **3-16**
 Print Log **3-17**
error messages
 service error codes **2-13**
 user attendance messages **2-5**
ESD-sensitive parts **4-1**

F

fan
 parts catalog **7-5**
 service check **2-22**
frame, parts catalog **7-6**
fuser
 parts catalog **7-5**
 service check **2-24**
Fuser Temp **3-15**

G

Gap Adjust **3-15**

H

handling ESD-sensitive parts **4-1**
History
 see error log 3-17

L

lithium battery **v-xv, 4-6**
locations
 front views **5-1**
 rear views **5-1**
lubrication specifications **6-1**
LVPS/HVPS
 parts catalog **7-5**
 service check **2-24**

M

maintenance approach **1-1**
maintenance kits **6-1**
menus
 accessing service menus **3-1**
messages
 service error codes **2-13**
 user attendance messages **2-5**
Model Name **3-14**
models
 comparison **1-1**
 diagrams **5-1**
 operator panels **1-2**
 trays available **1-5**

N

navigation buttons **2-2**

O

operator panel

LCD— **2-2**

LED—

service check **2-26**

LED— E238/E240(n)

overview **1-2**

P

panel, control **1-2**

paper jams

tips on preventing **1-7**

parallel port service check **2-28**

parts catalog

covers **7-2**

electronics **7-4**

frame **7-6**

options **7-8**

power-on self test (POST) **2-1**

symptoms **2-19**

Print Contrast **3-15**

print media

preventing jams **1-7**

trays by model **1-5**

types and sizes **1-6**

print quality pages

using **2-29**

print quality problems

print media **1-7**

service check **2-29**

solving **2-33**

printer symptom table **2-20**

printhead

service check **2-36**

R

registration **3-7**

removals

covers

front access cover **4-6**

procedures **4-2**

S

safety information **xv**

safety inspection guide **6-1**

service checks **2-21**

controller card **2-21**

cooling fan **2-22**

cover interlock switch **2-22**

dead machine **2-23**

fuser **2-24**

LVPS/HVPS **2-24**

main motor **2-25**

operator panel **2-26**

paper feed **2-26**

paper jam during POST **2-26**

paper never picks **2-27**

paper picks but stops **2-26**

paper picks sheets **2-27**

paper trees, curls **2-28**

parallel port **2-28**

print quality **2-29**

black page **2-30**

blank page **2-29**

heavy background **2-30**

image density **2-31**

light print **2-32**

partial blank image **2-31**

poor fusing of image **2-31**

toner on back of page **2-32**

white or black lines **2-32**

printhead **2-36**

transfer roll **2-36**

service error codes **2-13**

special tools **1-8**

specifications

connectivity **1-4**

input trays **1-5**

memory **1-3**

operating systems **1-4**

photoconductor capacity **1-5**

print media **1-6**

toner capacity **1-5**

start **2-1**

strobe adjustment **3-14**

symptom tables **2-19**

POST **2-19**

printer **2-20**

T

tools **1-8**

Top Margin **3-7**

Transfer **3-15**

transfer roll

parts catalog **7-7**

service check **2-36**

U

user attendance messages **2-5**

Part number index

P/N	Description	Page
40X0270	Power cord, 1.77M (straight)– Japan	7-9
40X0274	Power cord, 6 foot– Switzerland	7-9
40X0275	Power cord, 6 foot (straight)– Israel	7-9
40X0276	Power cord, 6 foot– South Africa	7-9
40X0277	Power cord, 6 foot (straight)– Brazil	7-9
40X0278	Power cord, 6 foot (straight)– Europe and others	7-9
40X0279	Power cord, 6 foot (straight)– Denmark	7-9
40X0280	Power cord, 1.77M (straight)– Korea	7-9
40X0281	Power cord, 1.77M (straight)– Taiwan	7-9
40X0282	Power cord, 1.77M (straight)– PRC	7-9
40X0286	Power cord, 6 foot– United Kingdom	7-9
40X0287	Power cord, 6 foot (straight)– Traditional Italy	7-9
40X0288	Power cord, 6 foot– Argentina	7-9
40X0296	Power cord, 1.8M (straight)– Australia	7-9
40X0297	Power cord, 1.77M (straight)– USA, Canada	7-9
40X1367	Parallel cable, packaged (3 m) (E460dn only)	7-8
40X1368	USB cable, packaged (2 m)	7-8
40X2855	Tray 2 wear strips (550-sheet tray only)	7-3
40X5036	Wireless card, E460dw	7-5
40X5320	Antenna (11 inch cable)	7-5
40X5344	Fuser assembly, 115 V	7-5
40X5345	Fuser assembly, 230 V	7-5
40X5346	Fuser assembly, 100 V	7-5
40X5350	Controller board, E460dn	7-5
40X5351	Controller board, E460dw	7-5
40X5356	LCD operator panel assembly, E460dn/E460dw	7-5
40X5357	LCD bezel cover, E460dn	7-3
40X5358	MPF tray assembly	7-7
40X5359	Nameplate cover	7-3
40X5360	Access door open sensor assembly	7-5
40X5361	LVPS/HVPS card assembly, 110 V/100 V	7-5
40X5362	LVPS/HVPS card assembly, 220 V	7-5
40X5363	Duplex gear drive CBM	7-7
40X5364	Transfer roll, bearings, gear, spring (CBM)	7-7
40X5365	Duplex and media sensor assembly	7-5
40X5366	Manual input sensor assembly	7-5
40X5367	Main drive gearbox (in motor)	7-7
40X5368	Manual feed clutch CBM	7-7
40X5369	Manual feed solenoid	7-5
40X5370	Media feed (ACM) clutch	7-5
40X5371	MPF feed clutch	7-5
40X5372	Media exit guide assembly (redrive)	7-7
40X5373	Top cover assembly	7-3
40X5374	Left side cover	7-3
40X5375	Right side cover	7-3
40X5377	Rear upper and lower cover assembly	7-3
40X5378	Front access door assembly	7-3
40X5379	Front door cover	7-3
40X5380	Complete duplex assembly	7-7
40X5381	Primary tray	7-3
40X5382	Wear strips (250-sheet trays, optional and primary)	7-3
40X5383	Upper front frame assembly	7-7

40X5385	Toner low sensor	7-5
40X5387	LSU, E460dn/E460dw (printhead)	7-5
40X5391	LLCD bezel cover, E460dw	7-3
40X5392	Cooling fan (screws included)	7-5
40X5394	Tray 2 assembly	7-3
40X5395	550-sheet (Tray 2) assembly	7-3
40X5396	Screws, miscellaneous	7-7
40X5397	Front mounts	7-7
40X5398	Optional 250-sheet tray	7-3
40X5399	Optional 550-sheet tray	7-3
40X5400	110 V maintenance kit	7-7
40X5400	Low voltage (110 V) maintenance kit	6-1
40X5401	220 V maintenance kit	7-7
40X5401	High voltage (220 V) maintenance kit	6-1
40X5402	100 V maintenance kit	6-1, 7-7
40X5440	Tray 2 paper feed tires	7-7
40X5451	Paper feed, ACM tires	7-7
40X5453	Media (ACM) drive assembly	7-7
40X5704	256MB flash	7-8
40X5937	128MB DIMM	7-8
40X5938	256MB DIMM	7-8
40X5939	512MB DIMM	7-8
40X5940	Bar code and forms	7-8
40X5951	Korean KS/KSSM/KSP	7-8
40X5952	Print crypton card assembly	7-8
40X5969	Korean font card assembly	7-8
40X5970	Simplified Chinese font card assembly	7-8
40X5971	Traditional Chinese font card assembly	7-8
40X5972	Japanese font card assembly	7-8
7470094	Field relocation package assembly	7-7