


SECTION 5
PARTS LIST

SAFETY PRECAUTION

Parts identified by the ⚠ symbol are critical for safety. Replace only with specified part numbers.

5.1 PACKING AND ACCESSORY ASSEMBLY <M1>

The instruction manual to be provided with this product will differ according to the destination.

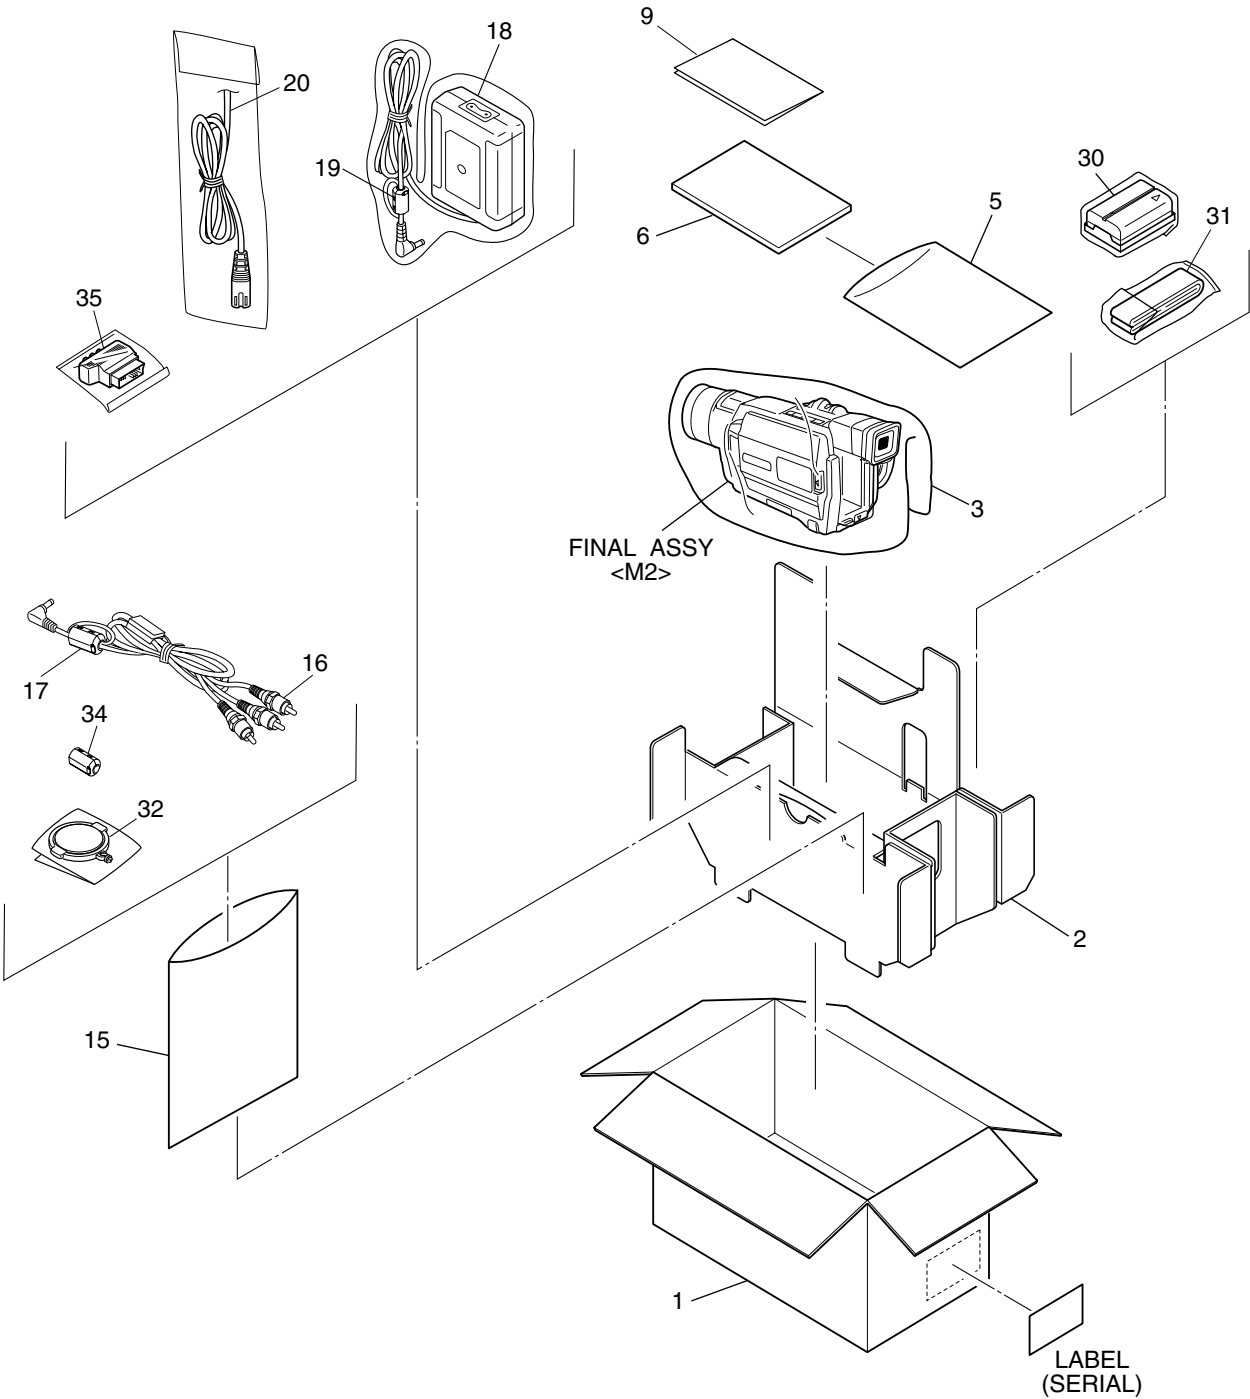

#	⚠ REF No.	PART No.	PART NAME, DESCRIPTION


PACKING AND ACCESSORY ASSEMBLY <M1>

1	LY32746-001A	PACKING CASE
2	LY32747-001A	CUSHION
3	LY30023-015A	POLY BAG
5	QPA02003506	POLY BAG
⚠ 6	LYT1023-002A	INST.BOOK(GE),A,B
⚠	LYT1023-003A	INST.BOOK(FR),A
⚠	LYT1023-004A	INST.BOOK(DU),A
⚠	LYT1023-005A	INST.BOOK(SP),A
⚠	LYT1023-006A	INST.BOOK(IT),A
⚠	LYT1023-007A	INST.BOOK(DA),B
⚠	LYT1023-008A	INST.BOOK(FI),B
⚠	LYT1023-009A	INST.BOOK(SW),B
⚠	LYT1023-010A	INST.BOOK(NO),B
⚠	LYT1023-011A	INST.BOOK(RU),C
⚠	LYT1023-012A	INST.BOOK(CZ),C
⚠	LYT1023-013A	INST.BOOK(PO),C
⚠	LYT1023-014A	INST.BOOK(HU),C
9	BT-54013-2	WARRANTY CARD
15	QPA01703005	POLY BAG
16	QAM0212-001	CABLE ASSY,AUDIO/VIDEO CABLE
17	QQR0918-002	CORE FILTER
⚠ 18	LY20847-001C	AC ADAPTER,AP-V12EG
19	QQR0917-002	CORE FILTER
⚠ 20	QMPL120-190-JR	POWER CORD
⚠ 30	LY32566-001A	BATTERY PACK,BN-V408U
31	LY20186-001A	SHOULDER STRAP
32	LY43606-001A	LENS CAP ASSY
34	QQR0491-002	CORE FILTER
35	QAM0302-001	ADAPTOR PLUG

MODEL	MARK
GR-DVL145EG-X	A
GR-DVL145EG-Y	B
GR-DVL145EG-Z	C

- INSTRUCTIONS
- GE GERMANY
 - FR FRENCH
 - DU DUTCH
 - SP SPANISH
 - IT ITALIAN
 - DA DANISH
 - FI FINNISH
 - SW SWEDISH
 - NO NORWEGIAN
 - RU RUSSIAN
 - CZ CZECH
 - PO POLISH
 - HU HUNGARIAN


5.2 FINAL ASSEMBLY <M2>

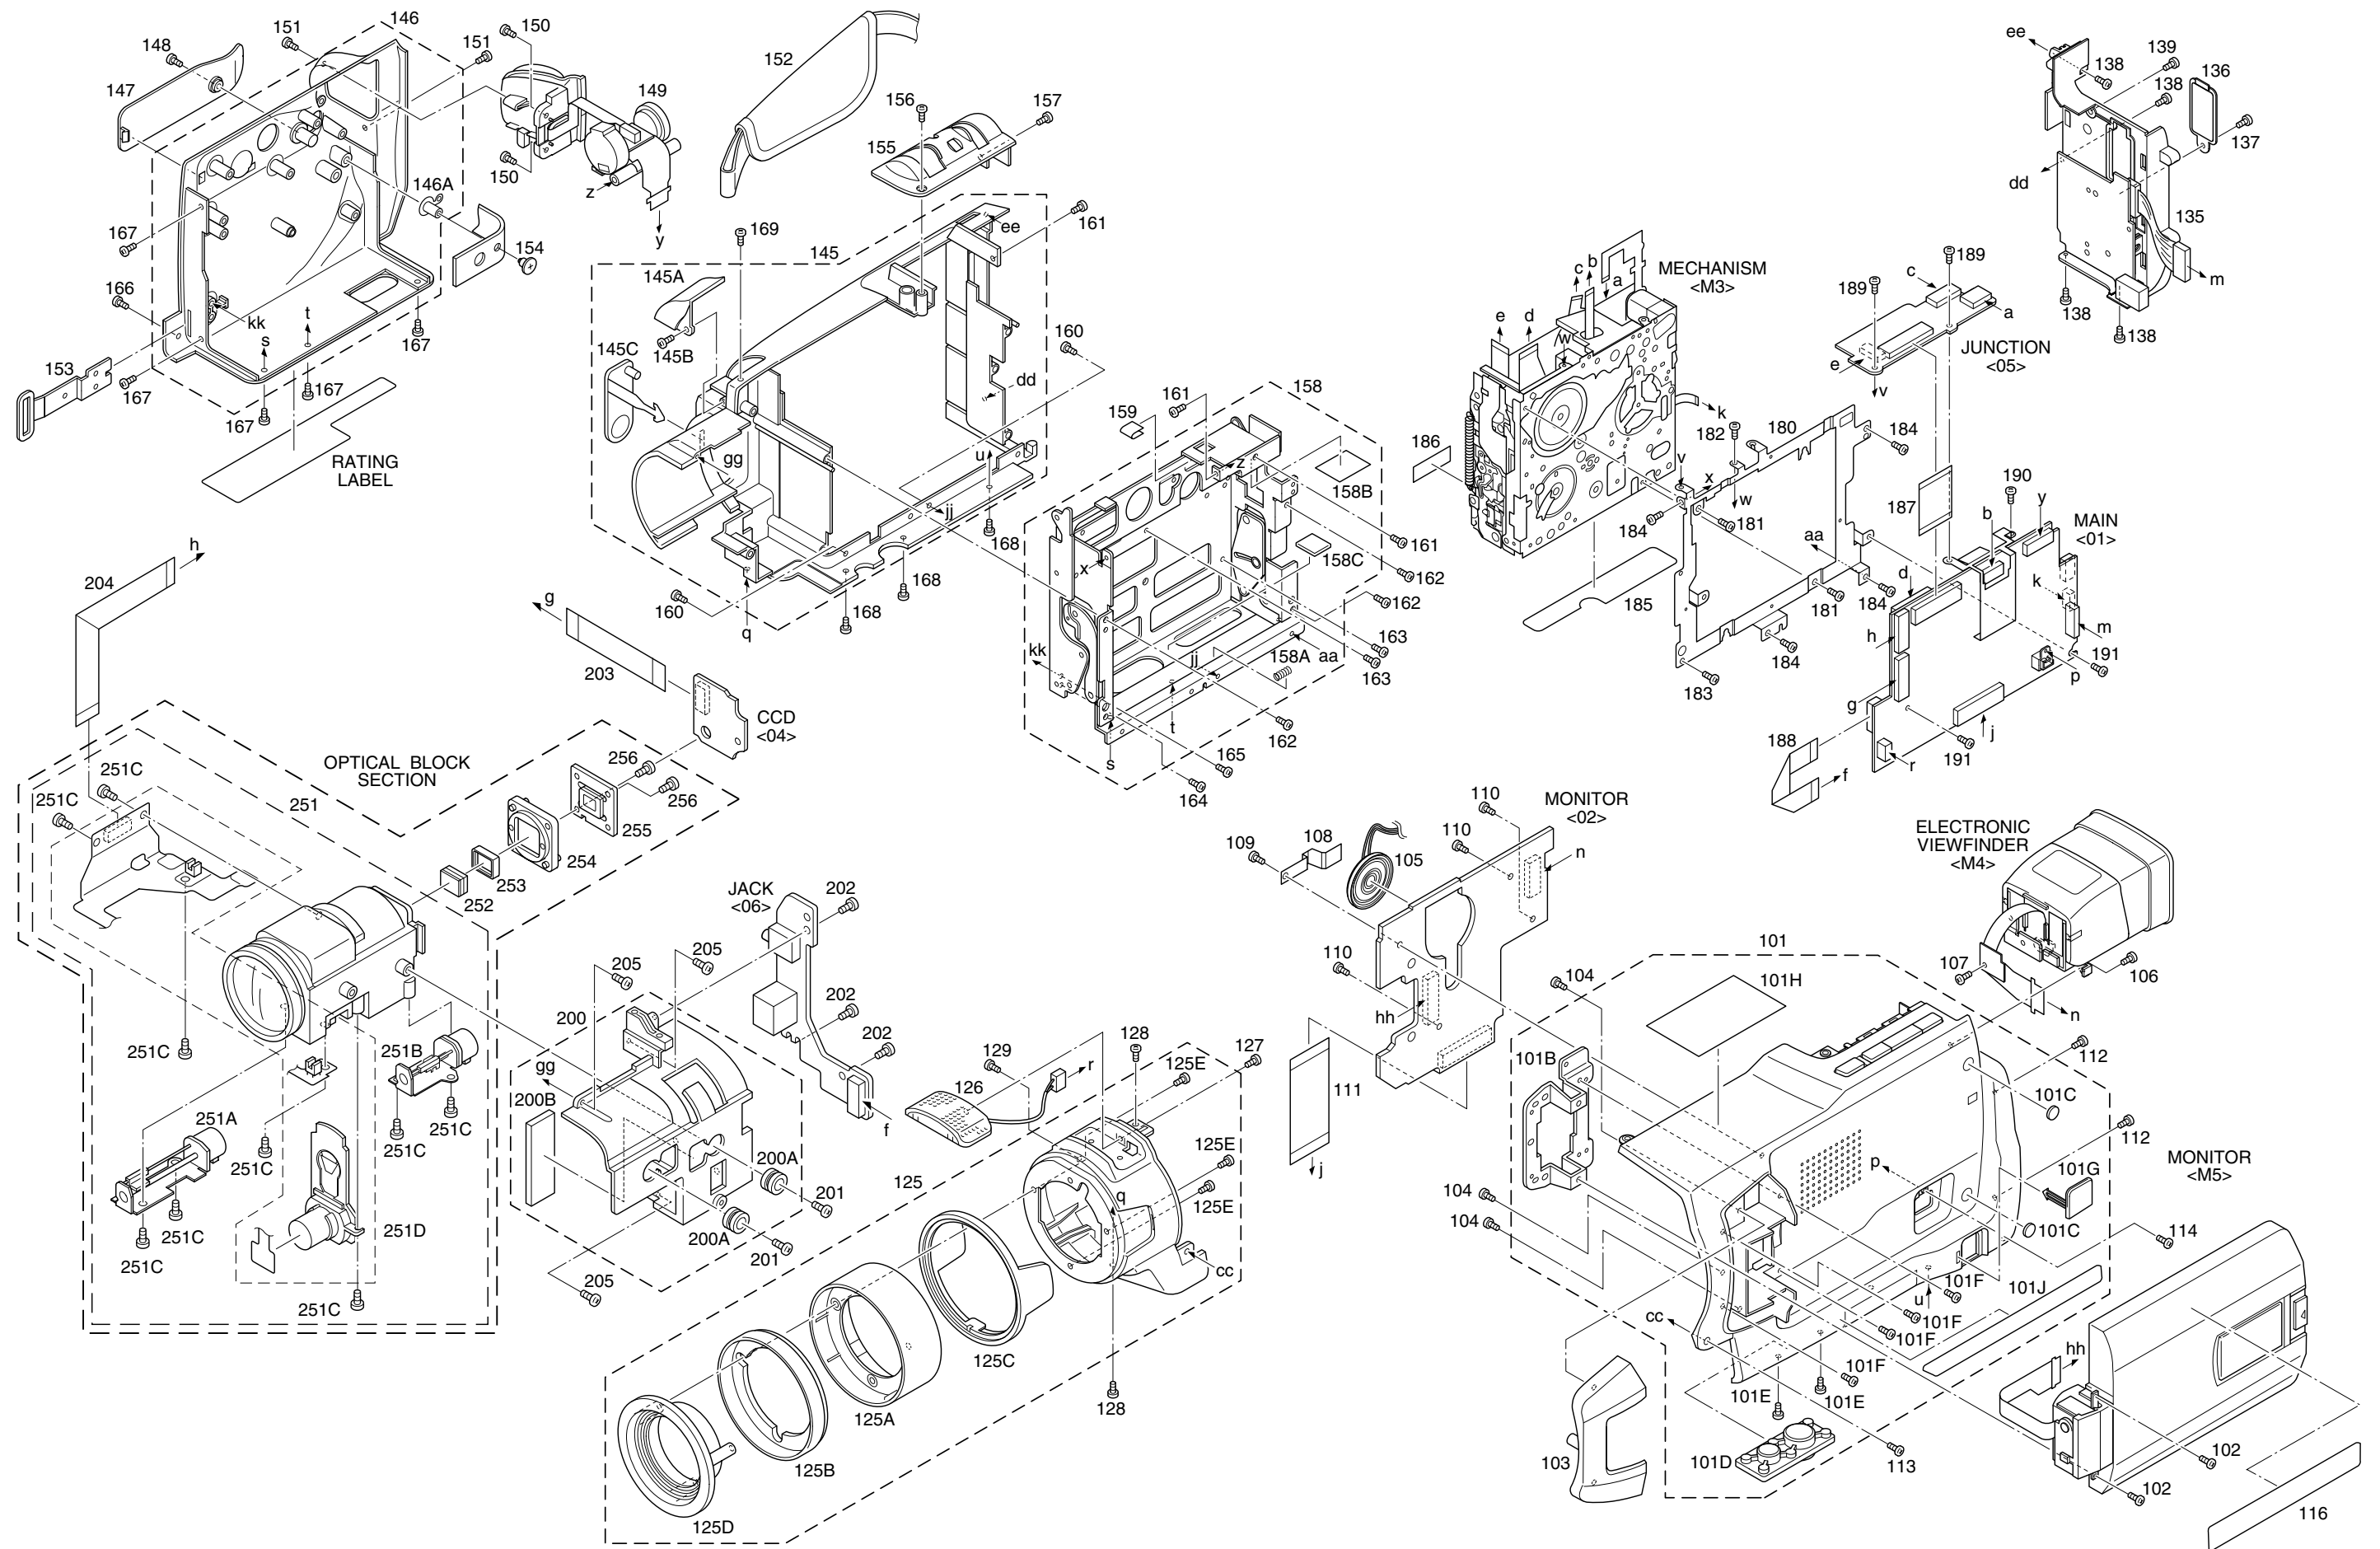

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	#	△	REF No.	PART No.	PART NAME, DESCRIPTION
*****					158C		LY30029-0E9A		SPACER(A)
FINAL ASSEMBLY <M2>					159		LY30030-013A		SPACER(A)
101			LY20867-002A	UPPER CASE ASSY,A	160		LY30018-038A		SPECIAL SCREW,X2
			LY20867-002B	UPPER CASE ASSY,B,C	161		LY30018-084A		SPECIAL SCREW,X3
101B			LY32737-001B	BRACKET(MONI)	162		LY30018-087A		SPECIAL SCREW,X3
101C			LY40664-001A	SPACER,X2	163		LY30018-087A		SPECIAL SCREW,X2
101D			LY31019-001A	BASE	164		LY30018-087A		SPECIAL SCREW
101E			LY30018-084A	SPECIAL SCREW,X2	165		LY30018-087A		SPECIAL SCREW
101F			LY30018-0A8A	SPECIAL SCREW,X4	166		LY30018-038A		SPECIAL SCREW
101G			LY42866-001A	CAP(DC JACK)	167		LY30018-038A		SPECIAL SCREW,X5
101H			LY43807-001A	STICKER(TOP)	168		LY30018-084A		SPECIAL SCREW,X3
101J			LY43809-001A	STICKER(UPPER)	169		LY30018-092A		SPECIAL SCREW
102			LY30018-0D6A	SPECIAL SCREW,X2	180		LY20696-001A		BRACKET(MECHA)
103			LY32738-001A	COVER(HINGE)	181		LY30019-026A		SPECIAL SCREW,X2
104			LY30018-092A	SPECIAL SCREW,X3	182		YQ43893-4		MINI SCREW
105			QAS0112-001	SPEAKER	183		LY30018-084A		SPECIAL SCREW
106			LY30018-063A	SPECIAL SCREW	184		LY30018-066A		SPECIAL SCREW,X4
107			LY30018-064A	SPECIAL SCREW	185		LY40698-002A		LABEL(HOUSING)
108			LY42167-001A	PLATE(SPK)	186		LY40699-002A		LABEL(PUSH)
109			LY30018-047A	SPECIAL SCREW	187		WJT0044-001A		E-CARD WIRE,MAIN CN113-JUNK.CN571
110			LY30018-023A	SPECIAL SCREW,X3	188		WJT0077-001A		E-CARD WIRE,MAIN CN103-JACK CN502
111			QUQ105-4007AA	FFC WIRE,MONI.CN761-MAIN CN101	189		QYSPSPT1730Z		SCREW,X2
112			LY30018-059A	SPECIAL SCREW,X2	190		YQ43893-4		MINI SCREW
113			LY30018-0G6A	SPECIAL SCREW	191		LY30019-033A		SPECIAL SCREW,X2
114			LY30018-006B	SPECIAL SCREW	200		LY32751-001A		FRAME(OP)ASSY
116			LY43808-002A	STICKER(MONI.)	200A		LY41082-001A		CUSHION(OP),X2
△ 125			LY20868-001A	FRONT COVER ASSY	200B		LY30029-0A4A		SPACER(A)
125A			LY32739-001A	HOOD(1)	201		LY30018-050A		SPECIAL SCREW,X2
125B			LY32740-001A	HOOD(2)	202		LY30018-084A		SPECIAL SCREW,X3
125C			LY32741-001A	RING	203		WJT0075-001A		E-CARD WIRE,CCD CN5001-MAIN CN107
125D			LY32742-001A	HOOD(SCREW)	204		WJT0076-001A		E-CARD WIRE,OP-MAIN CN108
125E			LY30018-052A	SPECIAL SCREW,X3	205		LY30018-084A		SPECIAL SCREW,X3
126			LY20869-001A	MICROPHONE	- OPTICAL BLOCK SECTION -				
127			LY30018-084A	SPECIAL SCREW	251		LY30948-004A		OP BLOCK ASSY
128			LY30018-084A	SPECIAL SCREW,X2	251A		PTY30948-301		ZOOM MOTOR
129			LY30018-059A	SPECIAL SCREW	251B		PTY30948-002		FOCUS MOTOR
135			LY20725-001A	REAR UNIT	251C		PTY30151-016		TAPPING SCREW,X9
136			LY41691-001A	COVER(JIG)	251D		PTY30948-006		IRIS MOTOR
137			LY30018-037A	SPECIAL SCREW	252		LY42936-001A		OPTICAL LPF
138			LY30018-084A	SPECIAL SCREW,X4	253		LY31370-001B		SPACER RUBBER
139			LY30018-065A	SPECIAL SCREW	254		LY20497-001A		CCD SPACER
145			LY20866-001A	LOWER CASE ASSY	255		LYH30406-002A		CCD BASE ASSY
145A			LY32735-001A	WINDOW(IR)	256		QYSPSGU2080Z		SCREW,X2
145B			LY30018-063A	SPECIAL SCREW					
145C			LY32736-001A	COVER(JACK)					
146			LY20704-001B	CASSETTE COVER ASSY					
146A			LY40592-001A	CAP(GRIP BELT)					
147			LY32092-013A	COVER(AJUST)					
148			LY30018-037A	SPECIAL SCREW					
149			LY20693-001B	ZOOM UNIT					
150			LY30018-096A	SPECIAL SCREW,X2					
151			LY30018-084A	SPECIAL SCREW,X2					
152			LY20575-004B	GRIP BELT					
153			LY42891-001A	HOOK(GRIP)					
154			LY30018-0D1A	SPECIAL SCREW					
155			LY32093-001B	COVER(ZOOM)ASSY					
156			LY30018-092A	SPECIAL SCREW					
157			LY30018-065A	SPECIAL SCREW					
158			LY20697-001D	ARM ASSY					
158A			LY30001-023A	TENSION SPRING					
158B			LY30029-0C7A	SPACER(A)					

BEWARE OF BOGUS PARTS

Parts that do not meet specifications may cause trouble in regard to safety and performance. We recommend that genuine JVC parts be used.

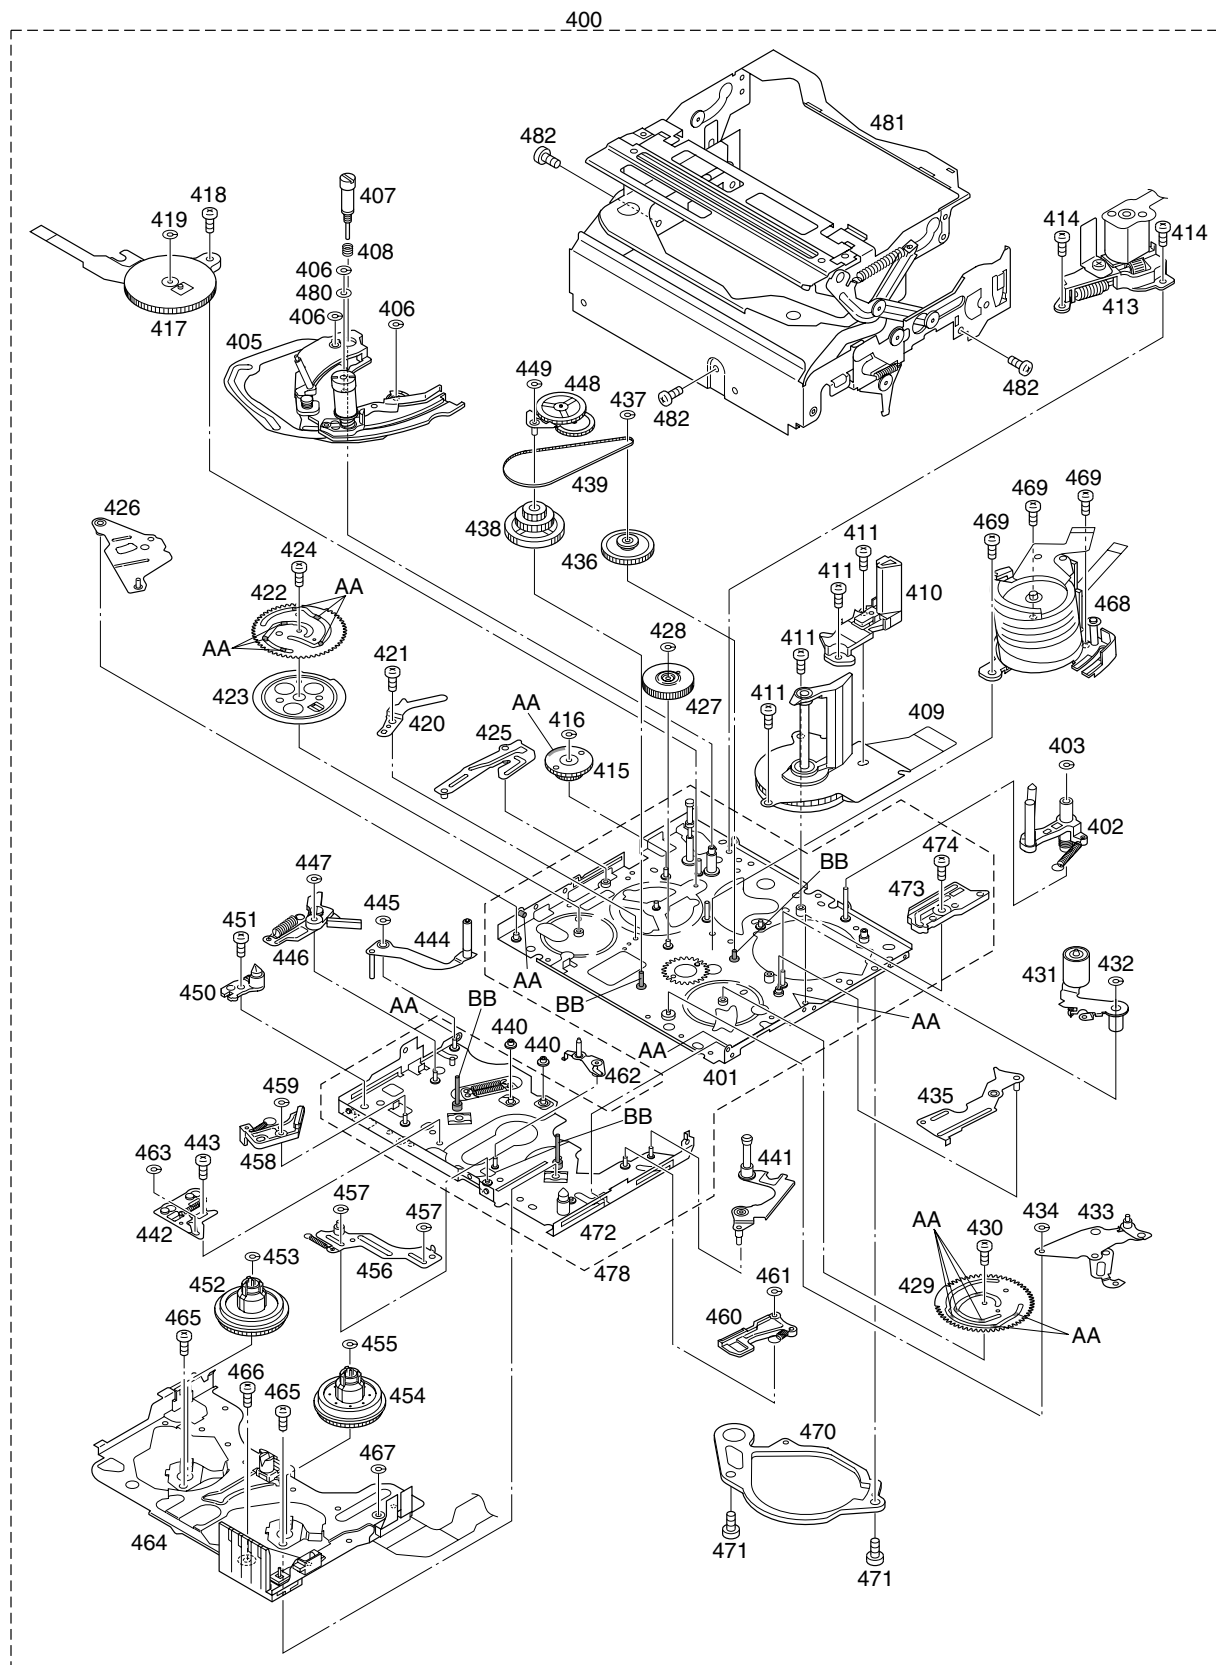


Classification	Part No.	Symbol in drawing
Grease	KYODO-SH-JB	AA
Oil	YTU94027	BB

NOTE: The section marked in **AA** and **BB** indicate lubrication and greasing areas.

#	REF No.	PART No.	PART NAME, DESCRIPTION

MECHANISM ASSEMBLY <M3>			
400	YMA0025WCC/E	MECHA(A)ASSY	
401	LY10240-001D	MAIN DECK ASSY	
402	LY30436-001J	SLANT POLE ARM ASSY	
403	YQ44246	SLIT WASHER	
405	LY10080-001V	RAIL ASSY	
406	YQ44246	SLIT WASHER,X3	
407	LY40353-001D	GUIDE ROLLER(S)ASSY	
408	LY30002-006C	COMPRESSION SPRING	
409	QAR0026-002	CAPSTAN MOTOR	
410	LY30504-001C	CATCHER(T)ASSY	
411	YQ43893	MINI SCREW,X4	
413	LY30448-001E	MOTOR BRACKET ASSY	
414	YQ43893	MINI SCREW,X2	
415	LY31840-001A	WORM WHEEL	
416	YQ44246	SLIT WASHER	
417	LY40496-001C	ROTARY ENCODER	
418	YQ43893	MINI SCREW	
419	YQ44246	SLIT WASHER	
420	LY42632-001A	GEAR HOLDER	
421	YQ43893-6	MINI SCREW	
422	LY31841-001A	MAIN CAM	
423	LY31842-001A	BRAKE CONTROL PLATE	
424	YQ43893	MINI SCREW	
425	LY42633-001A	TAKE UP CONTROL LEVER ASSY	
426	LY31844-001A	SLIDE LEVER ASSY	
427	LY31846-001A	CONNECT GEAR	
428	YQ44246	SLIT WASHER	
429	LY31847-001A	SUB CAM	
430	YQ43893	MINI SCREW	
431	LY31785-001A	PINCHI ROLLER ARM UNIT	
432	YQ44246	SLIT WASHER	
433	LY31850-001A	CHARGE ARM ASSY	
434	YQ44246	SLIT WASHER	
435	LY42643-001A	BRAKE CONTROL LEVER ASSY	
436	LY42645-001A	REEL DRIVE PULLEY ASSY	
437	YQ44246-2	SLIT WASHER	
438	LY40391-002B	CENTER GEAR ASSY	
439	LY40396-001A	TIMING BELT	
440	LY40413-001A	COLLAR,X2	
441	LY31854-001A	GUIDE ARM ASSY	
442	LY31786-001A	SLIDE GUIDE PLATE UNIT	
443	YQ43893-2	MINI SCREW	
444	LY42651-001B	TENSION ARM ASSY	
445	YQ44246	SLIT WASHER	
446	LY30471-001D	PAD ARM ASSY	
447	YQ44246	SLIT WASHER	
448	LY42745-001A	IDLER ARM ASSY	
449	YQ44246-2	SLIT WASHER	
450	LY31861-001A	GUIDE PIN(SUPPLY)	
451	YQ43893	MINI SCREW	
452	LY40441-001B	REEL DISK(SUPPLY)ASSY	
453	YQ44246	SLIT WASHER	
454	LY40443-002A	REEL DISK(TAKE UP)ASSY	
455	YQ44246	SLIT WASHER	
456	LY31788-001A	CONTROL PLATE UNIT	
457	YQ44246	SLIT WASHER,X2	
458	LY40444-001E	LOADING BRAKE ASSY	
459	YQ44246	SLIT WASHER	
460	LY40452-001C	SUB BRAKE ASSY	
461	YQ44246	SLIT WASHER	
462	LY31863-001B	RELEASE GUIDE ASSY	
463	YQ44246	SLIT WASHER	
464	LY20146-001H	REEL COVER ASSY	
465	YQ43893-4	MINI SCREW,X2	
466	YQ43893	MINI SCREW	
467	YQ44246	SLIT WASHER	
468	YDV2086S(CX)	DRUM ASSY	
469	YQ43893	MINI SCREW,X3	
470	LY20630-001A	PWB HOLDER	
471	YQ43893	MINI SCREW,X2	
472	LY10242-001A	SLIDE DECK ASSY	
473	LY31833-001A	LOADING GUIDE	
474	YQ43893	MINI SCREW	
478	LY31832-001D	DECK ASSY	
480	LY41573-001A	WASHER	
481	LY31867-001B	CASSETTE HOUSING ASSY	
482	YQ43893-4	MINI SCREW,X3	

5.4 ELECTRONIC VIEWFINDER ASSEMBLY <M4>

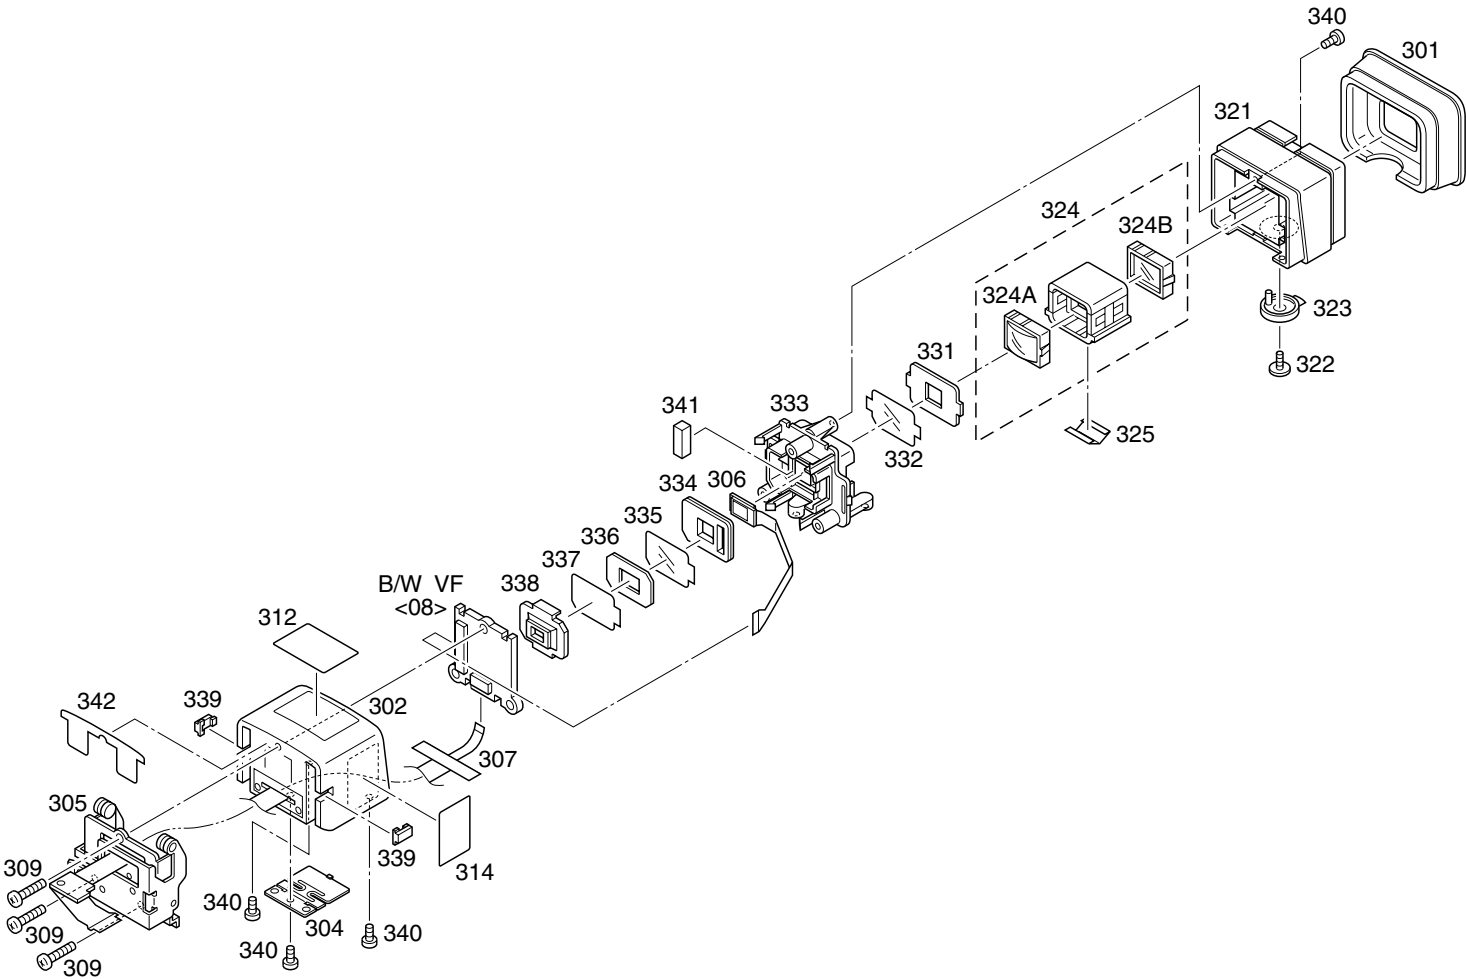

REF No. PART No. PART NAME, DESCRIPTION


ELECTRONIC VIEWFINDER ASSEMBLY <M4>

301	LY32349-001A	EYE CUP
302	LY20766-001A	CASE A(VF)
304	LY32351-001A	CAP(VF)
305	LY20768-001A	VF HINGE ASSY
306	QLD0193-001	LCD MODULE
307	QAL0380-002	FPC
309	LY30018-0F1A	SPECIAL SCREW,X3
312	LY41701-002A	SHEET(CAUTION)1
314	LY43041-002A	LABEL(VF)
321	LY20767-001A	CASE B(VF)
322	LY30019-037A	SPECIAL SCREW
323	LY43231-001A	LEVER(VF)

#	REF No.	PART No.	PART NAME, DESCRIPTION
	324	LY32472-001A	LENS ASSY
	324A	LY43356-001A	LENS(A)
	324B	LY43357-001A	LENS(B)
	325	LY43404-001A	SPRING(VF)
	331	LY43236-001A	SHEET
	332	LY43246-001A	SHEET2(POLA)
	333	LY32347-001A	HOLDER LCD(VF)
	334	LY43245-001A	SHEET(CUSION)
	335	LY43234-001A	SHEET1(POLA)
	336	LY43232-001A	SHEET(VF)
	337	LY43235-001A	SHEET(DIFF)
	338	LY43238-001A	HOLDER(LED)
	339	LY43239-001A	GUIDE(VF),X2
	340	LY30018-060A	SPECIAL SCREW,X4
	341	LY30029-0U6A	SPACER(A)
	342	LY43489-001B	PLATE(VF)

5.5 MONITOR ASSEMBLY <M5>

500

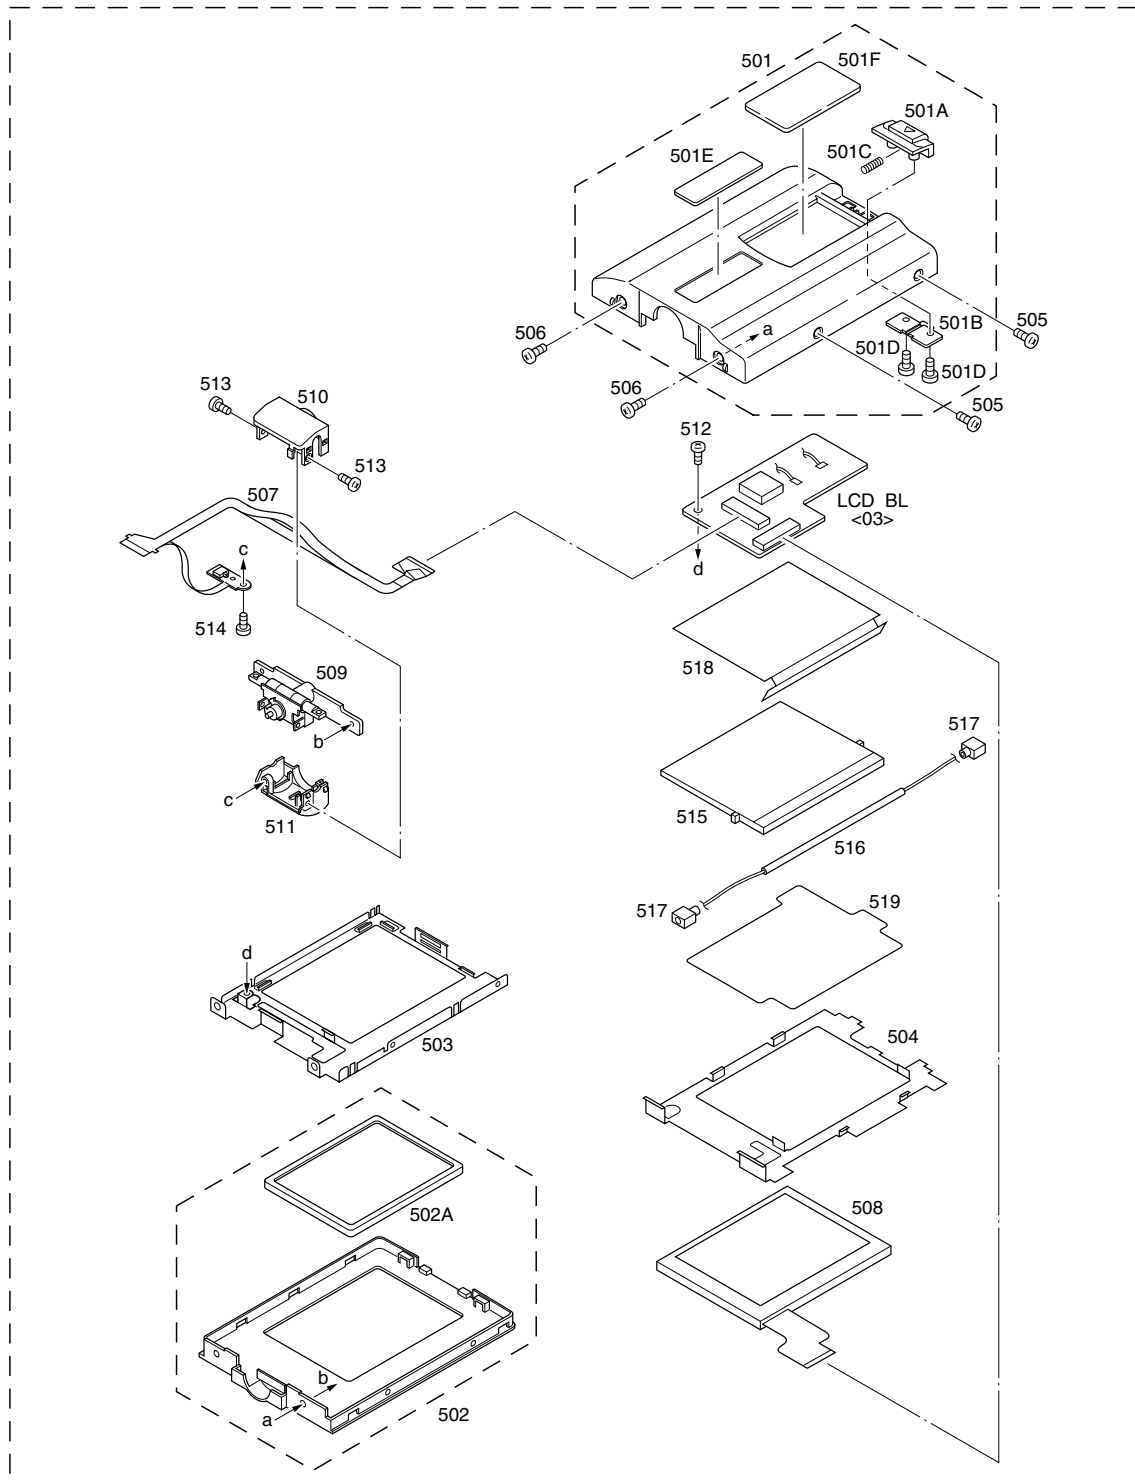

△ REF No. PART No. PART NAME, DESCRIPTION

MONITOR ASSEMBLY <M5>

500	LYH20246-045B	MONITOR ASSY
501	LY20702-008A	MONITOR COVER(2.5)ASSY
501A	LY31620-001A	KNOB(LOCK 1)
501B	LY42180-001A	KNOB(LOCK 2)
501C	LY30002-044A	COMPRESSION SPRING
501D	LY30018-084A	SPECIAL SCREW,X2
501E	LY42883-001B	MARK
501F	LY32087-006A	WINDOW
502	LY32924-001A	MONITOR CASE(2.5)ASSY
502A	LY43805-001A	SPACER(MONI.)
503	LY32748-001B	BRACKET(FRM1)
504	LY32749-001B	BRACKET(FRM2)

△ REF No. PART No. PART NAME, DESCRIPTION

505	QYSPSPT1730R	SCREW,X2
506	LY30018-0F2A	SPECIAL SCREW,X2
507	LY32574-001A	MONITOR FPC ASSY
508	QLD0234-001	LCD MODULE
509	LY32079-001A	HINGE ASSY
510	LY32088-001A	HINGE COVER(1)
511	LY32089-001B	HINGE COVER(2)
512	QYSPSPT1730R	SCREW
513	LY30018-058A	SPECIAL SCREW,X2
514	LY30018-023A	SPECIAL SCREW
515	LY43392-001A	LIGHT SCREEN
516	QLL0125-001	LAMP
517	LY43778-001A	HOLDER,X2
518	LY43396-001A	SHEET(REFLECT)
519	LY43362-001A	DIFFUSION SHEET(2.5),A
	LY43901-001A	DIFFUSION SHEET(2.5),B,C

5.6 ELECTRICAL PARTS LIST

△ REF No. PART No. PART NAME, DESCRIPTION

MAIN BOARD ASSEMBLY <01>

PW	YB10368B-01	MAIN BOARD ASSY
IC1001	UPD703039F1-A32	IC(MICRO C ROM)
	or UPD70F3040F1A32	IC(MICRO C ROM)
IC1002	RS5C314	IC
IC1003	X25170S8I-2.5-X	IC
	or 25LC160-I/SN-X	IC
	or AT25160N-10SC-X	IC
	or CAT25C16SI	IC
IC1004	TC75S56FU	IC
IC1005	TC7S00FU	IC
	or SN74AHC1G00K	IC
IC1006	MB90097PFV145	IC(MICRO C ROM)
IC1007	SN74AHC1G08K	IC
IC1008	IC-PST3423U-X	IC
IC1009	TC7W08FU	IC(DIGITAL)
IC1401	UPD703040YF-M12	IC(MICRO C ROM)
	or UPD70F3040YFM12	IC(MICRO C ROM)
△ IC1601	BD6631KV	IC
IC1602	TC7W14FU	IC(DIGITAL)
	or SN74AHC2G14T	IC
IC2001	AK4560AVQ	IC
IC3001	JCY0152	IC
IC3005	JCY0136	IC
IC3501	JCY0132	IC
IC3502	SN74AHC1G04K	IC
IC3701	BA7665FS	IC
IC4201	HD49334F	IC
	or HD49334AF	IC
IC4202	MM1385HN	IC
IC4301	JCY0158	IC
IC4302	MSM548331TA	IC(DIGITAL)
IC4305	TC7W53FU	IC(DIGITAL)
IC4601	BA10358F-XE	IC
IC4602	BA10324AF-XE	IC
IC4901	UPD16835AGS	IC
IC5501	JCY0117	IC
IC6001	S-80842CNNB-W	IC
IC6101	FA3698F	IC
Q1001	DTC124EE	DIGI TRANSISTOR
	or UN9212J	DIGI TRANSISTOR
Q1002	2SC4617/QR/-X	TRANSISTOR
	or 2SD2216J/QR/-X	TRANSISTOR
Q1004	DTC143XE	DIGI TRANSISTOR
Q1005	2SJ347	MOS FET
Q1008	DTA114EE	DIGI TRANSISTOR
	or PDTA114EE	DIGI TRANSISTOR
	or RN2102	DIGI TRANSISTOR
	or UN9111J	DIGI TRANSISTOR
Q1009	DTC144EE	DIGI TRANSISTOR
	or PDTC144EE	DIGI TRANSISTOR
	or RN1104	DIGI TRANSISTOR
	or UN9213J	DIGI TRANSISTOR
Q1010	UMX1N	PAIR TRANSISTOR
Q1011	UMX1N	PAIR TRANSISTOR
Q1012	UMX1N	PAIR TRANSISTOR
Q1013	UMX1N	PAIR TRANSISTOR
Q1401	DTA114EE	DIGI TRANSISTOR
	or PDTA114EE	DIGI TRANSISTOR
	or RN2102	DIGI TRANSISTOR

△ REF No. PART No. PART NAME, DESCRIPTION

	or UN9111J	DIGI TRANSISTOR
Q1402	UMC3N	DIGI TRANSISTOR
Q1403	UMC3N	DIGI TRANSISTOR
Q1601	UMC3N	DIGI TRANSISTOR
Q2001	UMX1N	PAIR TRANSISTOR
Q2002	2SC4617/RS/-X	TRANSISTOR
Q2004	2SC4617/RS/-X	TRANSISTOR
Q3001	2SC4617/RS/-X	TRANSISTOR
Q3002	2SC4617/RS/-X	TRANSISTOR
Q3701	UMT2N	PAIR TRANSISTOR
	or XP6401	TRANSISTOR
Q3702	UMZ1N	PAIR TRANSISTOR
	or XP4601	TRANSISTOR
Q4304	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
Q4305	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
Q4306	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
Q4307	PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
Q4601	2SC4617/QR/-X	TRANSISTOR
	or 2SD2216J/QR/-X	TRANSISTOR
Q4602	2SC4617/QR/-X	TRANSISTOR
	or 2SD2216J/QR/-X	TRANSISTOR
Q4901	2SC4617/RS/-X	TRANSISTOR
Q6001	DTC144EE	DIGI TRANSISTOR
	or PDTC144EE	DIGI TRANSISTOR
	or RN1104	DIGI TRANSISTOR
	or UN9213J	DIGI TRANSISTOR
Q6002	MCH6613	MOS FET
Q6004	2SB1188/QR/-W	TRANSISTOR
Q6201	MCH3308	MOS FET
Q6202	2SA1577/RS/-X	TRANSISTOR
Q6203	MCH3308	MOS FET
Q6204	CPH3314	MOS FET
Q6205	CPH3101	TRANSISTOR
Q6206	2SC4617/RS/-X	TRANSISTOR
Q6208	MCH3308	MOS FET
Q6210	MCH3308	MOS FET
Q6211	MCH3308	MOS FET
Q6212	HN1C01FU/G/-X	PAIR TRANSISTOR
	or PUMX1	PAIR TRANSISTOR
	or UMX1N	PAIR TRANSISTOR
Q6213	2SA1577/RS/-X	TRANSISTOR
Q6214	DTC144EE	DIGI TRANSISTOR
	or PDTC144EE	DIGI TRANSISTOR
	or RN1104	DIGI TRANSISTOR
	or UN9213J	DIGI TRANSISTOR
Q6215	HN1A01FU/G/-X	PAIR TRANSISTOR
	or PUMT1	PAIR TRANSISTOR
	or UMT1N	PAIR TRANSISTOR
Q6216	2SC4617/RS/-X	TRANSISTOR
Q6701	CPH3314	MOS FET
D1001	DA221	DIODE
D1002	RSD376	DIODE
D1003	MA8068	ZENER DIODE
D1602	DAP222	DIODE
D1603	DAP222	DIODE
D1604	DAP222	DIODE
D3001	EC2C01C	VARI CAP DIODE
D3002	EC2C01C	VARI CAP DIODE
D3003	EC2C01C	VARI CAP DIODE

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	# ▲ REF No.	PART No.	PART NAME, DESCRIPTION
	D3004	MA2Z720		R1082	NRSA6AJ-103W
	D5501	1SS355		R1083	NRSA6AJ-103W
▲	D6002	RB715F		R1090	NRSA6AJ-474W
	D6201	CRS01		R1091	NRSA6AJ-474W
	D6202	CRS01		R1092	NRSA6AJ-154W
	D6203	CRS01		R1093	NRSA6AJ-154W
	D6204	CRS01		R1094	NRSA6AJ-474W
	D6205	CRS01		R1095	NRSA6AJ-474W
	D6206	RB480Y		R1096	NRSA6AJ-154W
	D6207	UDZS9.1B		R1097	NRSA6AJ-154W
	D6208	RB480Y		R1401	NRSA6AJ-105W
	D6701	EP10HY03		R1402	NRSA6AJ-102W
	D6702	EP10HY03		R1403	NRSA6AJ-103W
	R1001	NRSA6AJ-104W		R1404	NRSA6AJ-472W
	R1002	NRSA6AJ-224W		R1405	NRSA6AJ-332W
	R1003	NRSA6AJ-472W		R1406	NRSA6AJ-332W
	R1004	NRSA6AJ-103W		R1407	NRSA6AJ-332W
	R1005	NRSA6AJ-153W		R1408	NRSA6AD-753W
	R1006	NRSA6AJ-103W		R1409	NRSA6AJ-334W
	R1007	NRSA6AJ-334W		R1411	NRSA6AJ-332W
	R1008	NRSA6AJ-102W		R1412	NRSA6AJ-332W
	R1009	NRSA6AJ-561W		R1413	NRSA6AJ-332W
	R1013	NRSA6AJ-0R0W		R1414	NRSA6AJ-332W
	R1015	NRSA6AJ-474W		R1415	NRSA6AJ-472W
	R1017	NRSA6AJ-561W		R1416	NRSA6AJ-472W
	R1018	NRSA6AJ-103W		R1417	NRSA6AJ-101W
	R1019	NRSA6AJ-623W		R1421	NRSA6AJ-103W
	R1020	NRSA6AJ-331W		R1422	NRSA6AJ-153W
	R1021	NRSA6AJ-331W		R1423	NRSA6AJ-820W
	R1022	NRSA6AJ-331W		R1424	NRSA6AJ-104W
	R1023	NRSA6AJ-103W		R1601	NRSA6AJ-681W
	R1024	NRSA6AJ-823W		R1602	NRSA6AJ-124W
	R1026	NRSA6AJ-472W		R1603	NRSA6AJ-472W
	R1027	NRSA6AJ-104W		R1604	NRSA6AJ-104W
	R1028	NRSA6AJ-185W		R1605	NRV142F-R22X
	R1030	NRSA6AJ-104W		R1609	NRV142F-R33X
	R1031	NRSA6AJ-102W		R1610	NRSA6AJ-471W
	R1032	NRSA6AJ-104W		R1611	NRSA6AJ-471W
	R1033	NRSA6AJ-103W		R1612	NRSA6AJ-104W
	R1034	NRSA6AJ-103W		R1613	NRSA6AJ-102W
	R1036	NRSA6AJ-102W		R1614	NRSA6AJ-102W
	R1037	NRSA6AJ-103W		R1615	NRSA6AJ-102W
	R1038	NRSA6AJ-104W		R1616	NRSA6AJ-391W
	R1039	NRSA6AJ-103W		R1617	NRSA6AJ-683W
	R1044	NRSA6AJ-123W		R1618	NRSA6AJ-683W
	R1045	NRSA6AJ-822W		R1619	NRSA6AJ-393W
	R1046	NRSA6AJ-103W		R1620	NRSA6AJ-103W
	R1048	NRSA6AJ-104W		R1621	NRSA6AJ-103W
	R1049	NRSA6AJ-393W		R1622	NRSA6AJ-103W
	R1050	NRSA6AJ-223W		R1624	NRVA6AD-123W
	R1051	NRSA6AJ-272W		R1625	NRSA6AJ-181W
	R1052	NRSA6AJ-183W		R1626	NRSA6AJ-181W
	R1053	NRSA6AJ-154W		R1628	NRVA6AD-271W
	R1054	NRSA6AJ-473W		R1629	NRSA6AJ-564W
	R1055	NRSA6AJ-103W		R1630	NRSA6AJ-0R0W
	R1056	NRSA6AJ-472W		R1631	NRSA6AJ-0R0W
	R1058	NRSA6AJ-222W		R1635	NRSA6AJ-472W
	R1066	NRSA6AJ-473W		R1636	NRSA6AJ-103W
	R1071	NRSA6AJ-474W		R1637	NRSA6AJ-154W
	R1072	NRSA6AJ-104W		R2006	NRSA6AJ-100W
	R1078	NRSA6AJ-102W		R2007	NRSA6AJ-102W
	R1079	NRSA6AJ-102W		R2008	NRSA6AJ-102W
	R1080	NRSA6AJ-102W		R2009	NRSA6AJ-332W
	R1081	NRSA6AJ-103W			

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R2014	NRSA6AJ-820W	MG RESISTOR	82Ω,1/16W	R3050	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2015	NRSA6AJ-820W	MG RESISTOR	82Ω,1/16W	R3051	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2016	NRSA6AJ-820W	MG RESISTOR	82Ω,1/16W	R3057	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W
R2017	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R3059	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W
R2018	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3066	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W
R2019	NRSA6AJ-2R7W	MG RESISTOR	2.7Ω,1/16W	R3067	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W
R2020	NRSA6AJ-2R7W	MG RESISTOR	2.7Ω,1/16W	R3068	NRSA6AJ-271W	MG RESISTOR	270Ω,1/16W
R2023	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R3069	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R2024	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W	R3071	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2025	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R3074	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R2027	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R3501	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W
R2028	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R3502	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R2101	NRSA6AJ-182W	MG RESISTOR	1.8kΩ,1/16W	R3503	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R2102	NRSA6AJ-182W	MG RESISTOR	1.8kΩ,1/16W	R3504	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2103	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W	R3505	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2104	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W	R3506	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2105	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R3507	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2106	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R3508	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W
R2107	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	R3511	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W
R2108	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	R3521	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2109	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3522	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2110	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3701	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2111	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R3702	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2112	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R3703	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R2113	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W	R3706	NRSA6AD-221W	MG RESISTOR	220Ω,1/16W
R2114	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W	R3707	NRSA6AD-221W	MG RESISTOR	220Ω,1/16W
R2117	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3708	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R2118	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3711	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W
R2119	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W	R3712	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W
R2120	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W	R3713	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W
R2127	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3714	NRSA6AJ-123W	MG RESISTOR	12kΩ,1/16W
R2128	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3715	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R2129	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R3717	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W
R2130	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R3718	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W
R2201	NRSA6AJ-182W	MG RESISTOR	1.8kΩ,1/16W	R3719	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R2202	NRSA6AJ-182W	MG RESISTOR	1.8kΩ,1/16W	R3724	NRSA6AJ-392W	MG RESISTOR	3.9kΩ,1/16W
R3002	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R4202	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3004	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R4203	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3005	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R4205	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W
R3006	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R4206	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R3007	NRSA6AJ-562W	MG RESISTOR	5.6kΩ,1/16W	R4207	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R3008	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R4208	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R3009	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R4301	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W
R3010	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R4304	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3011	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R4305	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3013	NRSA6AJ-242W	MG RESISTOR	2.4kΩ,1/16W	R4307	NRSA6AD-333W	MG RESISTOR	33kΩ,1/16W
R3014	NRSA6AJ-392W	MG RESISTOR	3.9kΩ,1/16W	R4308	NRSA6AD-682W	MG RESISTOR	6.8kΩ,1/16W
R3015	NRSA6AJ-392W	MG RESISTOR	3.9kΩ,1/16W	R4309	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3016	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W	R4311	NRSA6AD-123W	MG RESISTOR	12kΩ,1/16W
R3017	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W	R4312	NRSA6AD-272W	MG RESISTOR	2.7kΩ,1/16W
R3018	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W	R4313	NRSA6AD-272W	MG RESISTOR	2.7kΩ,1/16W
R3019	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W	R4314	NRSA6AD-123W	MG RESISTOR	12kΩ,1/16W
R3020	NRVA6AD-512W	CMF RESISTOR	5.1kΩ,1/16W	R4315	NRSA6AD-103W	MG RESISTOR	10kΩ,1/16W
R3025	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R4333	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3027	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R4336	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3029	NRSA6AJ-682W	MG RESISTOR	6.8kΩ,1/16W	R4337	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3030	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R4338	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W
R3031	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R4339	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3032	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	R4340	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3033	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R4341	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3034	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R4343	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3036	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R4344	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3037	NRSA6AJ-681W	MG RESISTOR	680Ω,1/16W	R4346	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W

#  REF No.	PART No.	PART NAME, DESCRIPTION		#  REF No.	PART No.	PART NAME, DESCRIPTION	
R4360	NRSA6AD-102W	MG RESISTOR	1kΩ, 1/16W	R5501	NRSA6AJ-0R0W	MG RESISTOR	0Ω, 1/16W
R4362	NRSA6AD-223W	MG RESISTOR	22kΩ, 1/16W	R5503	NRSA6AJ-270W	MG RESISTOR	27Ω, 1/16W
R4363	NRSA6AJ-0R0W	MG RESISTOR	0Ω, 1/16W	R5504	NRSA6AJ-270W	MG RESISTOR	27Ω, 1/16W
R4364	NRSA6AD-123W	MG RESISTOR	12kΩ, 1/16W	R5505	NRSA6AJ-270W	MG RESISTOR	27Ω, 1/16W
R4365	NRSA6AJ-105W	MG RESISTOR	1MΩ, 1/16W	R5506	NRSA6AJ-0R0W	MG RESISTOR	0Ω, 1/16W
R4366	NRSA6AJ-105W	MG RESISTOR	1MΩ, 1/16W	R5507	NRSA6AJ-0R0W	MG RESISTOR	0Ω, 1/16W
R4367	NRSA6AD-332W	MG RESISTOR	3.3kΩ, 1/16W	R5509	NRSA6AJ-470W	MG RESISTOR	47Ω, 1/16W
R4368	NRSA6AD-223W	MG RESISTOR	22kΩ, 1/16W	R5510	NRSA6AJ-470W	MG RESISTOR	47Ω, 1/16W
R4369	NRSA6AD-332W	MG RESISTOR	3.3kΩ, 1/16W	R5511	NRSA6AJ-470W	MG RESISTOR	47Ω, 1/16W
R4370	NRSA6AD-223W	MG RESISTOR	22kΩ, 1/16W	R5512	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W
R4371	NRSA6AD-332W	MG RESISTOR	3.3kΩ, 1/16W	R5513	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W
R4372	NRSA6AD-223W	MG RESISTOR	22kΩ, 1/16W	R5514	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W
R4375	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W	R6001	NRSA6AJ-104W	MG RESISTOR	100kΩ, 1/16W
R4376	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W	R6002	NRSA6AJ-104W	MG RESISTOR	100kΩ, 1/16W
R4377	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W	R6003	NRSA6AJ-224W	MG RESISTOR	220kΩ, 1/16W
R4378	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W	R6004	NRSA6AJ-183W	MG RESISTOR	18kΩ, 1/16W
R4379	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W	R6005	NRSA6AJ-104W	MG RESISTOR	100kΩ, 1/16W
R4380	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W	 R6009	NRSA63J-102X	MG RESISTOR	1kΩ, 1/16W
R4381	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W	R6010	NRSA6AJ-473W	MG RESISTOR	47kΩ, 1/16W
R4382	NRSA6AD-123W	MG RESISTOR	12kΩ, 1/16W	R6011	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W
R4383	NRSA6AD-123W	MG RESISTOR	12kΩ, 1/16W	R6012	NRSA6AD-104W	MG RESISTOR	100kΩ, 1/16W
R4384	NRSA6AD-123W	MG RESISTOR	12kΩ, 1/16W	R6013	NRSA6AD-683W	MG RESISTOR	68kΩ, 1/16W
R4385	NRSA6AD-101W	MG RESISTOR	100Ω, 1/16W	R6101	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W
R4386	NRSA6AD-271W	MG RESISTOR	270Ω, 1/16W	R6102	NRSA6AD-751W	MG RESISTOR	750Ω, 1/16W
R4387	NRSA6AD-271W	MG RESISTOR	270Ω, 1/16W	R6103	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W
R4388	NRSA6AD-271W	MG RESISTOR	270Ω, 1/16W	R6106	NRSA6AJ-333W	MG RESISTOR	33kΩ, 1/16W
R4601	NRSA6AJ-103W	MG RESISTOR	10kΩ, 1/16W	R6107	NRSA6AD-562W	MG RESISTOR	5.6kΩ, 1/16W
R4602	NRSA6AJ-104W	MG RESISTOR	100kΩ, 1/16W	R6108	NRSA6AJ-223W	MG RESISTOR	22kΩ, 1/16W
R4603	NRSA6AJ-223W	MG RESISTOR	22kΩ, 1/16W	R6113	NRSA6AJ-393W	MG RESISTOR	39kΩ, 1/16W
R4604	NRSA6AJ-331W	MG RESISTOR	330Ω, 1/16W	R6114	NRSA6AJ-823W	MG RESISTOR	82kΩ, 1/16W
R4605	NRSA6AJ-105W	MG RESISTOR	1MΩ, 1/16W	R6115	NRSA6AJ-823W	MG RESISTOR	82kΩ, 1/16W
R4606	NRSA6AJ-103W	MG RESISTOR	10kΩ, 1/16W	R6116	NRSA6AD-153W	MG RESISTOR	15kΩ, 1/16W
R4607	NRSA6AJ-104W	MG RESISTOR	100kΩ, 1/16W	R6117	NRSA6AJ-0R0W	MG RESISTOR	0Ω, 1/16W
R4608	NRSA6AJ-472W	MG RESISTOR	4.7kΩ, 1/16W	R6118	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W
R4609	NRSA6AJ-104W	MG RESISTOR	100kΩ, 1/16W	R6124	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W
R4610	NRSA6AJ-105W	MG RESISTOR	1MΩ, 1/16W	R6201	NRSA6AD-223W	MG RESISTOR	22kΩ, 1/16W
R4611	NRSA6AJ-243W	MG RESISTOR	24kΩ, 1/16W	R6202	NRSA6AJ-474W	MG RESISTOR	470kΩ, 1/16W
R4614	NRSA6AJ-472W	MG RESISTOR	4.7kΩ, 1/16W	R6203	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W
R4615	NRSA6AJ-683W	MG RESISTOR	68kΩ, 1/16W	R6204	NRSA6AJ-473W	MG RESISTOR	47kΩ, 1/16W
R4616	NRSA6AJ-103W	MG RESISTOR	10kΩ, 1/16W	R6205	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W
R4617	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W	R6206	NRSA6AD-183W	MG RESISTOR	18kΩ, 1/16W
R4618	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W	R6207	NRSA6AD-123W	MG RESISTOR	12kΩ, 1/16W
R4619	NRSA6AJ-104W	MG RESISTOR	100kΩ, 1/16W	R6208	NRSA6AD-123W	MG RESISTOR	12kΩ, 1/16W
R4620	NRSA6AJ-152W	MG RESISTOR	1.5kΩ, 1/16W	R6209	NRSA6AD-153W	MG RESISTOR	15kΩ, 1/16W
R4621	NRSA6AJ-334W	MG RESISTOR	330kΩ, 1/16W	R6210	NRSA6AD-183W	MG RESISTOR	18kΩ, 1/16W
R4622	NRSA6AJ-224W	MG RESISTOR	220kΩ, 1/16W	R6212	NRSA6AD-472W	MG RESISTOR	4.7kΩ, 1/16W
R4623	NRSA6AJ-333W	MG RESISTOR	33kΩ, 1/16W	R6213	NRSA6AJ-103W	MG RESISTOR	10kΩ, 1/16W
R4624	NRSA6AJ-223W	MG RESISTOR	22kΩ, 1/16W	R6214	NRSA6AJ-152W	MG RESISTOR	1.5kΩ, 1/16W
R4901	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W	R6215	NRSA6AJ-473W	MG RESISTOR	47kΩ, 1/16W
R4902	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W	R6219	NRSA6AD-243W	MG RESISTOR	24kΩ, 1/16W
R4903	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W	R6220	NRSA6AD-302W	MG RESISTOR	3kΩ, 1/16W
R4904	NRSA63J-6R8X	MG RESISTOR	6.8Ω, 1/16W	R6221	NRSA6AD-104W	MG RESISTOR	100kΩ, 1/16W
R4905	NRSA6AJ-271W	MG RESISTOR	270Ω, 1/16W	R6222	NRSA6AD-103W	MG RESISTOR	10kΩ, 1/16W
R4906	NRSA6AJ-333W	MG RESISTOR	33kΩ, 1/16W	R6223	NRSA6AD-123W	MG RESISTOR	12kΩ, 1/16W
R4907	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W	R6224	NRSA6AD-473W	MG RESISTOR	47kΩ, 1/16W
R4908	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W	R6225	NRSA6AD-562W	MG RESISTOR	5.6kΩ, 1/16W
R4909	NRSA6AJ-0R0W	MG RESISTOR	0Ω, 1/16W	R6226	NRSA6AD-223W	MG RESISTOR	22kΩ, 1/16W
R4911	NRSA63J-0R0X	MG RESISTOR	0Ω, 1/16W	R6227	NRSA6AD-473W	MG RESISTOR	47kΩ, 1/16W
R4914	NRSA6AJ-223W	MG RESISTOR	22kΩ, 1/16W	R6228	NRSA6AD-473W	MG RESISTOR	47kΩ, 1/16W
R4915	NRSA6AJ-182W	MG RESISTOR	1.8kΩ, 1/16W	R6229	NRSA6AD-332W	MG RESISTOR	3.3kΩ, 1/16W
R4916	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W	R6230	NRSA6AJ-272W	MG RESISTOR	2.7kΩ, 1/16W
R4917	NRSA6AJ-102W	MG RESISTOR	1kΩ, 1/16W	R6231	NRSA6AD-104W	MG RESISTOR	100kΩ, 1/16W
R4918	NRSA6AJ-0R0W	MG RESISTOR	0Ω, 1/16W	R6232	NRSA6AD-473W	MG RESISTOR	47kΩ, 1/16W

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R6233	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W	C1414	NCBA1CK-223W	CAPACITOR	0.022μF,16V
R6234	NRSA6AJ-273W	MG RESISTOR	27kΩ,1/16W	C1415	NCBA1CK-223W	CAPACITOR	0.022μF,16V
R6235	NRSA6AD-683W	MG RESISTOR	68kΩ,1/16W	C1416	NCBA1AK-104W	CAPACITOR	0.1μF,10V
R6236	NRSA6AD-473W	MG RESISTOR	47kΩ,1/16W	C1601	NCBA1CK-103W	CAPACITOR	0.01μF,16V
R6237	NRSA6AD-753W	MG RESISTOR	75kΩ,1/16W	C1602	NBE20JM-106X	T CAPACITOR	10μF,6.3V
R6238	NRSA6AD-104W	MG RESISTOR	100kΩ,1/16W	C1603	NBE20JM-106X	T CAPACITOR	10μF,6.3V
R6239	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1605	NCBA1AK-104W	CAPACITOR	0.1μF,10V
R6240	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	C1606	NCBA1HK-152W	CAPACITOR	0.0015μF,50V
R6241	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	C1607	NCBA1AK-473W	CAPACITOR	0.047μF,10V
R6242	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	C1614	NBE20JM-106X	T CAPACITOR	10μF,6.3V
R6243	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W	C1618	NCBA1HK-222W	CAPACITOR	0.0022μF,50V
R6701	NRZ0058-R20X	MG RESISTOR	0.2Ω,1/2W	C1619	NCBA1HK-222W	CAPACITOR	0.0022μF,50V
R6702	NRSA6AD-104W	MG RESISTOR	100kΩ,1/16W	C1620	NCBA1HK-222W	CAPACITOR	0.0022μF,50V
R6703	NRSA6AD-123W	MG RESISTOR	12kΩ,1/16W	C1621	NCB30JK-105X	CAPACITOR	1μF,6.3V
R6704	NRSA6AD-823W	MG RESISTOR	82kΩ,1/16W	C1622	NCBA1CK-223W	CAPACITOR	0.022μF,16V
R6705	NRSA6AD-333W	MG RESISTOR	33kΩ,1/16W	C1623	NCBA1AK-473W	CAPACITOR	0.047μF,10V
RA1008	NRZ0034-104W	NETWORK RESISTOR	100kΩ	C1624	NCBA1CK-103W	CAPACITOR	0.01μF,16V
RA1009	NRZ0034-104W	NETWORK RESISTOR	100kΩ	C1625	NCBA1AK-473W	CAPACITOR	0.047μF,10V
RA1010	NRZ0034-474W	NETWORK RESISTOR	470kΩ	C1626	NCBA1HK-331W	CAPACITOR	330pF,50V
RA1011	NRZ0034-474W	NETWORK RESISTOR	470kΩ	C1627	NCBA1CK-822W	CAPACITOR	0.0082μF,16V
RA1401	NRZ0034-473W	NETWORK RESISTOR	47kΩ	C1628	NCB21CK-224X	CAPACITOR	0.22μF,16V
RA3001	NRZ0034-560W	NETWORK RESISTOR	56Ω	C1632	NBE20JM-106X	T CAPACITOR	10μF,6.3V
RA3002	NRZ0034-560W	NETWORK RESISTOR	56Ω	C1633	NCB21CK-474X	CAPACITOR	0.47μF,16V
RA3003	NRZ0034-100W	NETWORK RESISTOR	10Ω	C1641	NCB21CK-474X	CAPACITOR	0.47μF,16V
RA3004	NRZ0034-103W	NETWORK RESISTOR	10kΩ	C2001	NBE20JM-106X	T CAPACITOR	10μF,6.3V
RA3005	NRZ0040-0R0X	NETWORK RESISTOR	0Ω	C2002	NBE20JM-106X	T CAPACITOR	10μF,6.3V
RA4301	NRZ0034-101W	NETWORK RESISTOR	100Ω	C2004	NCB21CK-105X	CAPACITOR	1μF,16V
RA4302	NRZ0034-101W	NETWORK RESISTOR	100Ω	C2005	NCB21CK-105X	CAPACITOR	1μF,16V
RA4303	NRZ0034-101W	NETWORK RESISTOR	100Ω	C2006	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C1003	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C2007	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C1004	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C2008	NCB21CK-105X	CAPACITOR	1μF,16V
C1006	NDCA1HJ-130W	CAPACITOR	13pF,50V	C2009	NCB21CK-105X	CAPACITOR	1μF,16V
C1007	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2010	NCB21CK-105X	CAPACITOR	1μF,16V
C1009	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2011	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C1010	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2012	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C1013	NCB31CK-104X	CAPACITOR	0.1μF,16V	C2013	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C1015	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2014	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C1016	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2015	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C1017	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2016	NCBA1CK-223W	CAPACITOR	0.022μF,16V
C1019	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2017	NCBA1AK-333W	CAPACITOR	0.033μF,10V
C1023	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C2018	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1026	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C2019	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1028	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2020	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C1029	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2021	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C1030	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2101	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1031	NCF31AZ-105X	CAPACITOR	1μF,10V	C2102	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1034	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2103	NCB21CK-105X	CAPACITOR	1μF,16V
C1036	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2104	NCB21CK-105X	CAPACITOR	1μF,16V
C1037	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2109	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C1038	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2110	NCB21CK-105X	CAPACITOR	1μF,16V
C1039	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2111	NCBA1EK-472W	CAPACITOR	0.0047μF,25V
C1401	NDCA1HJ-150W	CAPACITOR	15pF,50V	C2112	NCBA1EK-472W	CAPACITOR	0.0047μF,25V
C1402	NDCA1HJ-150W	CAPACITOR	15pF,50V	C2113	NCBA1EK-472W	CAPACITOR	0.0047μF,25V
C1403	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C2114	NCBA1EK-472W	CAPACITOR	0.0047μF,25V
C1404	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C2115	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1405	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C2116	NCB31CK-104X	CAPACITOR	0.1μF,16V
C1406	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C2121	NCBA1CK-223W	CAPACITOR	0.022μF,16V
C1407	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C2122	NCBA1CK-223W	CAPACITOR	0.022μF,16V
C1409	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2123	NCBA1CK-223W	CAPACITOR	0.022μF,16V
C1410	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2124	NCBA1CK-223W	CAPACITOR	0.022μF,16V
C1411	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C2125	NCBA1CK-223W	CAPACITOR	0.022μF,16V
C1412	NCBA1CK-223W	CAPACITOR	0.022μF,16V	C2126	NCBA1CK-223W	CAPACITOR	0.022μF,16V
C1413	NCBA1CK-223W	CAPACITOR	0.022μF,16V	C2131	NCBA1HK-102W	CAPACITOR	0.001μF,50V

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION		# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
C2132	NCBA1HK-102W	CAPACITOR	0.001μF,50V	C3514	NCBA1AK-473W	CAPACITOR	0.047μF,10V
C2133	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C3515	NCBA1AK-473W	CAPACITOR	0.047μF,10V
C2134	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C3516	NCBA1AK-473W	CAPACITOR	0.047μF,10V
C2201	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C3517	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C2202	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C3518	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3001	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C3519	NCBA1HK-102W	CAPACITOR	0.001μF,50V
C3003	NCB30JK-105X	CAPACITOR	1μF,6.3V	C3520	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3005	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C3521	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3006	NCB30JK-105X	CAPACITOR	1μF,6.3V	C3522	NCB20JM-475X	CAPACITOR	4.7μF,6.3V
C3007	NCB10JK-106X	CAPACITOR	10μF,6.3V	C3523	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3008	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C3524	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3009	NCB30JK-105X	CAPACITOR	1μF,6.3V	C3525	NCB20JM-475X	CAPACITOR	4.7μF,6.3V
C3011	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C3526	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3012	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C3527	NDCA1EJ-221W	CAPACITOR	220pF,25V
C3013	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C3528	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3015	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C3701	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3016	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C3702	NDCA1HJ-151W	CAPACITOR	150pF,50V
C3017	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C3703	NDCA1HJ-330W	CAPACITOR	33pF,50V
C3020	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C3704	NDCA1HJ-101W	CAPACITOR	100pF,50V
C3021	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C3705	NDCA1HJ-330W	CAPACITOR	33pF,50V
C3022	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C3706	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3023	NDCA1HJ-330W	CAPACITOR	33pF,50V	C3707	NCFA1AZ-104W	CAPACITOR	0.1μF,10V
C3024	NCBA1HK-102W	CAPACITOR	0.001μF,50V	C3708	NCB30JK-105X	CAPACITOR	1μF,6.3V
C3025	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C3709	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3026	NCB30JK-105X	CAPACITOR	1μF,6.3V	C3710	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C3027	NCBA1EK-472W	CAPACITOR	0.0047μF,25V	C3712	NEA70GM-337X	E CAPACITOR	330μF,4.0V
C3028	NDCA1EJ-271W	CAPACITOR	270pF,25V	C3713	NEA70GM-337X	E CAPACITOR	330μF,4.0V
C3029	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4201	NBE40GM-107X	T CAPACITOR	100μF,4.0V
C3030	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4202	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3031	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4203	NCB30JK-105X	CAPACITOR	1μF,6.3V
C3032	NCBA1HK-102W	CAPACITOR	0.001μF,50V	C4204	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3033	NDCA1HJ-8R0W	CAPACITOR	8pF,50V	C4205	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3036	NDCA1HJ-8R0W	CAPACITOR	8pF,50V	C4206	NCB21CK-105X	CAPACITOR	1μF,16V
C3037	NDCA1HJ-8R0W	CAPACITOR	8pF,50V	C4207	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3038	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4208	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3039	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4209	NCB30JK-105X	CAPACITOR	1μF,6.3V
C3042	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4210	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3043	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4211	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3044	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4212	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3045	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4213	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3046	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4214	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3047	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4215	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3048	NCB31CK-473X	CAPACITOR	0.047μF,16V	C4216	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3049	NCBA1HK-222W	CAPACITOR	0.0022μF,50V	C4217	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3050	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4301	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3055	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4303	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3064	NCBA1HK-102W	CAPACITOR	0.001μF,50V	C4304	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3066	NCB30JK-105X	CAPACITOR	1μF,6.3V	C4305	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3067	NCBA1HK-102W	CAPACITOR	0.001μF,50V	C4306	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3069	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4307	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3501	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4308	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3502	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4309	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3503	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C4310	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3504	NCBA1AK-473W	CAPACITOR	0.047μF,10V	C4311	NCB30JK-105X	CAPACITOR	1μF,6.3V
C3505	NCBA1CK-223W	CAPACITOR	0.022μF,16V	C4312	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3506	NCB21AK-105X	CAPACITOR	1μF,10V	C4313	NBE20JM-226X	T CAPACITOR	22μF,6.3V
C3507	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4314	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3508	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4315	NBE20JM-106X	T CAPACITOR	10μF,6.3V
C3509	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4317	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3510	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4318	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3511	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C4319	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3512	NCB31CK-104X	CAPACITOR	0.1μF,16V	C4320	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C3513	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4321	NCBA1AK-104W	CAPACITOR	0.1μF,10V

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
C4323	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C4920	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4324	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C5501	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4325	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5503	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4327	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5504	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4328	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5505	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4329	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5506	NBE40GM-476X	T CAPACITOR	47μF,4.0V
C4331	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C5507	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4333	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5508	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4334	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5509	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4335	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5510	NBP21VM-105X	T CAPACITOR	1μF,35V
C4336	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5511	NBP21DM-475X	T CAPACITOR	4.7μF,20V
C4337	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5512	NBE21AM-106X	T CAPACITOR	10μF,10V
C4338	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5513	NCB31CK-104X	CAPACITOR	0.1μF,16V
C4339	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5514	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4340	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5515	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4341	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5516	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4342	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5517	NCB31CK-104X	CAPACITOR	0.1μF,16V
C4343	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5518	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4344	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C5519	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4345	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C6001	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C4346	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C6004	NCB30JK-105X	CAPACITOR	1μF,6.3V
C4347	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C6005	NDCA1HJ-101W	CAPACITOR	100pF,50V
C4348	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C6101	NCB21CK-105X	CAPACITOR	1μF,16V
C4349	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C6102	NEA71CM-106X	E CAPACITOR	10μF,16V
C4350	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C6103	NCB21CK-105X	CAPACITOR	1μF,16V
C4360	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C6105	NCB21CK-105X	CAPACITOR	1μF,16V
C4361	NBP41EM-475X	T CAPACITOR	4.7μF,25V	C6106	NCB30JK-105X	CAPACITOR	1μF,6.3V
C4366	NCB30JK-105X	CAPACITOR	1μF,6.3V	C6107	NCB30JK-105X	CAPACITOR	1μF,6.3V
C4367	NCB30JK-105X	CAPACITOR	1μF,6.3V	C6108	NCB30JK-105X	CAPACITOR	1μF,6.3V
C4369	NCB30JK-105X	CAPACITOR	1μF,6.3V	C6109	NCB30JK-105X	CAPACITOR	1μF,6.3V
C4370	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C6110	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4372	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C6111	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4373	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C6112	NCBA1AK-333W	CAPACITOR	0.033μF,10V
C4374	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C6113	NCBA1HK-561W	CAPACITOR	560pF,50V
C4379	NDCA1EJ-221W	CAPACITOR	220pF,25V	C6114	NCBA1HK-272W	CAPACITOR	0.0027μF,50V
C4380	NDCA1HJ-9R0W	CAPACITOR	9pF,50V	C6115	NCBA1HK-561W	CAPACITOR	560pF,50V
C4381	NDCA1HJ-9R0W	CAPACITOR	9pF,50V	C6116	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C4382	NDCA1HJ-9R0W	CAPACITOR	9pF,50V	C6117	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4601	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C6118	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4602	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C6119	NDCA1HJ-101W	CAPACITOR	100pF,50V
C4603	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C6120	NCB30JK-105X	CAPACITOR	1μF,6.3V
C4604	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C6121	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4605	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C6122	NCBA1CK-223W	CAPACITOR	0.022μF,16V
C4606	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C6123	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C4607	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C6124	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C4608	NCB31CK-104X	CAPACITOR	0.1μF,16V	C6125	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C4609	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C6126	NCBA1CK-103W	CAPACITOR	0.01μF,16V
C4610	NCB30JK-105X	CAPACITOR	1μF,6.3V	C6127	NCBA1HK-102W	CAPACITOR	0.001μF,50V
C4611	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C6128	NCB21CK-105X	CAPACITOR	1μF,16V
C4612	NCBA1CK-103W	CAPACITOR	0.01μF,16V	C6129	NCBA1HK-561W	CAPACITOR	560pF,50V
C4905	NDCA1HJ-330W	CAPACITOR	33pF,50V	C6130	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4906	NCBA1CK-223W	CAPACITOR	0.022μF,16V	C6131	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4907	NCBA1CK-223W	CAPACITOR	0.022μF,16V	C6132	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4908	NCBA1HK-102W	CAPACITOR	0.001μF,50V	C6133	NCBA1HK-471W	CAPACITOR	470pF,50V
C4909	NCBA1HK-102W	CAPACITOR	0.001μF,50V	C6134	NCBA1AK-104W	CAPACITOR	0.1μF,10V
C4910	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C6201	NCB21CK-105X	CAPACITOR	1μF,16V
C4911	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C6202	NCB10JK-106X	CAPACITOR	10μF,6.3V
C4914	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C6203	NCBA1HK-102W	CAPACITOR	0.001μF,50V
C4915	NBE20JM-106X	T CAPACITOR	10μF,6.3V	C6204	NCBA1HK-561W	CAPACITOR	560pF,50V
C4916	NBE21AM-106X	T CAPACITOR	10μF,10V	C6205	NCB30JK-105X	CAPACITOR	1μF,6.3V
C4917	NBE21AM-106X	T CAPACITOR	10μF,10V	C6206	NCB21CK-105X	CAPACITOR	1μF,16V
C4918	NCBA1AK-104W	CAPACITOR	0.1μF,10V	C6207	NCB10JK-106X	CAPACITOR	10μF,6.3V
C4919	NCFA1AZ-104W	CAPACITOR	0.1μF,10V	C6208	NCBA1EK-472W	CAPACITOR	0.0047μF,25V

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	#	△	REF No.	PART No.	PART NAME, DESCRIPTION	
C6209			NCB21CK-105X	CAPACITOR	1μF,16V	L6202		NQL52EM-390X	COIL	39μH
C6210			NCB10JK-106X	CAPACITOR	10μF,6.3V	L6203		NQL52EM-390X	COIL	39μH
C6211			NCBA1HK-102W	CAPACITOR	0.001μF,50V	L6204		NQL144K-220X	COIL	22μH
C6214			NCB21CK-105X	CAPACITOR	1μF,16V	L6206		NQLZ011-470X	COIL	47μH
C6215			NCB21CK-105X	CAPACITOR	1μF,16V	L6207		NQLZ011-470X	COIL	47μH
C6216			NCBA1AK-683W	CAPACITOR	0.068μF,10V	L6208		NQLZ011-221X	COIL	220μH
C6217			NCB21CK-105X	CAPACITOR	1μF,16V	L6701		NQLZ010-100X	COIL	10μH
C6218			NCB21CK-105X	CAPACITOR	1μF,16V	X1001		NAX0474-001X	C OSCILLATOR	
C6219			NCB21CK-224X	CAPACITOR	0.22μF,16V	X1002		NAX0325-001X	CRYSTAL RESONATOR	
C6220			NCB21CK-105X	CAPACITOR	1μF,16V	X1401		NAX0204-001X	CRYSTAL RESONATOR	
C6221			NCB11EK-105X	CAPACITOR	1μF,25V	X3002		NAX0480-001X	CRYSTAL RESONATOR	
C6222			NCB11EK-105X	CAPACITOR	1μF,25V	X5501		NAX0356-001X	CXO	
C6225			NCBA1CK-103W	CAPACITOR	0.01μF,16V	K4311		NQR0129-002X	FERRITE BEAD	
C6226			NCB21CK-105X	CAPACITOR	1μF,16V	WR1		WJJ0206-001A	E-SI C WIRE C-C,CN104-REAR UNIT	
C6227			NCB11EK-105X	CAPACITOR	1μF,25V	J101		NNZ0041-001X	D CONNECTOR	
C6228			NCB11EK-105X	CAPACITOR	1μF,25V	CN101		QGF0508F1-40X	FPC CONNECTOR	
C6230			NCB21CK-105X	CAPACITOR	1μF,16V	CN103		QGF0505F1-20X	FPC CONNECTOR	
C6701			NCB21CK-105X	CAPACITOR	1μF,16V	CN104		QGA1002C1-10X	CONNECTOR	
C6703			NCB21CK-105X	CAPACITOR	1μF,16V	CN105		QGB0801K2-20X	CONNECTOR	
L1002			NQL315K-100X	COIL	10μH	CN106		QGA1201C2-03X	CONNECTOR	
L1401			NQR0006-001X	FERRITE BEAD		CN107		QGF0507F3-20X	FFC/FPC CONNECTOR	
L2001			NQL315K-100X	COIL	10μH	CN108		QGF0507F3-22X	FFC/FPC CONNECTOR	
L2002			NQL38DK-220X	COIL	22μH	CN109		QGF0507F3-15X	FFC/FPC CONNECTOR	
L2201			NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	CN110		QGF0505F1-08X	FPC CONNECTOR	
L2202			NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	CN111		QGF0503C1-06V	FFC/FPC CONNECTOR	
L2203			NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	CN112		QGF0505F2-18X	FPC CONNECTOR	
L3001			NQR0129-002X	FERRITE BEAD		CN113		QGF0508F1-34X	FPC CONNECTOR	
L3002			NQR0129-002X	FERRITE BEAD		△ F6101		NMFZ007-2R0X-K	FUSE	T2.0A,50V
L3004			NQR0006-001X	FERRITE BEAD		OT1		LY43770-003A	SPACER(CAPSTAN)	
L3005			NQR0006-001X	FERRITE BEAD		OT2		LY43770-004A	SPACER(CAPSTAN)	
L3007			NQL085J-2R2X	COIL	2.2μH	SD1		LY32080-001A	SHIELD CASE	
L3008			NQL085J-120X	COIL	12μH					
L3012			NQR0129-002X	FERRITE BEAD						
L3015			NQR0006-001X	FERRITE BEAD						
L3501			NQR0129-002X	FERRITE BEAD						
L3502			NQL402M-100X	COIL	10μH	*****				
L3503			NQR0006-001X	FERRITE BEAD		MONITOR BOARD ASSEMBLY <02>				
L3504			NQR0006-001X	FERRITE BEAD						
L3505			NQR0006-001X	FERRITE BEAD						
L3701			NQL38DK-100X	COIL	10μH	PW		YB10369B	MONITOR BOARD ASSY	
L4201			NQR0129-002X	FERRITE BEAD		IC7601		MN5814	IC	
L4301			NQR0129-002X	FERRITE BEAD		IC7602		BA4558F	IC	
L4302			NQR0129-002X	FERRITE BEAD		IC7603		SN74AHC1G04K	IC	
L4303			NQL315K-100X	COIL	10μH	IC7604		TC7SH32FU	IC(DIGITAL)	
L4304			NQL315K-220X	COIL	22μH	IC7605		TC7SH32FU	IC(DIGITAL)	
L4305			NQR0129-002X	FERRITE BEAD		Q7601		2SC4617/QR/-X	TRANSISTOR	
L4306			NQR0129-002X	FERRITE BEAD		Q7602		2SA1774/QR/-X	TRANSISTOR	
L4307			NQL315K-100X	COIL	10μH	Q7603		2SC4617/QR/-X	TRANSISTOR	
L4308			NQL38DK-100X	COIL	10μH	Q7604		2SA1774/QR/-X	TRANSISTOR	
L4311			NQL38DK-100X	COIL	10μH	Q7606		DTA144EE	DIGI TRANSISTOR	
L4601			NQL302N-100X	COIL	10μH			or RN2104	DIGI TRANSISTOR	
L4901			NQL315K-100X	COIL	10μH			or UN9113J	DIGI TRANSISTOR	
L4902			NQR0129-002X	FERRITE BEAD		Q7607		DTC144EE	DIGI TRANSISTOR	
L4903			NQL315K-100X	COIL	10μH			or RN1104	DIGI TRANSISTOR	
L5501			NQL315K-100X	COIL	10μH			or UN9213J	DIGI TRANSISTOR	
L5502			NQR0129-002X	FERRITE BEAD		Q7609		DTC144EE	DIGI TRANSISTOR	
L5503			NQR0129-002X	FERRITE BEAD				or RN1104	DIGI TRANSISTOR	
L5504			NQR0129-002X	FERRITE BEAD				or UN9213J	DIGI TRANSISTOR	
L5505			NQL315K-100X	COIL	10μH	D7601		MA365	VARI CAP DIODE	
L5506			NQL315K-100X	COIL	10μH	D7602		RB471E	SB DIODE	
L6101			NQLZ011-4R7X	COIL	4.7μH	D7603		UDZS5.1B	ZENER DIODE	
L6102			NQLZ011-4R7X	COIL	4.7μH	R3		NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
L6201			NQL52EM-390X	COIL	39μH	R4		NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W

PW	YB20929A-01	LCD BL BOARD ASSY	
Q7501	2SD1664/QR/-W	TRANSISTOR	
Q7502	2SD1664/QR/-W	TRANSISTOR	
Q7503	DTA144EE	DIGI TRANSISTOR	
	or RN2104	DIGI TRANSISTOR	
	or UN9113J	DIGI TRANSISTOR	
Q7504	2SC4617/QR/-X	TRANSISTOR	
	or 2SC4738/YG/-X	TRANSISTOR	
	or 2SD2216J/QR/-X	TRANSISTOR	
R7501	NRSA63J-102X	MG RESISTOR	1k Ω ,1/16W
R7502	NRSA63J-102X	MG RESISTOR	1k Ω ,1/16W
R7503	NRSA63J-102X	MG RESISTOR	1k Ω ,1/16W
R7506	NRSA63J-473X	MG RESISTOR	47k Ω ,1/16W
R7507	NRSA63J-473X	MG RESISTOR	47k Ω ,1/16W
R7511	NRSA63J-0R0X	MG RESISTOR	0 Ω ,1/16W
R7519	NRSA63J-0R0X	MG RESISTOR	0 Ω ,1/16W
R7520	NRSA63J-0R0X	MG RESISTOR	0 Ω ,1/16W
R7521	NRSA63J-0R0X	MG RESISTOR	0 Ω ,1/16W
C7501	NCZ1016-180X	CAPACITOR	18pF,2kV
C7503	NCB31EK-273X	CAPACITOR	0.027 μ F,25V
C7504	NCB31EK-103X	CAPACITOR	0.01 μ F,25V
C7505	NBE20JM-106X	T CAPACITOR	10 μ F,6.3V
L7501	NQLZ010-680X	COIL	68 μ H
T7501	NQS0048-001X	SW TRANSF	
CN751	QGF0506F2-32X	FPC CONNECTOR	
CN752	QGF0503F1-24X	FFC/FPC CONNECTOR	
F7501	NMFZ007-R40X-K	FUSE	T0.4A,50V

# △ REF No.	PART No.	PART NAME, DESCRIPTION

CCD BOARD ASSEMBLY <04>		
PW	YB20924A-SS	CCD BOARD ASSY
Q5001	2SC3931/CD/-X	TRANSISTOR
R5001	NRSA63J-472X	MG RESISTOR 4.7kΩ, 1/16W
R5003	NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R5005	NRSA63J-105X	MG RESISTOR 1MΩ, 1/16W
C5001	NCB31CK-104X	CAPACITOR 0.1μF, 16V
C5002	NBP41VM-225X	T CAPACITOR 2.2μF, 35V
C5003	NCB31CK-104X	CAPACITOR 0.1μF, 16V
C5004	NBP41CM-106X	T CAPACITOR 10μF, 16V
C5005	NCB31CK-104X	CAPACITOR 0.1μF, 16V
C5006	NCB31CK-104X	CAPACITOR 0.1μF, 16V
C5007	NCB31HK-102X	CAPACITOR 0.001μF, 50V
C5010	NCB31EK-103X	CAPACITOR 0.01μF, 25V
L5001	NQL315K-100X	COIL 10μH
CN5001	QGF0505F1-20X	FPC CONNECTOR

JUNCTION BOARD ASSEMBLY <05>		
PW2	YB20925A2-01	JUNCTION BOARD ASSY
D571	SML-010MT-X	LE DIODE
SW571	NSW0120-002X	PUSH SWITCH, OPEN EJECT
CN571	QGF0508F1-34X	FPC CONNECTOR
CN572	QGF0507F3-15X	FFC/FPC CONNECTOR
CN573	QGF0505F2-11X	FPC CONNECTOR
CN574	QGF0505F2-06X	FPC CONNECTOR

JACK BOARD ASSEMBLY <06>		
PW1	YB20925A1-01	JACK BOARD ASSY
IC501	BA10358F-XE	IC
IC502	RPM7138-V4	IR DETECT UNIT
Q501	RPM-22PB	PHOTO TRANSISTOR
D501	MA8068	ZENER DIODE
D502	MA8068	ZENER DIODE
D504	MA8068	ZENER DIODE
R501	NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R502	NRSA63J-684X	MG RESISTOR 680kΩ, 1/16W
R503	NRSA63J-182X	MG RESISTOR 1.8kΩ, 1/16W
R504	NRSA63J-222X	MG RESISTOR 2.2kΩ, 1/16W
R505	NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R506	NRSA63J-824X	MG RESISTOR 820kΩ, 1/16W
R507	NRSA63J-104X	MG RESISTOR 100kΩ, 1/16W
R508	NRSA63J-683X	MG RESISTOR 68kΩ, 1/16W
R509	NRSA63J-822X	MG RESISTOR 8.2kΩ, 1/16W
R510	NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W
R511	NRSA63J-302X	MG RESISTOR 3kΩ, 1/16W
R512	NRSA63J-470X	MG RESISTOR 47Ω, 1/16W
R513	NRSA63J-101X	MG RESISTOR 100Ω, 1/16W
R514	NRSA63J-101X	MG RESISTOR 100Ω, 1/16W
R525	NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W

# △ REF No.	PART No.	PART NAME, DESCRIPTION
R526	NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W
R527	NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W
C501	NBE21AM-335X	T CAPACITOR 3.3μF, 10V
C502	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C503	NCB31EK-153X	CAPACITOR 0.015μF, 25V
C504	NCB31EK-153X	CAPACITOR 0.015μF, 25V
C506	NBE21AM-106X	T CAPACITOR 10μF, 10V
C509	NBE20JM-226X	T CAPACITOR 22μF, 6.3V
C514	NCB31HK-103X	CAPACITOR 0.01μF, 50V
C515	NCB31HK-103X	CAPACITOR 0.01μF, 50V
L501	NQR0251-004X	FERRITE BEAD
L502	NQR0251-004X	FERRITE BEAD
L503	NQR0251-004X	FERRITE BEAD
J501	QNS0078-001	3.5 JACK
J503	QND0004-001	S JACK
CN502	QGF0508F1-20X	FPC CONNECTOR

B/W VF BOARD ASSEMBLY <08>		
PW	YB20910B	B/W VF BOARD ASSY
IC7001	MCVVQ111FB	IC
Q7001	PUMX1	PAIR TRANSISTOR
D7001	NSCW100A0/ST/-X	LE DIODE
D7002	MA111	DIODE
R7001	NRSA63J-103X	MG RESISTOR 10kΩ, 1/16W
R7002	NRSA63J-182X	MG RESISTOR 1.8kΩ, 1/16W
R7003	NRSA63J-183X	MG RESISTOR 18kΩ, 1/16W
R7004	NRSA63J-0R0X	MG RESISTOR 0Ω, 1/16W
R7006	NRVA63D-333X	CMF RESISTOR 33kΩ, 1/16W
R7007	NRVA63D-153X	CMF RESISTOR 15kΩ, 1/16W
R7008	NRVA63D-473X	CMF RESISTOR 47kΩ, 1/16W
R7009	NRSA63J-682X	MG RESISTOR 6.8kΩ, 1/16W
R7010	NRSA63J-102X	MG RESISTOR 1kΩ, 1/16W
R7011	NRSA63J-332X	MG RESISTOR 3.3kΩ, 1/16W
R7012	NRSA63J-561X	MG RESISTOR 560Ω, 1/16W
R7013	NRSA63J-470X	MG RESISTOR 47Ω, 1/16W
VR7001	NVP0016-223X	TRIM RESISTOR, GAIN
C7001	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C7002	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C7003	NCB21AK-105X	CAPACITOR 1μF, 10V
C7004	NCB31EK-223X	CAPACITOR 0.022μF, 25V
C7005	NCB31EK-103X	CAPACITOR 0.01μF, 25V
C7006	NCF21CZ-105X	CAPACITOR 1μF, 16V
C7007	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C7008	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C7009	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C7010	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C7011	NCB31HK-102X	CAPACITOR 0.001μF, 50V
C7012	NCB31EK-103X	CAPACITOR 0.01μF, 25V
C7013	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C7014	NCF31CZ-104X	CAPACITOR 0.1μF, 16V
C7015	NCB31EK-103X	CAPACITOR 0.01μF, 25V
C7016	NCB11CK-475X	CAPACITOR 4.7μF, 16V
C7017	NCB10JK-106X	CAPACITOR 10μF, 6.3V
L7001	NQL38DK-100X	COIL 10μH
L7002	NQL38DK-100X	COIL 10μH
CN7001	QGF0517F1-06X	FPC CONNECTOR
CN7002	QGF0517F2-20X	FPC CONNECTOR