



07 4445

35 6504

09 3110

06 5644

23 5445

35 3168

35 2476

16 9303
16 9301

16 9300

26 9715

16 9301
16 9302

16 9303

16 9301

16 9302

17 3673

17 3675

18 2306

18 2272

17 0218

16 9276

18 2275

48 0904

48 0883

48 0882

15 5217

08 5716

17 3672

17 3674

12 3761






28 8893


08 0591

Libro de instrucciones
52 8722
(E,P)

Instrucciones de
montaje
52 1893
(D,GB,F,I,NL,S,E,DK,N,,SF)

Cjto. panelación
26 7361

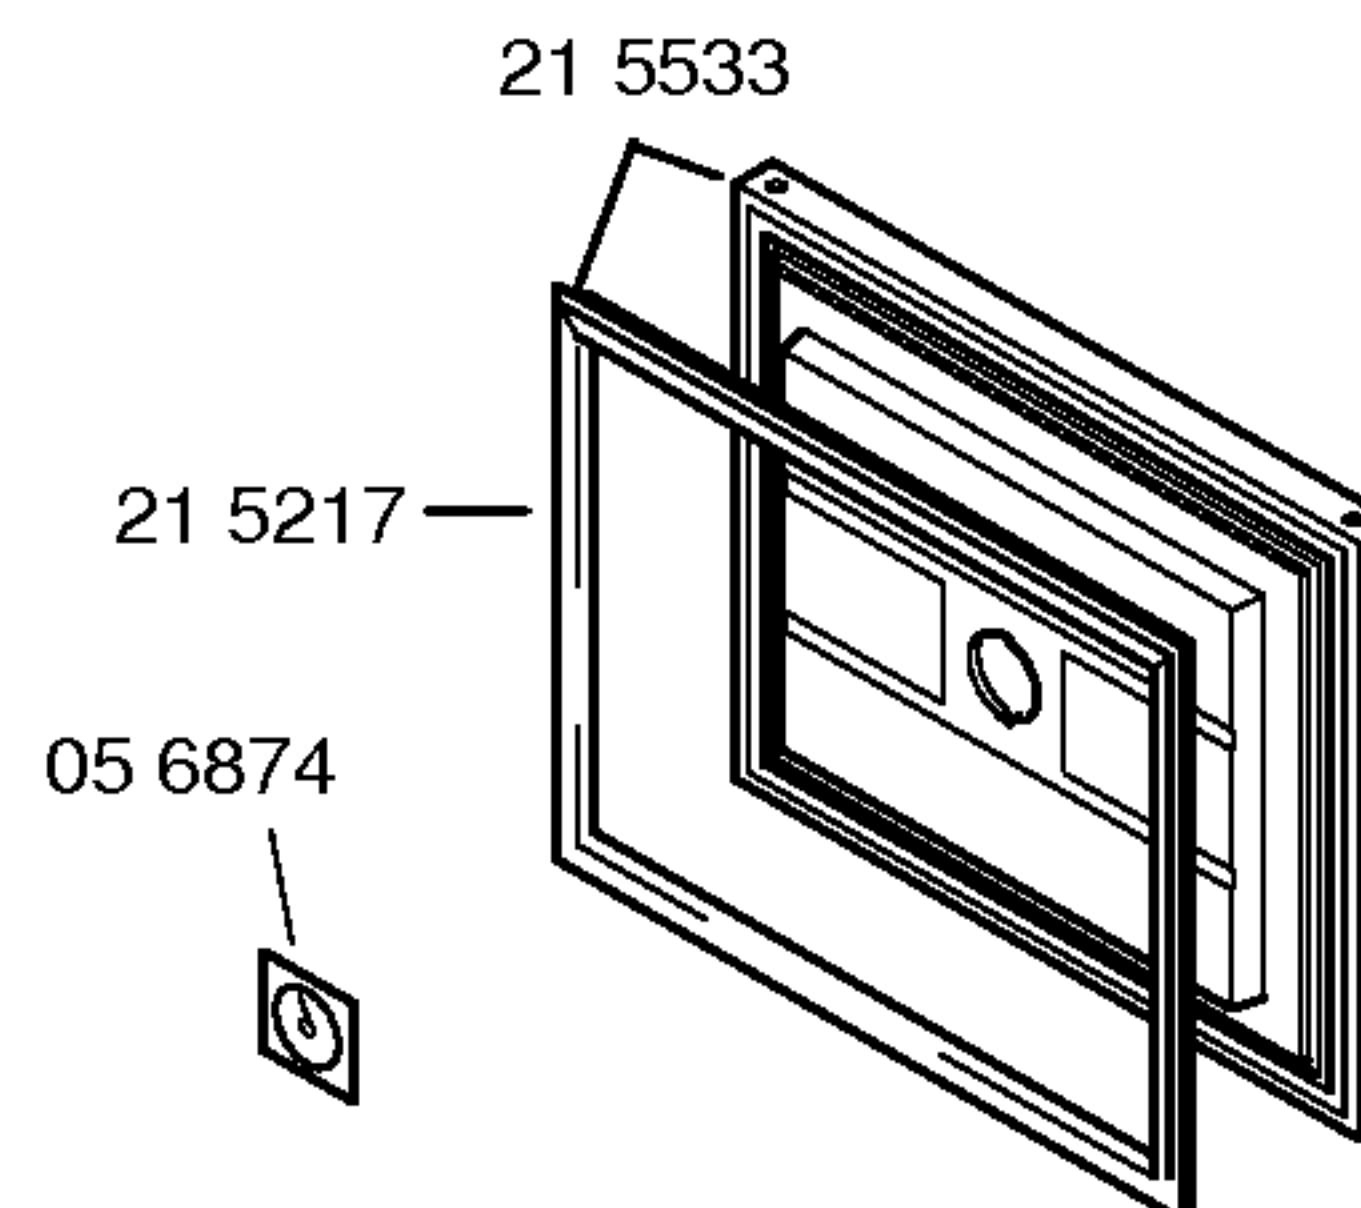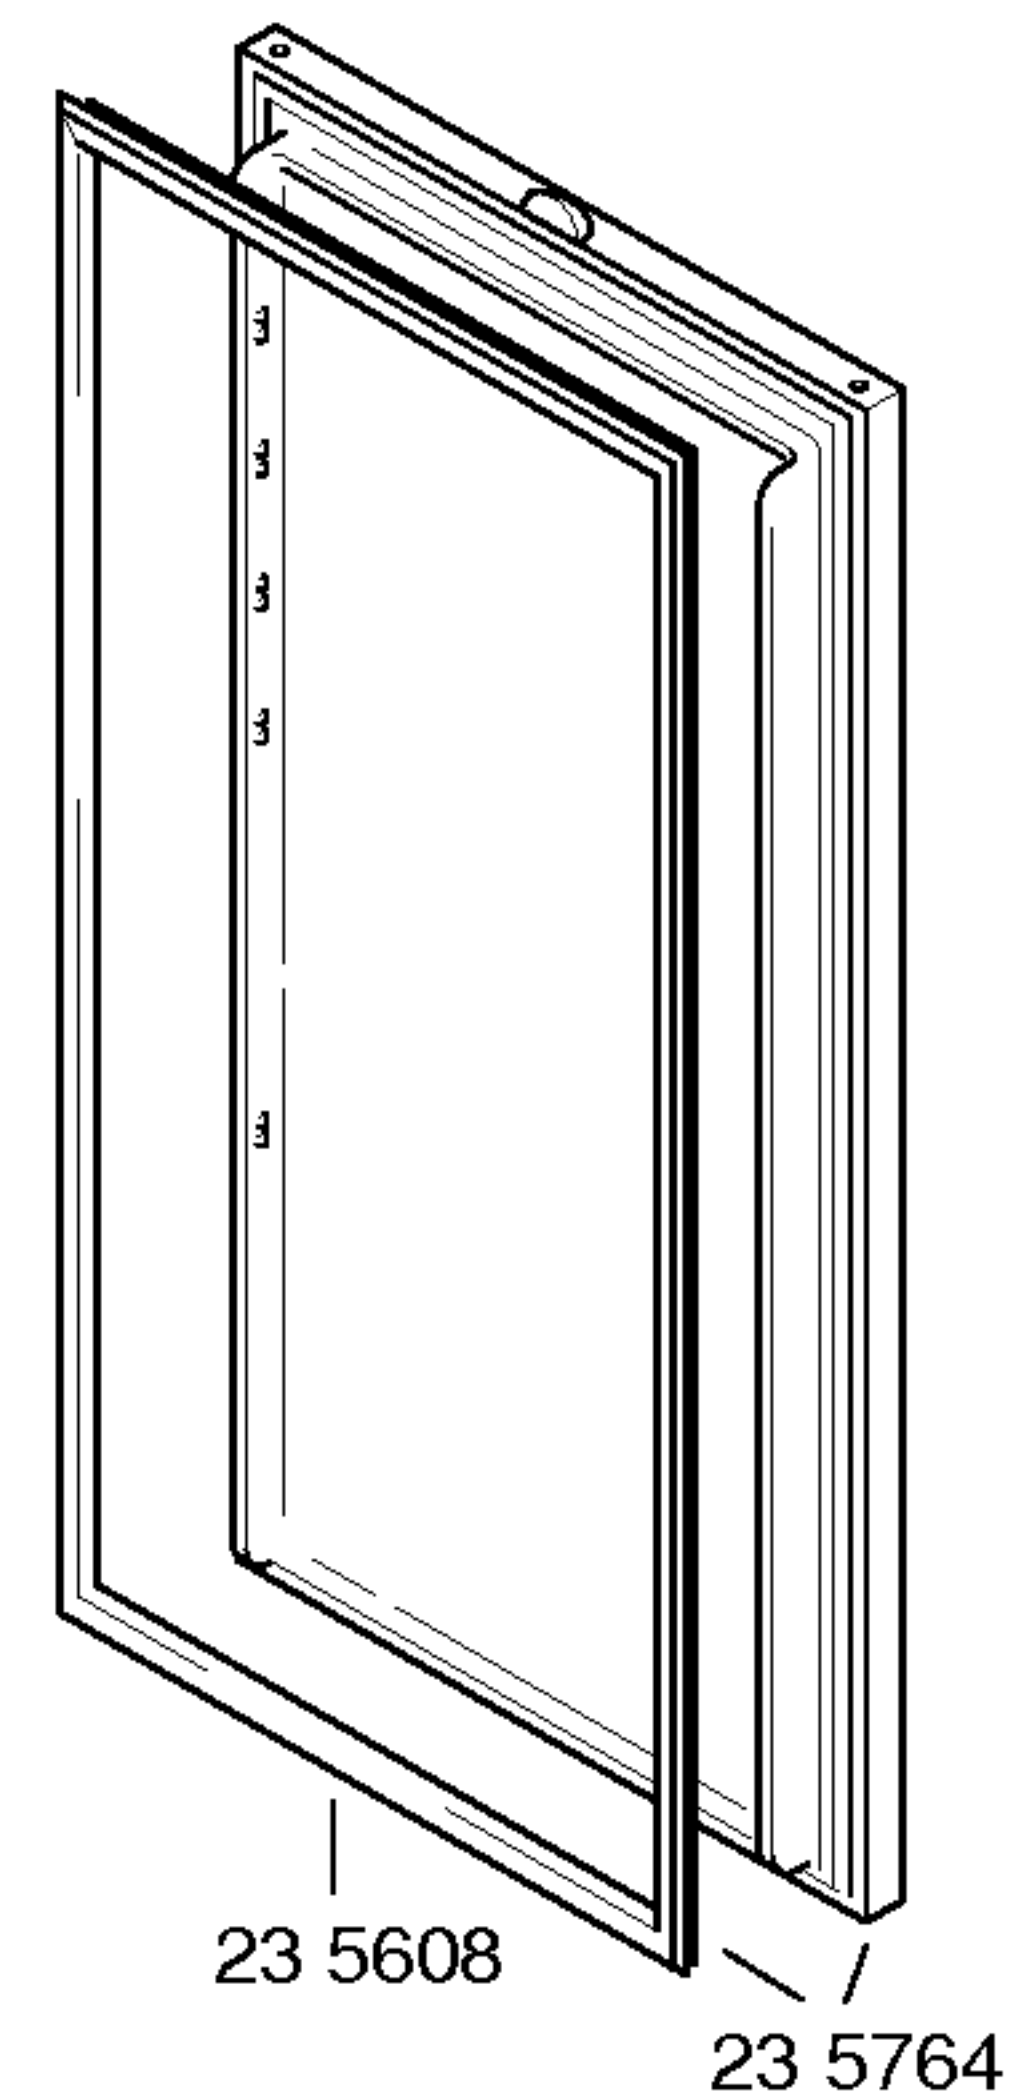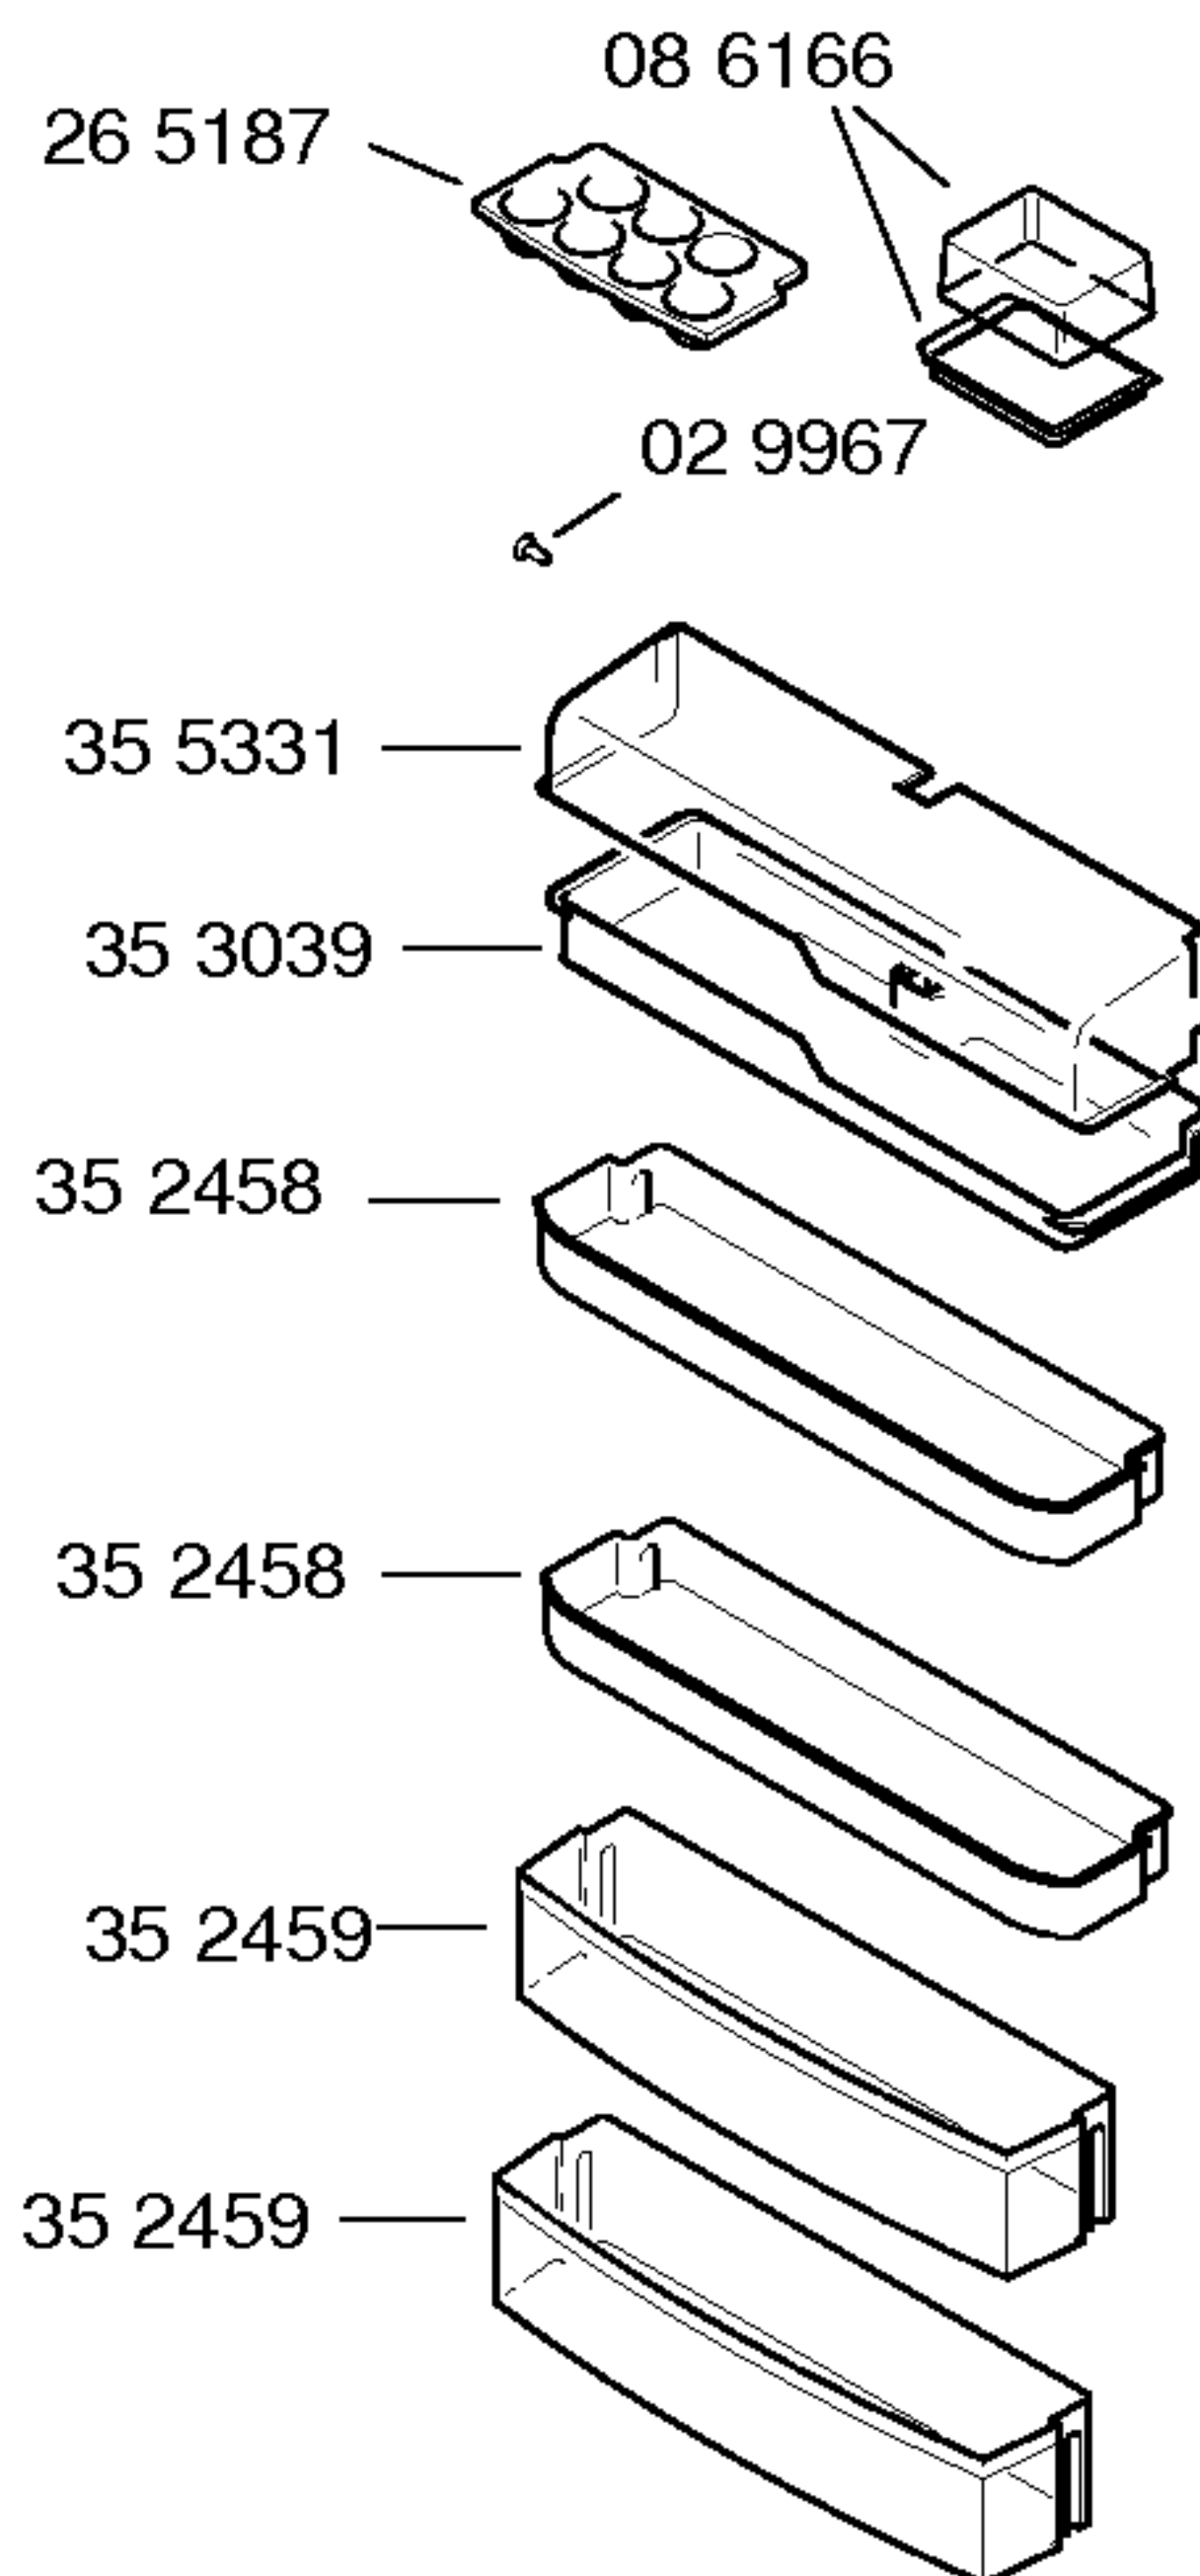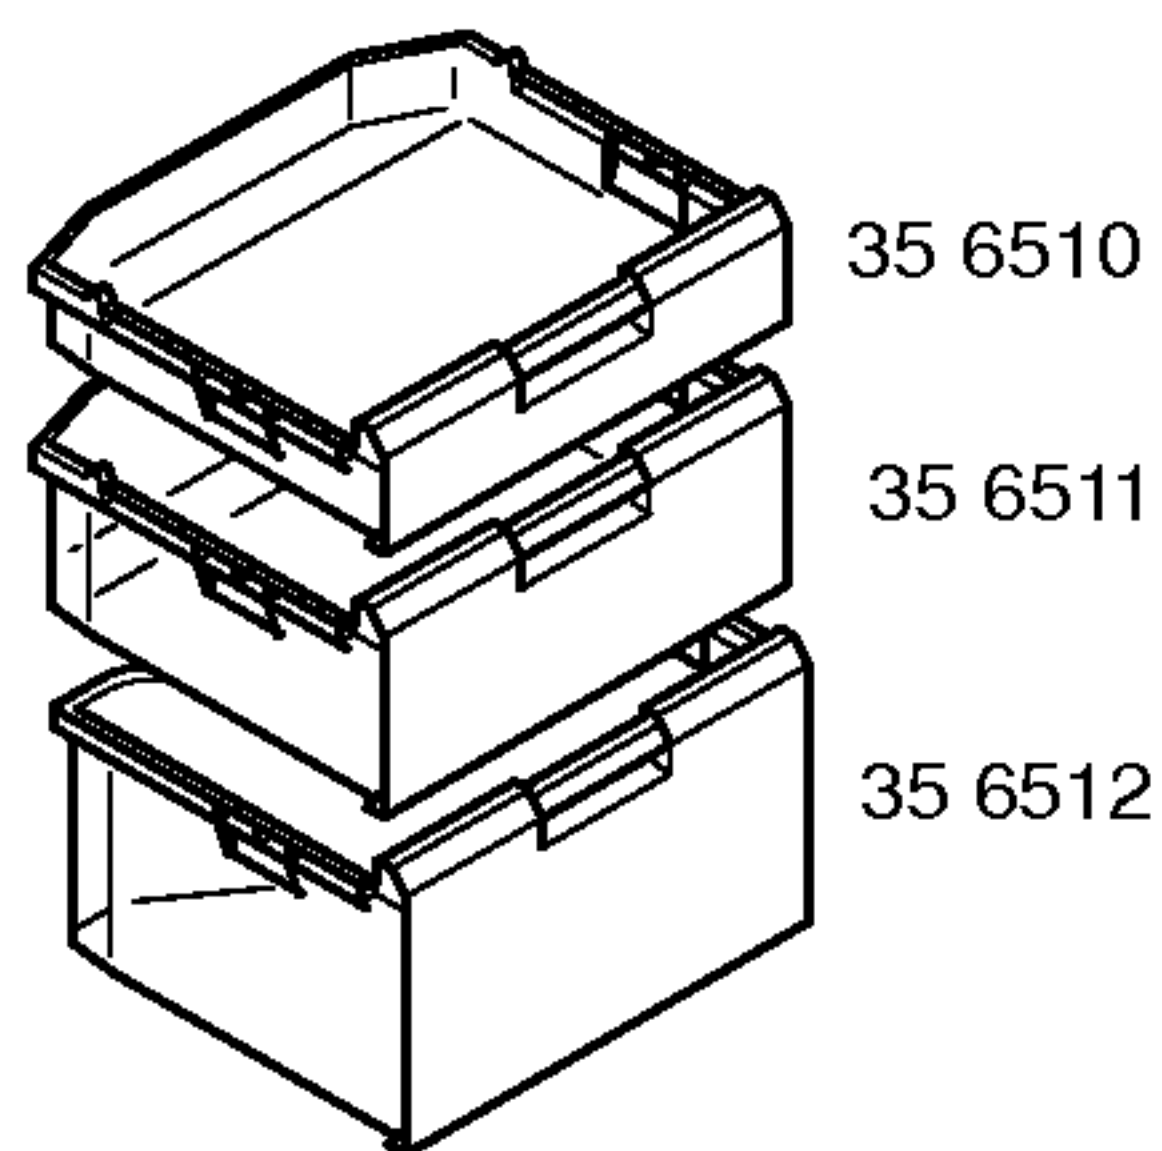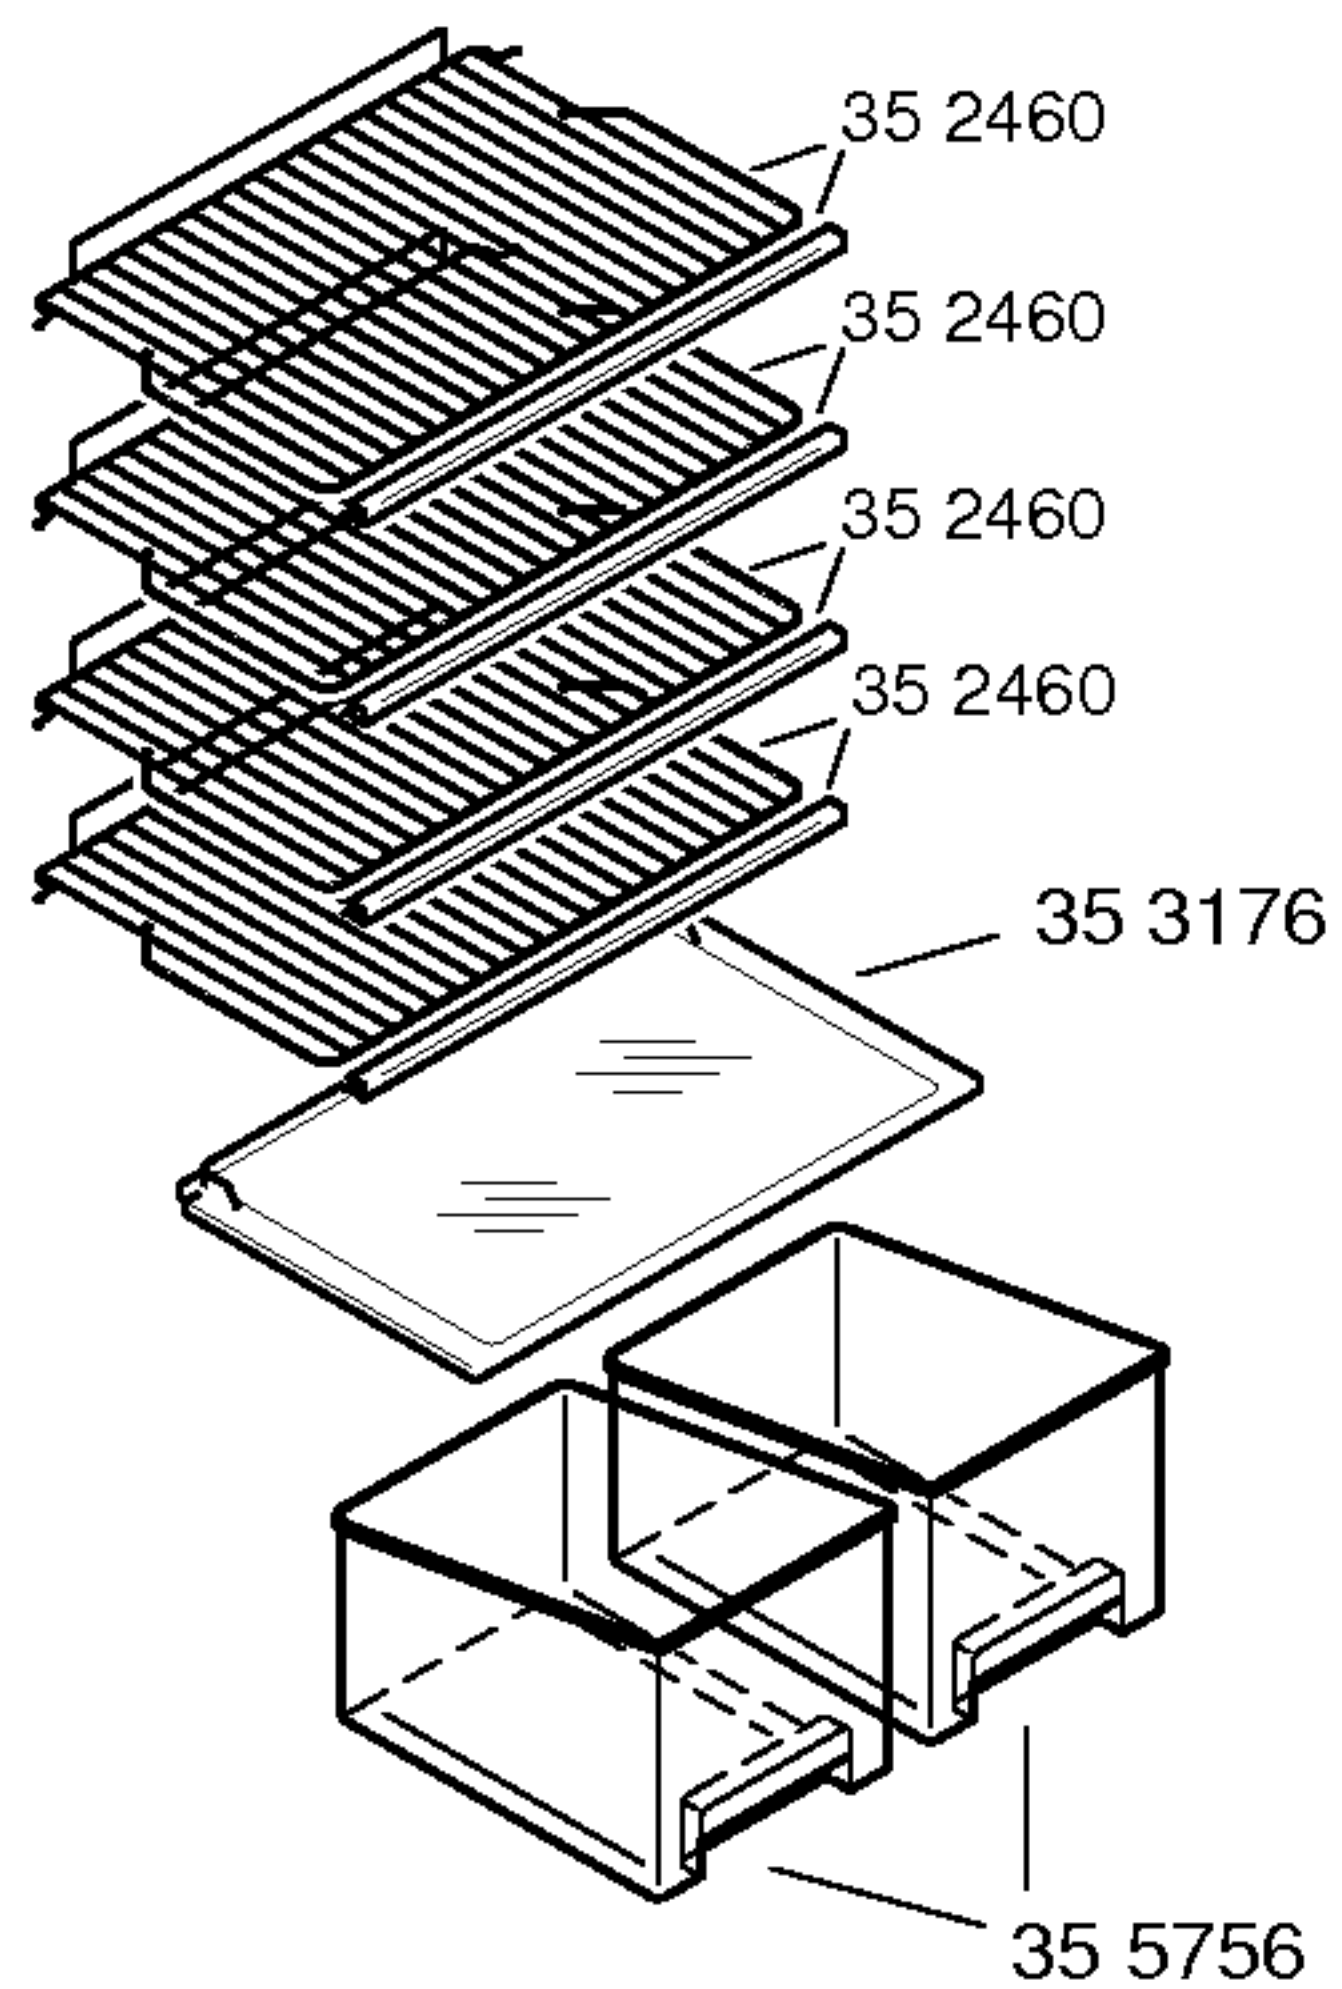

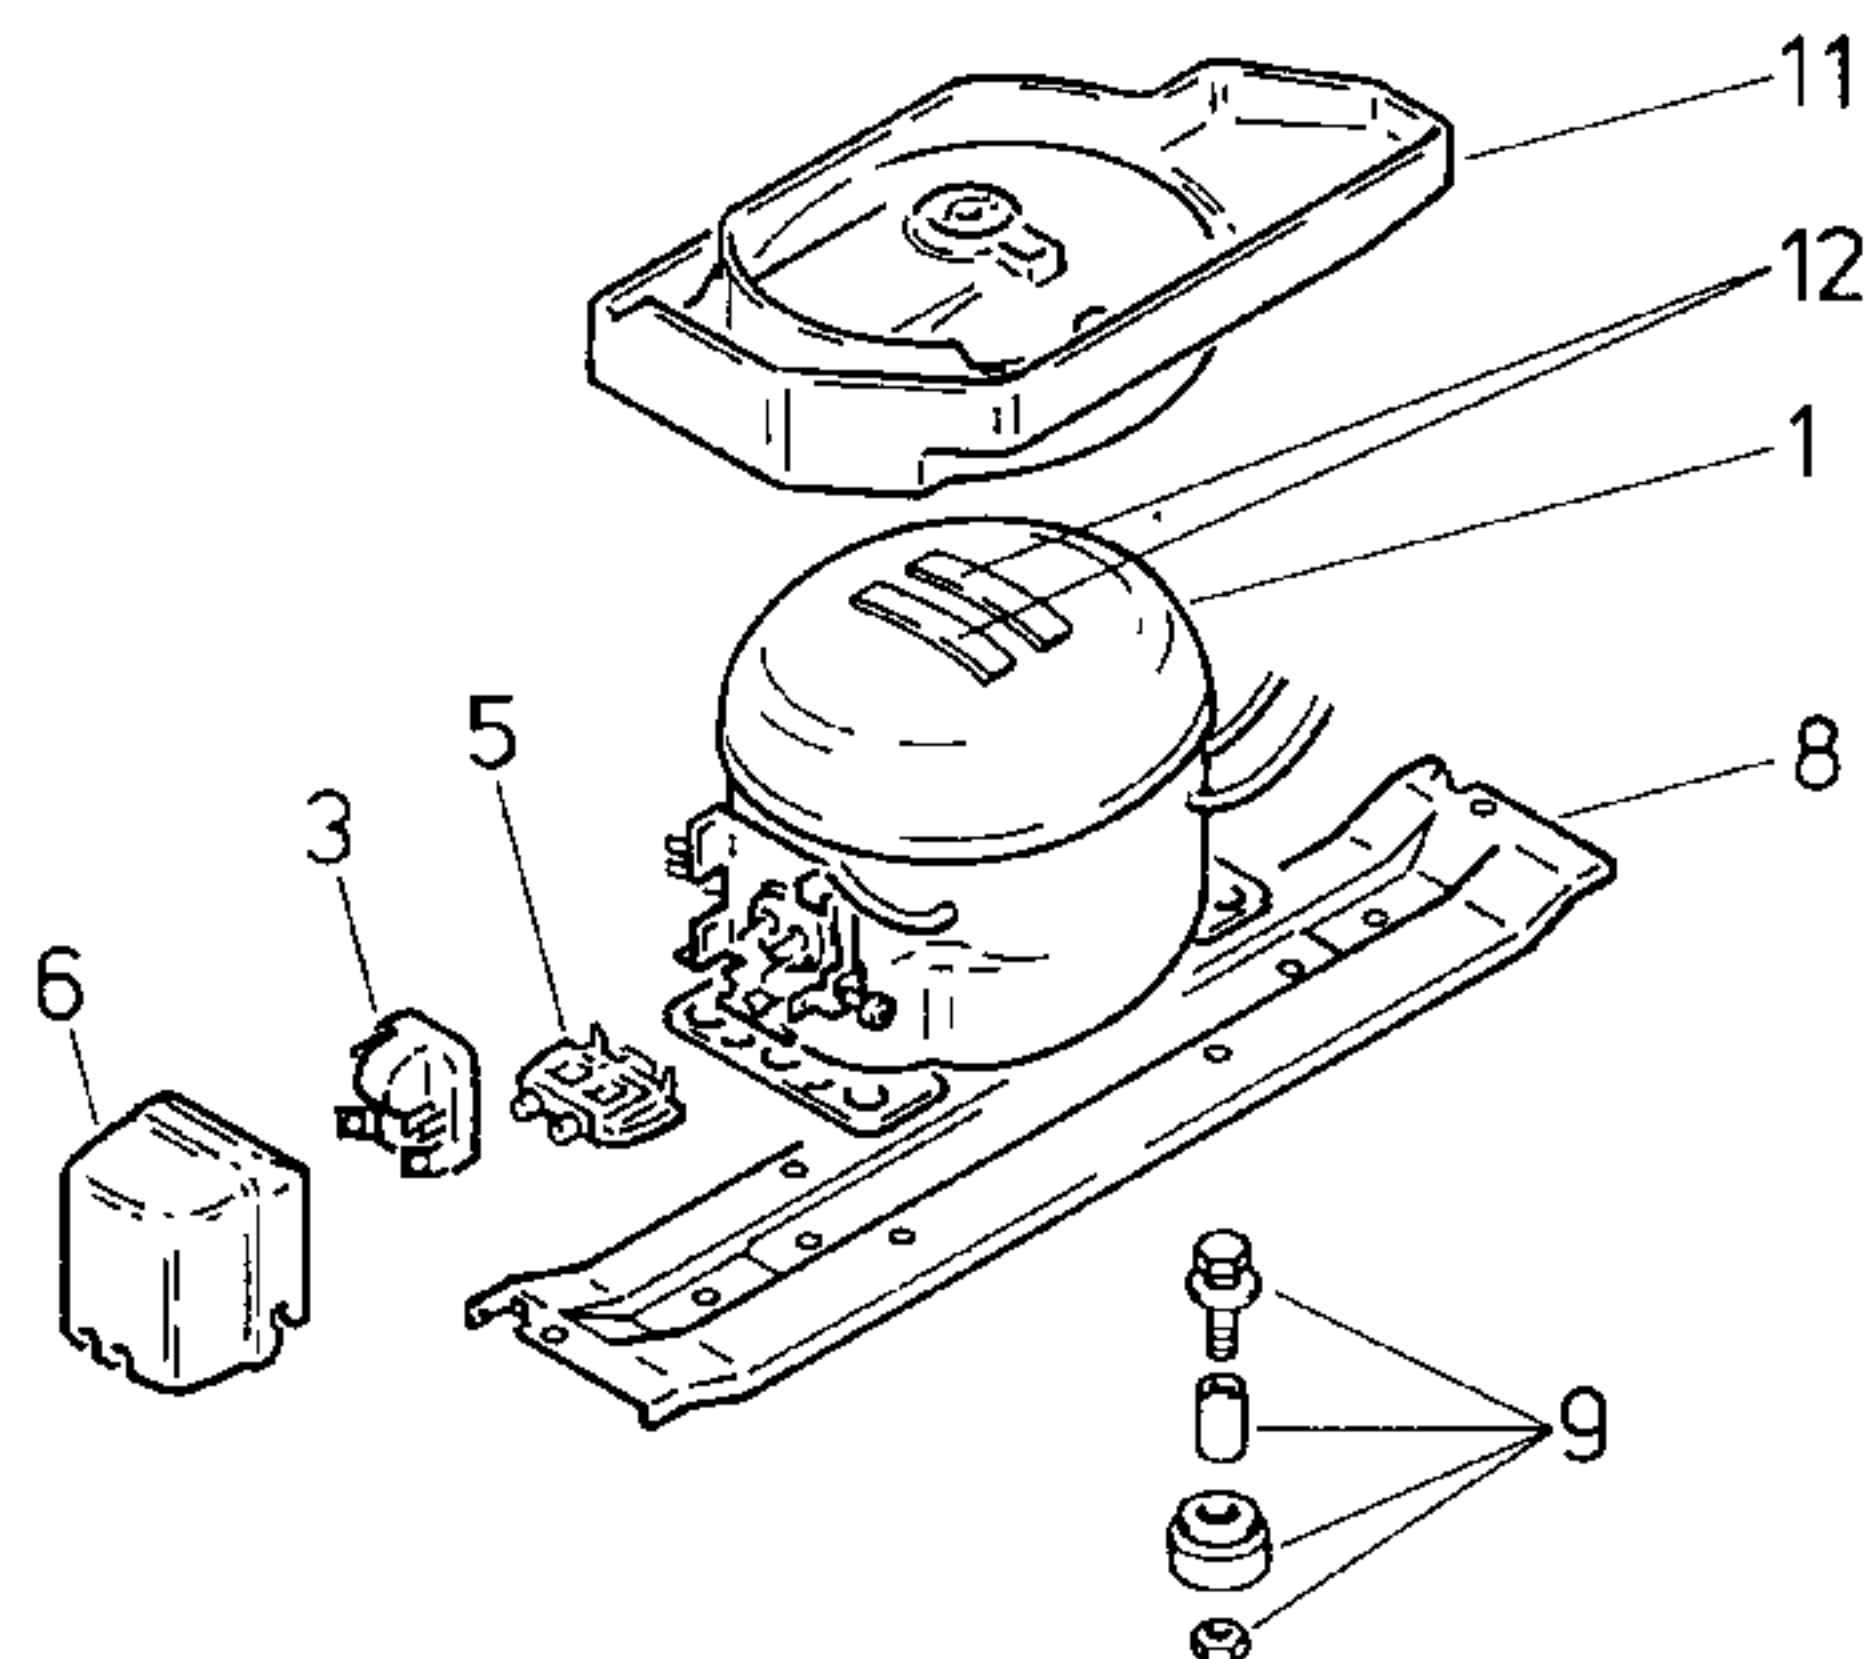

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		Matsushita
Typ/Type		NLY 13 K		DC125E
Förderleistung/Delivery/Débit	l/h	2637		2246
Anlaufstrom/Starting current/Cour. de démarrage	A	11,3		9,2
Widerstand/Resistance/Résistance	Ha/main/prin.	11,0		12,1
	Hi/aux	9,0		13,8
Temp.-Regler/Thermostat		RCO K59		
Typ/Type		KER		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/	„ein“ °C	+4,5 +4,5		
Valeurs de commutation	„aus“	-32,0 -21		
	(„abtauen“ od.) „alarm“			
Füllmenge/Fill.quantity/Charge	R600a	g	*	
Anschlußwert/Conn.load/Puiss. connectée		W	150	120
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
	Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
	Spannung/Voltage/Tension	V		

* siehe Typenschild

Pos.	V01	V02	
	Danfoss	Matsushita	
	NLY 13K	DC125E	
1	14 1747	14 2131	
2			
3	15 1055	17 2967	
4			
5	15 1053	16 2549	
6	15 1072	16 6782	
7			
8	28 1825	28 1825	
9	05 0166	05 0166	
10	05 9467	05 9467	
11	26 6624	26 6624	
12	05 6008	05 6008	