




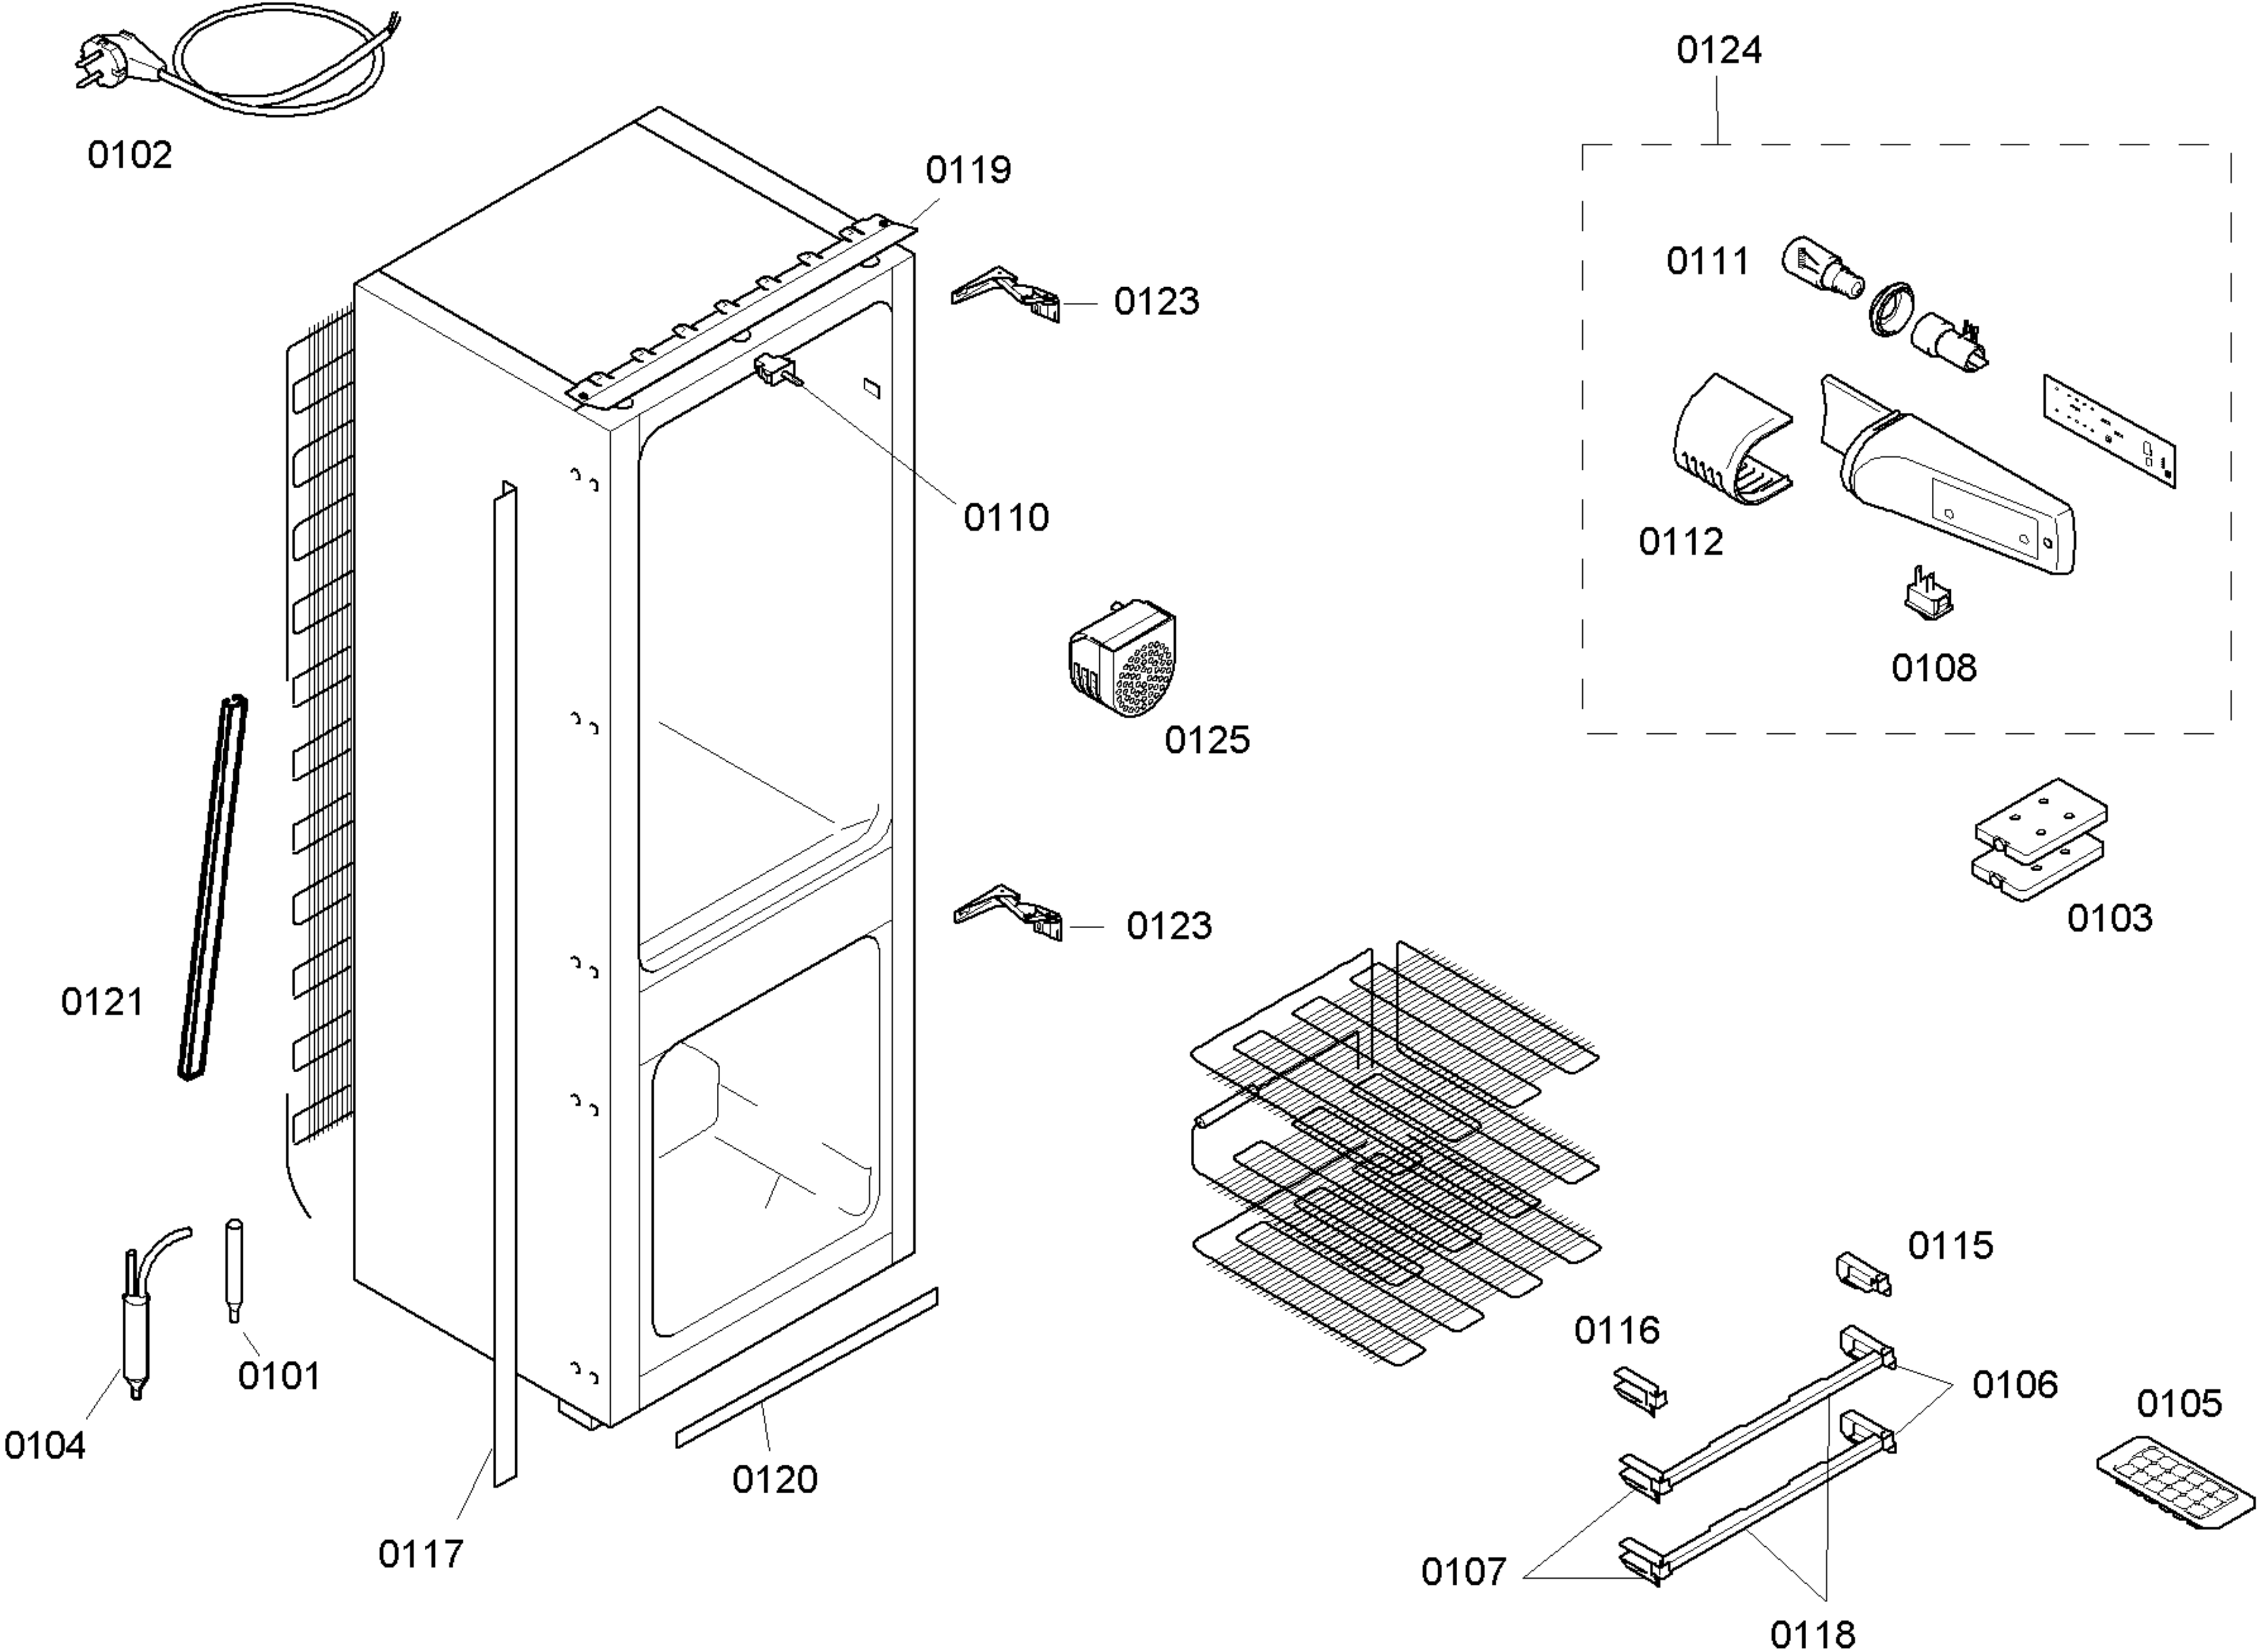

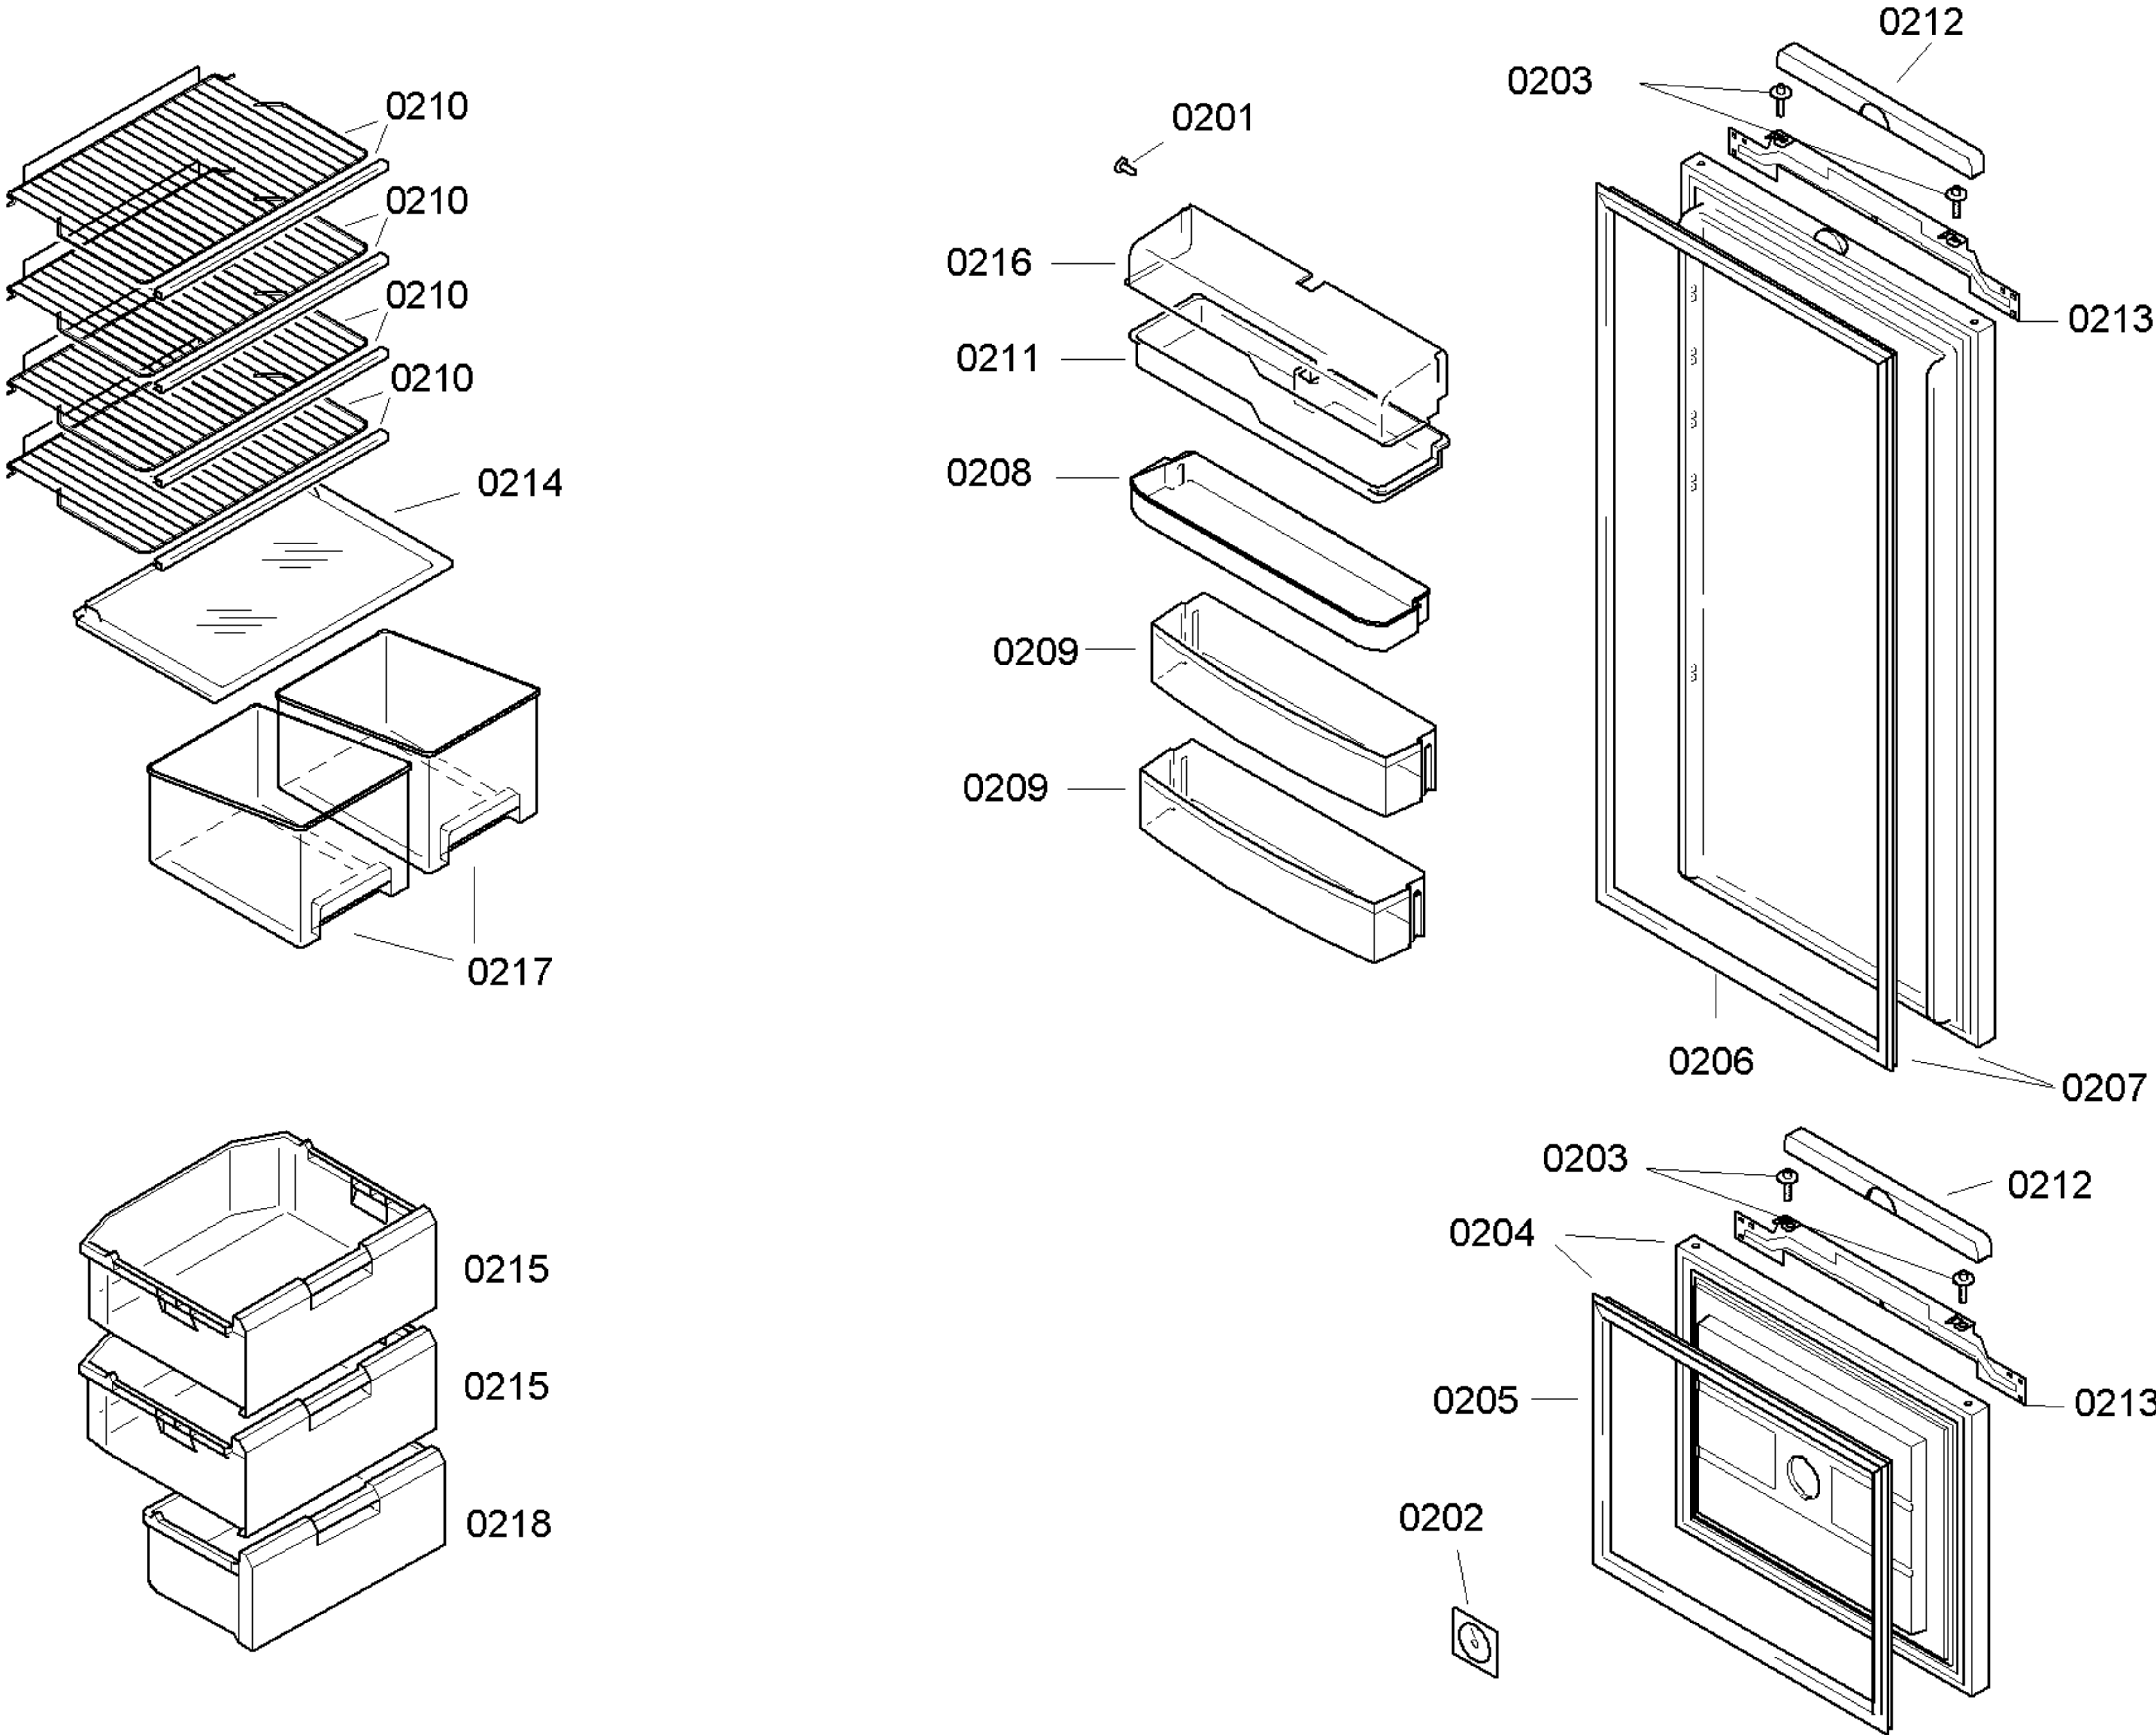

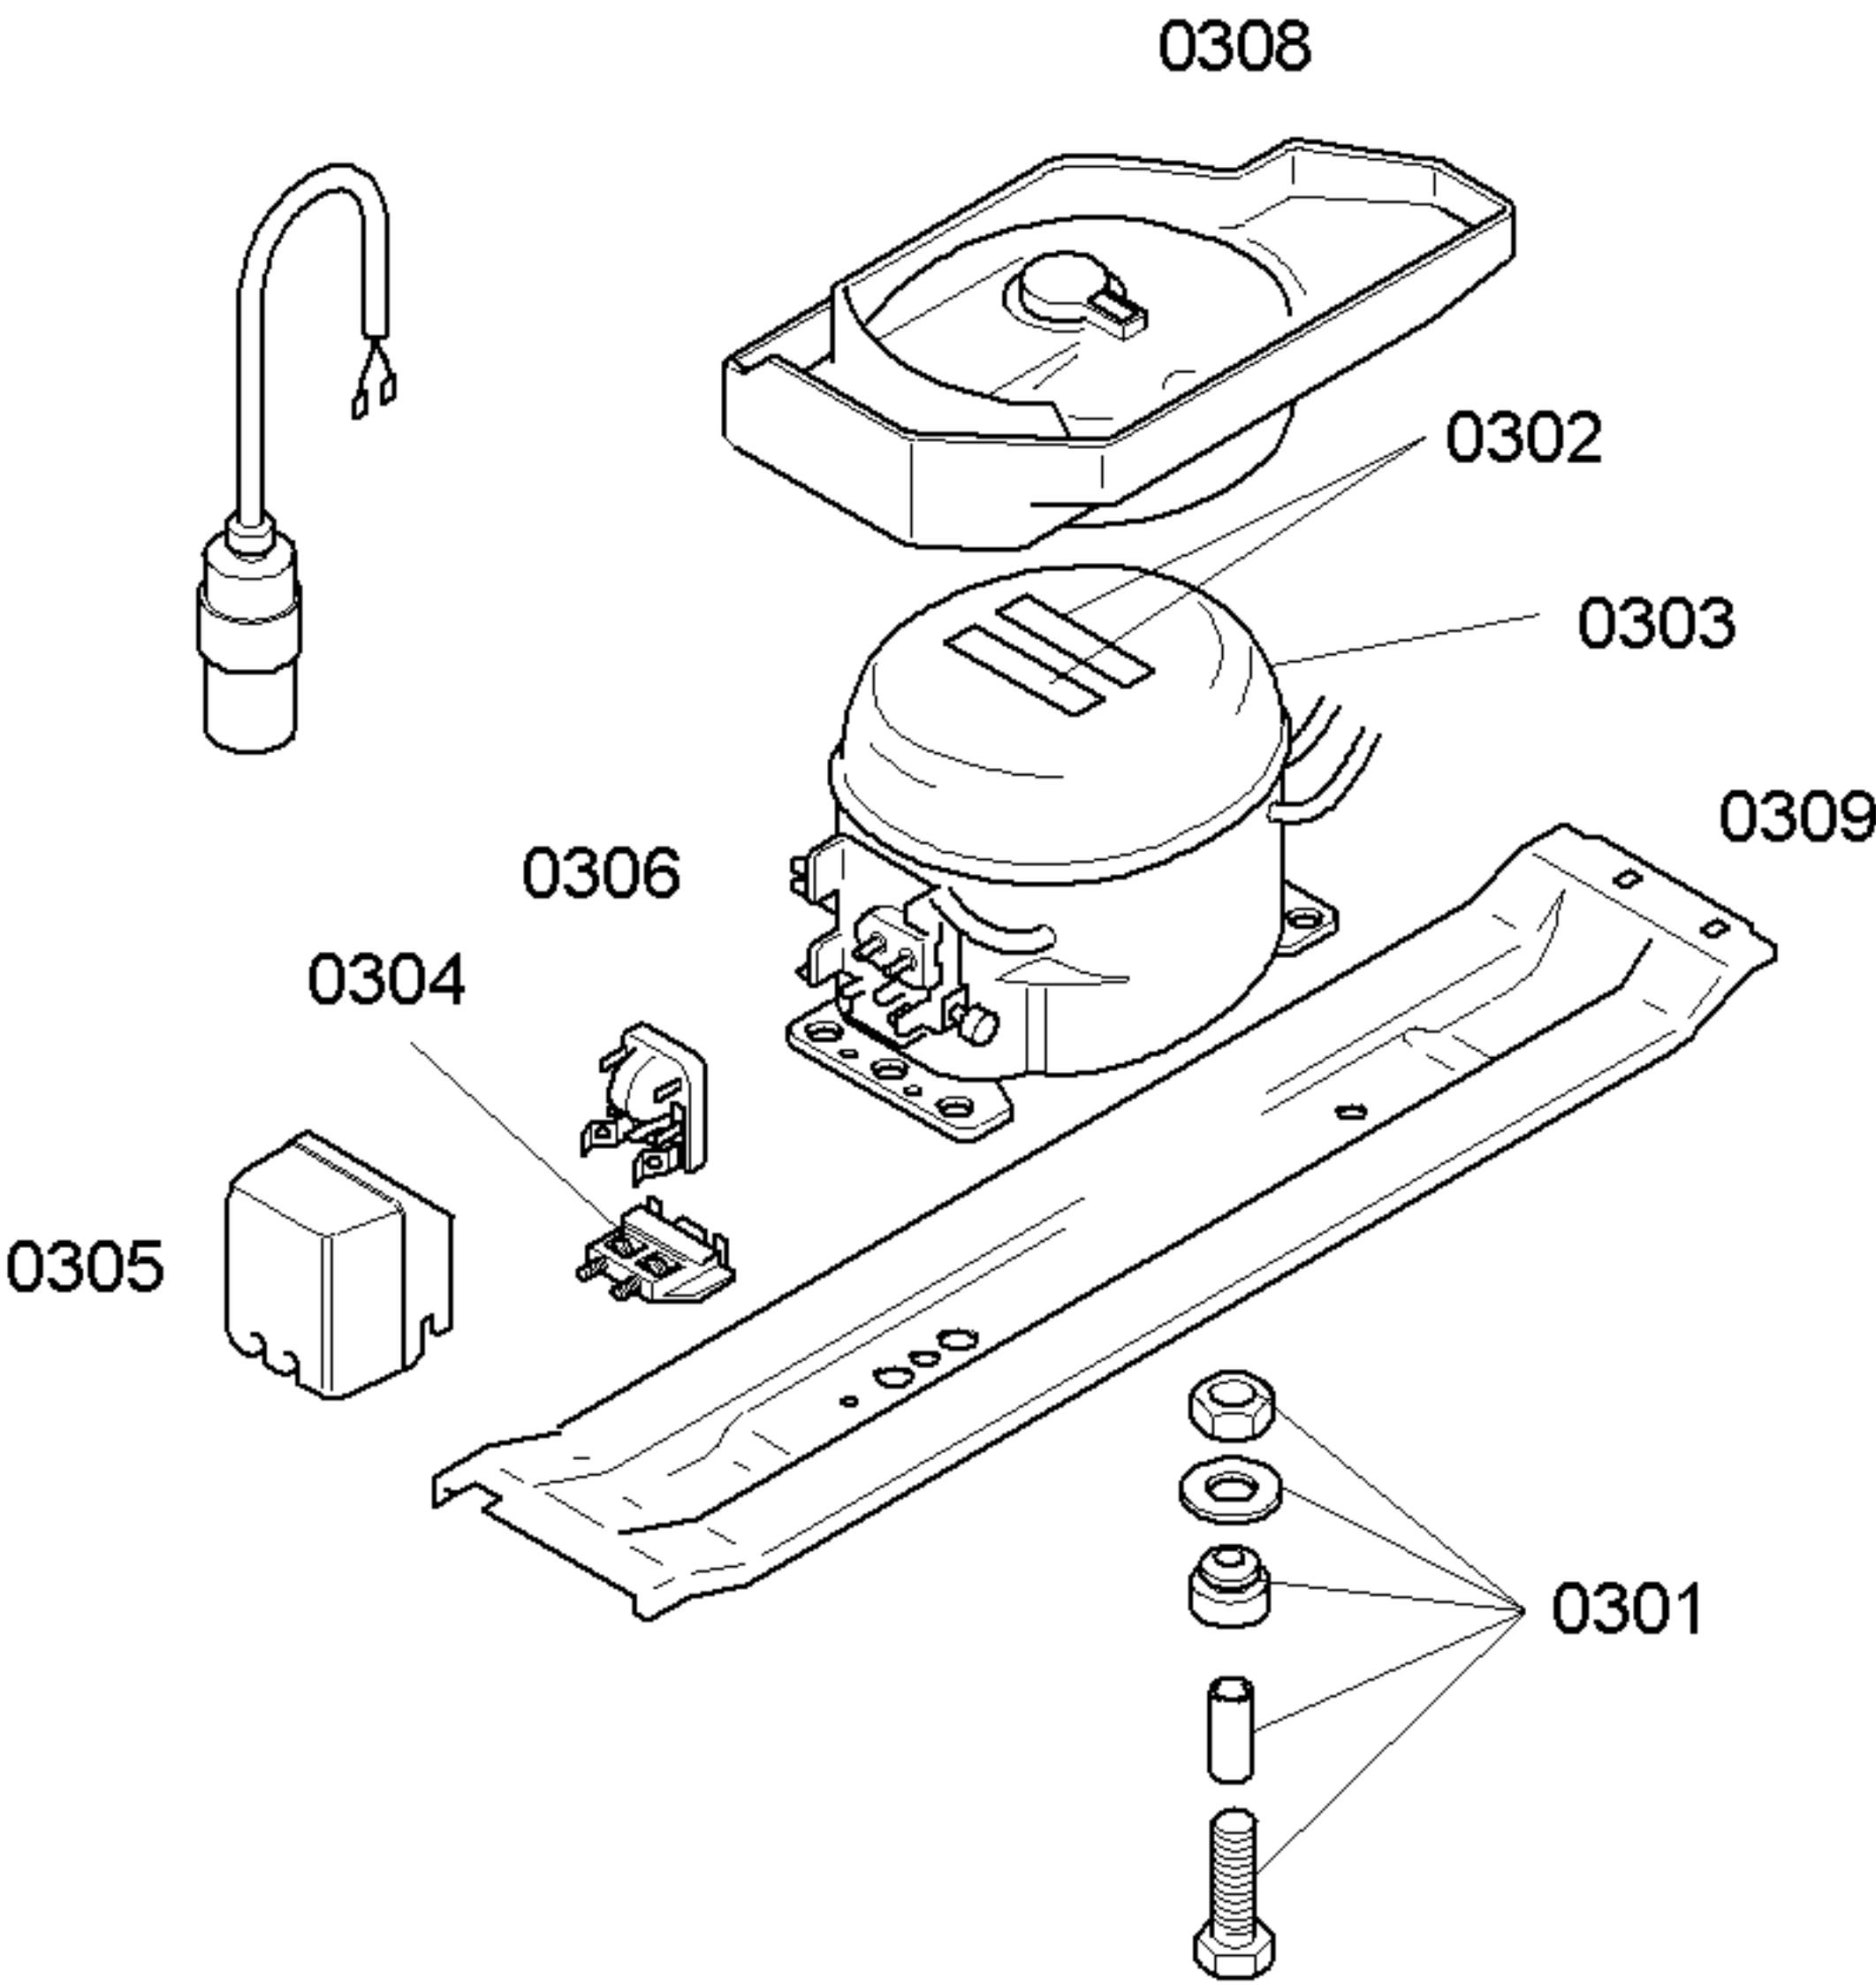

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Matsushita			
Typ/Type		DC125E			
Förderleistung/Delivery/Débit		l/h	0346		
Anlaufstrom/Starting current/Cour. de démarrage		A	9,2		
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	12,1	
		Hi/aux	Ω	13,8	
Temp.-Regler/Thermostat		RCO K59			
Typ/Type		KER			
Reglerstellung/Position		kalt warm			
Schaltwerte/Switching values/		„ein“	°C	+4,5	+4,5
Valeurs de commutation		„aus“		-32,0	-21
(„abtauen“ od.)		„alarm“			
Füllmenge/Fill.quantity/Charge		R600a	g	*	
Anschlußwert/Conn.load/Puiss. connectée		W	120		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

* siehe Typenschild