




13 Exploded View and Replacement Parts List

13.1. Exploded View and Mechanical Replacement Parts List



13.1.1. Exploded View

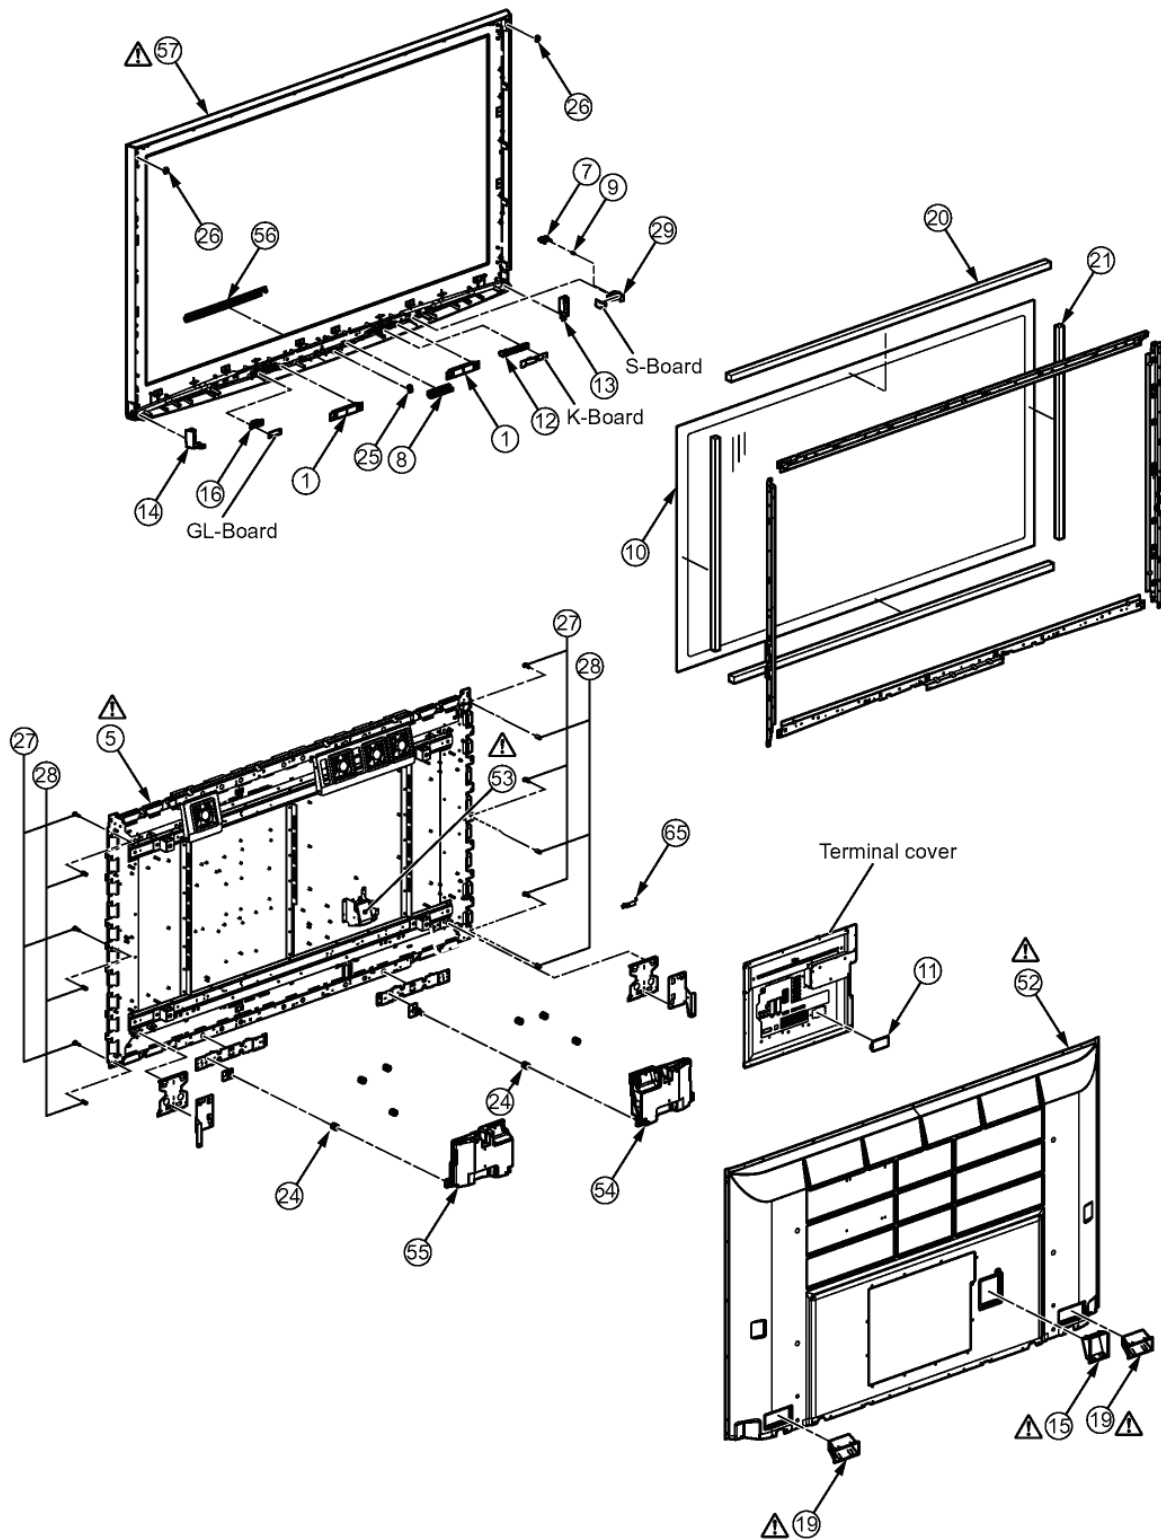


13.1.2. Fan and Flat cable location

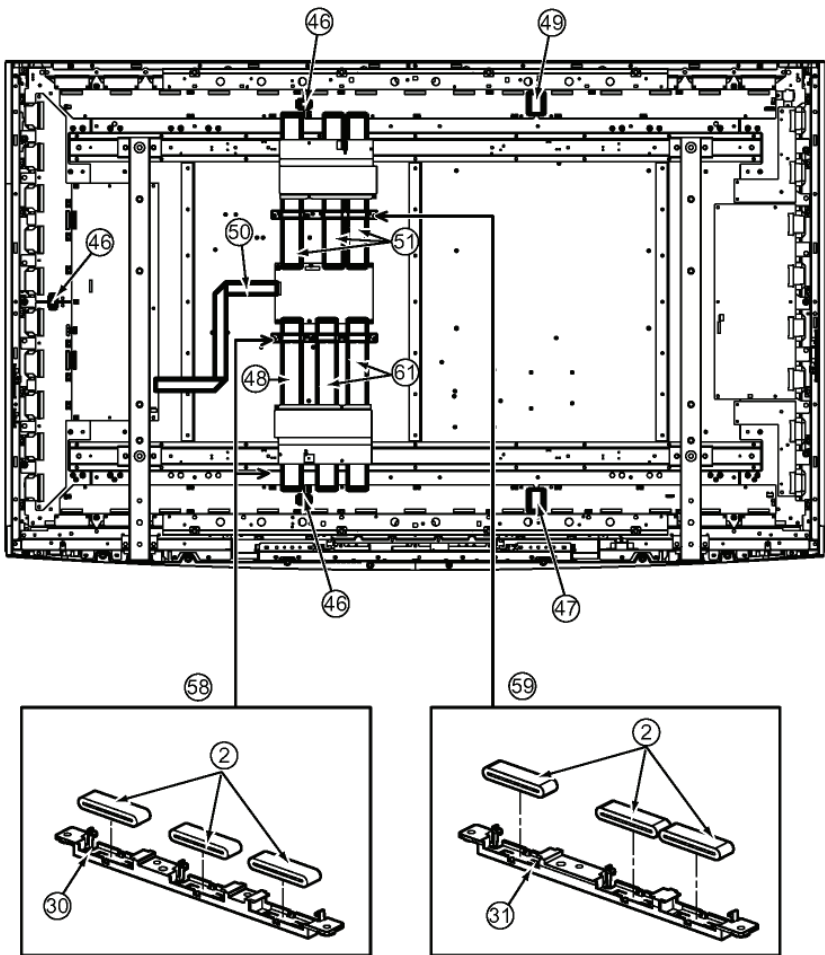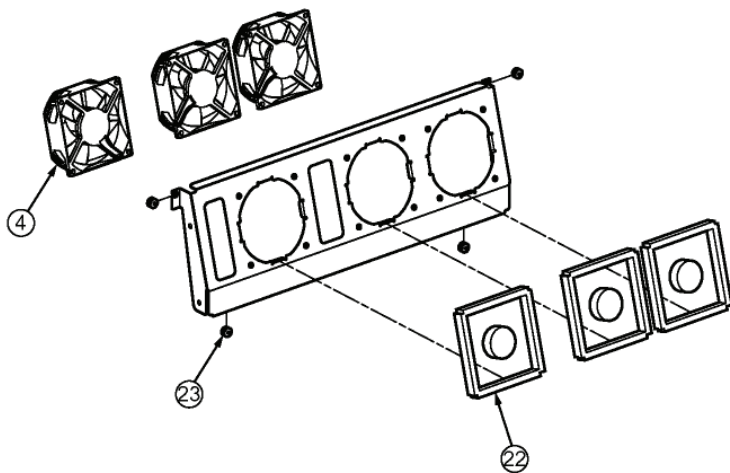

13.1.3. Packing

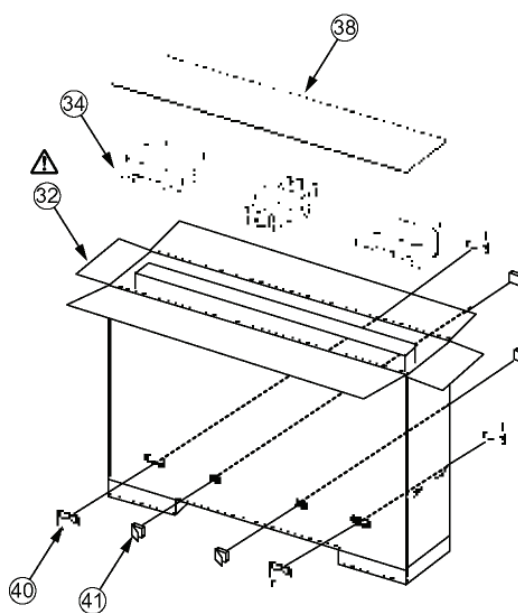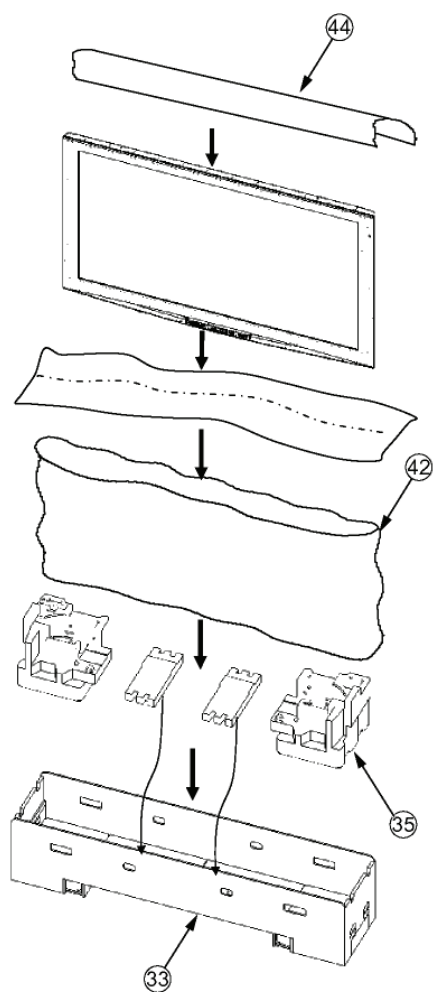

ACCESSORY

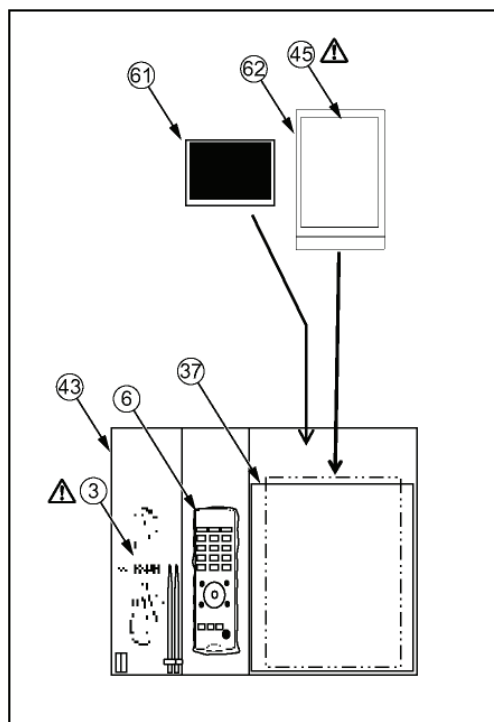

13.1.4. Mechanical Replacement Parts List

Note:

All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by PAVC-CSG.
Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	1	EAS10D85J	SQUAWKER SPEAKER (LEFT&RIGHT)	2	
	2	J0KD00000096	FERRITE CORE	6	
	3	K2CN3DH00006	AC CORD	1	E/P
	3	K2CT3DH00025	AC CORD	1	B
	4	L6FAYYYH0050	FAN(80MM-T25)	4	
	5	MD65F11A1J	PLASMA DISPLAY PANEL	1	
	6	N2QAYB000238	REMOTE CONTROL	1	PAVCCZ B/E
	6	N2QAYB000240	REMOTE CONTROL	1	PAVCCZ P
	7	TBXA53801	POWER BUTTON	1	
	8	TBXA53902	SELECTION BUTTON	1	
	9	TES0E201	POWER BUTTON SPRING	1	PAVCCZ
		THEJ016J	SCREW(AC INRET:2)	2	
		THEL0429	SCREW	20	
		THEL052Z	SCREW (BC TOP:4)	7	
		THTD013N	SCREW	8	
		THTF011N	SCREW	104	
	10	TKGA5467	FRONT GLASS	1	PAVCCZ
	11	TKK0E9520	ADJUSTMENT COVER	1	PAVCCZ
	12	TKKC5317	LED PANEL LIGHT	1	B/E
	12	TKKC5336	LED PANEL LIGHT	1	P
	13	TKKL5453	CORNER PROTECTION LEFT	1	PAVCCZ
	14	TKKL5454	CORNER PROTECTION RIGHT	1	PAVCCZ
	15	TKPB13101	INLET COVER	1	
	16	TKPB23701	SD PANEL LIGHT	1	
	19	TKRA52502A	REAR COVER HANDLE	2	
	20	TMK0E782	CUSHION (UPPER/BOTTOM)	2	PAVCCZ
	21	TMK0E783	CUSHION (LEFT/RIGHT)	2	PAVCCZ
	22	TMKG669	FAN SPONGE	3	
		TMM15414-2	CLAMPER	2	
		TMM16473-1	CLAMPER	1	
		TMM17499	CLAMPER	1	
		TMM6428-1	CLAMPER	1	
		TMM7464-2	CLAMPER	2	
		TMME084	CLAMPER	1	
		TMME190	CLAMPER	1	
		TMME260	CLAMPER	5	
		TMME287	CLAMPER	8	
		TMME289	CLAMPER	2	
		TMME292	CLAMPER	24	
		TMME293	CLAMPER	2	
		TMME305	CLAMPER	2	
	23	TMMJ068	RUBBER (FAN)	8	
	24	TMMJ070	SPEAKER RUBBER	8	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	25	TMMX226	DOOR SPRING	1	
	26	TMMX234	REAR COVER HOOK	2	
	27	TMMX243	INSULATION SPACER (A)	6	PAVCCZ
	28	TMMX244	INSULATION SPACER (B)	6	PAVCCZ
	29	TMWC026	POWER BUTTON BRACKET	1	PAVCCZ
		TMWX054	SPEAKER SHEET BRACKET	1	
	30	TMXX033	CORE HOLDER	1	
	65	TMXX045	AC CORD HOLDER	1	
		TMXX054	AC CORD CLAMPER	2	PAVCCZ E/P
		TMXX055	AC CORD CLAMPER	2	PAVCCZ B
	31	TMXX058	CORE HOLDER	1	PAVCCZ
	32	TPC0E51800	CARTON BOX TOP	1	PAVCCZ
	33	TPC0E51900	CARTON BOX BOTTOM	1	PAVCCZ
	34	TPD0E1067	CUSHION TOP	1	PAVCCZ
	35	TPD0E2043	CUSHION BOTTOM	1	PAVCCZ
		TPD0E2054	SKID CUSHION	2	PAVCCZ
	37	TPD0E9137	ACCESSORIES PAD	1	PAVCCZ
	38	TPD0E9154	TOP PAD	1	PAVCCZ
		TPD0E9155	BOTTOM PAD	2	PAVCCZ
	40	TPD169487	JOINT	4	
	41	TPDX0016	JOINT	4	
	42	TPE0E4015	PROTECTION BAG	1	PAVCCZ
	43	TPE0E9001	ACCESSORIES BAG	1	PAVCCZ
	44	TPEH359	PROTECTION SHEET	1	
	45	TQB0E0613	INSTRUCTION BOOK (ENGLISH)	1	PAVCCZ B
	45	TQB0E0614A	INSTRUCTION BOOK (GERMAN)	1	PAVCCZ E
	45	TQB0E0614B	INSTRUCTION BOOK (DUTCH)	1	PAVCCZ E
	45	TQB0E0614C	INSTRUCTION BOOK (ITALIAN)	1	PAVCCZ E
	45	TQB0E0614D	INSTRUCTION BOOK (FRENCH)	1	PAVCCZ E
	45	TQB0E0614E	INSTRUCTION BOOK (SPANISH)	1	PAVCCZ E
	45	TQB0E0614F	INSTRUCTION BOOK (SWEDISH)	1	PAVCCZ E
	45	TQB0E0614G	INSTRUCTION BOOK (NORWEGIAN)	1	PAVCCZ E
	45	TQB0E0614H	INSTRUCTION BOOK (FINNISH)	1	PAVCCZ E
	45	TQB0E0614I	INSTRUCTION BOOK (LITHUANIAN)	1	PAVCCZ E
	45	TQB0E0614J	INSTRUCTION BOOK (PORTUGUESE)	1	PAVCCZ E
	45	TQB0E0614K	INSTRUCTION BOOK (DANISH)	1	PAVCCZ E
	45	TQB0E0614M	INSTRUCTION BOOK (BULGARIAN)	1	PAVCCZ E
	45	TQB0E0614N	INSTRUCTION BOOK (ROMANIAN)	1	PAVCCZ E
	45	TQB0E0614O	INSTRUCTION BOOK (LATVIAN)	1	PAVCCZ E
	45	TQB0E0614P	INSTRUCTION BOOK (POLISH)	1	PAVCCZ E
	45	TQB0E0614Q	INSTRUCTION BOOK (HUNGARIAN)	1	PAVCCZ E
	45	TQB0E0614R	INSTRUCTION BOOK (CZECH)	1	PAVCCZ E
	45	TQB0E0614S	INSTRUCTION BOOK (GREEK)	1	PAVCCZ E

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	45	TQB0E0614T	INSTRUCTION BOOK (TURKISH)	1	PAVCCZ E
	45	TQB0E0614U	INSTRUCTION BOOK (ENGLISH)	1	PAVCCZ E
	45	TQB0E0614W	INSTRUCTION BOOK (SLOVAKIAN)	1	PAVCCZ E
	45	TQB0E0614X	INSTRUCTION BOOK (CD-R)	1	PAVCCZ E
	45	TQB0E0614Z	INSTRUCTION BOOK (ESTONIAN)	1	PAVCCZ E
	45	TQB0E0615A	INSTRUCTION BOOK (GERMAN)	1	PAVCCZ P
	45	TQB0E0615B	INSTRUCTION BOOK (DUTCH)	1	PAVCCZ P
	45	TQB0E0615C	INSTRUCTION BOOK (ITALIAN)	1	PAVCCZ P
	45	TQB0E0615D	INSTRUCTION BOOK (FRENCH)	1	PAVCCZ P
	45	TQB0E0615E	INSTRUCTION BOOK (SPANISH)	1	PAVCCZ P
	45	TQB0E0615F	INSTRUCTION BOOK (SWEDISH)	1	PAVCCZ P
	45	TQB0E0615G	INSTRUCTION BOOK (NORWEGIAN)	1	PAVCCZ P
	45	TQB0E0615H	INSTRUCTION BOOK (FINNISH)	1	PAVCCZ P
	45	TQB0E0615I	INSTRUCTION BOOK (LITHUANIAN)	1	PAVCCZ P
	45	TQB0E0615J	INSTRUCTION BOOK (PORTUGUESE)	1	PAVCCZ P
	45	TQB0E0615K	INSTRUCTION BOOK (DANISH)	1	PAVCCZ P
	45	TQB0E0615M	INSTRUCTION BOOK (BULGARIAN)	1	PAVCCZ P
	45	TQB0E0615N	INSTRUCTION BOOK (ROMANIAN)	1	PAVCCZ P
	45	TQB0E0615O	INSTRUCTION BOOK (LATVIAN)	1	PAVCCZ P
	45	TQB0E0615P	INSTRUCTION BOOK (POLISH)	1	PAVCCZ P
	45	TQB0E0615Q	INSTRUCTION BOOK (HUNGARIAN)	1	PAVCCZ P
	45	TQB0E0615R	INSTRUCTION BOOK (CZECH)	1	PAVCCZ P
	45	TQB0E0615S	INSTRUCTION BOOK (GREEK)	1	PAVCCZ P
	45	TQB0E0615T	INSTRUCTION BOOK (TURKISH)	1	PAVCCZ P
	45	TQB0E0615U	INSTRUCTION BOOK (ENGLISH)	1	PAVCCZ P
	45	TQB0E0615W	INSTRUCTION BOOK (SLOVAKIAN)	1	PAVCCZ P
	45	TQB0E0615X	INSTRUCTION BOOK (CD-R)	1	PAVCCZ P
	45	TQB0E0615Z	INSTRUCTION BOOK (ESTONIAN)	1	PAVCCZ P
	46	TSXL519	CABLE (C10-C20/C50-C60/SU11-SD11)	3	
	47	TSXL555	CABLE (C41-C51)	1	
	48	TSXL566	CABLE (C61-D31)	1	
	49	TSXL661	CABLE (C23-C33)	1	
	50	TSXL684	CABLE (D20-SC20)	1	PAVCCZ
	51	TSXL685	CABLE (C11-D34/C21-D35/C22-D36)	3	PAVCCZ
	52	TTU0E0366	REAR COVER	1	PAVCCZ B
	52	TTU0E0383	REAR COVER	1	PAVCCZ E
	52	TTU0E0384	REAR COVER	1	PAVCCZ P
	53	TXAJS01RATB	AC INLET ASSY	1	PAVCCZ
	54	TXFAB01RHTB	WOOFER BOX ASSY (LEFT)	1	PAVCCZ
	55	TXFAB02RHTB	WOOFER BOX ASSY (RIGHT)	1	PAVCCZ
	56	TXFKP01RFTA	DOOR ASSY	1	
	57	TXFKY01RATB	CABINET ASSY	1	PAVCCZ B
	57	TXFKY01RATD	CABINET ASSY	1	PAVCCZ E

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	57	TXFKY01RATE	CABINET ASSY	1	PAVCCZ P
	58	TXFMX01EVTJ	CORE ASSY	1	
	59	TXFMX01RATM	CORE ASSY (68P_3P)~2	1	PAVCCZ
	60	TXFPE01RLTB	CLEANING CLOTH ASSY	1	PAVCCZ
	61	TXFSX01DRTU	CABLE ASSY (D34-C55/D35-C54)	2	
		TXJH11RATB	SPEAKER LEAD (H11-SP)	1	PAVCCZ
		TXJH12RATB	SPEAKER LEAD (H12-SP)	1	PAVCCZ
		XSB3+6FJ	SCREW (HDMI MTG)	3	
		XTB3+10GFJ	SCREW	5	
		XTB4+12GFJ	SCREW	52	
		XTB4+12GFJK	SCREW	26	
		XTT4+16GFJK	SCREW (BC:22)	22	
		XTV3+10JFJK	SCREW	4	
		XTW3+10TFJ	SCREW	1	
		XTW4+25DFJ	SCREW	22	
		XTWT4+Z15DFJ	SCREW (SP BOX)	8	
		XYN3+F8FJ	SCREW	41	
		XYN3+J12FJ	SCREW	72	
		XYN4+F10FJ	SCREW	76	
		XYN4+F14FJ	SCREW	6	
		XYN8+F20FJK	SCREW	4	
	62	XZBT6506	POLY BAG (INSTRUCTION BOOK)	1	

13.2. Electrical Replacement Parts List

13.2.1. Replacement Parts List Notes

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J 1/4W
 Type Allowance

Type	Allowance
C : Carbon	F : ±1%
F : Fuse	G : ±2%
M : Metal Oxide	J : ±5%
Metal Film	K : ±10%
S : Solid	M : ±20%
W : Wire Wound	

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z 50V
 Type Allowance

Type	Allowance
C : Ceramic	C : ±0.25pF
E : Electrolytic	D : ±0.5pF
P : Polyester	F : ±1pF
Polyprop	G : ±3pF
lene	J : ±5pF
T : Tantalum	K : ±10pF
	L : ±15pF
	M : ±20pF
	P : +100%, -0%
	Z : +80%, -20%

13.2.2. Electrical Replacement Parts List

Note: All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by PAVC-CSG.
Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	A1	K1KA12A00317	12P CONNECTOR	1	
	A3	K1KA14A00248	14P CONNECTOR	1	
	A5	K1KB31AA0140	31P CONNECTOR	1	
	A6	K1KA20AA0009	20P CONNECTOR	1	
	A7	K1KA11AA0715	11P CONNECTOR	1	
	A8	K1KA06AA0714	6P CONNECTOR	1	
	A9	K1KA06A00508	6P CONNECTOR	1	
	A11	K1KA30AA0009	30P CONNECTOR	1	
	A12	K1KY15AA0607	15P CONNECTOR	1	
	A13	K1KY23AA0607	23P CONNECTOR	1	
	A14	K1KY23AA0607	23P CONNECTOR	1	
	A51	K1KY20A00015	20P CONNECTOR	1	
	A52	K1KA13AA0666	13P CONNECTOR	1	
	A53	K1KA02AA0150	2P CONNECTOR	1	
	A70	K1KA04AA0104	4P CONNECTOR	1	
	C858	FIJ1E104A227	C 0.10UF, Z, 25V	1	
	C859	FIJ1E104A227	C 0.10UF, Z, 25V	1	
	C860	F2A1E101A599	E 100UF, 25V	1	
	C861	FIJ1E104A227	C 0.10UF, Z, 25V	1	
	C862	FIJ1E104A227	C 0.10UF, Z, 25V	1	
	C869	ECA1EHG471	E 470UF, 25V	1	
	C1102	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C1103	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1104	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1106	FI1G1H270A731	C 27UF, 50V	1	
	C1107	FI1G1H220A731	C 22UF, 50V	1	
	C1108	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1109	FI1H1A1050032	C 10UF, 50V	1	
	C1111	FI1H1A1050032	C 10UF, 50V	1	
	C1112	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1114	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1117	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1122	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C1123	FI1H1A1050032	C 10UF, 50V	1	
	C2023	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2048	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2049	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2050	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2052	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2053	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2054	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2055	FI1G1H150A731	C 15UF, 50V	1	
	C2056	FI1G1H150A731	C 15UF, 50V	1	
	C2057	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2058	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2059	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2091	FI1G1H220A731	C 22UF, 50V	1	
	C2092	FI1G1H220A731	C 22UF, 50V	1	
	C2096	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2098	F2G0J2210013	E 220UF 6.3V	1	
	C2099	F2G0J2210013	E 220UF 6.3V	1	
	C2100	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2101	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2102	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2105	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2106	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2107	F2G0J470A019	E 47UF 6.3V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2108	F2G0J470A019	E 47UF 6.3V	1	
	C2109	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2110	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2111	FI1H0J2250008	C 2.2UF, K, 16V	1	
	C2112	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2113	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2114	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2115	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2116	FI1G1H471A731	C 470UF, 50V	1	
	C2117	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2118	FI1H1A1050032	C 10UF, 50V	1	
	C2119	EEEHB1A221P	C 220PF, J, 10V	1	
	C2120	FI1G1H560A731	C 56UF, 50V	1	
	C2121	FI1G1H560A731	C 56UF, 50V	1	
	C2122	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2123	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2124	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2125	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2126	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2127	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2128	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2129	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2131	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	C2135	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2136	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2137	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2138	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2145	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2146	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2151	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2174	FI1H1A1050032	C 10UF, 50V	1	
	C2175	F2G0J470A019	E 47UF 6.3V	1	
	C2176	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2179	F2G0J470A019	E 47UF 6.3V	1	
	C2180	FI1H1A1050032	C 10UF, 50V	1	
	C2184	FI1G1H102A730	C 1000UF, 50V	1	
	C2187	FI1H0J2250008	C 2.2UF, K, 16V	1	
	C2188	FI1G1H471A730	C 470UF, 50V	1	
	C2189	FI1H1A1050032	C 10UF, 50V	1	
	C2191	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C2192	F2G0J470A019	E 47UF 6.3V	1	
	C2195	FI1G1H102A730	C 1000UF, 50V	1	
	C2197	FI1H1E333A129	C 0.033UF, 25V	1	
	C2198	FI1H1E333A129	C 0.033UF, 25V	1	
	C2201	FI1G1A473A053	C 0.47UF, 10V	1	
	C2202	FI1H0J2250008	C 2.2UF, K, 16V	1	
	C2203	FI1H1A1050032	C 10UF, 50V	1	
	C2204	FI1H1C105A008	C 1UF, K, 16V	1	
	C2213	FI1G1H102A730	C 1000UF, 50V	1	
	C2216	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2244	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2245	FI1G1H102A730	C 1000UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2246	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2251	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2261	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2262	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2263	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2264	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2393	F1K1C1060004	C 0.010UF, 16V	1	
	C2394	F1J1H474A757	C 0.47UF, 50V	1	
	C2395	F1J1H474A757	C 0.47UF, 50V	1	
	C2400	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2401	F1G1H181A731	C 180UF, 50V	1	
	C2402	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2403	F2G1V220A020	E 22UF, 35V	1	
	C2404	F1G1H102A730	C 1000UF, 50V	1	
	C2407	F2H0J1010009	C 100UF, 6.3V	1	
	C2408	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2409	F2G0J1020022	E 1100PF, J, 6.3V	1	
	C2410	F1H0J2250008	C 2.2UF, K, 16V	1	
	C2411	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2412	F2G1H100A031	E 10UF, 50V	1	
	C2413	F1H1A1050032	C 10UF, 50V	1	
	C2414	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2415	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2418	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2419	F1G1H101A731	C 100PF, K, 50V	1	
	C2420	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2427	F1H1A1050032	C 10UF, 50V	1	
	C2430	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C2431	F1G1H101A731	C 100PF, K, 50V	1	
	C2432	F1G1H471A731	C 470UF, 50V	1	
	C2433	F1G1H471A731	C 470UF, 50V	1	
	C2434	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2437	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2511	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2512	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2515	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2517	F1H1H103A970	C 0.001UF, K, 50V	1	B/E
	C2521	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2525	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C2601	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2602	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2603	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2604	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2605	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2608	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2609	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2610	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2611	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2612	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2613	F1G1H180A731	C 18UF, 50V	1	
	C2614	F1G1H120A731	C 12UF, 50V	1	
	C2615	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2616	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2617	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2618	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2619	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2620	F1G1A104A012	C 0.01UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2621	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2622	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2623	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2624	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2625	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2626	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2627	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2628	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2629	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2630	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2631	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2632	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2633	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2634	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2635	ECJ1VB1H473K	C 0.047UF, K, 50V	1	
	C2637	EEEBB0G221P	C 220PF, J, 4V	1	
	C2638	EEEBB0G470R	C 47PF, J, 4V	1	
	C2639	F2G1C2200036	E 22UF, 16V	1	
	C2640	F2G1C2200036	E 22UF, 16V	1	
	C2641	F2G1C2200036	E 22UF, 16V	1	
	C2642	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2643	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2644	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2645	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2646	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2647	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2648	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2649	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2650	F2G1C2200036	E 22UF, 16V	1	
	C2651	F1G1H100A565	C 100PF, K, 50V	1	
	C2652	ECGRL0G680ER	C 68PF, J, 4V	1	
	C2657	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2658	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C2661	F1H1A1050032	C 10UF, 50V	1	
	C3099	F2G1C220A022	E 22UF, 16V	1	
	C3104	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3107	F1H1H470A971	C 47UF, K, 50V	1	
	C3109	F1G1H222A730	C 2200UF, 50V	1	
	C3110	F2G1C1010034	E 100PF, J, 16V	1	
	C3115	F1G1H222A730	C 2200UF, 50V	1	
	C3116	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3117	F1H1H561A971	C 560UF, 50V	1	
	C3122	F1H1A1050032	C 10UF, 50V	1	
	C3123	F1H1A1050032	C 10UF, 50V	1	
	C3124	F1H1A1050032	C 10UF, 50V	1	
	C3128	F1H1H561A971	C 560UF, 50V	1	
	C3136	F1H1H561A971	C 560UF, 50V	1	
	C3137	F1H1H561A971	C 560UF, 50V	1	
	C3138	F1H1H561A971	C 560UF, 50V	1	
	C3139	F1H1H561A971	C 560UF, 50V	1	
	C3140	F1H1H561A971	C 560UF, 50V	1	
	C3141	F1H1H561A971	C 560UF, 50V	1	
	C3142	F1H1H561A971	C 560UF, 50V	1	
	C3143	F1H1H561A971	C 560UF, 50V	1	
	C3144	F1H1H561A971	C 560UF, 50V	1	
	C3145	F1H1H561A971	C 560UF, 50V	1	
	C3148	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3149	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3150	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3151	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3152	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3154	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3172	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3173	ECJ1VB1C105K	C 0.01UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3180	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3181	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3221	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3222	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3223	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3225	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3226	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3245	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3246	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3247	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3248	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3249	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3250	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3253	FIH1A1050032	C 10UF, 50V	1	
	C3256	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C3257	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C3258	FIH1A1050032	C 10UF, 50V	1	B/E
	C3259	FIH1A1050032	C 10UF, 50V	1	
	C3260	FIH1A1050032	C 10UF, 50V	1	
	C3261	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3262	FIH1A1050032	C 10UF, 50V	1	
	C3263	FIH1A1050032	C 10UF, 50V	1	
	C3264	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3265	EEH1C221UP	C 220PF, J, 16V	1	
	C3266	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3267	FIH1A1050032	C 10UF, 50V	1	
	C3268	FIH1A1050032	C 10UF, 50V	1	
	C3269	FIH1A1050032	C 10UF, 50V	1	
	C3270	FIH1A1050032	C 10UF, 50V	1	
	C3271	FIH1A1050032	C 10UF, 50V	1	
	C3272	FIH1A1050032	C 10UF, 50V	1	
	C3273	FIH1A1050032	C 10UF, 50V	1	
	C3274	FIH1A1050032	C 10UF, 50V	1	
	C3275	FIH1A1050032	C 10UF, 50V	1	
	C3276	FIH1A1050032	C 10UF, 50V	1	
	C3277	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3278	F2G1A221A149	E 220UF, 10V	1	
	C3279	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3280	F2G1A221A149	E 220UF, 10V	1	
	C3284	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3297	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3298	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3299	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3300	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3302	EEH1C221UP	C 220PF, J, 16V	1	
	C3308	F2G1C100A022	C 10UF J 16V	1	
	C3310	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3311	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3319	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3320	F2G1C470A022	E 47UF, 16V	1	
	C3323	FIH1A1050032	C 10UF, 50V	1	
	C3701	ECJ2XC1H561K	C 560PF, K, 50V	1	
	C3703	ECJ2XC1H561K	C 560PF, K, 50V	1	
	C3711	ECJ2VF1H333Z	C 0.033UF, Z, 50V	1	
	C3712	ECJ2VF1H333Z	C 0.033UF, Z, 50V	1	
	C3750	FIJ1H102A721	C 1000UF, 50V	1	
	C3801	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3802	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3803	FIH1A1050032	C 10UF, 50V	1	
	C3804	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3806	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3807	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3808	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3809	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3810	FI1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3811	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3812	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3813	FIJ0J106A004	C 0.010UF, K, 16V	1	
	C3814	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3815	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3816	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3817	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3818	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3819	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3820	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3823	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3827	FIJ1A475A039	C 4.7UF, K, 10V	1	
	C3829	FIH1A1050032	C 10UF, 50V	1	
	C4005	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4006	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4008	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4010	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4011	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4013	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4014	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4015	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4016	FIJ1C475A170	C 4.7UF, K, 16V	1	
	C4018	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4019	FIJ1H474A757	C 0.47UF, 50V	1	
	C4020	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4021	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4022	FIJ1H474A757	C 0.47UF, 50V	1	
	C4023	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4024	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4025	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4027	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4028	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4030	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4032	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4033	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4034	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4035	FIH1A1050032	C 10UF, 50V	1	
	C4036	FIH1A1050032	C 10UF, 50V	1	
	C4038	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4039	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C4040	FI1G1H150A731	C 15UF, 50V	1	
	C4045	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4047	FIH1A1050032	C 10UF, 50V	1	
	C4049	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4050	FIH1A1050032	C 10UF, 50V	1	
	C4051	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4052	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4053	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4054	FIK1C1060004	C 0.010UF, 16V	1	
	C4055	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4056	F2G1C470A022	E 47UF, 16V	1	
	C4101	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4255	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4256	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4257	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4258	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4259	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4260	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4261	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4262	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4263	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4264	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4265	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4266	FIH0J1050012	C 1UF, K, 16V	1	
	C4267	FI1G1H1020008	C 1000UF, 50V	1	
	C4268	FI1G1H1020008	C 1000UF, 50V	1	
	C4270	FI1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4271	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4272	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4273	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4274	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4275	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4276	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4277	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4278	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4279	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4280	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4281	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4282	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4283	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4284	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4285	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4286	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4287	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4288	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4289	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4290	F1G1H1020008	C 1000UF, 50V	1	
	C4291	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4292	F1G1H1020008	C 1000UF, 50V	1	
	C4293	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4294	F1G1H1020008	C 1000UF, 50V	1	
	C4295	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4296	F1G1H1020008	C 1000UF, 50V	1	
	C4297	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4298	F1G1H1020008	C 1000UF, 50V	1	
	C4299	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4300	F2G0J470A019	E 47UF 6.3V	1	
	C4301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4302	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4313	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4314	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4315	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4316	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4317	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4318	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4319	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4320	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4321	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4323	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4325	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4326	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4328	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4329	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4500	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4501	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4502	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4503	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4510	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4511	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4513	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4514	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4517	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4520	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4521	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4522	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4523	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4524	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4525	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4533	F1G1H680A731	C 68UF, 50V	1	
	C4534	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4537	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4548	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4549	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4550	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4551	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4552	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4553	F1G1H102A730	C 1000UF, 50V	1	
	C4554	F2G1C470A022	E 47UF, 16V	1	
	C4555	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4567	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4574	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4575	F1H1A1050032	C 10UF, 50V	1	
	C4580	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4585	F1H1A1050032	C 10UF, 50V	1	
	C4595	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4596	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4598	F1H1A1050032	C 10UF, 50V	1	
	C4599	F2G0J470A019	E 47UF 6.3V	1	
	C4600	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4601	F2G0J470A019	E 47UF 6.3V	1	
	C4602	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4603	F1H0J2250008	C 2.2UF, K, 16V	1	
	C4604	F1G1H471A730	C 470UF, 50V	1	
	C4605	F1H1A1050032	C 10UF, 50V	1	
	C4606	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4607	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4609	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4610	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4611	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4612	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4613	F1H1A1050032	C 10UF, 50V	1	
	C4614	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4615	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4616	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4617	F1J0G2260001	C 0.001UF, 6.3V	1	
	C4619	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4624	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4625	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4628	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4630	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4632	F1H1A1050032	C 10UF, 50V	1	
	C4634	F1H1A1050032	C 10UF, 50V	1	
	C4636	F1H1A1050032	C 10UF, 50V	1	
	C4638	F1H1A1050032	C 10UF, 50V	1	
	C4640	F1H1A1050032	C 10UF, 50V	1	
	C4642	F1H1A1050032	C 10UF, 50V	1	
	C4643	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4644	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4645	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4646	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4647	F1K1C1060004	C 0.010UF, 16V	1	
	C5001	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5002	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5003	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5004	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5005	F1H0J1050012	C 1UF, K, 16V	1	
	C5006	F1H0J1050012	C 1UF, K, 16V	1	
	C5007	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5009	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5010	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5013	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5015	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5016	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5017	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5018	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5019	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5020	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5021	FIH0J1050012	C 1UF, K, 16V	1	
	C5022	FIH0J1050012	C 1UF, K, 16V	1	
	C5023	FIH0J1050012	C 1UF, K, 16V	1	
	C5024	FIH0J1050012	C 1UF, K, 16V	1	
	C5025	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5026	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5027	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5028	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5029	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5030	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5031	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5032	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5033	FIH0J1050012	C 1UF, K, 16V	1	
	C5034	FIH0J1050012	C 1UF, K, 16V	1	
	C5035	FIH0J1050012	C 1UF, K, 16V	1	
	C5036	FIH0J1050012	C 1UF, K, 16V	1	
	C5037	FIH0J1050012	C 1UF, K, 16V	1	
	C5038	FIH0J1050012	C 1UF, K, 16V	1	
	C5039	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5040	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5041	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5042	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5043	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5044	FIH0J1050012	C 1UF, K, 16V	1	
	C5045	FIH0J1050012	C 1UF, K, 16V	1	
	C5046	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5047	FIH0J1050012	C 1UF, K, 16V	1	
	C5048	FIH0J2250008	C 2.2UF, K, 16V	1	
	C5049	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5050	FIH0J1050012	C 1UF, K, 16V	1	
	C5051	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5052	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5053	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5054	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5055	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5056	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5057	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5058	ECGRLOG680ER	C 68PF, J, 4V	1	
	C5059	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5060	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5061	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5062	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5063	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5064	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5065	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5066	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5067	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5072	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5073	FIH0J2250008	C 2.2UF, K, 16V	1	
	C5200	FIH1H180A971	C 18PF, K, 50V	1	
	C5201	FIH1H180A971	C 18PF, K, 50V	1	
	C5301	FIH1A1050032	C 10UF, 50V	1	
	C5302	FIg1C104A081	C 0.10UF, K, 16V	1	
	C5303	FIH1A1050032	C 10UF, 50V	1	
	C5311	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5312	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5316	FIg1A473A053	C 0.47UF, 10V	1	
	C5317	FIH1A1050032	C 10UF, 50V	1	
	C5320	FIH1E104A129	C 0.1UF, 25V	1	
	C5321	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5322	FIJ1A475A039	C 4.7UF, K, 10V	1	
	C5323	FIg1H471A730	C 470UF, 50V	1	
	C5324	FIg1H221A730	C 220UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5325	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5326	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5327	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5328	ECGRLOG680ER	C 68PF, J, 4V	1	
	C5329	ECGRLOG680ER	C 68PF, J, 4V	1	
	C5341	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5395	FIJ1E105A171	C 1 UF 25V	1	
	C5396	EEH1B1E470P	C 47PF, J, 25V	1	
	C5397	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5399	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5432	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5433	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5434	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5435	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5436	FIH1E104A129	C 0.1UF, 25V	1	
	C5441	FIH1E104A129	C 0.1UF, 25V	1	
	C5442	FIH1H682A970	C 6800PF, K, 50V	1	
	C5443	F2H0J2210005	C 220UF, 6.3V	1	
	C5452	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5453	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5454	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5455	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5456	FIH1E104A129	C 0.1UF, 25V	1	
	C5461	FIH1E104A129	C 0.1UF, 25V	1	
	C5462	FIH1H392A970	C 3900PF, K, 50V	1	
	C5463	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5464	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5465	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5466	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5467	FIg1C104A081	C 0.10UF, K, 16V	1	
	C5468	F2G0G101A007	E 100UF 6.3V	1	
	C5469	F2G0G101A007	E 100UF 6.3V	1	
	C5470	FIJ0J106A020	C 0.010UF, K, 16V	1	
	C5471	FIJ0J106A020	C 0.010UF, K, 16V	1	
	C5472	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5473	F2H0J1010009	C 100UF, 6.3V	1	
	C5474	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5475	F2G1C1010034	E 100PF, J, 16V	1	
	C5476	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5477	F2H0J1010009	C 100UF, 6.3V	1	
	C5478	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5501	F2A1C471A537	E 470UF, 16V	1	
	C5502	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C5503	F2A1C471A537	E 470UF, 16V	1	
	C5504	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C5505	F2A1E102A220	E 1000UF, 25V	1	
	C5506	ECJ2VB1E104K	C 0.1UF, K, 25V	1	
	C5521	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5522	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5531	FIH1A1050032	C 10UF, 50V	1	
	C5533	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5541	FIH1E104A129	C 0.1UF, 25V	1	
	C5542	FIH1A1050032	C 10UF, 50V	1	
	C5543	FIg1H471A731	C 470UF, 50V	1	
	C5544	FIJ0J106A020	C 0.010UF, K, 16V	1	
	C5545	FIg1A104A012	C 0.01UF, K, 10V	1	
	C5546	F2G0G101A007	E 100UF 6.3V	1	
	C5595	F2G1C2200036	E 22UF, 16V	1	
	C5600	FIH1A1050032	C 10UF, 50V	1	
	C5601	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5602	ECGRLOG680ER	C 68PF, J, 4V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5603	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5604	F1G1C223A116	C 0.022UF, K, 16V	1	
	C5605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5606	F1G1H471A730	C 470UF, 50V	1	
	C5607	F1G1H221A731	C 220UF, 50V	1	
	C5608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5611	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5612	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5615	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5616	F1G1C223A116	C 0.022UF, K, 16V	1	
	C5617	F1H1A1050032	C 10UF, 50V	1	
	C5618	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5619	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5620	F1H1E104A129	C 0.1UF, 25V	1	
	C5621	F1G1A473A053	C 0.47UF, 10V	1	
	C5622	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5623	F1G1H221A730	C 220UF, 50V	1	
	C5624	F1G1H221A730	C 220UF, 50V	1	
	C5625	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5627	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5628	ECGRLO680ER	C 68PF, J, 4V	1	
	C5629	ECGRLO680ER	C 68PF, J, 4V	1	
	C5631	EEHMB1E470P	C 47PF, J, 25V	1	
	C5632	F1J1E105A171	C 1 UF 25V	1	
	C5636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5639	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5641	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5642	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5643	F1H1E104A129	C 0.1UF, 25V	1	
	C5644	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5661	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5662	F1G1A473A053	C 0.47UF, 10V	1	
	C5663	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5688	F1H1A225A051	C 22UF, 50V	1	
	C5691	EEHMB1C220UR	C 22PF, J, 16V	1	
	C5695	F2G0J470A019	E 47UF 6.3V	1	
	C5730	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5731	F2G0J470A019	E 47UF 6.3V	1	
	C7700	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7701	F1H1A225A051	C 22UF, 50V	1	
	C7702	F2G0G101A007	E 100UF 6.3V	1	
	C7704	F1H1A1050032	C 10UF, 50V	1	
	C7705	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7706	F1H1A1050032	C 10UF, 50V	1	
	C7708	F1H1A1050032	C 10UF, 50V	1	
	C7709	F1H1A225A051	C 22UF, 50V	1	
	C7710	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7711	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7712	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7713	F1H1H150A971	C 15PF, K, 50V	1	
	C7714	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7715	F1H1H220A971	C 22PF, K, 50V	1	
	C7716	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7717	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7718	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7719	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7720	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7721	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7724	F1H1H150A971	C 15PF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C7725	F1H1H150A971	C 15PF, K, 50V	1	
	C7729	F1H1H150A971	C 15PF, K, 50V	1	
	C7731	F1H1H150A971	C 15PF, K, 50V	1	
	C7732	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7733	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7736	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7737	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7738	F2G0G101A007	E 100UF 6.3V	1	
	C7742	F1J0J106A020	C 0.010UF, K, 16V	1	
	C8001	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8002	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8003	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8004	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8005	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8006	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8007	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8008	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8009	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8010	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8011	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8012	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8014	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8015	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8016	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8017	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8018	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8019	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8020	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8021	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8022	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8023	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8024	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8025	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8026	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8027	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8028	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8029	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8030	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8031	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8032	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8033	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8034	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8035	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8036	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8037	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8038	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8039	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8040	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8041	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8042	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8043	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8044	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8045	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8046	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8047	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8048	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8049	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8050	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8051	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8052	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8053	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8054	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8055	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8056	F1G1A104A012	C 0.01UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8057	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8058	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8059	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8060	FlH0J1050012	C 1UF, K, 16V	1	
	C8061	FlH0J1050012	C 1UF, K, 16V	1	
	C8062	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8070	FlH0J1050012	C 1UF, K, 16V	1	
	C8071	FlH0J1050012	C 1UF, K, 16V	1	
	C8072	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8073	FlH0J1050012	C 1UF, K, 16V	1	
	C8074	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8075	FlH0J1050012	C 1UF, K, 16V	1	
	C8076	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8077	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8078	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8079	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8080	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8081	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8082	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8083	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8084	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8085	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8101	FlG1H180A731	C 18UF, 50V	1	
	C8102	FlG1H7R0A732	C 7.0UF, 50V	1	
	C8103	FlH0J1050012	C 1UF, K, 16V	1	
	C8104	FlG1C1030008	C 0.010UF, K, 16V	1	
	C8105	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8106	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8107	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8201	FlG1A105A047	C 1UF, K, 10V	1	
	C8202	ECGMX0E101R	E 100UF, 10V	1	
	C8203	FlG1A105A047	C 1UF, K, 10V	1	
	C8204	FlG1A105A047	C 1UF, K, 10V	1	
	C8205	FlG1A105A047	C 1UF, K, 10V	1	
	C8206	FlG1A105A047	C 1UF, K, 10V	1	
	C8208	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8209	FlG1A105A047	C 1UF, K, 10V	1	
	C8210	FlG1A105A047	C 1UF, K, 10V	1	
	C8211	FlG1A105A047	C 1UF, K, 10V	1	
	C8212	FlG1A105A047	C 1UF, K, 10V	1	
	C8213	FlG1A105A047	C 1UF, K, 10V	1	
	C8214	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8215	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8216	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8217	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8218	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8219	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8220	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8221	FlG1A105A047	C 1UF, K, 10V	1	
	C8222	FlG1A105A047	C 1UF, K, 10V	1	
	C8223	FlG1A105A047	C 1UF, K, 10V	1	
	C8224	FlG1A105A047	C 1UF, K, 10V	1	
	C8225	FlG1A105A047	C 1UF, K, 10V	1	
	C8226	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8227	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8228	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8229	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8230	FlG1A105A047	C 1UF, K, 10V	1	
	C8231	ECGMX0E101R	E 100UF, 10V	1	
	C8232	FlG1A105A047	C 1UF, K, 10V	1	
	C8233	FlG1A105A047	C 1UF, K, 10V	1	
	C8234	FlG1A105A047	C 1UF, K, 10V	1	
	C8235	FlG1A105A047	C 1UF, K, 10V	1	
	C8306	FlG1H102A730	C 1000UF, 50V	1	B/E
	C8307	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8309	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8310	F2G0G101A007	E 100UF 6.3V	1	B/E
	C8311	FlG1H180A731	C 18UF, 50V	1	B/E
	C8312	FlG1H120A731	C 12UF, 50V	1	B/E
	C8313	FlG1E103A123	C 0.010UF, K, 16V	1	B/E

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8314	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8319	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8320	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8321	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8327	FlH1A1050032	C 10UF, 50V	1	B/E
	C8328	FlH1A1050032	C 10UF, 50V	1	B/E
	C8329	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8330	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8331	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8332	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8333	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8334	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8335	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8336	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8338	FlG1H220A731	C 22UF, 50V	1	B/E
	C8339	FlG1H220A731	C 22UF, 50V	1	B/E
	C8340	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8402	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8404	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8408	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8410	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8411	F2G1A101A019	E 100UF, 10V	1	B/E
	C8412	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8413	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8414	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8416	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8417	FlG1E103A123	C 0.010UF, K, 16V	1	B/E
	C8418	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8419	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8420	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8421	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8422	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8423	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8424	FlG1C104A116	C 0.10UF, K, 16V	1	B/E
	C8426	F2G1A101A019	E 100UF, 10V	1	B/E
	C8501	F2G0J470A019	E 47UF 6.3V	1	
	C8580	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8581	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8601	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8620	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8621	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8622	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8623	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8624	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8625	FlG1H5R0A732	C 5.0PF, K, 50V	1	
	C8626	FlG1H5R0A732	C 5.0PF, K, 50V	1	
	C8627	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8628	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8629	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8630	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8631	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8632	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8633	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8634	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8635	FlG1A104A012	C 0.01UF, K, 10V	1	
	C8637	F2G0J101A019	E 100UF 6.3V	1	
	C8638	FlH0J1050012	C 1UF, K, 16V	1	
	C8639	FlG1A104A012	C 0.01UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8640	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8641	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8642	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8643	ECUV1A335KBN	C 33UF 10V	1	
	C8644	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8645	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8646	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8647	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8648	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8649	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8650	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8651	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8652	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8653	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8654	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8851	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8852	F1G1H680A731	C 68UF, 50V	1	
	C8853	F1G1H680A731	C 68UF, 50V	1	
	C8854	F1G1H680A731	C 68UF, 50V	1	
	C8855	F1G1H680A731	C 68UF, 50V	1	
	C8856	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8951	F1G1C104A116	C 0.10UF, K, 16V	1	B/E
	C8952	ECJ3YB1E106M	C 10 UF, K, 25V	1	B/E
	C8953	F1J1A106A043	C 0.010UF, K, 10V	1	B/E
	C8954	F1G1C104A116	C 0.10UF, K, 16V	1	B/E
	C8955	F1G1C104A116	C 0.10UF, K, 16V	1	B/E
	C8956	ECJ3YB1E106M	C 10 UF, K, 25V	1	B/E
	C9001	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9033	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9034	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9035	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9036	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9037	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9055	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9056	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9057	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9058	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9064	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9065	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9066	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9067	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9068	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9069	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9096	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9097	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9098	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9103	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9106	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9107	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9109	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9110	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9111	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9113	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9115	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9116	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9119	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9120	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9121	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9122	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9123	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9124	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9125	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9126	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9127	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9128	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9129	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9130	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9131	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9132	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9133	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9135	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9136	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9138	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9139	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9140	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9142	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9143	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9144	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9145	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9146	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9147	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9148	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9149	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9150	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9152	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9153	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9154	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9155	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9156	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9157	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9158	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9159	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9160	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9161	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9162	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9163	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9164	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9165	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9168	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9169	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9170	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9171	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9172	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9173	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9174	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9175	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9176	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9177	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9178	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9179	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9180	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9181	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9182	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9183	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9184	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9185	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9186	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9187	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9188	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9189	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9190	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9191	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9192	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9193	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9194	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9195	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9196	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9198	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9199	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9200	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9201	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9202	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9203	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9204	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9205	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9206	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9207	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9208	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9209	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9210	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9211	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9212	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9213	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9214	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9215	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9216	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9217	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9218	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9219	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9220	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9221	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9222	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9223	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9224	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9226	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9227	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9228	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9230	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9231	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9232	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9233	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9234	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9235	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9236	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9237	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9239	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9240	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9241	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9242	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9243	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9244	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9245	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9246	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9247	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9248	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9249	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9250	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9303	FlJ1E105A171	C 1 UF 25V	1	
	C9304	FlJ1E105A171	C 1 UF 25V	1	
	C9305	FlJ1E105A171	C 1 UF 25V	1	
	C9306	FlJ1E105A171	C 1 UF 25V	1	
	C9307	FlJ1E105A171	C 1 UF 25V	1	
	C9308	FlJ1E105A171	C 1 UF 25V	1	
	C9309	FlJ1E105A171	C 1 UF 25V	1	
	C9310	FlJ1E105A171	C 1 UF 25V	1	
	C9313	FlH1A1050032	C 10UF, 50V	1	
	C9314	FlH1A1050032	C 10UF, 50V	1	
	C9317	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9318	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9319	ECJ1VB1H104K	C 0.1UF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9320	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9321	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9322	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9323	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9324	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9333	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9334	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9335	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9336	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9337	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9338	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9339	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9340	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9341	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9342	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9343	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9344	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9345	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9346	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9347	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9348	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9353	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9354	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9359	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9360	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9361	EEFGL1E471P	E 470UF, 25V	1	
	C9362	EEFGL1E471P	E 470UF, 25V	1	
	C9363	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9364	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9375	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9376	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9377	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9378	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9379	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9380	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9381	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9382	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9383	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9384	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9385	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9386	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9387	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9388	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9389	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9390	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9406	EEHBL1E470P	C 47PF, J, 25V	1	
	C9407	FlH1C104A143	C 0.1UF, K, 16V	1	
	C9408	FlJ1E105A171	C 1 UF 25V	1	
	C9469	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9535	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9536	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9537	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9538	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9539	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9540	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9541	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9542	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9543	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9544	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9545	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9546	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9547	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9548	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9549	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9550	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9551	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9552	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9553	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9823	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9825	FlG1H101A731	C 100PF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9832	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9837	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9840	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9841	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9842	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9844	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9845	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9846	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9858	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9859	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9860	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9861	F1H1E104A129	C 0.1UF, 25V	1	
	C9862	F1H1E104A129	C 0.1UF, 25V	1	
	C9863	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9864	F1H1E104A129	C 0.1UF, 25V	1	
	C9865	ECGRLOG680ER	C 68PF, J, 4V	1	
	C9866	ECGRLOG680ER	C 68PF, J, 4V	1	
	C9867	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9868	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9869	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9870	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9871	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9872	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9873	ECGRLOG680ER	C 68PF, J, 4V	1	
	C9874	F1G1H680A731	C 68UF, 50V	1	
	C9877	F1G1H680A731	C 68UF, 50V	1	
	C9878	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9879	F1G1C153A116	C 0.015UF, K, 16V	1	
	C9880	F1G1A563A032	C 0.56UF, 10V	1	
	C9881	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9882	F1G1C822A116	C 8200UF, K, 16V	1	
	C9883	F1G1H101A731	C 100PF, K, 50V	1	
	C9884	F1G1H102A730	C 1000UF, 50V	1	
	C9885	F1G1H102A730	C 1000UF, 50V	1	
	C9886	F1H1E104A129	C 0.1UF, 25V	1	
	C9887	F1H1E104A129	C 0.1UF, 25V	1	
	C9888	F1G1H361A731	C 360UF, 50V	1	
	C9927	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9928	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9929	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9930	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9931	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9932	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9933	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9934	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9935	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9936	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9937	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9938	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9939	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9940	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9941	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9942	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9943	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9944	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9945	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9946	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9947	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9948	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9951	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9961	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9966	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9971	F1G1H180A731	C 18UF, 50V	1	
	C9972	F1G1H150A731	C 15UF, 50V	1	
	D3	K1KA14B00129	14P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D5	K1KB31BA0064	31P CONNECTOR	1	
	D6	K1KA20AA0009	20P CONNECTOR	1	
	D20	K1MN35BA0266	35P CONNECTOR	1	
	D25	K1KA13B00069	13P CONNECTOR	1	
	D31	K1MN68BA0266	68P CONNECTOR	1	
	D32	K1MN68BA0266	68P CONNECTOR	1	
	D33	K1MN68BA0266	68P CONNECTOR	1	
	D34	K1MN68BA0266	68P CONNECTOR	1	
	D35	K1MN68BA0266	68P CONNECTOR	1	
	D36	K1MN68BA0266	68P CONNECTOR	1	
	D853	MA2J11100L	DIODE	1	
	D855	MA2J11100L	DIODE	1	
	D856	MA2J11100L	DIODE	1	
	D857	MA2J11100L	DIODE	1	
	D859	B0JCME000037	DIODE	1	
	D860	MAZ81100ML	ZENER DIODE	1	
	D861	MA2J11100L	DIODE	1	
	D862	MAZ80330LL	ZENER DIODE	1	
	D1107	MA3X704A0L	ZENER DIODE	1	
	D1112	MA2J72800L	ZENER DIODE	1	
	D2004	MA2J11100L	DIODE	1	
	D2005	MA2J11100L	DIODE	1	
	D2006	MA2J11100L	DIODE	1	
	D2007	MA2J11100L	DIODE	1	
	D2009	MA2J11100L	DIODE	1	
	D2010	MA2J11100L	DIODE	1	
	D2013	MA2J11100L	DIODE	1	
	D2020	MA3X78900L	ZENER DIODE	1	
	D2024	B0BC03900015	ZENER DIODE	1	
	D2201	MA3X704A0L	ZENER DIODE	1	
	D2300	MA2J11100L	DIODE	1	
	D2301	B0HCMM000014	DIODE	1	
	D2302	B0HCMM000014	DIODE	1	
	D2512	MAZ80560ML	ZENER DIODE	1	
	D2520	LNJ107W5PRW	LED	1	
	D2524	MAZ80560ML	ZENER DIODE	1	
	D2526	MAZ80560ML	ZENER DIODE	1	B/E
	D2530	MAZ80560ML	ZENER DIODE	1	
	D3057	B0BC01100001	ZENER DIODE	1	
	D3068	MAZ81400ML	ZENER DIODE	1	
	D3069	MAZ81400ML	ZENER DIODE	1	
	D3077	MAZ81400ML	ZENER DIODE	1	
	D3078	MAZ81400ML	ZENER DIODE	1	
	D3082	B0BC01100001	ZENER DIODE	1	
	D3095	MA3X704A0L	ZENER DIODE	1	
	D3096	MA3X704A0L	ZENER DIODE	1	
	D3702	MAZ81400ML	ZENER DIODE	1	
	D3703	MAZ81400ML	ZENER DIODE	1	
	D3704	MAZ81400ML	ZENER DIODE	1	
	D3705	MAZ81400ML	ZENER DIODE	1	
	D3706	MAZ81400ML	ZENER DIODE	1	
	D3801	EZAEG2A50AX	DIODE	1	
	D3802	EZAEG2A50AX	DIODE	1	
	D3803	EZAEG2A50AX	DIODE	1	
	D3804	EZAEG2A50AX	DIODE	1	
	D3805	EZAEG2A50AX	DIODE	1	
	D3806	EZAEG2A50AX	DIODE	1	
	D3807	EZJZ0V80008B	VARISTOR	1	
	D3808	EZJZ0V80008B	VARISTOR	1	
	D3809	EZAEG2A50AX	DIODE	1	
	D3810	EZAEG2A50AX	DIODE	1	
	D3811	EZJZ0V80008B	VARISTOR	1	
	D3813	B0HCMM000014	DIODE	1	
	D3814	B0HCMM000014	DIODE	1	
	D3815	EZJZ0V120JA	VARISTOR	1	
	D4502	EZAEG2A50AX	DIODE	1	
	D4503	EZAEG2A50AX	DIODE	1	
	D4504	EZAEG2A50AX	DIODE	1	
	D4505	EZAEG2A50AX	DIODE	1	
	D4506	EZAEG2A50AX	DIODE	1	
	D4507	EZAEG2A50AX	DIODE	1	
	D4508	EZAEG2A50AX	DIODE	1	
	D4509	EZAEG2A50AX	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D4510	EZAEG2A50AX	DIODE	1	
	D4511	EZAEG2A50AX	DIODE	1	
	D4512	EZAEG2A50AX	DIODE	1	
	D4513	B0BC5R6A0275	DIODE	1	
	D4514	EZAEG2A50AX	DIODE	1	
	D4515	B0BC5R6A0275	DIODE	1	
	D4516	EZAEG2A50AX	DIODE	1	
	D4517	EZAEG2A50AX	DIODE	1	
	D4518	EZAEG2A50AX	DIODE	1	
	D4519	EZAEG2A50AX	DIODE	1	
	D4520	EZAEG2A50AX	DIODE	1	
	D4521	EZAEG2A50AX	DIODE	1	
	D4522	EZAEG2A50AX	DIODE	1	
	D4523	EZAEG2A50AX	DIODE	1	
	D4541	MA2J11100L	DIODE	1	
	D4542	MA2J11100L	DIODE	1	
	D4544	EZAEG2A50AX	DIODE	1	
	D4545	EZAEG2A50AX	DIODE	1	
	D4546	EZAEG2A50AX	DIODE	1	
	D4547	EZAEG2A50AX	DIODE	1	
	D4548	EZAEG2A50AX	DIODE	1	
	D4549	EZAEG2A50AX	DIODE	1	
	D4550	B0BC5R6A0275	DIODE	1	
	D4551	EZAEG2A50AX	DIODE	1	
	D4552	EZAEG2A50AX	DIODE	1	
	D4553	EZAEG2A50AX	DIODE	1	
	D4554	EZAEG2A50AX	DIODE	1	
	D4560	MA2J11100L	DIODE	1	
	D4561	MA2J11100L	DIODE	1	
	D4562	MA2J11100L	DIODE	1	
	D4563	MA2J11100L	DIODE	1	
	D4564	MA2J11100L	DIODE	1	
	D4565	MA2J11100L	DIODE	1	
	D4566	B0HCMM000014	DIODE	1	
	D5201	MA2J72800L	ZENER DIODE	1	
	D5301	MA22D3900L	DIODE	1	
	D5302	MA22D3900L	DIODE	1	
	D5303	B0JCDD000002	DIODE	1	
	D5304	B0JCDD000002	DIODE	1	
	D5307	B0BC4R000002	ZENER DIODE	1	
	D5308	B0BC4R000002	ZENER DIODE	1	
	D5406	B0JCME000037	DIODE	1	
	D5407	B0BC4R700007	ZENER DIODE	1	
	D5408	B0BC4R700007	ZENER DIODE	1	
	D5409	B0JCME000037	DIODE	1	
	D5410	B0BC4R700007	ZENER DIODE	1	
	D5411	B0BC4R700007	ZENER DIODE	1	
	D5502	B0BC01000035	ZENER DIODE	1	
	D5503	B0BC01100001	ZENER DIODE	1	
	D5504	B0BC6R600005	ZENER DIODE	1	
	D5521	B0ADEJ000035	ZENER DIODE	1	
	D5522	B0ADEJ000035	ZENER DIODE	1	
	D5574	B0BC3R700006	ZENER DIODE	1	
	D5575	B0BC3R700006	ZENER DIODE	1	
	D5576	MA3X152E0L	ZENER DIODE	1	
	D5577	MAZ80680LL	ZENER DIODE	1	
	D5578	MA8120M	ZENER DIODE	1	
	D5579	MAZ80680LL	ZENER DIODE	1	
	D5580	MA2J11100L	DIODE	1	
	D5600	B0BC4R700007	ZENER DIODE	1	
	D5601	MA22D3900L	DIODE	1	
	D5602	MA22D3900L	DIODE	1	
	D5603	B0JCDD000002	DIODE	1	
	D5604	B0JCDD000002	DIODE	1	
	D5605	MA22D3900L	DIODE	1	
	D5606	B0JCDD000002	DIODE	1	
	D5607	B0BC4R700007	ZENER DIODE	1	
	D5608	B0BC4R700007	ZENER DIODE	1	
	D5691	B0BC6R600005	ZENER DIODE	1	
	D5692	MAZ80560LL	ZENER DIODE	1	
	D7800	B3AEB0000107	LED	1	
	D8901	MA2J72800L	ZENER DIODE	1	
	D8952	MA2J72800L	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D9002	K7AAAY000003	PHOTO LINK	1	
	D9014	MA2J11100L	DIODE	1	
	D9017	MA2J11100L	DIODE	1	
	D9021	B0JCCE000008	DIODE	1	
	D9022	B0JCCE000008	DIODE	1	
	D9023	B0JCCE000008	DIODE	1	
	D9024	B0JCCE000008	DIODE	1	
	D9025	B0JCCE000008	DIODE	1	
	D9026	B0JCCE000008	DIODE	1	
	D9027	B0BC3R3A0273	ZENER DIODE	1	
	D9028	B0BC3R3A0273	ZENER DIODE	1	
	D9029	B0BC3R3A0273	ZENER DIODE	1	
	D9110	B0JCGD000002	DIODE	1	
	D9807	B0JCCE000008	DIODE	1	
	D9808	B0JCCE000008	DIODE	1	
	D9812	MA22D3900L	DIODE	1	
	D9813	B0JCGD000002	DIODE	1	
	D9814	B0JCGD000002	DIODE	1	
	D9815	B0JCGD000002	DIODE	1	
	D9816	MA22D3900L	DIODE	1	
	D9817	MA22D3900L	DIODE	1	
	D2525B	LN1471YTR	LED	1	B/E
	FL3710	J0ZZA0000091	FILTER	1	
	FL3711	J0ZZA0000091	FILTER	1	
	FL3712	J0ZZA0000091	FILTER	1	
	FL3713	J0ZZA0000091	FILTER	1	
	FL3714	J0ZZA0000091	FILTER	1	
	FL4206	ECJ1VB0J474K	C 0.47UF, K, 6.3V	1	
	FL5015	J0JAD0000028	CHIP INDUCTOR	1	
	FL5016	J0JAD0000028	CHIP INDUCTOR	1	
	FL5017	J0JAD0000028	CHIP INDUCTOR	1	
	FL5018	J0JAD0000028	CHIP INDUCTOR	1	
	FL5019	J0JAD0000028	CHIP INDUCTOR	1	
	FL5020	J0JAD0000028	CHIP INDUCTOR	1	
	FL5731	J0HABH000013	LC FILTER	1	
	FL5732	J0HABH000013	LC FILTER	1	
	FL5733	J0HABH000013	LC FILTER	1	
	FL5734	J0HABH000013	LC FILTER	1	
	FL9001	J0HABB000003	LC FILTER	1	
	FL9002	J0HABB000003	LC FILTER	1	
	FL9003	J0HABB000004	LC FILTER	1	
	FL9004	J0HABB000004	LC FILTER	1	
	FL9005	J0HABB000004	LC FILTER	1	
	FL9803	FLJ1E104A148	C 0.10UF, Z, 25V	1	
	FL9805	FLJ1E104A148	C 0.10UF, Z, 25V	1	
	FL9806	FLJ1E104A148	C 0.10UF, Z, 25V	1	
	G51	K1KY16BA0192	16P CONNECTOR	1	
	GH10	K1FY121E0001	CONNECTOR	1	
	GH11	K1KA30AA0009	30P CONNECTOR	1	
	GL02	K1KA02B00294	2P CONNECTOR	1	
	GS02	K1KA02A00787	2P CONNECTOR	1	
	GS09	K1KA06A00508	6P CONNECTOR	1	
	H11	K1KA05AA0190	5P CONNECTOR	1	
	H12	K1KA04AA0190	4P CONNECTOR	1	
	HC12	K1KY15AA0606	15P CONNECTOR	1	
	HC13	K1KY23AA0606	23P CONNECTOR	1	
	HC14	K1KY23AA0606	23P CONNECTOR	1	
	HC15	K1KA11AA0715	11P CONNECTOR	1	
	HC16	K1KA20AA0009	20P CONNECTOR	1	
	IC850	C0DBAZF00003	IC	1	
	IC1100	MN103SG3FPA1	IC	1	
	IC1101	TVP987-2	IC	1	PAVCCZ
	IC2008	C0CBCBE00001	IC	1	
	IC2012	C1BB00000947	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC2013	C0DBGYY00281	IC	1	
	IC2106	C1AB00002909	IC	1	
	IC2107	C0DBFFD00003	IC	1	
	IC2109	C0DBGHF00001	IC	1	
	IC2110	C0DBGHF00001	IC	1	
	IC2403	C1AB00002877	IC	1	
	IC2602	C3ABRY000037	IC	1	
	IC2603	C0DBEFH00002	IC	1	
	IC2604	C1AB00002930	IC	1	
	IC3007	AN15876A-VT	IC	1	
	IC3009	AN15862A-VT	IC	1	
	IC3801	C1AB00002835	IC	1	
	IC3802	TVRQ130	IC	1	
	IC4001	C1AB00002687	IC	1	
	IC4002	C0CBCAC00358	IC	1	
	IC4005	C0CBCBC00227	IC	1	
	IC4013	C0JBAZ002060	IC	1	
	IC4200	C1AB00002886	IC	1	
	IC4502	C0JBAU000034	IC	1	
	IC4503	C1AB00002929	IC	1	
	IC4504	C0JBAU000034	IC	1	
	IC4510	C1AB00002966	IC	1	
	IC4511	C0CBCBE00001	IC	1	
	IC4512	C0DBGYY00477	IC	1	
	IC4513	C0DBGYY00477	IC	1	
	IC4516	TVRQ215	IC	1	
	IC5001	C3ABRY000015	IC	1	
	IC5002	C3ABRY000015	IC	1	
	IC5100	MN84527	IC	1	
	IC5300	C0CBCBD00062	IC	1	
	IC5301	C0DBAYY00274	IC	1	
	IC5402	C0DBAYY00183	IC	1	
	IC5403	C0DBAYY00183	IC	1	
	IC5404	C0DBEHG00006	IC	1	
	IC5405	C0DBGYY00204	IC	1	
	IC5501	EHMDD9851	LINEAR IC	1	
	IC5562	C0CBCAC00282	IC	1	
	IC5563	C0CBCAF00032	IC	1	
	IC5600	C0DBAYY00273	IC	1	
	IC5601	C0DBAYY00274	IC	1	
	IC5660	C0EBM0000026	IC	1	
	IC7700	TVRP965	IC	1	
	IC7701	C0DBEHG00006	IC	1	
	IC7702	C1CB00002668	IC	1	
	IC8001	MN2WS0031CTY	IC	1	
	IC8101	C0ZBZ0001567	IC	1	
	IC8201	C3ABSY000010	IC	1	
	IC8202	C3ABSY000010	IC	1	
	IC8203	C3ABRY000015	IC	1	
	IC8204	C3ABRY000015	IC	1	
	IC8301	C1AB00002710	IC	1	B/E
	IC8302	C0DBGFD00004	IC	1	B/E
	IC8401	C0JBAZ002800	IC	1	B/E
	IC8402	C1ZBZ0003811	IC	1	PAVCCZ B/E
	IC8403	C0ZBZ0001584	IC	1	PAVCCZ B/E
	IC8406	C0JBAZ002684	IC	1	PAVCCZ B/E
	IC8407	C0JBAZ002684	IC	1	PAVCCZ B/E
	IC8408	C0JBAE000354	IC	1	B/E
	IC8580	TVRQ048-4	IC	1	PAVCCZ
	IC8601	TVRQ100-2	IC	1	PAVCCZ B/E
	IC8601	TVRQ102-1	IC	1	PAVCCZ P
	IC8620	C1CB00002607	IC	1	
	IC8621	C0DBZYY00266	IC	1	
	IC8950	C0DBEJG00001	IC	1	B/E
	IC9001	C1AB00002875	IC	1	(HC)
	IC9001	TVRQ059	IC	1	PAVCCZ (D)
	IC9002	C1AB00002875	IC	1	(HC)

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC9002	C1ZBZ0003577	IC	1	(D)
	IC9003	C1ZBZ0003775	IC	1	(HC)
	IC9003	MN103SG4GPF3	IC	1	(D)
	IC9011	C0EBF0000431	IC	1	
	IC9013	C0JBAZ002060	IC	1	
	IC9016	C0JBAZ001120	IC	1	
	IC9017	C0JBAZ001120	IC	1	
	IC9018	C0JBAZ001120	IC	1	
	IC9019	C0JBAZ001120	IC	1	
	IC9300	MN84526	IC	1	
	IC9301	C3ABQJ000055	IC	1	
	IC9303	TVRQ069	IC	1	PAVCCZ
	IC9400	MN84526	IC	1	
	IC9401	C3ABQJ000055	IC	1	
	IC9500	C1ZBZ0003760	IC	1	
	IC9802	C0JBAZ001120	IC	1	
	IC9803	C0JBAZ001120	IC	1	
	IC9805	C0DBAYY00274	IC	1	
	IC9806	C0DBAYY00273	IC	1	
	JA3701	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3702	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3703	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3704	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3751	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3752	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3753	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3754	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JK3002A	K1FY121A0006	CONNECTOR	1	PAVCCZ
	JK3003A	K1FY121A0006	CONNECTOR	1	PAVCCZ
	JK3100A	K2HA7YYA0001	JACK	1	PAVCCZ
	JK3701	K4AK18B00007	TERMINAL	1	
	JK4500	K1FY119D0003	CONNECTOR	1	
	JK4501	K1FY119D0003	CONNECTOR	1	
	JK4502	K1FY119D0003	CONNECTOR	1	
	JK7702	K1NA09E00080	9P CONNECTOR	1	
	JK8401	K1NA68B00051	68P CONNECTOR	1	PAVCCZ B/E
	JK9001	K1FB315A0006	CONNECTOR	1	
	JS851	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS852	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS1100	D0YAR0000007	M 0 OHM 1/4W	1	
	JS1102	D0YAR0000007	M 0 OHM 1/4W	1	B
	JS1103	D0YAR0000007	M 0 OHM 1/4W	1	P
	JS1106	D0YAR0000007	M 0 OHM 1/4W	1	E
	JS2059	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2060	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2061	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2320	D0YAR0000007	M 0 OHM 1/4W	1	
	JS3039	D0YAR0000007	M 0 OHM 1/4W	1	
	JS3704	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3705	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3707	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3708	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS4002	D0YAR0000007	M 0 OHM 1/4W	1	
	JS7700	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9323	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9324	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9325	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9326	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	K1	K1KY12B00001	12P CONNECTOR	1	
	L852	G0C150MA0056	PEAKING COIL	1	
	L1100	J0JYC0000068	CHIP INDUCTOR	1	
	L2001	G1C150KA0038	INDUCTION COIL	1	
	L2005	J0JCC0000284	CHIP INDUCTOR	1	
	L2006	J0JCC0000284	CHIP INDUCTOR	1	
	L2021	G1C470MA0291	INDUCTION COIL	1	
	L2022	G1C100MA0072	INDUCTION COIL	1	
	L2025	J0JCC0000059	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L2026	J0JCC0000059	CHIP INDUCTOR	1	
	L2029	J0JCC0000059	CHIP INDUCTOR	1	
	L2030	J0JYC0000068	CHIP INDUCTOR	1	
	L2031	J0JYC0000068	CHIP INDUCTOR	1	
	L2032	J0JYC0000068	CHIP INDUCTOR	1	
	L2036	J0JYC0000068	CHIP INDUCTOR	1	
	L2300	J0JYC0000068	CHIP INDUCTOR	1	
	L3032	J0JCC0000100	CHIP INDUCTOR	1	
	L3033	J0JCC0000100	CHIP INDUCTOR	1	
	L3034	J0JCC0000100	CHIP INDUCTOR	1	
	L3035	J0JCC0000100	CHIP INDUCTOR	1	
	L3036	J0JCC0000100	CHIP INDUCTOR	1	
	L3037	J0JCC0000100	CHIP INDUCTOR	1	
	L3038	J0JCC0000100	CHIP INDUCTOR	1	
	L3039	J0JCC0000100	CHIP INDUCTOR	1	
	L3040	J0JCC0000100	CHIP INDUCTOR	1	
	L3041	J0JCC0000100	CHIP INDUCTOR	1	
	L3042	J0JCC0000100	CHIP INDUCTOR	1	
	L3043	J0JCC0000100	CHIP INDUCTOR	1	
	L3044	J0JCC0000100	CHIP INDUCTOR	1	
	L3045	J0JCC0000100	CHIP INDUCTOR	1	
⚠	L3049	G1C101M00018	INDUCTION COIL	1	
⚠	L3050	G1C101M00018	INDUCTION COIL	1	
	L3700	J0JCC0000364	CHIP INDUCTOR	1	
	L3701	J0JCC0000364	CHIP INDUCTOR	1	
	L3707	J0JCC0000100	CHIP INDUCTOR	1	
	L3708	J0JCC0000100	CHIP INDUCTOR	1	
	L3801	J0JHC0000078	CHIP INDUCTOR	1	
	L3804	J0JHC0000078	CHIP INDUCTOR	1	
	L3805	J0JHC0000078	CHIP INDUCTOR	1	
	L4002	J0JHC0000045	CHIP INDUCTOR	1	
	L4004	J0JYC0000068	CHIP INDUCTOR	1	
	L4006	J0JHC0000045	CHIP INDUCTOR	1	
	L4008	J0JYC0000068	CHIP INDUCTOR	1	
	L4009	J0JYC0000068	CHIP INDUCTOR	1	
	L4212	J0JYC0000068	CHIP INDUCTOR	1	
	L4216	J0JYC0000068	CHIP INDUCTOR	1	
	L4217	J0JYC0000068	CHIP INDUCTOR	1	
	L4219	J0JYC0000068	CHIP INDUCTOR	1	
	L4220	J0JYC0000068	CHIP INDUCTOR	1	
	L4502	J0JYC0000068	CHIP INDUCTOR	1	
	L4503	J0JYC0000068	CHIP INDUCTOR	1	
	L4504	J0JYC0000068	CHIP INDUCTOR	1	
	L4505	J0JYC0000068	CHIP INDUCTOR	1	
	L4506	J0JYC0000068	CHIP INDUCTOR	1	
	L4507	J0JYC0000068	CHIP INDUCTOR	1	
	L4508	J0JYC0000068	CHIP INDUCTOR	1	
	L4511	J0JYC0000068	CHIP INDUCTOR	1	
	L4512	J0JYC0000068	CHIP INDUCTOR	1	
	L4513	J0JYC0000068	CHIP INDUCTOR	1	
	L4514	J0JYC0000068	CHIP INDUCTOR	1	
	L4515	J0JYC0000068	CHIP INDUCTOR	1	
	L4516	J0JYC0000068	CHIP INDUCTOR	1	
	L4517	J0JYC0000068	CHIP INDUCTOR	1	
	L4518	J0JYC0000068	CHIP INDUCTOR	1	
	L4519	J0JYC0000068	CHIP INDUCTOR	1	
	L4521	J0JYC0000068	CHIP INDUCTOR	1	
	L4522	J0JYC0000068	CHIP INDUCTOR	1	
	L4523	J0JYC0000068	CHIP INDUCTOR	1	
	L5001	J0JHC0000045	CHIP INDUCTOR	1	
	L5002	J0JHC0000045	CHIP INDUCTOR	1	
	L5004	J0JHC0000045	CHIP INDUCTOR	1	
	L5005	J0JHC0000045	CHIP INDUCTOR	1	
	L5006	J0JHC0000045	CHIP INDUCTOR	1	
	L5300	G1C2R2Z00007	INDUCTION COIL	1	
	L5301	G1C2R2Z00007	INDUCTION COIL	1	
	L5302	J0JYC0000068	CHIP INDUCTOR	1	
	L5304	G1C100MA0203	INDUCTION COIL	1	
	L5305	J0JHC0000075	CHIP INDUCTOR	1	
	L5407	G1C330M00027	INDUCTION COIL	1	
	L5409	G1C100MA0291	INDUCTION COIL	1	
	L5410	G1C330M00027	INDUCTION COIL	1	
	L5412	J0JYC0000068	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L5414	G1C100MA0291	INDUCTION COIL	1	
	L5415	J0JYC0000068	CHIP INDUCTOR	1	
	L5501	G0A2R7HA0011	CHOKE COIL	1	
	L5502	G0C150MA0056	PEAKING COIL	1	
	L5503	G0C330MA0056	PEAKING COIL	1	
	L5504	G0A2R7HA0011	CHOKE COIL	1	
	L5505	G0A2R7HA0011	CHOKE COIL	1	
	L5600	G1C3R9Z00003	INDUCTION COIL	1	
	L5601	G1C3R9Z00003	INDUCTION COIL	1	
	L5602	G1C2R2Z00007	INDUCTION COIL	1	
	L5604	G1C100MA0203	INDUCTION COIL	1	
	L5605	J0JHC0000075	CHIP INDUCTOR	1	
	L5606	G1C100MA0203	INDUCTION COIL	1	
	L5610	J0JHC0000035	CHIP INDUCTOR	1	
	L5611	J0JHC0000035	CHIP INDUCTOR	1	
	L5690	J0JYC0000068	CHIP INDUCTOR	1	
	L5691	J0JYC0000068	CHIP INDUCTOR	1	
	L5735	J0JYC0000068	CHIP INDUCTOR	1	
	L7704	J0JHC0000045	CHIP INDUCTOR	1	
	L7705	J0JHC0000045	CHIP INDUCTOR	1	
	L8030	J0JHC0000045	CHIP INDUCTOR	1	
	L8031	J0JHC0000045	CHIP INDUCTOR	1	
	L8032	J0JHC0000045	CHIP INDUCTOR	1	
	L8034	J0JHC0000045	CHIP INDUCTOR	1	
	L8035	J0JHC0000045	CHIP INDUCTOR	1	
	L8036	J0JHC0000045	CHIP INDUCTOR	1	
	L8101	J0JHC0000045	CHIP INDUCTOR	1	
	L8201	J0JHC0000045	CHIP INDUCTOR	1	
	L8301	J0JHC0000045	CHIP INDUCTOR	1	B/E
	L8304	J0JHC0000045	CHIP INDUCTOR	1	B/E
	L8401	J0JHC0000075	CHIP INDUCTOR	1	B/E
	L8501	J0JHC0000045	CHIP INDUCTOR	1	
	L8580	J0JHC0000075	CHIP INDUCTOR	1	
	L8620	J0JHC0000045	CHIP INDUCTOR	1	
	L8621	J0JHC0000045	CHIP INDUCTOR	1	
	L8623	J0JHC0000045	CHIP INDUCTOR	1	
	L8950	J0JYC0000068	CHIP INDUCTOR	1	B/E
	L9000	J0JHC0000078	CHIP INDUCTOR	1	
	L9001	J0JHC0000078	CHIP INDUCTOR	1	
	L9002	J0JHC0000078	CHIP INDUCTOR	1	
	L9003	J0JHC0000078	CHIP INDUCTOR	1	
	L9004	J0JHC0000078	CHIP INDUCTOR	1	
	L9005	J0JHC0000078	CHIP INDUCTOR	1	
	L9006	J0JHC0000078	CHIP INDUCTOR	1	
	L9007	J0JHC0000078	CHIP INDUCTOR	1	
	L9010	G1C220MA0291	INDUCTION COIL	1	
	L9011	G1C220MA0291	INDUCTION COIL	1	
	L9012	G1C220MA0291	INDUCTION COIL	1	
	L9013	G1C220MA0291	INDUCTION COIL	1	
	L9014	G1C220MA0291	INDUCTION COIL	1	
	L9015	G1C220MA0291	INDUCTION COIL	1	
	L9016	G1C220MA0291	INDUCTION COIL	1	
	L9017	G1C220MA0291	INDUCTION COIL	1	
	L9018	J0JHC0000042	CHIP INDUCTOR	1	
	L9019	J0JHC0000042	CHIP INDUCTOR	1	
	L9023	G1C3R0ZA0156	INDUCTION COIL	1	
	L9800	G1C2R2Z00007	INDUCTION COIL	1	
	L9801	G1C1R5Z00006	INDUCTION COIL	1	
	L9802	G1C2R2Z00007	INDUCTION COIL	1	
	PA5	K1KA12AA0194	12P CONNECTOR	1	
	PA6	K1KA20AA0009	20P CONNECTOR	1	
	PA8	K1KA06A00452	6P CONNECTOR	1	
	PA33	K1KA04AA0192	4P CONNECTOR	1	
	PA35	K1KA03AA0192	3P CONNECTOR	1	
	PA36	K1KA04AA0192	4P CONNECTOR	1	
	PA37	K1KA03AA0192	3P CONNECTOR	1	
⚠	PA5200	K5H5022A0023	FUSE	1	
	PA5400	K5H5022A0023	FUSE	1	
⚠	PA5402	K5H1022A0031	FUSE	1	
⚠	PA5403	K5H1022A0031	FUSE	1	
⚠	PA5600	K5H5022A0023	FUSE	1	
	PA9800	K5H4022A0031	FUSE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	PA9900	K5H5022A0031	FUSE	1	
	PC2511	B3JB00000046	IC	1	
⚠	PCB	A-65PZ800B	CIRCUIT BOARD A	1	PAVCCZ B
⚠	PCB	A-65PZ800E	CIRCUIT BOARD A	1	PAVCCZ E
⚠	PCB	A-65PY800P	CIRCUIT BOARD A	1	PAVCCZ P
⚠	PCB	TXNHC1RHTB	CIRCUIT BOARD HC	1	
⚠	PCB	TZTNP01RATB	CIRCUIT BOARD D	1	PAVCCZ
⚠	PCB	TXNPA1RHTB	CIRCUIT BOARD PA	1	PAVCCZ
⚠	PCB	TNPA4535AB	CIRCUIT BOARD S	1	
⚠	PCB	TXN/G1RHTB	CIRCUIT BOARD G	1	PAVCCZ
⚠	PCB	TXNGH1RHTB	CIRCUIT BOARD GH	1	PAVCCZ
⚠	PCB	TXNGS1RHTB	CIRCUIT BOARD GS	1	PAVCCZ
⚠	PCB	TXN/K1RHTB	CIRCUIT BOARD K	1	PAVCCZ B/E
⚠	PCB	TXN/K1RHTB	CIRCUIT BOARD K	1	PAVCCZ P
⚠	PCB	TXNGL1RHTB	CIRCUIT BOARD GL	1	PAVCCZ
	Q2001	2SD0601ARL	TRANSISTOR	1	
	Q2022	2SB0709ARL	TRANSISTOR	1	
	Q2027	B1CFNG000001	FET	1	
	Q2028	B1CBHD000002	FET	1	
	Q2029	B1CBHD000002	FET	1	
	Q2030	2SB0709ARL	TRANSISTOR	1	
	Q2033	2SB0709ARL	TRANSISTOR	1	
	Q2510	2SD0601ARL	TRANSISTOR	1	
	Q2511	2SD0601ARL	TRANSISTOR	1	
	Q2513	2SD0601ARL	TRANSISTOR	1	
	Q2519	2SD0601ARL	TRANSISTOR	1	B/E
	Q3022	2SD0601ARL	TRANSISTOR	1	
	Q3023	2SD0601ARL	TRANSISTOR	1	
	Q3024	2SD0601ARL	TRANSISTOR	1	
	Q3025	2SD0601ARL	TRANSISTOR	1	
	Q3026	2SD0601ARL	TRANSISTOR	1	
	Q3027	2SD0601ARL	TRANSISTOR	1	
	Q3028	2SB0709ARL	TRANSISTOR	1	
	Q3029	2SB0709ARL	TRANSISTOR	1	
	Q3801	2SD0601ARL	TRANSISTOR	1	
	Q3802	2SD0601ARL	TRANSISTOR	1	
	Q3804	2SD0601ARL	TRANSISTOR	1	
	Q4000	2SA207700L	TRANSISTOR	1	
	Q4001	2SA207700L	TRANSISTOR	1	
	Q4002	2SA207700L	TRANSISTOR	1	
	Q4017	2SD0601ASL	TRANSISTOR	1	
	Q4500	2SD0601ASL	TRANSISTOR	1	
	Q4501	2SD0601ASL	TRANSISTOR	1	
	Q4502	2SD0601ARL	TRANSISTOR	1	
	Q4503	2SD0601ARL	TRANSISTOR	1	
	Q4514	2SB0709ARL	TRANSISTOR	1	
	Q4515	2SB0709ARL	TRANSISTOR	1	
	Q4516	2SB0709ARL	TRANSISTOR	1	
	Q4517	2SB0709ARL	TRANSISTOR	1	
	Q4519	2SB0709ARL	TRANSISTOR	1	
	Q4520	2SD0601ARL	TRANSISTOR	1	
	Q4522	2SD0601ARL	TRANSISTOR	1	
	Q4523	2SD0601ASL	TRANSISTOR	1	
	Q4524	2SD0601ASL	TRANSISTOR	1	
	Q4528	2SB0709ARL	TRANSISTOR	1	
	Q4529	2SB0709ARL	TRANSISTOR	1	
	Q4530	2SB0709ARL	TRANSISTOR	1	
	Q4531	2SB0709ARL	TRANSISTOR	1	
	Q4801	2SD0601ASL	TRANSISTOR	1	
	Q4802	2SD0601ASL	TRANSISTOR	1	
	Q4803	2SD0601ASL	TRANSISTOR	1	
	Q4831	2SD0601ASL	TRANSISTOR	1	
	Q4832	2SD0601ASL	TRANSISTOR	1	
	Q5301	B1MBEDA00015	FET	1	
	Q5302	B1MBEDA00015	FET	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q5501	2SD0601ASL	TRANSISTOR	1	
	Q5522	2SB0709ARL	TRANSISTOR	1	
	Q5531	2SD0601ARL	TRANSISTOR	1	
	Q5532	2SD0601ARL	TRANSISTOR	1	
	Q5533	2SD0601ARL	TRANSISTOR	1	
	Q5534	2SD0601ARL	TRANSISTOR	1	
	Q5561	B1DHDC000028	FET	1	
	Q5562	2SD0601ARL	TRANSISTOR	1	
	Q5563	2SD0601ARL	TRANSISTOR	1	
	Q5564	2SD0601ARL	TRANSISTOR	1	
	Q5565	2SD0601ASL	TRANSISTOR	1	
	Q5600	B1MBEDA00015	FET	1	
	Q5601	B1MBDDA00003	FET	1	
	Q5602	B1MBDDA00003	FET	1	
	Q5603	2SD0601ARL	TRANSISTOR	1	
	Q5604	2SD0601ARL	TRANSISTOR	1	
	Q5691	2SD0601ARL	TRANSISTOR	1	
	Q5693	B1DHDC000028	FET	1	
	Q7700	2SB0709ARL	TRANSISTOR	1	
	Q7701	2SD0601ARL	TRANSISTOR	1	
	Q8401	2SD0601ASL	TRANSISTOR	1	B/E
	Q8402	2SD0601ASL	TRANSISTOR	1	B/E
	Q8850	2SD0601ARL	TRANSISTOR	1	
	Q8852	2SD0601ARL	TRANSISTOR	1	
	Q8853	2SD0601ASL	TRANSISTOR	1	
	Q9010	2SD0601ARL	TRANSISTOR	1	
	Q9055	2SD0601ARL	TRANSISTOR	1	
	Q9056	2SD0601ARL	TRANSISTOR	1	
	Q9057	2SD0601ARL	TRANSISTOR	1	
	Q9058	2SD0601ARL	TRANSISTOR	1	
	Q9059	2SD0601ARL	TRANSISTOR	1	
	Q9060	2SD0601ARL	TRANSISTOR	1	
	Q9061	2SD0601ARL	TRANSISTOR	1	
	Q9805	2SD0601ARL	TRANSISTOR	1	
	Q9806	2SD0601ARL	TRANSISTOR	1	
	Q9807	B1MBDDA00003	FET	1	
	Q9808	B1MBDDA00015	FET	1	
	Q9809	B1MBDDA00003	FET	1	
	R853	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R855	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R856	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R857	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R859	ERJ6ENF2101	M2.10KOHM, 1/10W	1	
	R861	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R864	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R869	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R871	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R872	ERJ6ENF4990	M 499 OHM, 1/10W	1	
	R874	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
	R880	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R883	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R884	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R885	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R1100	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R1101	DOYAR0000007	M 0 OHM 1/4W	1	
	R1102	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R1103	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R1104	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1105	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R1106	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R1107	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R1108	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1109	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1110	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1124	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1125	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1134	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1139	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1146	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1147	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1148	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1153	ERJ2GEJ821	M 820 OHM, J,0.063W	1	
	R1157	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1162	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1164	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1166	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1169	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1170	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1171	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1172	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1173	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R1174	DOYAR0000007	M 0 OHM 1/4W	1	
	R1175	DOYAR0000007	M 0 OHM 1/4W	1	
	R1179	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1181	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1182	ERJ2GED273X	M 27KOHM, J,0.063W	1	
	R1183	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1184	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1194	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1196	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1197	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1200	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1201	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1203	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1205	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1206	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1209	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1210	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1211	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1216	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1217	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1218	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1219	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1220	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1221	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R1222	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1229	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1236	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1238	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1239	DOYAR0000007	M 0 OHM 1/4W	1	
	R1243	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1251	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2000	DOYAR0000007	M 0 OHM 1/4W	1	
	R2001	DOYAR0000007	M 0 OHM 1/4W	1	
	R2002	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R2003	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2006	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2007	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2008	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2015	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2016	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2017	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2018	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2019	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2020	D1BB2001A055	M 2KOHM, 1/10W	1	
	R2023	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2026	D1BB1203A055	M 120KOHM, 1/10W	1	
	R2027	D1BB7502A055	M 75KOHM, 1/10W	1	
	R2047	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2048	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2050	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2051	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2052	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R2053	DOYAR0000007	M 0 OHM 1/4W	1	
	R2057	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2058	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2063	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2064	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2065	ERJ2GEJ823	M 82KOHM, J,0.063W	1	
	R2068	DOYAR0000007	M 0 OHM 1/4W	1	
	R2071	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R2072	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R2073	ERJ6GEYJ681	M 680 OHM,J,1/ 10W	1	
	R2074	D1BB6802A055	M 68KOHM, 1/10W	1	
	R2075	D1BB1583A055	M 158KOHM, 1/10W	1	
	R2089	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R2090	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R2092	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2093	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2095	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R2096	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R2097	ERJ2GEJ105	M 1MOHM, J, 0.063W	1	
	R2098	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2108	ERJ6GEYJ150V	M 15 OHM, J, 1/10W	1	
	R2111	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2114	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R2115	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R2119	D0GBR00Z0002	M 0 OHM J 1/16W	1	P
	R2120	D0GBR00Z0002	M 0 OHM J 1/16W	1	P
	R2132	ERJ2GEJ471	M 470 OHM, J, 0.063W	1	
	R2141	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2142	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R2148	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R2149	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R2164	D1BB1003A055	M 100KOHM, 1/10W	1	
	R2165	D1BB3401A055	M 3.4KOHM, 1/10W	1	
	R2166	ERJ6GEYJ153V	M 15KOHM, J, 1/10W	1	
	R2172	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2174	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2175	D1BB5600A055	M 600 OHM, 1/10W	1	
	R2176	ERJ6GEYJ271V	M 270 OHM J 1/10W	1	
	R2179	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2191	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2193	D0GBR00Z0002	M 0 OHM J 1/16W	1	B/E
	R2194	D0GBR00Z0002	M 0 OHM J 1/16W	1	B/E
	R2204	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2205	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2206	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2208	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2209	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2211	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2270	EXB28V220J	RESISTOR ARRAY	1	
	R2271	EXB28V220J	RESISTOR ARRAY	1	
	R2300	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R2506	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R2507	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R2516	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2517	ERJ3GEYJ470	M 47 OHM, J, 1/16W	1	
	R2520	ERJ3GEYJ224	M 220KOHM, J, 1/16W	1	
	R2524	D0GB473JA057	M 47KOHM, J, 1/16W	1	
	R2525	D1BB60400001	M 604 OHM, 1/10W	1	
	R2530	D0GB473JA057	M 47KOHM, J, 1/16W	1	
	R2531	D1BB2700A055	M 270 OHM, 1/10W	1	
	R2542	D0GB473JA057	M 47KOHM, J, 1/16W	1	
	R2556	D0GB103JA041	M 10K OHM J 1/16W	1	
	R2557	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2561	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	B/E
	R2562	D0GB473JA057	M 47KOHM, J, 1/16W	1	B/E
	R2565	ERJ3EKF75R0	M 0.75HM, 1/16W	1	B/E
	R2581	D0GDR00Z0002	M 0 OHM, 1/10W	1	B/E
	R2601	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2602	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2603	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2605	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2606	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2607	EXB2HV560JV	RESISTOR ARRAY	1	
	R2608	EXB2HV560JV	RESISTOR ARRAY	1	
	R2609	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2610	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2611	EXB2HV560JV	RESISTOR ARRAY	1	
	R2612	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2613	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2614	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2619	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2620	D0YAR0000007	M 0 OHM 1/4W	1	
	R2621	D0YAR0000007	M 0 OHM 1/4W	1	
	R2622	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2623	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2624	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2625	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2626	EXB2HV330JV	RESISTOR ARRAY	1	
	R2631	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2632	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2633	EXB2HV330JV	RESISTOR ARRAY	1	
	R2634	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2635	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2636	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2637	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2638	EXB2HV330JV	RESISTOR ARRAY	1	
	R2644	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2645	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2646	EXB28V470JX	RESISTOR ARRAY	1	
	R2647	EXB28V470JX	RESISTOR ARRAY	1	
	R2648	EXB28V470JX	RESISTOR ARRAY	1	
	R2649	EXB28V470JX	RESISTOR ARRAY	1	
	R2650	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R2651	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R2652	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2653	ERJ2GEJ240	M 24 OHM, J, 0.063W	1	
	R2654	ERJ2GEJ240	M 24 OHM, J, 0.063W	1	
	R2655	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R2656	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R2657	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2658	EXB28V330J	RESISTOR ARRAY	1	
	R2659	EXB28V330J	RESISTOR ARRAY	1	
	R2660	EXB28V330J	RESISTOR ARRAY	1	
	R2661	EXB28V330J	RESISTOR ARRAY	1	
	R2662	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2663	EXB28V680JX	RESISTOR ARRAY	1	
	R2664	EXB28V680JX	RESISTOR ARRAY	1	
	R2665	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2666	EXB28V680JX	RESISTOR ARRAY	1	
	R2667	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2669	EXB28V680JX	RESISTOR ARRAY	1	
	R2670	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2671	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2672	EXB28V680JX	RESISTOR ARRAY	1	
	R2673	EXB28V680JX	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2674	EXB28V680JX	RESISTOR ARRAY	1	
	R2675	EXB28V680JX	RESISTOR ARRAY	1	
	R2676	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2677	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2703	D1BB5R10A068	M 5.1 OHM, 1/10W	1	
	R2704	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2705	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2709	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2710	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2711	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2712	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2715	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2733	D0YAR0000007	M 0 OHM 1/4W	1	
	R3099	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3100	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3103	EXB28VR000X	RESISTOR ARRAY	1	
	R3104	EXB28VR000X	RESISTOR ARRAY	1	
	R3105	D0YAR0000007	M 0 OHM 1/4W	1	
	R3106	D0YAR0000007	M 0 OHM 1/4W	1	
	R3107	D0YAR0000007	M 0 OHM 1/4W	1	
	R3108	D0YAR0000007	M 0 OHM 1/4W	1	
	R3110	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3111	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3112	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3113	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3114	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3115	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3116	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3117	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3118	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3119	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3120	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3121	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3122	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3123	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3124	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3125	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3126	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3127	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3130	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3131	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3133	D0YAR0000007	M 0 OHM 1/4W	1	
	R3134	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3135	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3136	D0YAR0000007	M 0 OHM 1/4W	1	
	R3137	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3138	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3139	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3140	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3141	ERJ2GEJ221	M 220 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3142	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3143	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3144	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3145	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3146	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3147	D0YAR0000007	M 0 OHM 1/4W	1	
	R3148	D0YAR0000007	M 0 OHM 1/4W	1	
	R3150	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3151	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3152	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3154	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3155	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3170	ERJ2GED273X	M 27KOHM, J,0.063W	1	
	R3171	ERJ2GED273X	M 27KOHM, J,0.063W	1	
	R3175	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3176	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3187	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3189	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3208	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3212	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3213	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3217	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3218	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3219	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3223	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3225	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3236	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3237	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3238	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3239	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3240	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3245	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3255	ERJ6GEYJ680V	M 68 OHM,J,1/10W	1	
	R3256	ERJ6ENF2152	M21.5KOHM, 1/10W	1	
	R3262	ERJ6ENF2152	M21.5KOHM, 1/10W	1	
	R3265	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R3343	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3344	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3364	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3366	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3369	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3371	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3377	D0YAR0000007	M 0 OHM 1/4W	1	
	R3383	D0YAR0000007	M 0 OHM 1/4W	1	
	R3384	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3385	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3387	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3388	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3389	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3390	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3391	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3392	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3393	ERJ6RED750	M 75 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3395	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3397	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3400	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3401	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	B/E
	R3402	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3403	D0YAR0000007	M 0 OHM 1/4W	1	
	R3404	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3405	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3406	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3407	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3408	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3409	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3410	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3411	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3412	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3413	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3414	ERJ2GEJ274	M 270KOHM, J, 0.063W	1	
	R3415	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3418	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3425	ERJ6GEYJ680V	M 68 OHM, J, 1/10W	1	
	R3439	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3440	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3441	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3442	ERJ3RBD361	M 360 OHM, J, 1/16W	1	
	R3443	ERJ3RBD361	M 360 OHM, J, 1/16W	1	
	R3444	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3445	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3446	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3447	ERJ3RBD361	M 360 OHM, J, 1/16W	1	
	R3448	ERJ3RBD361	M 360 OHM, J, 1/16W	1	
	R3449	D0YAR0000007	M 0 OHM 1/4W	1	
	R3450	D0YAR0000007	M 0 OHM 1/4W	1	
	R3451	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3452	ERJ2GEJ274	M 270KOHM, J, 0.063W	1	
	R3454	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R3457	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3458	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3459	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3460	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3461	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3462	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3463	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3465	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3470	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3475	D0YAR0000007	M 0 OHM 1/4W	1	
	R3476	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3477	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3480	D0YAR0000007	M 0 OHM 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3481	D0YAR0000007	M 0 OHM 1/4W	1	
	R3482	D0YAR0000007	M 0 OHM 1/4W	1	
	R3484	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3485	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3489	D0YAR0000007	M 0 OHM 1/4W	1	
	R3490	D0YAR0000007	M 0 OHM 1/4W	1	
	R3491	D0YAR0000007	M 0 OHM 1/4W	1	
	R3492	D0YAR0000007	M 0 OHM 1/4W	1	
	R3495	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R3497	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R3508	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3509	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R3510	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R3511	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3512	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3513	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3514	D0YAR0000007	M 0 OHM 1/4W	1	
	R3515	D0YAR0000007	M 0 OHM 1/4W	1	
	R3518	D0YAR0000007	M 0 OHM 1/4W	1	
	R3520	D0YAR0000007	M 0 OHM 1/4W	1	
	R3716	ERJ6GEYJ184	M 180KOHM, J, 1/10W	1	
	R3717	ERJ6GEYJ184	M 180KOHM, J, 1/10W	1	
	R3721	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R3751	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	R3753	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
	R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
	R3767	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R3801	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R3802	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R3803	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R3804	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R3805	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R3806	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3807	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R3808	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R3809	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3810	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3811	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R3812	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R3814	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R3815	D0YAR0000007	M 0 OHM 1/4W	1	
	R3818	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R3821	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R3822	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3823	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R3824	D0GA2R7JA014	M 2.7OHM, J, 0.063W	1	
	R3825	D0GA2R7JA014	M 2.7OHM, J, 0.063W	1	
	R3826	D0GA2R7JA014	M 2.7OHM, J, 0.063W	1	
	R3827	D0GA2R7JA014	M 2.7OHM, J, 0.063W	1	
	R3828	D0GA2R7JA014	M 2.7OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3829	D0GA2R7JA014	M 2.7OHM, J, 0.063W	1	
	R3830	D0GA2R7JA014	M 2.7OHM, J, 0.063W	1	
	R3831	D0GA2R7JA014	M 2.7OHM, J, 0.063W	1	
	R3832	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R3834	D1BB49R90002	M 49 OHM, 1/10W	1	
	R3840	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R3841	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R3845	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R3847	D0YAR0000007	M 0 OHM 1/4W	1	
	R4029	EXB2HV680J	RESISTOR ARRAY	1	
	R4030	EXB2HV680J	RESISTOR ARRAY	1	
	R4031	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4032	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4033	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4034	D1BB7500A055	M 750 OHM, 1/10W	1	
	R4035	D1BB1241A055	M1.24KOHM, 1/10W	1	
	R4036	D0YAR0000007	M 0 OHM 1/4W	1	
	R4037	D0YAR0000007	M 0 OHM 1/4W	1	
	R4038	ERJ2GEJ681	M 680 OHM, J, 0.063W	1	
	R4039	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4040	ERJ2GEJ681	M 680 OHM, J, 0.063W	1	
	R4041	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4042	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4043	D0GB202JA057	M 2KOHM, J, 1/16W	1	
	R4046	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4047	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4048	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4049	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4153	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4154	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4155	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4158	D0YAR0000007	M 0 OHM 1/4W	1	
	R4274	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4275	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4277	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4278	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4279	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4281	D0YAR0000007	M 0 OHM 1/4W	1	
	R4282	D0YAR0000007	M 0 OHM 1/4W	1	
	R4283	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4303	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4306	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4335	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R4338	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4500	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4501	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4502	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4503	ERJ2RKD330	M 33 OHM, J, 2W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4506	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4507	D0YAR0000007	M 0 OHM 1/4W	1	
	R4526	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4527	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4528	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4530	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4538	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4540	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4552	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4567	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R4587	D1BB1241A055	M1.24KOHM, 1/10W	1	
	R4588	D1BB7150A055	M 715 OHM, 1/10W	1	
	R4589	D1BB7150A055	M 715 OHM, 1/10W	1	
	R4592	D1BB7150A055	M 715 OHM, 1/10W	1	
	R4593	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4596	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4597	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4598	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4600	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4601	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4603	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4604	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4605	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4606	D1BB9101A055	M 9.1KOHM, 1/10W	1	
	R4608	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4609	ERJ2GEJ122	M 1.2KOHM, J, 0.063W	1	
	R4610	D0YAR0000007	M 0 OHM 1/4W	1	
	R4611	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R4613	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4614	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4615	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4619	D0YAR0000007	M 0 OHM 1/4W	1	
	R4621	D0YAR0000007	M 0 OHM 1/4W	1	
	R4622	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4626	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4627	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4628	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4629	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4631	D1BB4990A055	M 499 OHM, 1/10W	1	
	R4634	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4635	EXB28V680JX	RESISTOR ARRAY	1	
	R4636	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4637	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4638	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4639	EXB28V680JX	RESISTOR ARRAY	1	
	R4640	EXB28V680JX	RESISTOR ARRAY	1	
	R4641	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4643	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4644	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4645	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4646	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4647	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4648	EXB28V330J	RESISTOR ARRAY	1	
	R4650	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4651	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4652	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4653	D0YAR0000007	M 0 OHM 1/4W	1	
	R4656	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R4657	D0YAR0000007	M 0 OHM 1/4W	1	
	R4658	D0YAR0000007	M 0 OHM 1/4W	1	
	R4661	D0YAR0000007	M 0 OHM 1/4W	1	
	R4663	D0YAR0000007	M 0 OHM 1/4W	1	
	R4664	D1BB1241A055	M1.24KOHM, 1/10W	1	
	R4665	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4666	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4673	D0YAR0000007	M 0 OHM 1/4W	1	
	R4678	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4679	EXB28V680JX	RESISTOR ARRAY	1	
	R4680	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4681	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4683	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4685	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4686	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4687	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4689	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4690	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R4691	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4692	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4693	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4694	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4696	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4699	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4700	EXB28V680JX	RESISTOR ARRAY	1	
	R4701	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4704	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4705	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4706	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4707	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4708	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4711	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4712	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4713	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4714	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4715	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4716	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4717	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4720	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4721	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4722	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4723	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4724	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4726	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4727	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4728	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4729	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4731	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4732	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4733	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4736	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4737	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4742	D0YAR0000007	M 0 OHM 1/4W	1	
	R4743	D0YAR0000007	M 0 OHM 1/4W	1	
	R4749	D0YAR0000007	M 0 OHM 1/4W	1	
	R4750	D0YAR0000007	M 0 OHM 1/4W	1	
	R4755	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R4756	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R4757	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4758	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4759	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4760	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4761	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R4762	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R4763	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4764	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4765	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4766	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4810	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4811	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4812	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4813	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4814	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4817	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4832	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4833	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4834	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4841	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4842	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4844	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4853	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4854	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4856	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4857	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5024	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5025	D1BB2700A055	M 270 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5026	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5049	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5050	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5051	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5052	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5053	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5054	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5055	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5056	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5057	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5058	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5059	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5060	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5061	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5062	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5063	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5064	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5065	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5066	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5067	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R5068	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5070	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5071	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5074	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5075	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R5076	ERJ2GEJ301	M 300 OHM, J, 0.063W	1	
	R5077	DOYAR0000007	M 0 OHM 1/4W	1	
	R5078	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R5079	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5080	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5082	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5088	ERJ3GEYJ680	M 68 OHM, J, 1/16W	1	
	R5092	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5200	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5201	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5202	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5203	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5204	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5205	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5206	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5207	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5208	ERJ2GEJ105	M 1MOHM, J, 0.063W	1	
	R5209	DOYAR0000007	M 0 OHM 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5210	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5216	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5217	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5223	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5225	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5226	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R5227	D0GB103JA041	M 10K OHM J 1/16W	1	
	R5229	D0GB103JA041	M 10K OHM J 1/16W	1	
	R5231	EXB2HV680J	RESISTOR ARRAY	1	
	R5232	EXB2HV680J	RESISTOR ARRAY	1	
	R5314	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5316	DOYAR0000007	M 0 OHM 1/4W	1	
	R5321	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5322	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5323	D1BB5602A055	M 56KOHM, 1/10W	1	
	R5324	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5325	DOYAR0000007	M 0 OHM 1/4W	1	
	R5326	DOYAR0000007	M 0 OHM 1/4W	1	
	R5327	DOYAR0000007	M 0 OHM 1/4W	1	
	R5328	DOYAR0000007	M 0 OHM 1/4W	1	
	R5329	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5330	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5331	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5332	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5333	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5334	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5335	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5337	DOYAR0000007	M 0 OHM 1/4W	1	
	R5431	DOYAR0000007	M 0 OHM 1/4W	1	
	R5433	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5434	D1BB2702A055	M 27KOHM, 1/10W	1	
	R5435	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R5441	DOYAR0000007	M 0 OHM 1/4W	1	
	R5443	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5444	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R5445	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5451	D1BB5602A055	M 56KOHM, 1/10W	1	
	R5452	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5453	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5456	DOYAR0000007	M 0 OHM 1/4W	1	
	R5459	DOYAR0000007	M 0 OHM 1/4W	1	
	R5503	ERJ6ENF2611	M2.61KOHM, 1/10W	1	
	R5504	ERJ6ENF1271	M1.27KOHM, 1/10W	1	
	R5506	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R5507	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R5508	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R5509	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R5515	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5516	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5535	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5536	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5537	ERJ2GEJ681	M 680 OHM, J, 0.063W	1	
	R5538	ERJ2GEJ122	M 1.2KOHM, J, 0.063W	1	
	R5542	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
	R5544	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R5550	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5556	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5557	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5558	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5559	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R5560	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5561	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5565	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5566	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5567	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5569	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5570	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5571	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5572	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5573	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5574	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5575	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5576	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5577	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R5578	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5579	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5580	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5581	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5582	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5583	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5587	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R5588	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R5589	ERJ6GEYJ104V	M 100KOHM, J, 1/10W	1	
	R5590	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5591	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5592	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5600	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5601	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5602	D0YAR0000007	M 0 OHM 1/4W	1	
	R5603	D0YAR0000007	M 0 OHM 1/4W	1	
	R5604	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5605	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5606	D0YAR0000007	M 0 OHM 1/4W	1	
	R5607	D0YAR0000007	M 0 OHM 1/4W	1	
	R5610	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5611	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5612	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5614	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5616	D0YAR0000007	M 0 OHM 1/4W	1	
	R5620	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5621	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5622	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5623	D1BB3602A055	M 36KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5625	D0YAR0000007	M 0 OHM 1/4W	1	
	R5626	D0YAR0000007	M 0 OHM 1/4W	1	
	R5627	D0YAR0000007	M 0 OHM 1/4W	1	
	R5628	D0YAR0000007	M 0 OHM 1/4W	1	
	R5629	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5630	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5631	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5632	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R5633	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5634	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5635	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R5636	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R5637	D0YAR0000007	M 0 OHM 1/4W	1	
	R5638	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5641	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5644	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5646	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5647	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5660	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5661	ERJ2GEJ123	M 12KOHM, J, 0.063W	1	
	R5662	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5663	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5664	D0YAR0000007	M 0 OHM 1/4W	1	
	R5691	D0GB103JA041	M 10K OHM J 1/16W	1	
	R5693	D0GB473JA057	M 47KOHM, J, 1/16W	1	
	R5695	D1BB2001A055	M 2KOHM, 1/10W	1	
	R5697	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5698	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R5699	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R5702	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5732	ERJ2GEJ153	M 15KOHM, J, 0.063W	1	
	R5733	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R7701	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7702	ERJ3EKF75R0	M 0.75HM, 1/16W	1	
	R7703	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R7704	D0GB102JA041	M 1KOHM, J, 1/16W	1	
	R7705	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7706	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
	R7708	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7709	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7710	D0GB102JA041	M 1KOHM, J, 1/16W	1	
	R7711	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
	R7712	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7713	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
	R7714	D1BB1202A055	M 12KOHM, 1/10W	1	
	R7715	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
	R7716	D0GB105JA041	M 1M OHM F 1/16W	1	
	R7717	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7718	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7719	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7725	ERJ3GEYJ680	M 68 OHM, J, 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R7726	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7727	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7733	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7734	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7735	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7737	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7738	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7742	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7744	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7749	J0JCC0000241	CHIP INDUCTOR	1	
	R7750	J0JCC0000241	CHIP INDUCTOR	1	
	R7751	J0JCC0000241	CHIP INDUCTOR	1	
	R7754	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7777	D1BB3402A055	M 34KOHM, 1/10W	1	
	R7778	D1BB1002A055	M 10KOHM, 1/10W	1	
	R7779	EXB38VR000V	RESISTOR ARRAY	1	
	R7781	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7782	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7800	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8001	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R8002	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8003	D1BB1002A055	M 10KOHM, 1/10W	1	
	R8004	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R8005	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R8006	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8007	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R8008	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8016	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8017	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8080	EXB2HV103JV	RESISTOR ARRAY	1	B/E
	R8081	EXB28V103JX	RESISTOR ARRAY	1	B/E
	R8082	ERJ2GEJ103	M 10KOHM, J,0.063W	1	B/E
	R8083	DOYAR0000007	M 0 OHM 1/4W	1	B/E
	R8084	DOYAR0000007	M 0 OHM 1/4W	1	B/E
	R8086	ERJ2GEJ104	M 100KOHM, J,0.063W	1	B/E
	R8087	ERJ2GEJ104	M 100KOHM, J,0.063W	1	B/E
	R8088	ERJ2GEJ104	M 100KOHM, J,0.063W	1	B/E
	R8089	ERJ2GEJ104	M 100KOHM, J,0.063W	1	B/E
	R8090	ERJ2GEJ104	M 100KOHM, J,0.063W	1	B/E
	R8091	ERJ2GEJ104	M 100KOHM, J,0.063W	1	B/E
	R8092	ERJ2GEJ104	M 100KOHM, J,0.063W	1	B/E
	R8093	ERJ2GEJ101	M 100 OHM, J,0.063W	1	B/E
	R8094	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8098	ERJ2GEJ102X	M 1K OHM J 1/4W	1	B/E
	R8101	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8102	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8105	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8106	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8108	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8110	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8111	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8112	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8117	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8118	ERJ2RKD330	M 33 OHM, J, 2W	1	B/E
	R8126	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8132	DOYAR0000007	M 0 OHM 1/4W	1	
	R8133	DOYAR0000007	M 0 OHM 1/4W	1	
	R8134	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8135	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8136	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8139	DOYAR0000007	M 0 OHM 1/4W	1	
	R8140	DOYAR0000007	M 0 OHM 1/4W	1	
	R8141	DOYAR0000007	M 0 OHM 1/4W	1	
	R8142	DOYAR0000007	M 0 OHM 1/4W	1	
	R8143	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8144	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8149	DOYAR0000007	M 0 OHM 1/4W	1	
	R8150	DOYAR0000007	M 0 OHM 1/4W	1	
	R8151	DOYAR0000007	M 0 OHM 1/4W	1	
	R8152	DOYAR0000007	M 0 OHM 1/4W	1	
	R8153	DOYAR0000007	M 0 OHM 1/4W	1	
	R8154	DOYAR0000007	M 0 OHM 1/4W	1	
	R8155	DOYAR0000007	M 0 OHM 1/4W	1	
	R8156	DOYAR0000007	M 0 OHM 1/4W	1	
	R8157	DOYAR0000007	M 0 OHM 1/4W	1	
	R8158	DOYAR0000007	M 0 OHM 1/4W	1	
	R8159	DOYAR0000007	M 0 OHM 1/4W	1	
	R8160	DOYAR0000007	M 0 OHM 1/4W	1	
	R8161	DOYAR0000007	M 0 OHM 1/4W	1	
	R8162	DOYAR0000007	M 0 OHM 1/4W	1	
	R8163	DOYAR0000007	M 0 OHM 1/4W	1	
	R8164	DOYAR0000007	M 0 OHM 1/4W	1	
	R8165	DOYAR0000007	M 0 OHM 1/4W	1	
	R8166	DOYAR0000007	M 0 OHM 1/4W	1	
	R8167	DOYAR0000007	M 0 OHM 1/4W	1	
	R8168	DOYAR0000007	M 0 OHM 1/4W	1	
	R8169	DOYAR0000007	M 0 OHM 1/4W	1	
	R8170	DOYAR0000007	M 0 OHM 1/4W	1	
	R8171	DOYAR0000007	M 0 OHM 1/4W	1	
	R8172	DOYAR0000007	M 0 OHM 1/4W	1	
	R8173	DOYAR0000007	M 0 OHM 1/4W	1	
	R8174	DOYAR0000007	M 0 OHM 1/4W	1	
	R8175	DOYAR0000007	M 0 OHM 1/4W	1	
	R8176	DOYAR0000007	M 0 OHM 1/4W	1	
	R8177	DOYAR0000007	M 0 OHM 1/4W	1	
	R8178	DOYAR0000007	M 0 OHM 1/4W	1	
	R8179	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8180	ERJ3GEYJ301	M 300 OHM,J,1/16W	1	
	R8181	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8182	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8183	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8184	ERJ3GEYJ301	M 300 OHM,J,1/16W	1	
	R8185	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8186	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8187	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8188	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8189	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8190	DOYAR0000007	M 0 OHM 1/4W	1	
	R8191	DOYAR0000007	M 0 OHM 1/4W	1	
	R8192	DOYAR0000007	M 0 OHM 1/4W	1	
	R8193	DOYAR0000007	M 0 OHM 1/4W	1	
	R8196	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8197	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8198	ERJ2GEJ221	M 220 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8199	D0YAR0000007	M 0 OHM 1/4W	1	
	R8201	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8202	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8203	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8204	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8205	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8206	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8207	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8208	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8209	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8210	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8211	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8212	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8213	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8214	D0YAR0000007	M 0 OHM 1/4W	1	
	R8215	D0YAR0000007	M 0 OHM 1/4W	1	
	R8216	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8217	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8218	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8219	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8220	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8221	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8222	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8223	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8224	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8225	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8226	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8227	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8228	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8229	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8230	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8231	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8232	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8233	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8234	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8235	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8236	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8237	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8238	D0YAR0000007	M 0 OHM 1/4W	1	
	R8239	D0YAR0000007	M 0 OHM 1/4W	1	
	R8240	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8241	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8242	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8243	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8244	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8245	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8246	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8247	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8248	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8249	D0YAR0000007	M 0 OHM 1/4W	1	
	R8250	D0YAR0000007	M 0 OHM 1/4W	1	
	R8251	D0YAR0000007	M 0 OHM 1/4W	1	
	R8252	D0YAR0000007	M 0 OHM 1/4W	1	
	R8253	D0YAR0000007	M 0 OHM 1/4W	1	
	R8254	D0YAR0000007	M 0 OHM 1/4W	1	
	R8255	D0YAR0000007	M 0 OHM 1/4W	1	
	R8256	D0YAR0000007	M 0 OHM 1/4W	1	
	R8257	D0YAR0000007	M 0 OHM 1/4W	1	
	R8258	D0YAR0000007	M 0 OHM 1/4W	1	
	R8259	D0YAR0000007	M 0 OHM 1/4W	1	
	R8260	D0YAR0000007	M 0 OHM 1/4W	1	
	R8261	D0YAR0000007	M 0 OHM 1/4W	1	
	R8262	D0YAR0000007	M 0 OHM 1/4W	1	
	R8263	D0YAR0000007	M 0 OHM 1/4W	1	
	R8264	D0YAR0000007	M 0 OHM 1/4W	1	
	R8265	D0YAR0000007	M 0 OHM 1/4W	1	
	R8266	D0YAR0000007	M 0 OHM 1/4W	1	
	R8267	D0YAR0000007	M 0 OHM 1/4W	1	
	R8268	D0YAR0000007	M 0 OHM 1/4W	1	
	R8269	D0YAR0000007	M 0 OHM 1/4W	1	
	R8270	D0YAR0000007	M 0 OHM 1/4W	1	
	R8271	D0YAR0000007	M 0 OHM 1/4W	1	
	R8272	D0YAR0000007	M 0 OHM 1/4W	1	
	R8273	D0YAR0000007	M 0 OHM 1/4W	1	
	R8274	D0YAR0000007	M 0 OHM 1/4W	1	
	R8275	D0YAR0000007	M 0 OHM 1/4W	1	
	R8276	D0YAR0000007	M 0 OHM 1/4W	1	
	R8277	D0YAR0000007	M 0 OHM 1/4W	1	
	R8278	D0YAR0000007	M 0 OHM 1/4W	1	
	R8279	D0YAR0000007	M 0 OHM 1/4W	1	
	R8280	D0YAR0000007	M 0 OHM 1/4W	1	
	R8281	D0YAR0000007	M 0 OHM 1/4W	1	
	R8282	D0YAR0000007	M 0 OHM 1/4W	1	
	R8283	D0YAR0000007	M 0 OHM 1/4W	1	
	R8284	D0YAR0000007	M 0 OHM 1/4W	1	
	R8285	D0YAR0000007	M 0 OHM 1/4W	1	
	R8286	D0YAR0000007	M 0 OHM 1/4W	1	
	R8287	D0YAR0000007	M 0 OHM 1/4W	1	
	R8288	D0YAR0000007	M 0 OHM 1/4W	1	
	R8289	D0YAR0000007	M 0 OHM 1/4W	1	
	R8290	D0YAR0000007	M 0 OHM 1/4W	1	
	R8291	D0YAR0000007	M 0 OHM 1/4W	1	
	R8292	D0YAR0000007	M 0 OHM 1/4W	1	
	R8293	D0YAR0000007	M 0 OHM 1/4W	1	
	R8294	D0YAR0000007	M 0 OHM 1/4W	1	
	R8295	D0YAR0000007	M 0 OHM 1/4W	1	
	R8296	D0YAR0000007	M 0 OHM 1/4W	1	
	R8297	D0YAR0000007	M 0 OHM 1/4W	1	
	R8298	D0YAR0000007	M 0 OHM 1/4W	1	
	R8299	D0YAR0000007	M 0 OHM 1/4W	1	
	R8305	ERJ2GEJ223	M 22KOHM, J,0.063W	1	B/E
	R8306	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	B/E
	R8307	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	B/E
	R8308	ERJ2GEJ103	M 10KOHM, J,0.063W	1	B/E
	R8310	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8311	D0YAR0000007	M 0 OHM 1/4W	1	B/E

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8314	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8315	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8318	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	B/E
	R8321	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	B/E
	R8322	ERJ2GEJ102X	M 1K OHM J 1/4W	1	B/E
	R8323	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	B/E
	R8324	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	B/E
	R8325	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8326	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8327	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8328	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8329	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	B/E
	R8330	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8353	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	B/E
	R8354	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	B/E
	R8356	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8359	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8370	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8385	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8396	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	B/E
	R8401	ERJ8GEY0R00	M 0 OHM, 1/8W	1	B/E
	R8402	D0GDR00Z0002	M 0 OHM, 1/10W	1	B/E
	R8403	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8404	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	B/E
	R8405	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	B/E
	R8406	D0GFR10JA020	M 1 OHM, J, 0.33W	1	PAVCCZ B/E
	R8407	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	B/E
	R8409	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8410	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	B/E
	R8411	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	B/E
	R8412	EXB2HV473JV	RESISTOR ARRAY	1	B/E
	R8413	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8414	EXB2HV101J	RESISTOR ARRAY	1	B/E
	R8415	ERJ8GEY0R00	M 0 OHM, 1/8W	1	B/E
	R8416	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	B/E
	R8417	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	B/E
	R8418	ERJ2GEJ681	M 680 OHM, J, 0.063W	1	B/E
	R8419	EXB2HV101J	RESISTOR ARRAY	1	B/E
	R8420	ERJ8GEY0R00	M 0 OHM, 1/8W	1	B/E
	R8421	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8422	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8423	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8424	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8425	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8426	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	B/E
	R8427	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8428	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8429	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8430	EXB2HV680J	RESISTOR ARRAY	1	B/E
	R8431	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	B/E
	R8432	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	B/E
	R8433	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	B/E
	R8434	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	B/E
	R8435	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	B/E
	R8436	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	B/E
	R8437	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	B/E
	R8438	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	B/E
	R8439	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8440	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	B/E
	R8441	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8442	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8443	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	B/E
	R8444	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	B/E
	R8445	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	B/E
	R8446	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8447	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8448	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8449	EXB2HV103JV	RESISTOR ARRAY	1	
	R8450	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	B/E
	R8454	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8455	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8456	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8457	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8458	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8459	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8460	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8461	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	B/E
	R8462	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8463	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	B/E
	R8464	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	B/E
	R8465	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8466	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8467	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	B/E
	R8468	EXB2HV101J	RESISTOR ARRAY	1	B/E
	R8469	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8470	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8471	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	B/E
	R8472	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	B/E
	R8473	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	B/E
	R8474	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	B/E
	R8475	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	B/E

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8476	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8477	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8478	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8479	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8480	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8481	ERJ2GEJ151	M 150 OHM, J,0.063W	1	B/E
	R8482	ERJ2GEJ151	M 150 OHM, J,0.063W	1	B/E
	R8483	ERJ2GEJ101	M 100 OHM, J,0.063W	1	B/E
	R8484	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8486	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8487	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8488	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8489	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8490	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8492	ERJ2GEJ680	M 68 OHM, J,0.063W	1	B/E
	R8493	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8494	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8495	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8496	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8497	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8498	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8499	ERJ2GEJ221	M 220 OHM, J,0.063W	1	B/E
	R8525	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8526	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8527	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8528	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8529	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8530	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8531	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8532	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8533	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8534	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8535	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8536	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8537	D1HG1218A002	NETWORK RESISTER	1	
	R8538	D1HG1218A002	NETWORK RESISTER	1	
	R8539	D1HG1218A002	NETWORK RESISTER	1	
	R8540	D1HG1218A002	NETWORK RESISTER	1	
	R8541	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8542	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8543	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8544	ERJ2GEJ121	M 120 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8545	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8546	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8547	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8548	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8549	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8550	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8551	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8552	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8553	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8554	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8555	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8556	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8557	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8558	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8559	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8560	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8561	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8562	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8563	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8564	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8565	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8566	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8567	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8569	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8581	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8583	D0YAR0000007	M 0 OHM 1/4W	1	
	R8601	D0YAR0000007	M 0 OHM 1/4W	1	
	R8602	D0YAR0000007	M 0 OHM 1/4W	1	
	R8603	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8604	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8620	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8621	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R8622	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8623	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8625	D1BA1601A026	M 1.6KOHM, 1/10W	1	
	R8626	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8627	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8628	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8629	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8630	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R8631	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8632	D0YAR0000007	M 0 OHM 1/4W	1	
	R8650	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8651	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8661	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8663	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8701	EXB2HV680J	RESISTOR ARRAY	1	
	R8702	EXB2HV680J	RESISTOR ARRAY	1	
	R8703	EXB2HV101J	RESISTOR ARRAY	1	
	R8704	EXB2HV101J	RESISTOR ARRAY	1	
	R8705	EXB2HV101J	RESISTOR ARRAY	1	
	R8706	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8707	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8709	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8710	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R8711	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8715	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8716	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8718	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8719	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8720	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8721	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8722	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8723	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8724	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8725	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8726	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8727	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8728	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8730	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	B/E
	R8732	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8733	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8734	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8735	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R8736	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R8737	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R8738	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R8739	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8740	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8741	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8742	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8743	EXB38V560JV	RESISTOR ARRAY	1	
	R8744	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8745	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8746	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8747	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8748	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8749	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8750	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8751	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8752	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8753	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8754	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8757	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8758	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8759	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8760	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8761	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8762	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8764	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8765	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8766	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8767	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8768	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8769	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8770	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8771	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8772	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8773	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8774	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8775	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8776	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8777	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8778	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8779	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	B/E
	R8781	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8782	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8783	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8785	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8786	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8787	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8788	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8789	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8790	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8791	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8792	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8795	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8796	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8798	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8799	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8806	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8807	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8809	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8811	D0YAR0000007	M 0 OHM 1/4W	1	
	R8812	D0YAR0000007	M 0 OHM 1/4W	1	
	R8813	D0YAR0000007	M 0 OHM 1/4W	1	
	R8816	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R8817	ERJ2GEJ562	M 5.6KOHM, J, 0.063W	1	
	R8818	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8821	ERJ8GEYJ472V	M 4.7KOHM, J, 1/8W	1	
	R8823	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8824	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R8825	D0YAR0000007	M 0 OHM 1/4W	1	
	R8826	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8829	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8830	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8831	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8832	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8833	D0YAR0000007	M 0 OHM 1/4W	1	
	R8834	D0YAR0000007	M 0 OHM 1/4W	1	
	R8835	D0YAR0000007	M 0 OHM 1/4W	1	
	R8837	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8838	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8839	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8850	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8851	EXB38V103JV	RESISTOR ARRAY	1	
	R8852	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8853	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8855	EXB38VR000V	RESISTOR ARRAY	1	
	R8856	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8857	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8859	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8860	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8861	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8864	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8865	EXB2HV103JV	RESISTOR ARRAY	1	
	R8866	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
	R8869	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8901	EXB2HV103JV	RESISTOR ARRAY	1	
	R8902	EXB2HV103JV	RESISTOR ARRAY	1	
	R8903	EXB2HV103JV	RESISTOR ARRAY	1	
	R8904	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8905	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8906	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8907	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8910	EXB2HV103JV	RESISTOR ARRAY	1	
	R8911	EXB2HV103JV	RESISTOR ARRAY	1	
	R8912	EXB2HV103JV	RESISTOR ARRAY	1	
	R8913	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R8914	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8915	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8916	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8917	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8918	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8920	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8921	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8922	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8923	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8924	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8925	D0YAR0000007	M 0 OHM 1/4W	1	B/E
	R8926	D0YAR0000007	M 0 OHM 1/4W	1	
	R8927	D0YAR0000007	M 0 OHM 1/4W	1	
	R8928	D0YAR0000007	M 0 OHM 1/4W	1	
	R8929	D0YAR0000007	M 0 OHM 1/4W	1	
	R8930	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8931	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8932	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8933	EXB2HV560JV	RESISTOR ARRAY	1	
	R8934	EXB2HV560JV	RESISTOR ARRAY	1	
	R8940	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8941	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8942	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8950	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8951	D1BB4702A055	M 47KOHM, 1/10W	1	B/E
	R8952	ERJ2GEJ102X	M 1K OHM J 1/4W	1	B/E
	R8954	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8955	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8956	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8957	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8959	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8960	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8961	EXB2HV330JV	RESISTOR ARRAY	1	
	R8962	EXB2HV330JV	RESISTOR ARRAY	1	
	R8963	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
	R8964	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8965	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8966	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8967	D1BB1203A055	M 120KOHM, 1/10W	1	B/E
	R8968	D1BB2202A055	M 22KOHM, 1/10W	1	PAVCCZ B/E
	R8970	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8972	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8973	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8974	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8995	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	B
	R9001	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9002	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9007	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9013	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R9014	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R9015	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9016	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9023	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9027	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9028	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9029	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9069	EXB2HV220JV	RESISTOR ARRAY	1	
	R9070	EXB2HV220JV	RESISTOR ARRAY	1	
	R9071	EXB2HV220JV	RESISTOR ARRAY	1	
	R9072	EXB2HV220JV	RESISTOR ARRAY	1	
	R9073	EXB2HV220JV	RESISTOR ARRAY	1	
	R9074	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9075	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9076	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9077	EXB38V470J	RESISTOR ARRAY	1	
	R9078	EXB38V470J	RESISTOR ARRAY	1	
	R9079	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9080	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9081	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9086	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9087	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9088	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9089	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9092	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9093	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9094	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9095	EXB2HV220JV	RESISTOR ARRAY	1	
	R9096	EXB2HV220JV	RESISTOR ARRAY	1	
	R9097	EXB2HV220JV	RESISTOR ARRAY	1	
	R9098	EXB2HV220JV	RESISTOR ARRAY	1	
	R9099	EXB2HV220JV	RESISTOR ARRAY	1	
	R9100	EXB2HV220JV	RESISTOR ARRAY	1	
	R9101	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9103	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9105	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9106	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9107	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R9108	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9109	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9110	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9111	EXB2HV220JV	RESISTOR ARRAY	1	
	R9112	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9113	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9114	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9115	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9116	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9117	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9118	D0GDR00Z0002	M 0 OHM, 1/10W	1	(D)
	R9118	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	(HC)
	R9119	EXB38V470J	RESISTOR ARRAY	1	
	R9120	EXB2HV103JV	RESISTOR ARRAY	1	
	R9121	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	(D)
	R9121	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9122	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	(D)
	R9122	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9123	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9123	EXB2HV470JV	RESISTOR ARRAY	1	(D)
	R9124	D0GDR00Z0002	M 0 OHM, 1/10W	1	(D)
	R9124	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9125	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	(D)
	R9125	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9126	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	(D)
	R9126	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9127	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	(D)
	R9127	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9128	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	
	R9129	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9129	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	(D)
	R9130	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9130	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	(D)
	R9131	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9132	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9133	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9133	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	(D)
	R9134	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9135	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9136	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9137	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9137	EXB2HV220JV	RESISTOR ARRAY	1	(D)
	R9138	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9138	EXB2HV220JV	RESISTOR ARRAY	1	(D)
	R9139	EXB2HV220JV	RESISTOR ARRAY	1	
	R9140	EXB2HV220JV	RESISTOR ARRAY	1	
	R9141	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9142	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9143	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9144	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9145	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9146	EXB2HV220JV	RESISTOR ARRAY	1	
	R9147	EXB2HV220JV	RESISTOR ARRAY	1	
	R9148	EXB38V680J	RESISTOR ARRAY	1	
	R9149	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9150	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9151	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9154	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9155	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9156	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9157	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9158	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9159	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	
	R9160	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	
	R9161	D0GB100JA041	M 10 OHM J 1/16W	1	(D)
	R9161	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	(HC)
	R9162	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9163	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9164	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9166	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9167	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9168	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9170	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9171	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9172	D0YAR0000007	M 0 OHM 1/4W	1	
	R9174	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9175	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9177	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9178	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9179	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9180	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9181	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9182	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9185	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R9186	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R9187	ERJ2GED563X	M 56KOHM, J, 0.063W	1	
	R9188	ERJ2GEJ243	M 24KOHM, J, 0.063W	1	
	R9189	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9190	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9191	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9192	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9193	EXB2HV220JV	RESISTOR ARRAY	1	
	R9195	EXB2HV220JV	RESISTOR ARRAY	1	
	R9197	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9198	D0YAR0000007	M 0 OHM 1/4W	1	
	R9199	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9200	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R9201	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R9202	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9203	D0YAR0000007	M 0 OHM 1/4W	1	
	R9204	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9205	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R9206	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9207	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9208	EXB2HV220JV	RESISTOR ARRAY	1	
	R9209	EXB2HV220JV	RESISTOR ARRAY	1	
	R9210	EXB2HV220JV	RESISTOR ARRAY	1	
	R9211	EXB2HV220JV	RESISTOR ARRAY	1	
	R9212	EXB2HV470JV	RESISTOR ARRAY	1	
	R9213	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9214	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9215	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9216	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9217	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9218	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9219	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9223	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9224	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9225	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9226	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9229	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9230	EXB38V470J	RESISTOR ARRAY	1	
	R9231	D0YAR0000007	M 0 OHM 1/4W	1	
	R9232	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9233	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9234	EXB2HV470JV	RESISTOR ARRAY	1	
	R9235	EXB2HV470JV	RESISTOR ARRAY	1	
	R9236	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9237	EXB38V470J	RESISTOR ARRAY	1	
	R9238	ERJ2GEJ151	M 150 OHM, J, 0.063W	1	
	R9245	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9246	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9247	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9248	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9249	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9250	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9251	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9252	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9253	EXB2HV103JV	RESISTOR ARRAY	1	
	R9254	EXB2HV103JV	RESISTOR ARRAY	1	
	R9255	EXB2HV103JV	RESISTOR ARRAY	1	
	R9256	EXB38V470J	RESISTOR ARRAY	1	
	R9257	EXB38V470J	RESISTOR ARRAY	1	
	R9258	EXB38V470J	RESISTOR ARRAY	1	
	R9259	EXB38V470J	RESISTOR ARRAY	1	
	R9260	EXB38V470J	RESISTOR ARRAY	1	
	R9261	EXB38V470J	RESISTOR ARRAY	1	
	R9262	EXB38V470J	RESISTOR ARRAY	1	
	R9263	EXB38V470J	RESISTOR ARRAY	1	
	R9264	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9265	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9266	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9267	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9270	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9271	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9272	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9273	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9278	D0YAR0000007	M 0 OHM 1/4W	1	
	R9279	D0YAR0000007	M 0 OHM 1/4W	1	
	R9280	EXB2HV103JV	RESISTOR ARRAY	1	
	R9281	EXB2HV103JV	RESISTOR ARRAY	1	
	R9282	EXB2HV103JV	RESISTOR ARRAY	1	
	R9283	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9286	D0YAR0000007	M 0 OHM 1/4W	1	
	R9287	D0YAR0000007	M 0 OHM 1/4W	1	
	R9288	D0YAR0000007	M 0 OHM 1/4W	1	
	R9290	EXB2HV103JV	RESISTOR ARRAY	1	
	R9291	EXB2HV103JV	RESISTOR ARRAY	1	
	R9294	EXB2HV103JV	RESISTOR ARRAY	1	
	R9295	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9296	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9297	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9298	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9299	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9300	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9301	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9302	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9303	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9304	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9308	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9309	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9310	EXB38V103JV	RESISTOR ARRAY	1	
	R9311	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9312	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R9315	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9316	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9318	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9320	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9322	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9325	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9327	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9333	EXB38V103JV	RESISTOR ARRAY	1	
	R9334	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9335	EXB2HV103JV	RESISTOR ARRAY	1	
	R9337	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9341	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9342	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9343	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9344	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9345	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9348	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9350	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9351	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9352	EXB2HV470JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9353	EXB38V470J	RESISTOR ARRAY	1	
	R9354	EXB2HV103JV	RESISTOR ARRAY	1	
	R9355	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9358	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9362	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9385	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9419	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R9420	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R9421	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R9578	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9599	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9600	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9824	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9825	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9826	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9839	EXB38V101JV	RESISTOR ARRAY	1	
	R9840	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9846	EXB2HV103JV	RESISTOR ARRAY	1	
	R9847	EXB2HV103JV	RESISTOR ARRAY	1	
	R9848	EXB2HV470JV	RESISTOR ARRAY	1	
	R9849	EXB2HV470JV	RESISTOR ARRAY	1	
	R9854	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9859	EXB38V101JV	RESISTOR ARRAY	1	
	R9868	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9869	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9870	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9871	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9878	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9879	D1BB1302A055	M 13KOHM, 1/10W	1	
	R9886	D1BB4702A055	M 47KOHM, 1/10W	1	
	R9887	D1BB5102A055	M 51KOHM, 1/10W	1	
	R9888	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9889	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9890	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9891	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R9892	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9893	D1BB4302A055	M 43KOHM, 1/10W	1	
	R9894	D1BB2002A055	M 20KOHM, 1/10W	1	
	R9895	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9896	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9897	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9901	D0YAR0000007	M 0 OHM 1/4W	1	
	R9905	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9907	ERJ2GEJ151	M 150 OHM, J,0.063W	1	
	R9936	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9937	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9938	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9939	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9940	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9944	EXB38V470J	RESISTOR ARRAY	1	
	R9945	EXB38V470J	RESISTOR ARRAY	1	
	R9946	EXB38V470J	RESISTOR ARRAY	1	
	R9947	EXB38V470J	RESISTOR ARRAY	1	
	R9948	EXB38V470J	RESISTOR ARRAY	1	
	R9949	EXB38V470J	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9950	EXB38V470J	RESISTOR ARRAY	1	
	R9951	EXB38V470J	RESISTOR ARRAY	1	
	R9952	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9953	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9954	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9955	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9966	ERJ2GEJ471	M 470 OHM, J, 0.063W	1	
	R9969	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9972	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9973	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9974	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9975	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9980	D0YAR0000007	M 0 OHM 1/4W	1	
	R2582A	J0JCC0000241	CHIP INDUCTOR	1	
	R2583A	J0JCC0000241	CHIP INDUCTOR	1	
	R2585A	J0JCC0000241	CHIP INDUCTOR	1	B/E
	RM2501	B3RAD0000160	REMOTE SENSOR	1	
	S1	K1KA03AA0193	3P CONNECTOR	1	
⚠	SW2500	K0F162B00002	SWITCH	1	
	SW3753	EVQPC105K	SWITCH	1	
	SW3754	EVQPC105K	SWITCH	1	
	SW3755	EVQPC105K	SWITCH	1	
	SW3756	EVQPC105K	SWITCH	1	
	SW3757	EVQPC105K	SWITCH	1	
⚠	TU8301	ENG37E09KF	TUNER	1	
	X1100	H0J100500035	CRYSTAL	1	
	X2010	H0J245500089	CRYSTAL	1	
	X2601	H0J202500019	CRYSTAL	1	
	X5200	H0J270500113	CRYSTAL	1	
	X7700	H0J240500037	CRYSTAL	1	
	X8101	H0J270500061	CRYSTAL	1	
	X8301	H0J204500006	CRYSTAL	1	B/E
	X8620	H0J300500026	CRYSTAL	1	
	X9000	H2D100500004	CRYSTAL	1	
	X9200	H0J200500076	CRYSTAL	1	
	ZA0001	K4AZ01D00004	TERMINAL	1	
	ZA0002	K4AZ01D00004	TERMINAL	1	
	ZA0003	K4AZ01D00004	TERMINAL	1	
	ZA0004	K4AZ01D00004	TERMINAL	1	
	ZA0005	K4AZ01D00004	TERMINAL	1	
	ZA0006	K4AZ01D00004	TERMINAL	1	
	ZA0007	K4AZ01D00004	TERMINAL	1	
	ZA0008	K4AZ01D00004	TERMINAL	1	
	ZA0010	TESA169	SHIELD CLIP	1	
	ZA0011	TESA169	SHIELD CLIP	1	
	ZA851	K4CZ01000027	AV TERMINAL	1	
	ZA852	K4CZ01000027	AV TERMINAL	1	
	ZA3701	K4CZ01000027	AV TERMINAL	1	
	ZA3702	K4CZ01000027	AV TERMINAL	1	
	ZA3801	K4AD01D00005	TERMINAL	1	
	ZA3802	K4AD01D00005	TERMINAL	1	
	ZA9000	K4CD01000011	AV TERMINAL	1	
	ZA9001	K4AZ01D00004	TERMINAL	1	
	ZA9002	K4AZ01D00004	TERMINAL	1	
	C10	K1MN20BA0231	20P CONNECTOR	1	
	C11	K1MN68BA0266	68P CONNECTOR	1	
	C20	K1MN20BA0266	20P CONNECTOR	1	
	C21	K1MN68BA0266	68P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C22	K1MN68BA0266	68P CONNECTOR	1	
	C23	K1MN68BA0266	68P CONNECTOR	1	
	C32	K1KA04AA0728	4P CONNECTOR	1	
	C33	K1MN68BA0266	68P CONNECTOR	1	
	C41	K1MN80BA0076	80P CONNECTOR	1	
	C43	K1KA10A00416	10P CONNECTOR	1	
	C45	K1KA04AA0728	4P CONNECTOR	1	
	C50	K1MN20BA0266	20P CONNECTOR	1	
	C51	K1MN80BA0076	80P CONNECTOR	1	
	C52	K1MN68BA0266	68P CONNECTOR	1	
	C53	K1MN68BA0266	68P CONNECTOR	1	
	C60	K1MN20BA0231	20P CONNECTOR	1	
	C61	K1MN68BA0266	68P CONNECTOR	1	
	C14352	F1J1C1050030	C 1UF, Z, 16V	1	
	C14356	F1J1C1050030	C 1UF, Z, 16V	1	
	C14360	F1L2E104A028	E 1000UF, 25V	1	
	C14361	F1L2E104A028	E 1000UF, 25V	1	
	C14364	F1J1C1050030	C 1UF, Z, 16V	1	
	C14368	F1J1C1050030	C 1UF, Z, 16V	1	
	C14369	F1G1H102A730	C 1000UF, 50V	1	
	C14370	F1L2E104A028	E 1000UF, 25V	1	
	C14376	F1L2E104A028	E 1000UF, 25V	1	
	C14377	F1L2E104A028	E 1000UF, 25V	1	
	C14384	F1L2E104A028	E 1000UF, 25V	1	
	C14385	F1L2E104A028	E 1000UF, 25V	1	
	C14901	F1G1H102A730	C 1000UF, 50V	1	
	C14902	F1J1C1050030	C 1UF, Z, 16V	1	
	C14904	F1J1C1050030	C 1UF, Z, 16V	1	
	C14906	F1J1C1050030	C 1UF, Z, 16V	1	
	C14908	F1J1C1050030	C 1UF, Z, 16V	1	
	C14910	F1J1C1050030	C 1UF, Z, 16V	1	
	C14912	F1J1C1050030	C 1UF, Z, 16V	1	
	C14920	F1L2E104A028	E 1000UF, 25V	1	
	C14923	F1L2E104A028	E 1000UF, 25V	1	
	C14924	F1L2E104A028	E 1000UF, 25V	1	
	C14925	F1L2E104A028	E 1000UF, 25V	1	
	C14927	F1L2E104A028	E 1000UF, 25V	1	
	C14929	F1L2E104A028	E 1000UF, 25V	1	
	C14930	F1L2E104A028	E 1000UF, 25V	1	
	C14931	F1G1H102A730	C 1000UF, 50V	1	
	C14934	F1L2E104A028	E 1000UF, 25V	1	
	C14936	F1G1H471A731	C 470UF, 50V	1	
	C14937	F1G1H471A731	C 470UF, 50V	1	
	C14938	F1G1H471A731	C 470UF, 50V	1	
	C14939	F1G1H471A731	C 470UF, 50V	1	
	C14940	F1G1H102A730	C 1000UF, 50V	1	
	C14941	F1G1H471A731	C 470UF, 50V	1	
	C14942	F1G1H471A731	C 470UF, 50V	1	
	C14943	F1L1E4750004	C 4.7UF, 25V	1	
	C14945	F1G1H101A731	C 100PF, K, 50V	1	
	C14950	F1G1H471A731	C 470UF, 50V	1	
	C14952	F1J1C1050030	C 1UF, Z, 16V	1	
	C14955	F1J1C1050030	C 1UF, Z, 16V	1	
	C14957	F1J1C1050030	C 1UF, Z, 16V	1	
	C14958	F1J1C1050030	C 1UF, Z, 16V	1	
	C14961	F1J1C1050030	C 1UF, Z, 16V	1	
	C14963	F1J1C1050030	C 1UF, Z, 16V	1	
	C14969	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14970	F1G1H471A731	C 470UF, 50V	1	
	C14971	F1G1H471A731	C 470UF, 50V	1	
	C14972	F1G1H471A731	C 470UF, 50V	1	
	C14973	F1G1H102A730	C 1000UF, 50V	1	
	C14974	F1L2E104A028	E 1000UF, 25V	1	
	C14976	F1G1H102A730	C 1000UF, 50V	1	
	C14979	F1L2E104A028	E 1000UF, 25V	1	
	C14980	F1L2E104A028	E 1000UF, 25V	1	
	C14981	F1G1H471A731	C 470UF, 50V	1	
	C14984	F1L2E104A028	E 1000UF, 25V	1	
	C14985	F1L2E104A028	E 1000UF, 25V	1	
	C14987	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14988	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14989	F1G1H471A731	C 470UF, 50V	1	
	C14990	ECJ1VB1H104K	C 0.1UF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C14992	FIH1C105A008	C 1UF, K, 16V	1	
	C16003	FIL2J562A022	C 5600UF, K, 6.3V	1	
	C16011	F2A2T251A004	E 250UF, 220V	1	
	C16012	F2A2T251A004	E 250UF, 220V	1	
	C16013	F2A2T251A004	E 250UF, 220V	1	
	C16014	F2A2T251A004	E 250UF, 220V	1	
	C16015	F2A2T251A004	E 250UF, 220V	1	
	C16016	F2A2T251A004	E 250UF, 220V	1	
	C16018	F0C2E225A231	E 0.022UF, 250V	1	
	C16023	FIL2J562A022	C 5600UF, K, 6.3V	1	
	C16071	FIL2J1520001	C 1500UF, K, 6.3V	1	PAVCCZ
	C16092	FIL2J1520001	C 1500UF, K, 6.3V	1	PAVCCZ
	C16131	FIL1E4750004	C 4.7UF, 25V	1	
	C16133	FIL1E4750004	C 4.7UF, 25V	1	
	C16135	FIK1E105A029	C 1UF, Z, 25V	1	
	C16151	FIK1E105A029	C 1UF, Z, 25V	1	
	C16152	FIL1E4750004	C 4.7UF, 25V	1	
	C16153	FIL1E4750004	C 4.7UF, 25V	1	
	C16154	FIL1E4750004	C 4.7UF, 25V	1	
	C16157	FIL1E4750004	C 4.7UF, 25V	1	
	C16191	FIL1E4750004	C 4.7UF, 25V	1	
	C16192	ECJ1VB1E104K	C 0.1UF, K, 50V	1	
	C16194	FIL1E4750004	C 4.7UF, 25V	1	
	C16195	FIL1E4750004	C 4.7UF, 25V	1	
	C16197	FIL1E4750004	C 4.7UF, 25V	1	
	C16201	F0C2E405A230	E 0.040UF, 250V	1	
	C16202	F0C2E405A230	E 0.040UF, 250V	1	
	C16203	F0C2E405A230	E 0.040UF, 250V	1	
	C16204	F0C2E405A230	E 0.040UF, 250V	1	
	C16205	F0C2E405A230	E 0.040UF, 250V	1	
	C16241	F2A1A101A106	E 100UF, 10V	1	
	C16242	FIH1C105A008	C 1UF, K, 16V	1	
	C16243	FIH1H103A970	C 0.001UF, K, 50V	1	
	C16251	FIH1C105A008	C 1UF, K, 16V	1	
	C16252	FIK1E105A029	C 1UF, Z, 25V	1	
	C16262	F2AZZ821A012	E 820UF, 80V	1	
	C16263	F2AZZ821A012	E 820UF, 80V	1	
	C16265	F2AZZ821A012	E 820UF, 80V	1	
	C16267	F2AZZ821A012	E 820UF, 80V	1	
	C16268	F2AZZ821A012	E 820UF, 80V	1	
	C16270	F2AZZ821A012	E 820UF, 80V	1	
	C16271	F0C2E405A230	E 0.040UF, 250V	1	
	C16272	F0C2E405A230	E 0.040UF, 250V	1	
	C16272	F2A1E471A487	E 470UF, 25V	1	
	C16280	FIK1E105A029	C 1UF, Z, 25V	1	
	C16282	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16283	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16284	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16285	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16286	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16287	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16288	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16289	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16301	F2A1E470A454	E 47UF, 25V	1	
	C16302	FIH1H471A219	C 470UF, 50V	1	
	C16303	ECJ1XB1C103K	C 0.010UF, K, 16V	1	
	C16310	F2A2T251A004	E 250UF, 220V	1	
	C16311	FIH1A1050032	C 10UF, 50V	1	
	C16312	FIH1H472A970	C 4700PF, K, 50V	1	
	C16313	FIH1C105A008	C 1UF, K, 16V	1	
	C16321	FIL2E224A028	E 2200UF, 25V	1	
	C16322	FIL2E224A028	E 2200UF, 25V	1	
	C16323	F2A1E470A454	E 47UF, 25V	1	
	C16324	F2A1E471A487	E 470UF, 25V	1	
	C16325	FIL1E4750004	C 4.7UF, 25V	1	
	C16326	FIL1E4750004	C 4.7UF, 25V	1	
	C16328	F2A2D201A226	E 220UF, 200V	1	
	C16329	F2A2D201A226	E 220UF, 200V	1	
	C16331	F0C2E225A231	E 0.022UF, 250V	1	
	C16402	FIL2J562A022	C 5600UF, K, 6.3V	1	
	C16411	F2A2T251A004	E 250UF, 220V	1	
	C16412	F2A2T251A004	E 250UF, 220V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16413	F2A2T251A004	E 250UF, 220V	1	
	C16414	F2A2T251A004	E 250UF, 220V	1	
	C16415	F2A2T251A004	E 250UF, 220V	1	
	C16416	F2A2T251A004	E 250UF, 220V	1	
	C16417	F2A2T251A004	E 250UF, 220V	1	
	C16419	F0C2E225A231	E 0.022UF, 250V	1	
	C16423	FIL2J562A022	C 5600UF, K, 6.3V	1	
	C16471	FIL2J1520001	C 1500UF, K, 6.3V	1	PAVCCZ
	C16472	FIK1E105A029	C 1UF, Z, 25V	1	
	C16491	FIL2J1520001	C 1500UF, K, 6.3V	1	PAVCCZ
	C16501	FIK1E105A029	C 1UF, Z, 25V	1	
	C16502	FIL1E4750004	C 4.7UF, 25V	1	
	C16503	F2A1E471A487	E 470UF, 25V	1	
	C16504	FIL1E4750004	C 4.7UF, 25V	1	
	C16505	FIK1E105A029	C 1UF, Z, 25V	1	
	C16521	FIK1E105A029	C 1UF, Z, 25V	1	
	C16522	FIL1E4750004	C 4.7UF, 25V	1	
	C16523	FIL1E4750004	C 4.7UF, 25V	1	
	C16524	FIL1E4750004	C 4.7UF, 25V	1	
	C16525	FIL1E4750004	C 4.7UF, 25V	1	
	C16533	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16535	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16536	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16562	FIH1C105A008	C 1UF, K, 16V	1	
	C16563	F2A1A101A106	E 100UF, 10V	1	
	C16564	FIH1C105A008	C 1UF, K, 16V	1	
	C16565	FIH1H103A970	C 0.001UF, K, 50V	1	
	C16566	FIH1H103A970	C 0.001UF, K, 50V	1	
	C16581	FIK1E105A029	C 1UF, Z, 25V	1	
	C16582	FIH1C105A008	C 1UF, K, 16V	1	
	C16593	FIH1H102A971	C 1000PF, K, 50V	1	
	C16602	FIH1H220A971	C 22PF, K, 50V	1	
	C16603	FIK2J102A014	C 1000UF, K, 6.3V	1	
	C16604	FIK2J102A014	C 1000UF, K, 6.3V	1	
	C16605	FIH1H220A971	C 22PF, K, 50V	1	
	C16606	FIH1H220A971	C 22PF, K, 50V	1	
	C16608	FIH1H221A971	C 220UF, K, 50V	1	
	C16631	F0C2E405A230	E 0.040UF, 250V	1	
	C16632	F0C2E405A230	E 0.040UF, 250V	1	
	C16633	F0C2E405A230	E 0.040UF, 250V	1	
	C16634	F0C2E405A230	E 0.040UF, 250V	1	
	C16635	F0C2E405A230	E 0.040UF, 250V	1	
	C16641	FIL2E153A029	E 0.015UF, 25V	1	
	C16642	FIL2E153A029	E 0.015UF, 25V	1	
	C16661	FIK2J102A014	C 1000UF, K, 6.3V	1	
	C16662	FIK2J102A014	C 1000UF, K, 6.3V	1	
	C16664	FIH1H820A971	C 82UF, 50V	1	
	C16665	FIH1H820A971	C 82UF, 50V	1	
	C16666	FIH1H820A971	C 82UF, 50V	1	
	C16684	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16685	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16691	ECA2CM101	E 100UF, 160V	1	
	C16692	ECA2CM101	E 100UF, 160V	1	
	C16707	FIH1H220A971	C 22PF, K, 50V	1	
	C16708	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16721	F2A1E221A487	E 220UF, 25V	1	
	C16723	FIL1E4750004	C 4.7UF, 25V	1	
	C16724	FIL1E4750004	C 4.7UF, 25V	1	
	C16725	FIL1E4750004	C 4.7UF, 25V	1	
	C16753	FIL1E4750004	C 4.7UF, 25V	1	
	C16755	FIL1E4750004	C 4.7UF, 25V	1	
	C16756	FIL1E4750004	C 4.7UF, 25V	1	
	C16771	FIH1C105A008	C 1UF, K, 16V	1	
	C16772	FIL1E4750004	C 4.7UF, 25V	1	
	C16773	FIL1E4750004	C 4.7UF, 25V	1	
	C16775	FIL1E4750004	C 4.7UF, 25V	1	
	C16791	F2A1E221A487	E 220UF, 25V	1	
	C16795	F2A1E471A487	E 470UF, 25V	1	
	C16796	F2A1E471A487	E 470UF, 25V	1	
	C16806	ECA2CM101	E 100UF, 160V	1	
	C16807	ECA2CM101	E 100UF, 160V	1	
	C16811	ECJ3VC1H472J	C 4700PF, J, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16813	ECA2CM101	E 100UF, 160V	1	
	C16814	F1H1H561A971	C 560UF, 50V	1	
	C16821	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16822	F2A2G470A187	E 470UF, 400V	1	
	C16823	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16835	F2A1E221A487	E 220UF, 25V	1	
	C16842	ECA2CM101	E 100UF, 160V	1	
	C16843	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16844	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16855	F1H1C105A008	C 1UF, K, 16V	1	
	C16856	F1H1A1050032	C 10UF, 50V	1	
	C16857	F1H1H472A970	C 4700PF, K, 50V	1	
	C16858	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16860	F1H1A1050032	C 10UF, 50V	1	
	C16861	F1H1H472A970	C 4700PF, K, 50V	1	
	C16862	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16863	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16864	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16866	F1H1A1050032	C 10UF, 50V	1	
	C16867	F1H1H472A970	C 4700PF, K, 50V	1	
	C16868	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16869	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C17101	F1H1A1050032	C 10UF, 50V	1	
	C17102	F1H1A1050032	C 10UF, 50V	1	
	C17109	F1K2A105A006	C 1UF, 100V	1	
	C17110	F1K2A105A006	C 1UF, 100V	1	
	C17112	F1K2A105A006	C 1UF, 100V	1	
	C17114	F1K2A105A006	C 1UF, 100V	1	
	C17119	F1H1A1050032	C 10UF, 50V	1	
	C17120	F1H1A1050032	C 10UF, 50V	1	
	C17121	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17122	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17123	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17124	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17125	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17126	F1K2A105A006	C 1UF, 100V	1	
	C17130	F1H1A1050032	C 10UF, 50V	1	
	C17131	F1H1A1050032	C 10UF, 50V	1	
	C17132	F1H1A1050032	C 10UF, 50V	1	
	C17133	F1H1A1050032	C 10UF, 50V	1	
	C17134	F1H1A1050032	C 10UF, 50V	1	
	C17135	F1H1A1050032	C 10UF, 50V	1	
	C17136	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17201	F1H1A1050032	C 10UF, 50V	1	
	C17202	F1H1A1050032	C 10UF, 50V	1	
	C17203	F1H1A1050032	C 10UF, 50V	1	
	C17204	F1H1A1050032	C 10UF, 50V	1	
	C17205	F1H1A1050032	C 10UF, 50V	1	
	C17206	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17207	F1H1A1050032	C 10UF, 50V	1	
	C17210	F1H1A1050032	C 10UF, 50V	1	
	C17211	F1K2A105A006	C 1UF, 100V	1	
	C17213	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17214	F1K2A105A006	C 1UF, 100V	1	
	C17218	F1K2A105A006	C 1UF, 100V	1	
	C17219	F1H1A1050032	C 10UF, 50V	1	
	C17220	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17224	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17225	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17226	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17227	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17228	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17229	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17230	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17231	F1H1A1050032	C 10UF, 50V	1	
	C17232	F1K2A105A006	C 1UF, 100V	1	
	C17236	F1H1A1050032	C 10UF, 50V	1	
	C17238	F1K2A105A006	C 1UF, 100V	1	
	C17241	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17242	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17302	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17304	F1H1A1050032	C 10UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17305	F1H1A1050032	C 10UF, 50V	1	
	C17310	F1K2A105A006	C 1UF, 100V	1	
	C17313	F1K2A105A006	C 1UF, 100V	1	
	C17314	F1K2A105A006	C 1UF, 100V	1	
	C17315	F1K2A105A006	C 1UF, 100V	1	
	C17322	F1H1A1050032	C 10UF, 50V	1	
	C17323	F1H1A1050032	C 10UF, 50V	1	
	C17325	F1K2A105A006	C 1UF, 100V	1	
	C17328	F1H1A1050032	C 10UF, 50V	1	
	C17329	F1H1A1050032	C 10UF, 50V	1	
	C17330	F1H1A1050032	C 10UF, 50V	1	
	C17331	F1H1A1050032	C 10UF, 50V	1	
	C17332	F1H1A1050032	C 10UF, 50V	1	
	C17333	F1H1A1050032	C 10UF, 50V	1	
	C17334	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17335	F1K2A105A006	C 1UF, 100V	1	
	C17401	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17402	F1K2A105A006	C 1UF, 100V	1	
	C17404	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17409	F1H1A1050032	C 10UF, 50V	1	
	C17410	F1H1A1050032	C 10UF, 50V	1	
	C17415	F1K2A105A006	C 1UF, 100V	1	
	C17418	F1K2A105A006	C 1UF, 100V	1	
	C17419	F1K2A105A006	C 1UF, 100V	1	
	C17420	F1K2A105A006	C 1UF, 100V	1	
	C17427	F1H1A1050032	C 10UF, 50V	1	
	C17428	F1H1A1050032	C 10UF, 50V	1	
	C17429	F1K2A105A006	C 1UF, 100V	1	
	C17433	F1H1A1050032	C 10UF, 50V	1	
	C17434	F1H1A1050032	C 10UF, 50V	1	
	C17435	F1H1A1050032	C 10UF, 50V	1	
	C17436	F1H1A1050032	C 10UF, 50V	1	
	C17437	F1H1A1050032	C 10UF, 50V	1	
	C17438	F1H1A1050032	C 10UF, 50V	1	
	C17501	F1H1A1050032	C 10UF, 50V	1	
	C17503	F1K2A105A006	C 1UF, 100V	1	
	C17504	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17507	F1H1A1050032	C 10UF, 50V	1	
	C17508	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17512	F1K2A105A006	C 1UF, 100V	1	
	C17513	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17514	F1H1A1050032	C 10UF, 50V	1	
	C17516	F1K2A105A006	C 1UF, 100V	1	
	C17518	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17520	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17521	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17522	F1H1A1050032	C 10UF, 50V	1	
	C17523	F1H1A1050032	C 10UF, 50V	1	
	C17524	F1H1A1050032	C 10UF, 50V	1	
	C17525	F1H1A1050032	C 10UF, 50V	1	
	C17526	F1H1A1050032	C 10UF, 50V	1	
	C17527	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17528	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17529	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17530	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17531	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17532	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17533	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17534	F1H1A1050032	C 10UF, 50V	1	
	C17535	F1K2A105A006	C 1UF, 100V	1	
	C17539	F1H1A1050032	C 10UF, 50V	1	
	C17541	F1K2A105A006	C 1UF, 100V	1	
	C17601	F1H1A1050032	C 10UF, 50V	1	
	C17602	F1H1A1050032	C 10UF, 50V	1	
	C17607	F1K2A105A006	C 1UF, 100V	1	
	C17610	F1K2A105A006	C 1UF, 100V	1	
	C17611	F1K2A105A006	C 1UF, 100V	1	
	C17612	F1K2A105A006	C 1UF, 100V	1	
	C17619	F1H1A1050032	C 10UF, 50V	1	
	C17620	F1H1A1050032	C 10UF, 50V	1	
	C17621	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17622	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17623	F1H1C104A143	C 0.1UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17624	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17625	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17626	FIK2A105A006	C 1UF, 100V	1	
	C17630	FIH1A1050032	C 10UF, 50V	1	
	C17631	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17632	FIH1A1050032	C 10UF, 50V	1	
	C17633	FIH1A1050032	C 10UF, 50V	1	
	C17634	FIH1A1050032	C 10UF, 50V	1	
	C17635	FIH1A1050032	C 10UF, 50V	1	
	C17636	FIH1A1050032	C 10UF, 50V	1	
	CA1	K1MN68BA0052	68P CONNECTOR	1	
	CA2	K1MN68BA0052	68P CONNECTOR	1	
	CA3	K1MN68BA0052	68P CONNECTOR	1	
	CA4	K1MN68BA0052	68P CONNECTOR	1	
	CA5	K1MN68BA0052	68P CONNECTOR	1	
	CA6	K1MN68BA0052	68P CONNECTOR	1	
	CA7	K1MN68BA0052	68P CONNECTOR	1	
	CA8	K1MN68BA0052	68P CONNECTOR	1	
	CA9	K1MN68BA0052	68P CONNECTOR	1	
	CA10	K1MN68BA0052	68P CONNECTOR	1	
	CA11	K1MN68BA0052	68P CONNECTOR	1	
	CA12	K1MN68BA0052	68P CONNECTOR	1	
	CA13	K1MN68BA0052	68P CONNECTOR	1	
	CA14	K1MN68BA0052	68P CONNECTOR	1	
	CA15	K1MN68BA0052	68P CONNECTOR	1	
	CB1	K1MN68BA0052	68P CONNECTOR	1	
	CB2	K1MN68BA0052	68P CONNECTOR	1	
	CB3	K1MN68BA0052	68P CONNECTOR	1	
	CB4	K1MN68BA0052	68P CONNECTOR	1	
	CB5	K1MN68BA0052	68P CONNECTOR	1	
	CB6	K1MN68BA0052	68P CONNECTOR	1	
	CB7	K1MN68BA0052	68P CONNECTOR	1	
	CB8	K1MN68BA0052	68P CONNECTOR	1	
	CB9	K1MN68BA0052	68P CONNECTOR	1	
	CB10	K1MN68BA0052	68P CONNECTOR	1	
	CB11	K1MN68BA0052	68P CONNECTOR	1	
	CB12	K1MN68BA0052	68P CONNECTOR	1	
	CB13	K1MN68BA0052	68P CONNECTOR	1	
	CB14	K1MN68BA0052	68P CONNECTOR	1	
	CB15	K1MN68BA0052	68P CONNECTOR	1	
	D14903	BOHCMM000013	DIODE	1	
	D14904	BOHCMM000013	DIODE	1	
	D14905	BOHCMM000013	DIODE	1	
	D14906	BOHCMM000013	DIODE	1	
	D14907	BOHCMM000013	DIODE	1	
	D14908	BOHCMM000013	DIODE	1	
	D14909	MA3X152E0L	ZENER DIODE	1	
	D14910	MA2J11100L	DIODE	1	
	D14911	BOHCMM000013	DIODE	1	
	D14912	BOHCMM000013	DIODE	1	
	D14913	BOHCMM000013	DIODE	1	
	D14914	BOHCMM000013	DIODE	1	
	D14953	BOHCMM000013	DIODE	1	
	D14954	BOHCMM000013	DIODE	1	
	D14955	BOHCMM000013	DIODE	1	
	D14956	BOHCMM000013	DIODE	1	
	D14957	BOHCMM000013	DIODE	1	
	D14958	BOHCMM000013	DIODE	1	
	D14959	BOHCMM000013	DIODE	1	
	D14960	BOHCMM000013	DIODE	1	
	D14961	MA8056H	ZENER DIODE	1	
	D14974	MA3X152E0L	ZENER DIODE	1	
	D14975	MA2J11100L	DIODE	1	
	D14976	MA2J11100L	DIODE	1	
	D14977	BOHCMM000013	DIODE	1	
	D14978	BOHCMM000013	DIODE	1	
	D14979	MA2J11100L	DIODE	1	
	D16001	BOFBCN000005	DIODE	1	
	D16002	BOFBCN000005	DIODE	1	
	D16003	BOFBCN000005	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16021	MA3DF30000LW	ZENER DIODE	1	
	D16022	MA3DF30000LW	ZENER DIODE	1	
	D16032	MA2J11100L	DIODE	1	
	D16041	MA3DF46000LW	ZENER DIODE	1	
	D16042	MA3DF46000LW	ZENER DIODE	1	
	D16043	MA3DF46000LW	ZENER DIODE	1	
	D16050	BOECKP000047	DIODE	1	
	D16051	BOFBCN000005	DIODE	1	
	D16052	BOFBCN000005	DIODE	1	
	D16053	BOFBCN000005	DIODE	1	
	D16101	MA22D3900L	DIODE	1	
	D16131	BOECP000003	DIODE	1	
	D16151	BOECP000003	DIODE	1	
	D16152	BOECKP000047	DIODE	1	
	D16153	BOECKP000047	DIODE	1	
	D16191	BOECKP000047	DIODE	1	
	D16192	MA2J11100L	DIODE	1	
	D16253	B3ABB0000210	LED	1	
	D16255	MA2J11100L	DIODE	1	
	D16280	MA2J11100L	DIODE	1	
	D16281	MAZ80510LL	ZENER DIODE	1	
	D16282	MAZ80680ML	ZENER DIODE	1	
	D16283	MA3X152D0L	DIODE	1	
	D16284	MA3X152D0L	DIODE	1	
	D16285	MA3X152D0L	DIODE	1	
	D16286	MA3X152D0L	DIODE	1	
	D16300	BOECKP000047	DIODE	1	
	D16301	MA3X152E0L	ZENER DIODE	1	
	D16302	MA2J11100L	DIODE	1	
	D16304	MAZ80510LL	ZENER DIODE	1	
	D16311	MAZ81500ML	ZENER DIODE	1	
	D16313	BOECKP000047	DIODE	1	
	D16321	BOECKP000047	DIODE	1	
	D16323	MAZ80330HL	ZENER DIODE	1	
	D16324	MA3X152D0L	DIODE	1	
	D16401	MA3DF47000LW	ZENER DIODE	1	
	D16402	MA3DF47000LW	ZENER DIODE	1	
	D16403	MA3DF47000LW	ZENER DIODE	1	
	D16407	MA22D3900L	DIODE	1	
	D16411	MA2J11100L	DIODE	1	
	D16421	MA3DF40000LW	ZENER DIODE	1	
	D16422	MA3DF40000LW	ZENER DIODE	1	
	D16423	MA3DF40000LW	ZENER DIODE	1	
	D16451	BOECKP000047	DIODE	1	
	D16461	MA3DF46000LW	ZENER DIODE	1	
	D16462	MA3DF46000LW	ZENER DIODE	1	
	D16463	MA3DF46000LW	ZENER DIODE	1	
	D16464	MA3DF46000LW	ZENER DIODE	1	
	D16466	MA2J11100L	DIODE	1	
	D16473	MA3X152D0L	DIODE	1	
	D16474	MA2J11100L	DIODE	1	
	D16475	MAZ80510LL	ZENER DIODE	1	
	D16476	MA2J11100L	DIODE	1	
	D16477	MA2J11100L	DIODE	1	
	D16478	BOHCKS000002	DIODE	1	
	D16480	MA2J11100L	DIODE	1	
	D16481	MA3DF46000LW	ZENER DIODE	1	
	D16482	MA3DF46000LW	ZENER DIODE	1	
	D16483	MA3DF46000LW	ZENER DIODE	1	
	D16484	MA3DF46000LW	ZENER DIODE	1	
	D16497	BOECKP000047	DIODE	1	
	D16503	BOHCKS000002	DIODE	1	
	D16522	BOECKP000047	DIODE	1	
	D16523	BOECKP000047	DIODE	1	
	D16524	BOECKP000047	DIODE	1	
	D16536	BOHCKS000002	DIODE	1	
	D16583	B3ABB0000210	LED	1	
	D16602	MA8120M	ZENER DIODE	1	
	D16604	MA2J11100L	DIODE	1	
	D16605	MAZ80510LL	ZENER DIODE	1	
	D16606	BOECKM000038	DIODE	1	
	D16607	MA2J11100L	DIODE	1	
	D16608	MA8120M	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16609	MA2J11100L	DIODE	1	
	D16610	MA2J11100L	DIODE	1	
	D16618	B0ECKP000047	DIODE	1	
	D16619	B0ECKP000047	DIODE	1	
	D16621	B0FBCN000006	DIODE	1	
	D16622	B0FBCN000006	DIODE	1	
	D16623	B0FBCN000006	DIODE	1	
	D16631	MAZ81500ML	ZENER DIODE	1	
	D16632	MAZ81500ML	ZENER DIODE	1	
	D16633	MAZ81500ML	ZENER DIODE	1	
	D16641	MA3DF25000LW	ZENER DIODE	1	
	D16642	MA3DF25000LW	ZENER DIODE	1	
	D16643	MA3DF25000LW	ZENER DIODE	1	
	D16660	B0HCM0000014	DIODE	1	
	D16661	MA2J11100L	DIODE	1	
	D16662	MAZ81500ML	ZENER DIODE	1	
	D16663	MAZ81500ML	ZENER DIODE	1	
	D16664	MAZ81500ML	ZENER DIODE	1	
	D16665	MAZ80510LL	ZENER DIODE	1	
	D16667	MA2J11100L	DIODE	1	
	D16668	MA3X152D0L	DIODE	1	
	D16669	MA2J11100L	DIODE	1	
	D16671	MA2J11100L	DIODE	1	
	D16702	MA2J11100L	DIODE	1	
	D16710	MAZ815000L	ZENER DIODE	1	
	D16711	B0HCMR000002	DIODE	1	
	D16712	MAZ815000L	ZENER DIODE	1	
	D16713	B0HCMR000002	DIODE	1	
	D16714	MAZ815000L	ZENER DIODE	1	
	D16715	B0HCMR000002	DIODE	1	
	D16717	MA8330M	ZENER DIODE	1	
	D16718	MA2J11100L	DIODE	1	
	D16719	B0ECKP000047	DIODE	1	
	D16720	B0ECKP000047	DIODE	1	
	D16721	B0HCKS000002	DIODE	1	
	D16722	MA2J11100L	DIODE	1	
	D16725	MA2J11100L	DIODE	1	
	D16761	MA22D3900L	DIODE	1	
	D16764	B0HCKS000002	DIODE	1	
	D16765	B0ECKP000047	DIODE	1	
	D16781	MA2J11100L	DIODE	1	
	D16791	MAZ82000ML	ZENER DIODE	1	
	D16820	MA3X152E0L	ZENER DIODE	1	
	D16821	MAZ82000ML	ZENER DIODE	1	
	D16822	MA2J11100L	DIODE	1	
	D16824	MA8330M	ZENER DIODE	1	
	D16825	MA8330M	ZENER DIODE	1	
	D16835	B0ECKP000047	DIODE	1	
	D16859	B0HCKS000002	DIODE	1	
	D16860	B0HCKS000002	DIODE	1	
	D16861	MA8330M	ZENER DIODE	1	
	D16862	MA8330M	ZENER DIODE	1	
	D16871	MAZ815000L	ZENER DIODE	1	
	D16873	MAZ815000L	ZENER DIODE	1	
	D16874	MAZ80510LL	ZENER DIODE	1	
	D16875	MA2J11100L	DIODE	1	
	D17101	B0ECKM000038	DIODE	1	
	D17102	B0ECKM000038	DIODE	1	
	D17103	B0ECKM000038	DIODE	1	
	D17104	B0ECKM000038	DIODE	1	
	D17105	B0ECKM000038	DIODE	1	
	D17106	B0ECKM000038	DIODE	1	
	D17107	B0ECKM000038	DIODE	1	
	D17108	B0ECKM000038	DIODE	1	
	D17109	B0ECKM000038	DIODE	1	
	D17110	B0ECKM000038	DIODE	1	
	D17201	B0ECKM000038	DIODE	1	
	D17202	B0ECKM000038	DIODE	1	
	D17203	B0ECKM000038	DIODE	1	
	D17204	B0ECKM000038	DIODE	1	
	D17205	B0ECKM000038	DIODE	1	
	D17206	B0ECKM000038	DIODE	1	
	D17207	B0ECKM000038	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D17208	B0ECKM000038	DIODE	1	
	D17209	B0ECKM000038	DIODE	1	
	D17210	B0ECKM000038	DIODE	1	
	D17301	B0ECKM000038	DIODE	1	
	D17302	B0ECKM000038	DIODE	1	
	D17303	B0ECKM000038	DIODE	1	
	D17304	B0ECKM000038	DIODE	1	
	D17305	B0ECKM000038	DIODE	1	
	D17306	B0ECKM000038	DIODE	1	
	D17307	B0ECKM000038	DIODE	1	
	D17308	B0ECKM000038	DIODE	1	
	D17309	B0ECKM000038	DIODE	1	
	D17310	B0ECKM000038	DIODE	1	
	D17401	B0ECKM000038	DIODE	1	
	D17402	B0ECKM000038	DIODE	1	
	D17403	B0ECKM000038	DIODE	1	
	D17404	B0ECKM000038	DIODE	1	
	D17405	B0ECKM000038	DIODE	1	
	D17406	B0ECKM000038	DIODE	1	
	D17407	B0ECKM000038	DIODE	1	
	D17408	B0ECKM000038	DIODE	1	
	D17409	B0ECKM000038	DIODE	1	
	D17410	B0ECKM000038	DIODE	1	
	D17501	B0ECKM000038	DIODE	1	
	D17502	B0ECKM000038	DIODE	1	
	D17503	B0ECKM000038	DIODE	1	
	D17504	B0ECKM000038	DIODE	1	
	D17505	B0ECKM000038	DIODE	1	
	D17506	B0ECKM000038	DIODE	1	
	D17507	B0ECKM000038	DIODE	1	
	D17508	B0ECKM000038	DIODE	1	
	D17509	B0ECKM000038	DIODE	1	
	D17510	B0ECKM000038	DIODE	1	
	D17601	B0ECKM000038	DIODE	1	
	D17602	B0ECKM000038	DIODE	1	
	D17603	B0ECKM000038	DIODE	1	
	D17604	B0ECKM000038	DIODE	1	
	D17605	B0ECKM000038	DIODE	1	
	D17606	B0ECKM000038	DIODE	1	
	D17607	B0ECKM000038	DIODE	1	
	D17608	B0ECKM000038	DIODE	1	
	D17609	B0ECKM000038	DIODE	1	
	D17610	B0ECKM000038	DIODE	1	
	FL17101	J0HABH000013	LC FILTER	1	
	FL17201	J0HABH000013	LC FILTER	1	
	FL17501	J0HABH000013	LC FILTER	1	
	FL17601	J0HABH000013	LC FILTER	1	
	IC14901	AN16181A-VT	IC	1	PAVCCZ
	IC14902	AN16181A-VT	IC	1	PAVCCZ
	IC14903	AN16181A-VT	IC	1	PAVCCZ
	IC14904	AN16181A-VT	IC	1	PAVCCZ
	IC14905	AN16181A-VT	IC	1	PAVCCZ
	IC14906	AN16181A-VT	IC	1	PAVCCZ
	IC14907	AN16181A-VT	IC	1	PAVCCZ
	IC14908	AN16181A-VT	IC	1	PAVCCZ
	IC14951	AN16181A-VT	IC	1	PAVCCZ
	IC14952	AN16181A-VT	IC	1	PAVCCZ
	IC14953	AN16181A-VT	IC	1	PAVCCZ
	IC14954	AN16181A-VT	IC	1	PAVCCZ
	IC14955	AN16181A-VT	IC	1	PAVCCZ
	IC14956	AN16181A-VT	IC	1	PAVCCZ
	IC14957	AN16181A-VT	IC	1	PAVCCZ
	IC14958	AN16181A-VT	IC	1	PAVCCZ
	IC14961	C0JBAZ000994	IC	1	
	IC14962	C0JBAZ000994	IC	1	
	IC14963	C0JBAA000174	IC	1	
	IC14964	C0JBAA000174	IC	1	
	IC16131	C0ZBZ0000895	IC	1	
	IC16151	C0ZBZ0001324	IC	1	
	IC16241	C0JBAZ002811	IC	1	
	IC16251	C0BBBA000024	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC16301	MIP9L02MBS	IC	1	
	IC16302	C0CBALC00012	IC	1	
	IC16303	C0JBAB000715	IC	1	
	IC16464	C0JBAB000715	IC	1	
	IC16465	C0JBAB000715	IC	1	
	IC16471	C0DBEKA00003	IC	1	
	IC16501	C0ZBZ0001324	IC	1	
	IC16521	C0ZBZ0001324	IC	1	
	IC16561	C0JBAZ002811	IC	1	
	IC16562	C0JBAZ002811	IC	1	
	IC16563	C0JBAZ000994	IC	1	
	IC16564	C0JBAB000715	IC	1	
	IC16581	C0BBBA000024	IC	1	
	IC16724	C0CBADC00072	IC	1	
	IC16725	C0CBADC00072	IC	1	
	IC16771	C0CBADC00072	IC	1	
	IC16772	C0ZBZ0001325	IC	1	
	IC16773	C0JBAB000715	IC	1	
	IC16784	MIP9L02MBS	IC	1	
	IC16786	MIP9L02MBS	IC	1	
	IC16787	C0DBEYY00078	IC	1	
	IC16788	MIP9L02MBS	IC	1	
	IC16789	C0DBEYY00078	IC	1	
	IC16791	EHMDD9863	LINEAR IC	1	
	IC16801	C0DBEYY00078	IC	1	
	IC17101	C0JBAZ001120	IC	1	
	IC17102	C0JBAZ001120	IC	1	
	IC17103	C0JBAZ001120	IC	1	
	IC17104	C0JBAZ001120	IC	1	
	IC17105	C0JBAZ001120	IC	1	
	IC17106	C0JBAZ001120	IC	1	
	IC17201	C0JBAZ001120	IC	1	
	IC17202	C0JBAZ001120	IC	1	
	IC17203	C0JBAZ001120	IC	1	
	IC17204	C0JBAZ001120	IC	1	
	IC17205	C0JBAZ001120	IC	1	
	IC17206	C0JBAZ001120	IC	1	
	IC17207	C0JBAZ001120	IC	1	
	IC17208	C0JBAZ001120	IC	1	
	IC17209	C0JBAZ001120	IC	1	
	IC17210	C0JBAZ001120	IC	1	
	IC17211	C0JBAZ001120	IC	1	
	IC17212	C0JBAZ001120	IC	1	
	IC17301	C0JBAZ001120	IC	1	
	IC17306	C0JBAZ001120	IC	1	
	IC17401	C0JBAZ001120	IC	1	
	IC17402	C0JBAZ001120	IC	1	
	IC17501	C0JBAZ001120	IC	1	
	IC17502	C0JBAZ001120	IC	1	
	IC17503	C0JBAZ001120	IC	1	
	IC17504	C0JBAZ001120	IC	1	
	IC17505	C0JBAZ001120	IC	1	
	IC17506	C0JBAZ001120	IC	1	
	IC17507	C0JBAZ001120	IC	1	
	IC17508	C0JBAZ001120	IC	1	
	IC17509	C0JBAZ001120	IC	1	
	IC17510	C0JBAZ001120	IC	1	
	IC17511	C0JBAZ001120	IC	1	
	IC17512	C0JBAZ001120	IC	1	
	IC17513	C0JBAZ001120	IC	1	
	IC17601	C0JBAZ001120	IC	1	
	IC17602	C0JBAZ001120	IC	1	
	IC17603	C0JBAZ001120	IC	1	
	IC17604	C0JBAZ001120	IC	1	
	IC17605	C0JBAZ001120	IC	1	
	IC17606	C0JBAZ001120	IC	1	
	L16001	G0C1R4KA0118	PEAKING COIL	1	
	L16002	G0C1R4KA0118	PEAKING COIL	1	
	L16003	G0C1R4KA0118	PEAKING COIL	1	
	L16004	G0C1R4KA0118	PEAKING COIL	1	
	L16005	G0C1R4KA0118	PEAKING COIL	1	
	L16006	G0C1R4KA0118	PEAKING COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L16011	G0C1R4KA0118	PEAKING COIL	1	
	L16012	G0C1R4KA0118	PEAKING COIL	1	
	L16013	G0C1R4KA0118	PEAKING COIL	1	
	L16014	G0C1R4KA0118	PEAKING COIL	1	
	L16015	G0C1R4KA0118	PEAKING COIL	1	
	L16016	G0C1R4KA0118	PEAKING COIL	1	
	L16103	G0ZZ00002183	PEAKING COIL	1	
	L16221	G0ZZ00002183	PEAKING COIL	1	
	L16262	G0ZZ00002183	PEAKING COIL	1	
	L16271	G0ZZ00002183	PEAKING COIL	1	
	L16301	J0JHC0000031	CHIP INDUCTOR	1	
	L16398	J0JJC0000015	CHIP INDUCTOR	1	
	L16399	J0JJC0000015	CHIP INDUCTOR	1	
	L16401	G0C1R9KA0147	PEAKING COIL	1	
	L16402	G0C1R9KA0147	PEAKING COIL	1	
	L16403	G0C1R9KA0147	PEAKING COIL	1	
	L16404	G0C1R9KA0147	PEAKING COIL	1	
	L16405	G0C1R9KA0147	PEAKING COIL	1	
	L16406	G0C1R9KA0147	PEAKING COIL	1	
	L16407	G0C1R9KA0147	PEAKING COIL	1	
	L16411	G0C1R9KA0147	PEAKING COIL	1	
	L16412	G0C1R9KA0147	PEAKING COIL	1	
	L16413	G0C1R9KA0147	PEAKING COIL	1	
	L16414	G0C1R9KA0147	PEAKING COIL	1	
	L16415	G0C1R9KA0147	PEAKING COIL	1	
	L16416	G0C1R9KA0147	PEAKING COIL	1	
	L16417	G0C1R9KA0147	PEAKING COIL	1	
	L16472	G0ZZ00002183	PEAKING COIL	1	
	L16473	G0ZZ00002183	PEAKING COIL	1	
	L16474	G0ZZ00002183	PEAKING COIL	1	
	L16591	G0ZZ00002183	PEAKING COIL	1	
	L16698	G0C681KA0187	PEAKING COIL	1	
	L16699	G0C331KA0187	PEAKING COIL	1	
	L16801	G0ZZ00002183	PEAKING COIL	1	
	L16851	G0ZZ00002183	PEAKING COIL	1	
	PC14951	B3PBA0000457	IC	1	
	PC14952	B3PBA0000457	IC	1	
	PC14953	B3PBA0000456	IC	1	
	PC16191	B3PBA0000496	IC	1	
	PC16461	B3PBA0000457	IC	1	
	PC16480	B3PBA0000223	IC	1	
	PC16601	B3PBA0000223	IC	1	
	PC16603	B3PBA0000223	IC	1	
	PC16684	B3PBA0000496	IC	1	
	PC16685	B3PBA0000496	IC	1	
	PC16896	B3PBA0000223	IC	1	
	PC16897	B3PBA0000223	IC	1	
	△ PCB	ETX2MM706NGN	CIRCUIT BOARD P	1	PAVCCZ
	△ PCB	TXNC11RATJ	CIRCUIT BOARD C1	1	PAVCCZ
	△ PCB	TXNC21RATJ	CIRCUIT BOARD C2	1	PAVCCZ
	△ PCB	TXNC31RATJ	CIRCUIT BOARD C3	1	PAVCCZ
	△ PCB	TXNC41RATJ	CIRCUIT BOARD C4	1	PAVCCZ
	△ PCB	TXNC51RATJ	CIRCUIT BOARD C5	1	PAVCCZ
	△ PCB	TXNC61RATJ	CIRCUIT BOARD C6	1	PAVCCZ
	△ PCB	TXNSC1RATJ	CIRCUIT BOARD SC	1	PAVCCZ
	△ PCB	TXNSD1RATJ	CIRCUIT BOARD SD	1	PAVCCZ
	△ PCB	TXNSS1RATJ	CIRCUIT BOARD SS	1	PAVCCZ
	△ PCB	TXNSS21RATJ	CIRCUIT BOARD SS2	1	PAVCCZ
	△ PCB	TXNSS31RATJ	CIRCUIT BOARD SS3	1	PAVCCZ
	△ PCB	TXNSU1RATJ	CIRCUIT BOARD SU	1	PAVCCZ
	Q16001	B1JAEN000004	TRANSISTOR	1	
	Q16002	B1JAEN000004	TRANSISTOR	1	
	Q16003	B1JAEN000004	TRANSISTOR	1	
	Q16004	B1JAEN000004	TRANSISTOR	1	
	Q16005	B1JAEN000004	TRANSISTOR	1	
	Q16021	B1JAEN000004	TRANSISTOR	1	
	Q16022	B1JAEN000004	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16023	B1JAEN000004	TRANSISTOR	1	
	Q16024	B1JAEN000004	TRANSISTOR	1	
	Q16025	B1JAEN000004	TRANSISTOR	1	
	Q16041	2PG0330000RP	TRANSISTOR	1	PAVCCZ
	Q16042	2PG0330000RP	TRANSISTOR	1	PAVCCZ
	Q16051	2PG0330000RP	TRANSISTOR	1	PAVCCZ
	Q16052	2PG0330000RP	TRANSISTOR	1	PAVCCZ
	Q16055	B1HFFPA00001	TRANSISTOR	1	
	Q16056	B1HFFPA00001	TRANSISTOR	1	
	Q16101	2SK4174000RP	FET	1	
	Q16102	2SK4175000LZ	FET	1	
	Q16141	B1HFFPA00001	TRANSISTOR	1	
	Q16161	B1HFFPA00001	TRANSISTOR	1	
	Q16191	B1HFFPA00001	TRANSISTOR	1	
	Q16251	2SD0601ARL	TRANSISTOR	1	
	Q16280	2SD0601ARL	TRANSISTOR	1	
	Q16301	B1CBGD000001	FET	1	
	Q16302	B1CFNG000001	FET	1	
	Q16304	2SB0709ARL	TRANSISTOR	1	
	Q16331	2SK4174000RP	FET	1	
	Q16339	2SK417300L	FET	1	
	Q16401	2PG0060A00RP	TRANSISTOR	1	
	Q16402	2PG0060A00RP	TRANSISTOR	1	
	Q16403	2PG0060A00RP	TRANSISTOR	1	
	Q16404	2PG0060A00RP	TRANSISTOR	1	
	Q16406	2PG0060A00RP	TRANSISTOR	1	
	Q16421	B1JAEP000004	TRANSISTOR	1	
	Q16422	B1JAEP000004	TRANSISTOR	1	
	Q16423	B1JAEP000004	TRANSISTOR	1	
	Q16424	B1JAEP000004	TRANSISTOR	1	
	Q16425	B1JAEP000004	TRANSISTOR	1	
	Q16441	2PG0430000RP	TRANSISTOR	1	PAVCCZ
	Q16442	2PG0430000RP	TRANSISTOR	1	PAVCCZ
	Q16443	2PG0430000RP	TRANSISTOR	1	PAVCCZ
	Q16451	2PG0430000RP	TRANSISTOR	1	PAVCCZ
	Q16452	2PG0430000RP	TRANSISTOR	1	PAVCCZ
	Q16453	2PG0430000RP	TRANSISTOR	1	PAVCCZ
	Q16471	B1ABCF000231	TRANSISTOR	1	
	Q16501	B1HFFPA00001	TRANSISTOR	1	
	Q16502	B1HFFPA00001	TRANSISTOR	1	
	Q16503	B1HFFPA00001	TRANSISTOR	1	
	Q16521	B1HFFPA00001	TRANSISTOR	1	
	Q16522	B1HFFPA00001	TRANSISTOR	1	
	Q16523	B1HFFPA00001	TRANSISTOR	1	
	Q16531	B1HFFPA00001	TRANSISTOR	1	
	Q16532	B1HFFPA00001	TRANSISTOR	1	
	Q16551	B1HFFPA00001	TRANSISTOR	1	
	Q16552	B1HFFPA00001	TRANSISTOR	1	
	Q16601	B1DEET000002	FET	1	
	Q16602	2SD0601AQL	TRANSISTOR	1	
	Q16603	2SB0709ARL	TRANSISTOR	1	
	Q16604	B1CHPM000001	FET	1	
	Q16606	2SD0601AQL	TRANSISTOR	1	
	Q16607	B1CBGD000001	FET	1	
	Q16609	B1CFHL000002	FET	1	
	Q16621	2SK4208000RP	FET	1	
	Q16622	2SK4208000RP	FET	1	
	Q16623	2SK4208000RP	FET	1	
	Q16642	B1JADN000004	TRANSISTOR	1	
	Q16643	B1JADN000004	TRANSISTOR	1	
	Q16644	B1JADN000004	TRANSISTOR	1	
	Q16661	B1JAER000004	TRANSISTOR	1	
	Q16662	2SD0601AQL	TRANSISTOR	1	
	Q16663	2SB0709ARL	TRANSISTOR	1	
	Q16664	B1HFFPA00001	TRANSISTOR	1	
	Q16665	B1ABCF000231	TRANSISTOR	1	
	Q16667	B1ADCN000007	TRANSISTOR	1	
	Q16701	B1ADCN000007	TRANSISTOR	1	
	Q16702	B1ABCF000231	TRANSISTOR	1	
	Q16743	2SD0601ARL	TRANSISTOR	1	
	Q16762	B1ADNF000006	TRANSISTOR	1	
	Q16781	B1HFFPA00001	TRANSISTOR	1	
	Q16801	B1ADCN000007	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16810	B1ABCF000231	TRANSISTOR	1	
	Q16814	B1ABCF000007	TRANSISTOR	1	
	Q16815	B1ABCF000007	TRANSISTOR	1	
	Q16816	2SD0601AQL	TRANSISTOR	1	
	Q16817	2SD0601AQL	TRANSISTOR	1	
	Q16871	2SB0709ARL	TRANSISTOR	1	
	Q16872	2SB0709ARL	TRANSISTOR	1	
	Q16873	B1ABCF000231	TRANSISTOR	1	
	Q16874	B1CBGD000001	FET	1	
	Q16875	B1ABCF000231	TRANSISTOR	1	
	Q16876	B1ABCF000231	TRANSISTOR	1	
	Q16879	B1ABCF000231	TRANSISTOR	1	
	R14349	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14353	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14354	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14355	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14357	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14359	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14360	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14361	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14363	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14365	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14366	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14367	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14369	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14371	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14372	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14373	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14375	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14376	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14378	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14379	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14381	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14382	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14384	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14385	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14387	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14388	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14390	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14391	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14393	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14394	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14397	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14901	D0GD101JA036	M 100 OHM, J, 0.25W	1	
	R14902	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14903	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14904	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14905	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14906	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14907	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14908	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14909	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14910	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14911	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14912	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14913	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14914	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14915	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14916	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14917	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14919	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14920	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14921	ERJ8GEYJ224V	M 220KOHM, J, 1/8W	1	
	R14923	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14924	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14925	D0GD103JA036	M 10KOHM, J, 0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14926	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14928	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14929	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14930	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14932	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14933	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R14934	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14935	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14936	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R14937	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R14939	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14940	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14942	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14943	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R14944	ERJ6GEYJ100V	M 10 OHM,J,1/10W	1	
	R14947	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14949	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
	R14950	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14951	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14952	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14953	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14954	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14955	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14956	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14957	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14958	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14959	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14960	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14961	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14962	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14963	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14964	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14965	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14966	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14967	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14971	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R14973	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14974	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14975	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14976	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14977	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14978	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14979	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14980	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14981	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14982	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14983	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14984	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14986	ERJ8GEYJ224V	M 220KOHM, J,1/8W	1	
	R14987	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14988	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14990	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14991	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14992	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14993	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14994	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14995	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14996	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14997	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14998	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14999	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16001	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16002	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16003	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16004	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16005	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16021	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16022	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16023	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16024	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16025	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16031	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16032	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16041	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16042	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16051	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16052	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16101	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16102	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16103	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16104	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16105	ERJ8GEYJ474	M 470KOHM, J,1/8W	1	
	R16109	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16110	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16116	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16131	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16132	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16134	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16137	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16138	ERJ14Y0R00	M 0 OHM, J,1/4W	1	
	R16141	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16142	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16143	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16151	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16152	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16154	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16155	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16159	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16161	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16162	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16163	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16171	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16172	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16173	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16181	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16182	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16183	ERJ6GEYF473	M 47KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16191	D0GD151JA036	M 150 OHM,J,0.25W	1	
	R16192	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16195	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16220	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16221	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16230	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16231	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16241	EXB38V470J	RESISTOR ARRAY	1	
	R16242	EXB38V472JV	RESISTOR ARRAY	1	
	R16251	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16252	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16253	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16254	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16257	D0GD273JA036	M 27KOHM,J,0.25W	1	
	R16258	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16260	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16261	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16280	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16281	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16282	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16283	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16284	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16285	EXB38V623J	RESISTOR ARRAY	1	
	R16286	EXB38V623J	RESISTOR ARRAY	1	
	R16287	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16288	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16289	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16290	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16291	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16292	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16293	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16294	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16300	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16301	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16302	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16303	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16304	ERJT08J751V	M750 OHM,F,0.33W	1	PAVCCZ
	R16305	ERJ6GEYJ271V	M 270 OHM J 1/10W	1	
	R16306	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16308	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16309	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16310	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16311	ERJ6GEYJ124V	M 120KOHM,J,1/10W	1	
	R16312	ERJ6GEYJ124V	M 120KOHM,J,1/10W	1	
	R16313	ERJ6ENF5762	M57.6KOHM, 1/10W	1	
	R16314	ERJ6ENF6192	M61.9KOHM, 1/10W	1	
	R16315	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16316	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16321	ERJ6GEYF473	M 47KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16322	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16323	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16324	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16325	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16331	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16333	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16338	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16339	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16401	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16402	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16403	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16404	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16406	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16410	ERJ6GEYG391	M 390 OHM,F,1/10W	1	
	R16411	ERJ6ENF2700	M 270 OHM, 1/10W	1	
	R16414	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16415	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16416	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16421	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16422	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16423	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16424	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16425	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16441	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16442	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16443	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16451	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16452	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16453	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16467	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16468	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16471	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16472	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16473	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16474	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16475	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16476	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16478	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16479	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16480	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16501	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16502	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16503	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16504	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16505	ERJT06J100V	M 10 OHM,F,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16506	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16507	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16509	ERJT08J1R0V	M 1.80OHM,J,0.33W	1	
	R16510	ERJT14J1R0U	C1.0 OHM, J,1/4W	1	
	R16511	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16512	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16513	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16514	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16516	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16517	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16518	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16519	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16520	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16521	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16522	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16523	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16526	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16527	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16528	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16529	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16530	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16531	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16532	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16533	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16536	ERJT08J1R0V	M 1.80OHM,J,0.33W	1	
	R16538	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16539	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16540	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16542	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16543	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16544	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16551	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16552	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16553	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16561	EXB38V470J	RESISTOR ARRAY	1	
	R16562	EXB38V470J	RESISTOR ARRAY	1	
	R16563	EXB38V470J	RESISTOR ARRAY	1	
	R16564	EXB38V470J	RESISTOR ARRAY	1	
	R16565	EXB38V472JV	RESISTOR ARRAY	1	
	R16566	EXB38V472JV	RESISTOR ARRAY	1	
	R16567	EXB38V472JV	RESISTOR ARRAY	1	
	R16568	EXB38V472JV	RESISTOR ARRAY	1	
	R16570	EXB38V472JV	RESISTOR ARRAY	1	
	R16573	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16579	EXB38V470J	RESISTOR ARRAY	1	
	R16582	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16583	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16584	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16586	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16587	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16588	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16590	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16591	EXB38V472JV	RESISTOR ARRAY	1	
	R16592	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16593	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16602	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16604	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16605	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R16606	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16607	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R16608	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16609	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16610	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16611	ERJ8GEYJ683V	M 68KOHM, J,1/8W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16612	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16613	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16614	ERJ8GEYJ683V	M 68KOHM, J,1/8W	1	
	R16615	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
	R16617	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16621	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16622	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16623	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16631	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16633	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16634	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16638	D0GZ6R8JA020	M 6.8 OHM,J,0.5W	1	
	R16642	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16643	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16644	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16661	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
	R16662	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
	R16663	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16664	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16665	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16666	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16668	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16669	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16670	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16671	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16672	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16674	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16676	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16677	ERJ6RBD152	M 1.5KOHM,J,1/10W	1	
	R16678	ERJ8GEYJ563	M 56KOHM, J,1/8W	1	
	R16681	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16682	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16683	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16684	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16685	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16696	ERF5TK2R2	W 2.2 OHM, K, 5W	1	
	R16700	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16701	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16702	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R16703	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16704	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16707	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
	R16711	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16712	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16717	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16719	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16720	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16721	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16722	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16723	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16729	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16730	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16731	ERG1FJS823D	M 82KOHM, J, 1W	1	
	R16732	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
	R16733	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
	R16734	ERJ6ENF4991	M4.99KOHM, 1/10W	1	
	R16735	ERJ6ENF2213	M 221KOHM, 1/10W	1	
	R16736	ERJ6ENF2213	M 221KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16737	ERJ6ENF2103	M 210KOHM, 1/10W	1	
	R16738	ERG1FJS823D	M 82KOHM, J, 1W	1	
	R16740	ERJ6GEYJ104V	M 100KOHM, J, 1/10W	1	
	R16742	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R16744	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16745	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
	R16746	ERJT06J103V	M 10KOHM, F, 0.25W	1	
	R16747	ERJT06J103V	M 10KOHM, F, 0.25W	1	
	R16749	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R16750	ERJT06J223V	M 22 KOHM, F, 0.25W	1	
	R16751	ERJT06J224V	M 220KOHM, F, 0.25W	1	
	R16752	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16753	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16756	ERJT06J223V	M 22 KOHM, F, 0.25W	1	
	R16757	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16758	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
	R16761	ERJT06J100V	M 10 OHM, F, 0.25W	1	
	R16762	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16765	ERJT08J7R5V	M 7.5OHM, J, 0.33W	1	
	R16766	ERJT06J750V	M 75 OHM, F, 0.25W	1	
	R16769	ERJT06J750V	M 75 OHM, F, 0.25W	1	
	R16774	ERG1SJ683	M 68KOHM, J, 1W	1	
	R16775	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16776	D0GD101JA036	M 100 OHM, J, 0.25W	1	
	R16777	ERJT06J151V	M 150 OHM, F, 0.25W	1	
	R16778	ERF5TK2R2	W 2.2 OHM, K, 5W	1	
	R16781	ERJT06J470V	M 47 OHM, F, 0.25W	1	
	R16782	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16785	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16786	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16787	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16788	ERJT06J154V	M 150KOHM, F, 0.25W	1	
	R16789	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R16791	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16794	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16795	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16796	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16802	ERJ6ENF3321	M3.32KOHM, 1/10W	1	
	R16804	ERJ8GEYJ563	M 56KOHM, J, 1/8W	1	
	R16813	ERJ8GEYJ102V	M 1KOHM, J, 1/8W	1	
	R16814	ERJ6ENF3091	M3.09KOHM, 1/10W	1	
	R16815	ERJ6ENF1001	M 1KOHM, 1/10W	1	
	R16816	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16822	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16823	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16824	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16825	ERJT06J154V	M 150KOHM, F, 0.25W	1	
	R16826	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R16828	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16838	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16841	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16844	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16845	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16846	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16851	ERJ6GEYJ104V	M 100KOHM, J, 1/10W	1	
	R16852	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R16860	D0D28R2JA021	M 8.2 OHM, J, 2W	1	
	R16867	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R16869	ERJ8GEYJ473	M 47KOHM, J, 1/8W	1	
	R16870	ERG2FJS333D	M 33KOHM, J, 2W	1	
	R16871	ERJ6GEYJ392	M 3.9KOHM, J, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16872	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R16873	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
	R16874	ERJ6ENF7322	M73.2KOHM, 1/10W	1	
	R16875	ERJ6ENF7152	M71.5KOHM, 1/10W	1	
	R16886	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R16887	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R16888	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R17101	D0GF103JA047	M 10 KOHM, J, 0.33W	1	
	R17102	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17103	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17104	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17105	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17106	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17107	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17108	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17109	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17110	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17111	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17112	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17113	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17114	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17115	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17116	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17117	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17118	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17119	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17120	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17121	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17122	EXB38V471J	RESISTOR ARRAY	1	
	R17123	EXB38V471J	RESISTOR ARRAY	1	
	R17124	EXB38V471J	RESISTOR ARRAY	1	
	R17125	EXB38V470J	RESISTOR ARRAY	1	
	R17126	EXB38V470J	RESISTOR ARRAY	1	
	R17127	EXB38V471J	RESISTOR ARRAY	1	
	R17128	EXB38V471J	RESISTOR ARRAY	1	
	R17129	EXB38V470J	RESISTOR ARRAY	1	
	R17130	EXB38V470J	RESISTOR ARRAY	1	
	R17131	EXB38V471J	RESISTOR ARRAY	1	
	R17132	EXB38V471J	RESISTOR ARRAY	1	
	R17133	EXB38V470J	RESISTOR ARRAY	1	
	R17134	EXB38V470J	RESISTOR ARRAY	1	
	R17135	EXB38V471J	RESISTOR ARRAY	1	
	R17136	EXB38V470J	RESISTOR ARRAY	1	
	R17137	EXB38V470J	RESISTOR ARRAY	1	
	R17138	EXB38V470J	RESISTOR ARRAY	1	
	R17139	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R17140	ERJ6GEYJ104V	M 100KOHM, J, 1/10W	1	
	R17141	EXB38V681J	RESISTOR ARRAY	1	
	R17142	EXB38V681J	RESISTOR ARRAY	1	
	R17143	EXB38V220JV	RESISTOR ARRAY	1	
	R17144	EXB38V220JV	RESISTOR ARRAY	1	
	R17145	EXB38V220JV	RESISTOR ARRAY	1	
	R17156	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R17201	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17202	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17203	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17204	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17205	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17206	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17207	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17208	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17209	EXB38V220JV	RESISTOR ARRAY	1	
	R17210	EXB38V220JV	RESISTOR ARRAY	1	
	R17211	EXB38V471J	RESISTOR ARRAY	1	
	R17212	EXB38V471J	RESISTOR ARRAY	1	
	R17213	EXB38V470J	RESISTOR ARRAY	1	
	R17214	EXB38V470J	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17215	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17216	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17217	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17218	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17219	EXB38V470J	RESISTOR ARRAY	1	
	R17220	EXB38V470J	RESISTOR ARRAY	1	
	R17221	EXB38V471J	RESISTOR ARRAY	1	
	R17222	EXB38V471J	RESISTOR ARRAY	1	
	R17223	EXB38V470J	RESISTOR ARRAY	1	
	R17224	EXB38V470J	RESISTOR ARRAY	1	
	R17225	EXB38V471J	RESISTOR ARRAY	1	
	R17226	EXB38V471J	RESISTOR ARRAY	1	
	R17227	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17228	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17229	EXB38V470J	RESISTOR ARRAY	1	
	R17230	EXB38V470J	RESISTOR ARRAY	1	
	R17231	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17232	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17233	EXB38V220JV	RESISTOR ARRAY	1	
	R17234	EXB38V470J	RESISTOR ARRAY	1	
	R17235	EXB38V470J	RESISTOR ARRAY	1	
	R17236	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17237	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17238	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17239	EXB38V470J	RESISTOR ARRAY	1	
	R17240	EXB38V470J	RESISTOR ARRAY	1	
	R17241	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17242	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17243	EXB38V471J	RESISTOR ARRAY	1	
	R17244	EXB38V681J	RESISTOR ARRAY	1	
	R17245	EXB38V471J	RESISTOR ARRAY	1	
	R17246	EXB38V220JV	RESISTOR ARRAY	1	
	R17247	EXB38V220JV	RESISTOR ARRAY	1	
	R17248	EXB38V220JV	RESISTOR ARRAY	1	
	R17249	EXB38V220JV	RESISTOR ARRAY	1	
	R17250	EXB38V220JV	RESISTOR ARRAY	1	
	R17251	EXB38V220JV	RESISTOR ARRAY	1	
	R17252	EXB38V471J	RESISTOR ARRAY	1	
	R17253	EXB38V471J	RESISTOR ARRAY	1	
	R17254	EXB38V471J	RESISTOR ARRAY	1	
	R17255	EXB38V471J	RESISTOR ARRAY	1	
	R17256	EXB38V471J	RESISTOR ARRAY	1	
	R17257	EXB38V471J	RESISTOR ARRAY	1	
	R17258	EXB38V471J	RESISTOR ARRAY	1	
	R17259	EXB38V471J	RESISTOR ARRAY	1	
	R17260	EXB38V471J	RESISTOR ARRAY	1	
	R17261	EXB38V471J	RESISTOR ARRAY	1	
	R17262	EXB38V681J	RESISTOR ARRAY	1	
	R17263	EXB38V681J	RESISTOR ARRAY	1	
	R17264	ERJ3GEYJ220	M 22 OHM, J,1/16W	1	
	R17275	EXB38V220JV	RESISTOR ARRAY	1	
	R17276	EXB38V220JV	RESISTOR ARRAY	1	
	R17277	ERJ6GEYJ224	M 220KOHM, J,1/10W	1	
	R17301	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17302	EXB38V470J	RESISTOR ARRAY	1	
	R17315	EXB38V681J	RESISTOR ARRAY	1	
	R17316	EXB38V681J	RESISTOR ARRAY	1	
	R17321	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17322	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17323	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17324	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17325	D0GF103JA047	M 10 KOHM, J, 0.33W	1	
	R17326	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17327	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17328	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17329	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17330	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17331	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17332	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17333	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17334	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17335	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17336	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17337	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17338	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17339	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17340	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17341	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17342	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R17343	ERJ6GEYJ104V	M 100KOHM, J,1/10W	1	
	R17344	ERJ6GEYJ223	M 22KOHM, J,1/10W	1	
	R17345	EXB38V220JV	RESISTOR ARRAY	1	
	R17346	EXB38V220JV	RESISTOR ARRAY	1	
	R17347	ERJ6GEYJ224	M 220KOHM, J,1/10W	1	
	R17348	EXB38V331J	RESISTOR ARRAY	1	
	R17349	EXB38V331J	RESISTOR ARRAY	1	
	R17350	EXB38V331J	RESISTOR ARRAY	1	
	R17351	EXB38V331J	RESISTOR ARRAY	1	
	R17352	EXB38V331J	RESISTOR ARRAY	1	
	R17353	EXB38V331J	RESISTOR ARRAY	1	
	R17354	EXB38V471J	RESISTOR ARRAY	1	
	R17355	EXB38V471J	RESISTOR ARRAY	1	
	R17356	EXB38V471J	RESISTOR ARRAY	1	
	R17368	EXB38V471J	RESISTOR ARRAY	1	
	R17370	EXB38V220JV	RESISTOR ARRAY	1	
	R17401	EXB38V681J	RESISTOR ARRAY	1	
	R17402	EXB38V220JV	RESISTOR ARRAY	1	
	R17403	EXB38V220JV	RESISTOR ARRAY	1	
	R17420	ERJ6GEYJ224	M 220KOHM, J,1/10W	1	
	R17429	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R17430	EXB38V220JV	RESISTOR ARRAY	1	
	R17431	EXB38V331J	RESISTOR ARRAY	1	
	R17432	EXB38V331J	RESISTOR ARRAY	1	
	R17433	EXB38V331J	RESISTOR ARRAY	1	
	R17434	EXB38V331J	RESISTOR ARRAY	1	
	R17435	EXB38V471J	RESISTOR ARRAY	1	
	R17436	EXB38V471J	RESISTOR ARRAY	1	
	R17437	EXB38V331J	RESISTOR ARRAY	1	
	R17438	EXB38V331J	RESISTOR ARRAY	1	
	R17439	EXB38V471J	RESISTOR ARRAY	1	
	R17440	EXB38V471J	RESISTOR ARRAY	1	
	R17441	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17442	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17443	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17444	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17445	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17446	EXB38V470J	RESISTOR ARRAY	1	
	R17447	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17448	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17449	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17450	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17451	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17452	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17453	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17454	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17455	D0GF103JA047	M 10 KOHM, J, 0.33W	1	
	R17456	EXB38V681J	RESISTOR ARRAY	1	
	R17457	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17458	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17459	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17460	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17461	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17462	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17463	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17464	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17465	ERJ6GEYJ223	M 22KOHM, J,1/10W	1	
	R17466	ERJ6GEYJ104V	M 100KOHM, J,1/10W	1	
	R17501	ERJ3GEYJ220	M 22 OHM, J,1/16W	1	
	R17502	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17503	EXB38V220JV	RESISTOR ARRAY	1	
	R17504	EXB38V220JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17505	EXB38V471J	RESISTOR ARRAY	1	
	R17506	EXB38V471J	RESISTOR ARRAY	1	
	R17507	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17508	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17509	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17510	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17511	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17512	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17513	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17514	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17515	EXB38V470J	RESISTOR ARRAY	1	
	R17516	EXB38V470J	RESISTOR ARRAY	1	
	R17517	EXB38V681J	RESISTOR ARRAY	1	
	R17518	EXB38V470J	RESISTOR ARRAY	1	
	R17519	EXB38V681J	RESISTOR ARRAY	1	
	R17520	EXB38V470J	RESISTOR ARRAY	1	
	R17521	EXB38V471J	RESISTOR ARRAY	1	
	R17522	EXB38V470J	RESISTOR ARRAY	1	
	R17523	EXB38V470J	RESISTOR ARRAY	1	
	R17524	EXB38V470J	RESISTOR ARRAY	1	
	R17525	EXB38V470J	RESISTOR ARRAY	1	
	R17526	EXB38V470J	RESISTOR ARRAY	1	
	R17527	EXB38V470J	RESISTOR ARRAY	1	
	R17528	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17529	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17530	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17531	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17532	EXB38V681J	RESISTOR ARRAY	1	
	R17533	EXB38V681J	RESISTOR ARRAY	1	
	R17534	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17535	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17536	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17537	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17538	EXB38V470J	RESISTOR ARRAY	1	
	R17539	EXB38V471J	RESISTOR ARRAY	1	
	R17540	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17541	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17542	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17543	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17544	EXB38V471J	RESISTOR ARRAY	1	
	R17545	EXB38V470J	RESISTOR ARRAY	1	
	R17546	EXB38V470J	RESISTOR ARRAY	1	
	R17547	EXB38V471J	RESISTOR ARRAY	1	
	R17548	EXB38V471J	RESISTOR ARRAY	1	
	R17549	EXB38V470J	RESISTOR ARRAY	1	
	R17550	EXB38V681J	RESISTOR ARRAY	1	
	R17551	EXB38V220JV	RESISTOR ARRAY	1	
	R17552	EXB38V220JV	RESISTOR ARRAY	1	
	R17553	EXB38V220JV	RESISTOR ARRAY	1	
	R17554	EXB38V220JV	RESISTOR ARRAY	1	
	R17555	EXB38V220JV	RESISTOR ARRAY	1	
	R17556	EXB38V220JV	RESISTOR ARRAY	1	
	R17557	EXB38V471J	RESISTOR ARRAY	1	
	R17558	EXB38V471J	RESISTOR ARRAY	1	
	R17559	EXB38V471J	RESISTOR ARRAY	1	
	R17560	EXB38V471J	RESISTOR ARRAY	1	
	R17561	EXB38V471J	RESISTOR ARRAY	1	
	R17562	EXB38V471J	RESISTOR ARRAY	1	
	R17563	EXB38V471J	RESISTOR ARRAY	1	
	R17564	EXB38V471J	RESISTOR ARRAY	1	
	R17565	EXB38V471J	RESISTOR ARRAY	1	
	R17566	EXB38V471J	RESISTOR ARRAY	1	
	R17567	EXB38V471J	RESISTOR ARRAY	1	
	R17568	EXB38V220JV	RESISTOR ARRAY	1	
	R17569	EXB38V220JV	RESISTOR ARRAY	1	
	R17580	ERJ6GEYJ224	M 220KOHM, J,1/10W	1	
	R17581	EXB38V220JV	RESISTOR ARRAY	1	
	R17601	EXB38V681J	RESISTOR ARRAY	1	
	R17602	EXB38V220JV	RESISTOR ARRAY	1	
	R17603	EXB38V220JV	RESISTOR ARRAY	1	
	R17604	EXB38V220JV	RESISTOR ARRAY	1	
	R17605	ERJ6GEYJ224	M 220KOHM, J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17606	EXB38V471J	RESISTOR ARRAY	1	
	R17607	EXB38V471J	RESISTOR ARRAY	1	
	R17608	EXB38V471J	RESISTOR ARRAY	1	
	R17609	EXB38V471J	RESISTOR ARRAY	1	
	R17610	EXB38V471J	RESISTOR ARRAY	1	
	R17611	EXB38V471J	RESISTOR ARRAY	1	
	R17612	EXB38V471J	RESISTOR ARRAY	1	
	R17613	EXB38V471J	RESISTOR ARRAY	1	
	R17614	EXB38V470J	RESISTOR ARRAY	1	
	R17615	EXB38V470J	RESISTOR ARRAY	1	
	R17616	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17617	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17618	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17619	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17620	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17621	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17622	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17623	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17624	D0GF103JA047	M 10 KOHM, J, 0.33W	1	
	R17625	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17626	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17627	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17628	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17629	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17630	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17631	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17632	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17633	EXB38V470J	RESISTOR ARRAY	1	
	R17634	EXB38V681J	RESISTOR ARRAY	1	
	R17635	EXB38V470J	RESISTOR ARRAY	1	
	R17636	EXB38V470J	RESISTOR ARRAY	1	
	R17637	EXB38V470J	RESISTOR ARRAY	1	
	R17638	EXB38V470J	RESISTOR ARRAY	1	
	R17639	EXB38V470J	RESISTOR ARRAY	1	
	R17640	EXB38V470J	RESISTOR ARRAY	1	
	R17641	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17642	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17643	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17644	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17645	ERJ6GEYJ223	M 22KOHM, J,1/10W	1	
	R17646	ERJ6GEYJ104V	M 100KOHM, J,1/10W	1	
	SC2	K1KA02A00676	2P CONNECTOR	1	
	SC20	K1MN35BA0266	35P CONNECTOR	1	
	SC41	K1KA23AA0733	23P CONNECTOR	1	
	SC42	K1KA23AA0733	23P CONNECTOR	1	
	SC46	K1KA09A00239	9P CONNECTOR	1	
	SD11	K1MN20BA0231	20P CONNECTOR	1	
	SD42	K1KB23AA0234	23P CONNECTOR	1	
	SD46	K1KY09AA0607	9P CONNECTOR	1	
	SD1B	K1MNA8BA0250	8P CONNECTOR	1	
	SD4B	K1MNA8BA0250	8P CONNECTOR	1	
	SD5B	K1MNA8BA0250	8P CONNECTOR	1	
	SD2B	K1MNA8BA0250	8P CONNECTOR	1	
	SD3B	K1MNA8BA0250	8P CONNECTOR	1	
	SS02	K1KB15AA0032	15P CONNECTOR	1	
	SS03	K1KB15AA0032	15P CONNECTOR	1	
	SS11	K1KA02A00676	2P CONNECTOR	1	
	SS12	K1KA10AA0194	10P CONNECTOR	1	
	SS21	K1KY15AA0606	15P CONNECTOR	1	
	SS22	K1KY15AA0606	15P CONNECTOR	1	
	SS32	K1KA04AA0193	4P CONNECTOR	1	
	SS33	K1KA10A00416	10P CONNECTOR	1	
	SS34	K1KA03AA0193	3P CONNECTOR	1	
	SS35	K1KA04AA0193	4P CONNECTOR	1	
	SS51	K1MN13B00091	13P CONNECTOR	1	
	SS52	K1MN13B00091	13P CONNECTOR	1	
	SS53	K1MN13B00091	13P CONNECTOR	1	
	SS54	K1MN13B00091	13P CONNECTOR	1	
	SS55	K1MN13B00091	13P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	SS56	K1MN13B00091	13P CONNECTOR	1	
	SS57	K1MN13B00091	13P CONNECTOR	1	
	SS58	K1MN13B00091	13P CONNECTOR	1	
	SSMM2	TMME190	CLAMPER	1	
	SSMM4	TMME260	CLAMPER	1	
	SSMM6	TMME260	CLAMPER	1	
	SSMM7	TMME260	CLAMPER	1	
	SU11	K1MN20BA0266	20P CONNECTOR	1	
	SU41	K1KB23AA0234	23P CONNECTOR	1	
	SU1B	K1MNA8BA0250	8P CONNECTOR	1	
	SU2B	K1MNA8BA0250	8P CONNECTOR	1	
	SU5B	K1MNA8BA0250	8P CONNECTOR	1	
	SU4B	K1MNA8BA0250	8P CONNECTOR	1	
	SU3B	K1MNA8BA0250	8P CONNECTOR	1	
	T16301	ETS19AB249AC	SWITCHING TRANS	1	
	T16697	ETS19AB249AC	SWITCHING TRANS	1	
	VR16000	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16600	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16602	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	
	ZA14901	K4AD01Z00004	TERMINAL	1	PAVCCZ
	ZA14902	K4AD01Z00004	TERMINAL	1	PAVCCZ
	ZA14903	K4AD01Z00004	TERMINAL	1	PAVCCZ
	ZA14951	K4AD01Z00004	TERMINAL	1	PAVCCZ
	ZA14952	K4AD01Z00004	TERMINAL	1	PAVCCZ
	ZA14953	K4AD01Z00004	TERMINAL	1	PAVCCZ
	ZA16001	K4CD01000011	AV TERMINAL	1	
	ZA16002	K4CD01000011	AV TERMINAL	1	
	ZA16003	K4CD01000011	AV TERMINAL	1	
	ZA16010	K4ZZ01000206	TERMINAL	1	
	ZA16011	K4ZZ01000206	TERMINAL	1	
	ZA16012	K4ZZ01000206	TERMINAL	1	
	ZA16013	K4ZZ01000206	TERMINAL	1	
	ZA16401	K4CD01000011	AV TERMINAL	1	
	ZA16402	K4CD01000011	AV TERMINAL	1	
	ZA16403	K4CD01000011	AV TERMINAL	1	
	ZA17101	K4CD01000013	AV TERMINAL	1	
	ZA17103	K4CD01000013	AV TERMINAL	1	
	ZA17104	K4CD01000013	AV TERMINAL	1	
	ZA17105	K4CD01000013	AV TERMINAL	1	
	ZA17106	K4CD01000013	AV TERMINAL	1	
	ZA17201	K4CD01000013	AV TERMINAL	1	
	ZA17202	K4CD01000013	AV TERMINAL	1	
	ZA17203	K4CD01000013	AV TERMINAL	1	
	ZA17204	K4CD01000013	AV TERMINAL	1	
	ZA17205	K4CD01000013	AV TERMINAL	1	
	ZA17301	K4CD01000013	AV TERMINAL	1	
	ZA17303	K4CD01000013	AV TERMINAL	1	
	ZA17304	K4CD01000013	AV TERMINAL	1	
	ZA17305	K4CD01000013	AV TERMINAL	1	
	ZA17306	K4CD01000013	AV TERMINAL	1	
	ZA17401	K4CD01000013	AV TERMINAL	1	
	ZA17403	K4CD01000013	AV TERMINAL	1	
	ZA17404	K4CD01000013	AV TERMINAL	1	
	ZA17405	K4CD01000013	AV TERMINAL	1	
	ZA17406	K4CD01000013	AV TERMINAL	1	
	ZA17502	K4CD01000013	AV TERMINAL	1	
	ZA17503	K4CD01000013	AV TERMINAL	1	
	ZA17504	K4CD01000013	AV TERMINAL	1	
	ZA17505	K4CD01000013	AV TERMINAL	1	
	ZA17506	K4CD01000013	AV TERMINAL	1	
	ZA17601	K4CD01000013	AV TERMINAL	1	
	ZA17602	K4CD01000013	AV TERMINAL	1	
	ZA17603	K4CD01000013	AV TERMINAL	1	
	ZA17604	K4CD01000013	AV TERMINAL	1	
	ZA17605	K4CD01000013	AV TERMINAL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	#	TW-4BS-2L	LUG TERMINAL	1	
⚠	A601	AYRA362MSV7T	ARRESTOR	1	
⚠	A602	AYRA362MSV7T	ARRESTOR	1	
	C201	ACKZE1H220T	50V 22PF	1	
	C202	ACCC3FD470JP	3kV 47PF	1	
	C203	ACCC3FD470JP	3kV 47PF	1	
⚠	C204	ACMPEF12333H	1250V 0.033PF	1	
⚠	C205	ACMPEF12333H	1250V 0.033PF	1	
	C207	ACDE1SL471JP	1kV 470PF	1	
	C208	ACDE1SL471JP	1kV 470PF	1	
	C209	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C210	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C231	ACKZE1H220T	50V 22PF	1	
	C232	ACKZE1H220T	50V 22PF	1	
	C251	ECQV1H104JL	P 0.1UF, J, 50V	1	
	C252	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C254	ECQE2223SKF	250V 0.022PF	1	
	C255	ECQE2223SKF	250V 0.022PF	1	
⚠	C256	ACKMQ220901Z	220V 900PF	1	
⚠	C257	ACKMQ220901Z	220V 900PF	1	
⚠	C258	ACKMQ220901Z	220V 900PF	1	
⚠	C259	ACKMQ220901Z	220V 900PF	1	
	C301	ACKZE1H220T	50V 22PF	1	
	C302	ACRR3DD101K7	2kV 100PF	1	
	C303	ACRR3DD101K7	2kV 100PF	1	
⚠	C304	ACMPEF12473H	1250V 0.047PF	1	
	C305	ACCK1B681KP	1kV 680p	1	
	C306	ACCK1B681KP	1kV 680p	1	
	C352	ACKZE1E182ST	25V 1800PF	1	
	C354	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C355	ECQV1H823JL	50V 0.082PF	1	
	C357	ACKZE1E471LT	25V 470PF	1	
	C358	ACKZE1E471LT	25V 470PF	1	
	C401	ECQE2104SKF	250V 0.1PF	1	
	C402	ECQE2104SKF	250V 0.1PF	1	
⚠	C403	EETHC2C471HX	160V 470PF	1	
	C404	ACKZE1H101T	50V 100PF	1	
⚠	C406	EETHC2A122JJ	100V 1200PF	1	
	C409	ECQE2104SKF	250V 0.1PF	1	
	C451	ACKZE1A471C	10V 470PF	1	
	C500	ACKZE1H221T	50V 220PF	1	
⚠	C501	ECQU2A103MLA	P 0.01UF, M,250V	1	
⚠	C503	ACKMQ2W560T	450V 56PF	1	
	C504	ACKZE1H220T	50V 22PF	1	
	C505	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C506	ACKZE1H100T	50V 10PF	1	
	C507	ACKZE1H221T	50V 220PF	1	
	C508	ACKZE1H220T	50V 22PF	1	
	C551	ACKZE1A102LC	10V 1000PF	1	
	C555	ACKZE1E470T	25V 47PF	1	
	C558	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C559	ECQV1H474JL	P 0.47UF, J, 50V	1	
⚠	C602	ECQU2A104MLA	P 0.1UF, M,250V	1	
⚠	C603	ECKENA221KBR	C 221P 250V	1	
⚠	C604	ECKENA221KBR	C 221P 250V	1	
	C605	ACDE1R102K7	1kV 680p	1	
⚠	C606	AC4MPH105KA3	450V 1PF	1	
	C610	ECQV1H105JL	50V 1PF	1	
	C611	ACKZE1H220T	50V 22PF	1	
⚠	C612	EETHD2W301LZ	450V 300PF	1	
⚠	C613	EETHD2W301LZ	450V 300PF	1	
⚠	C615	ECKENA101KBR	C 100P 250V	1	
⚠	C620	ECKENA101KBR	C 100P 250V	1	
⚠	C621	ECKENA101KBR	C 100P 250V	1	
	C625	ACRR3AD222KP	1kV 2200PF	1	
⚠	C629	AC4MPH105KA3	450V 1PF	1	
	C701	ACKZE1A471C	10V 470PF	1	
	C702	ECQV1H103JL2	50V 0.01PF	1	
⚠	C801	ECQU2A104MLA	P 0.1UF, M,250V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
△	C802	ECKENA101KBR	C 100P 250V	1	
△	C803	ECKENA101KBR	C 100P 250V	1	
	C807	ACDE1R102K7	1kv 680p	1	
△	C808	AC4MPH105KA3	450V 1PF	1	
	C809	ACRR3AD222KP	1kv 2200PF	1	
	C810	ECQV1H105JL	50V 1PF	1	
	C811	ACKZE1H220T	50V 22PF	1	
△	C812	EETHD2W301LZ	450V 300PF	1	
△	C814	ECKENA101KBR	C 100P 250V	1	
△	C815	ECKENA221KBR	C 221P 250V	1	
△	C816	ECKENA221KBR	C 221P 250V	1	
△	C818	AC4MPH105KA3	450V 1PF	1	
	D201	VDAG01AT	DIODE	1	
	D202	VDAG01AT	DIODE	1	
	D251	MA165TAKU	DIODE	1	
	D254	MA2DF3100S	DIODE	1	
	D255	MA2DF3100S	DIODE	1	
	D256	MA2DF3100S	DIODE	1	
	D257	MA2DF3100S	DIODE	1	
	D351	VDG865C08R	DIODE	1	
	D352	VDAG01AT	DIODE	1	
	D353	VDG865C08R	DIODE	1	
	D401	VDD6SBN20	DIODE	1	
	D402	VDAG01AT	DIODE	1	
	D403	VDYG901C3R	DIODE	1	
	D500	VDAG01AT	DIODE	1	
△	D501	VDS1WBA80	DIODE	1	
	D504	VXST3D82BL3	DIODE	1	
	D505	VDAG01AT	DIODE	1	
	D506	VDAG01AT	DIODE	1	
	D551	VDRK39A5	DIODE	1	
	D603	VDAP01CT	DIODE	1	
	D604	VDAP01CT	DIODE	1	
	D606	VDS3V60L1	DIODE	1	
	D651	MA165TAKU	DIODE	1	
	D652	MA165TAKU	DIODE	1	
	D702	VDERA83-004T	DIODE	1	
	D703	MA165TAKU	DIODE	1	
	D801	MA165TAKU	DIODE	1	
	D802	MA165TAKU	DIODE	1	
	D803	VDAP01CT	DIODE	1	
	D804	VDAP01CT	DIODE	1	
	D805	VDS3V60L1	DIODE	1	
△	F201	HU216005BEP	FUSE	1	
△	F301	HU216005BEP	FUSE	1	
△	F601	HU215010BEP	FUSE	1	
△	F602	HU215010BEP	FUSE	1	
△	F801	HU215010BEP	FUSE	1	
△	F802	HU215010BEP	FUSE	1	
△	F803	HU382T2P	FUSE	1	
	IC251	AN1431TBTA	IC	1	
	IC352	AN1431TBTA	IC	1	
	IC401	AN1431TBTA	IC	1	
△	IC501	MIP3E30MPSCF	IC	1	
	IC555	AN1431TBTA	IC	1	
△	K601	ALKT329C93	RELAY	1	
△	K602	ALDJ5D2T8	RELAY	1	
△	K801	ALKT329C93	RELAY	1	
△	K802	ALDJ5D2T8	RELAY	1	
	L401	AYLH8TB681K	FILTER CHOKE	1	
	L402	AYH221012HY	FILTER CHOKE	1	
	L500	EXCELD35V	CORE	1	
	L501	EXCELSA35	BEAD CHOKE	1	
	L502	EXCELD35V	CORE	1	
	L503	EXCELD35V	CORE	1	
△	L601	AYP3165208ZA	FILTER CHOKE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
△	L602	AYP3165208ZA	FILTER CHOKE	1	
	L603	ETB50CZ14GAD	TRANSFORMER	1	
△	L604	AYP3165208ZA	FILTER CHOKE	1	
	L801	EXCELSA35	BEAD CHOKE	1	
△	L802	AYP2590204Z	FILTER CHOKE	1	
△	L803	AYP2590204Z	FILTER CHOKE	1	
	L805	ETB32CZ13GAD	TRANSFORMER	1	
△	MC201	MDPPND471	MODULE	1	
△	MC203	MP00R3A1	MODULE	1	
△	MC204	MP00R3A1	MODULE	1	
△	MC231	MDPHHA101	MODULE	1	
△	MC301	MDPPND472	MODULE	1	
△	MC352	MDPJFB471	MODULE	1	
△	MC401	MDPPSA471	MODULE	1	
△	MC451	MDPLSC471	MODULE	1	
△	MC501	MDPTZA101	MODULE	1	
△	MC502	MDPHHA101	MODULE	1	
△	MC552	MDPPFC101	MODULE	1	
△	MC601	MDPLPB101	MODULE	1	
△	MC602	MP00P18	MODULE	1	
△	MC603	MP00P28	MODULE	1	
△	MC606	MP00P29	MODULE	1	
△	MC701	MDPZDA471	MODULE	1	
△	MC801	MP00P15A1	MODULE	1	
△	MC802	MDPLPB472	MODULE	1	
	P2	AKB2P3-VH-B	2P CONNECTOR	1	
	P6	AKB12B-EH-A	12P CONNECTOR	1	
	P7	AKB11B-EH-A	11P CONNECTOR	1	
△	P9	AKB03P-VL	3P CONNECTOR	1	
	P11	AKB2P3-VH-B	2P CONNECTOR	1	
	P12	AKB10B-PH-KS	10P CONNECTOR	1	
	P25	AKB13B-PH-KS	13P CONNECTOR	1	
△	P51	AKB3P4VH-B-L	3P CONNECTOR	1	
△	P52	AKB3P4VH-B-L	3P CONNECTOR	1	
△	P53	AKB2P-VH	2P CONNECTOR	1	
△	P54	AKB2P-VH	2P CONNECTOR	1	
	P55	AKB8B-PH-KS	8P CONNECTOR	1	
	P56	AKB8B-PH-KS	8P CONNECTOR	1	
△	PC201	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC202	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC231	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC301	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC302	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC401	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC501	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC502	VPS2581AL1VH	OPTOISOLATOR	1	
	Q201	2SD21770SA	TRANSISTOR	1	
	Q202	2SB14340SA	TRANSISTOR	1	
	Q203	2SD21770SA	TRANSISTOR	1	
	Q204	2SB14340SA	TRANSISTOR	1	
△	Q301	VKFMA16N55G	FET	1	
△	Q302	VKFMA16N55G	FET	1	
	Q351	2SK3704	FET	1	
	Q401	2SK3607	FET	1	
	Q402	2SA17670Q2	TRANSISTOR	1	
	Q403	2SA17670Q2	TRANSISTOR	1	
	Q651	2SB1030AR	TRANSISTOR	1	
	Q652	2SB1030AR	TRANSISTOR	1	
	R201	ERG12SJ820J	M 82 OHM, J,1/2W	1	
	R202	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R203	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R204	ERDS2FJ334	C 330KOHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R205	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R206	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R207	ERG12SJ820J	M 82 OHM, J,1/2W	1	
	R208	ER0S2CKF1000	M 100 OHM, F,1/4W	1	
	R209	ERDS2FJ154	C 150KOHM, J,1/4W	1	
	R210	ERDS2FJ154	C 150KOHM, J,1/4W	1	
	R211	ERX12SJ3R3J	M 3.3 OHM, J,1/2W	1	
	R212	ERX12SJ3R3J	M 3.3 OHM, J,1/2W	1	
	R215	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R216	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R218	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R219	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R220	ER0S2CHF1300	M 130 OHM, F,1/4W	1	
	R251	ARRCR1F1153T	METAL GLAZE FIXED RESISTOR	1	
	R252	ARRCR1F1133T	METAL GLAZE FIXED RESISTOR	1	
	R253	ERDS2FJ151	C 150 OHM, J,1/4W	1	
	R254	ERDS2FJ102	M 1KOHM, J,1/10W	1	
	R256	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R257	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R258	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R259	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R263	ERDS2FJ220	C 22 OHM, J,1/4W	1	
	R264	ERDS2FJ102	M 1KOHM, J,1/10W	1	
	R265	ARRCR1F2103T	METAL GLAZE FIXED RESISTOR	1	
	R266	ARRCR1F3323T	METAL GLAZE FIXED RESISTOR	1	
	R267	ARRCR1F3243T	METAL GLAZE FIXED RESISTOR	1	
	R302	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R303	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R304	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R308	ERG12SJ910J	M 91 OHM, J,1/2W	1	
	R309	ERG12SJ680J	M 68 OHM, J,1/2W	1	
	R310	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R311	ERG12SJ910J	M 91 OHM, J,1/2W	1	
	R351	ER0S2CHF8871	M8.87KOHM, F,1/4W	1	
	R352	ARRF5EJ30MB	METAL GLAZE FIXED RESISTOR	1	
	R353	ERDS2FJ561	C 560 OHM, J,1/4W	1	
	R354	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R355	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R356	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R359	ER0S2THD5232	M52.3KOHM, F,1/4W	1	
	R362	ERG12SJ332J	M 3.3KOHM, J,1/2W	1	
	R366	ER0S2THF6981	M6.98KOHM, F,1/4W	1	
	R367	ER0S2CHF8451	M8.45KOHM, F,1/4W	1	
	R371	ER0S2THF6981	M6.98KOHM, F,1/4W	1	
	R372	ER0S2THF1151	M1150 OHM, F,1/4W	1	
	R403	ERG12SJ100J	M 10 OHM, J,1/2W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R404	ER0S2CHF5492	M54.9KOHM, F,1/4W	1	
	R405	ARRF2EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R409	ERDS2FJ473	C 47KOHM, J,1/4W	1	
	R411	ER0S2CKF2001	M 2KOHM, F,1/4W	1	
	R412	ER0S2CKF2001	M 2KOHM, F,1/4W	1	
	R413	ER0S2CHF3092	M30.9KOHM, F,1/4W	1	
	R417	ER0S2CHF4222	M42.2KOHM, F,1/4W	1	
	R418	ER0S2CHF4022	M40.2KOHM, F,1/4W	1	
	R420	ER0S2THF5620	M 56.2 OHM, F,1/4W	1	
	R421	ER0S2THF4422	M42.2KOHM, F,1/4W	1	
	R422	ER0S2CHF1272	M12.7KOHM, F,1/4W	1	
	R423	ER0S2CHF1333	M 133KOHM, F,1/4W	1	
	R456	ER0S2CKF1332	M13.3KOHM, F,1/4W	1	
⚠	R502	ARRCR6J825M	METAL GLAZE FIXED RESISTOR	1	
	R505	ERDS2FJ201	C 200 OHM, J,1/4W	1	
	R506	ARRCR2F1304T	METAL GLAZE FIXED RESISTOR	1	
	R507	ARRCR2F1184T	METAL GLAZE FIXED RESISTOR	1	
	R509	ARRCR2F1304T	METAL GLAZE FIXED RESISTOR	1	
	R510	ARRCR2F1184T	METAL GLAZE FIXED RESISTOR	1	
	R522	ERDS2FJ180	C 18 OHM, J,1/4W	1	
	R555	ER0S2CKF1052	M10.5KOHM, F,1/4W	1	
	R557	ERDS2TJ392	C 3.9KOHM, J,1/4W	1	
	R560	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R561	ER0S2CKF2152	M21.5KOHM, F,1/4W	1	
	R562	ERDS2FJ150	C 15 OHM, J,1/4W	1	
	R563	ERDS2FJ121	C 120 OHM, J,1/4W	1	
	R564	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R603	ARRCR2F4753T	METAL GLAZE FIXED RESISTOR	1	
	R604	ARRCR2F4023T	METAL GLAZE FIXED RESISTOR	1	
	R607	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R608	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R611	ER0S2THF5112	M51.1KOHM, F,1/4W	1	
	R617	ARRF5EJR15B	METAL GLAZE FIXED RESISTOR	1	
	R618	ARRF5EJR15B	METAL GLAZE FIXED RESISTOR	1	
	R619	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R622	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R623	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R624	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R625	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R626	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R627	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R630	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R631	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R632	ARRCR1F2213T	METAL GLAZE FIXED RESISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R651	ERDS2FJ103	C 10KOHM, J,1/4W	1	
	R652	ERDS2FJ103	C 10KOHM, J,1/4W	1	
	R653	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R654	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R655	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R656	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R657	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R658	ERDS2FJ681	C680 OHM, J,1/4W	1	
	R701	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R702	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R705	ERDS2FJ393	C 39KOHM, J,1/4W	1	
	R706	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R707	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R712	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R713	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
⚠	R801	ARRCR5J624M	METAL GLAZE FIXED RESISTOR	1	
⚠	R802	ARR5B100JC2	5W 10 OHM	1	
	R803	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R804	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R805	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R806	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R807	EROS2CHF3482	M34.8KOHM, F,1/4W	1	
	R809	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R810	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R811	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R812	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R813	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R814	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R815	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R816	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R817	ARRCR1F2213T	METAL GLAZE FIXED RESISTOR	1	
⚠	RF601	HUY5JA200JP	W 20 OHM, J, 5W	1	
⚠	RF801	HUY5JA200JP	W 20 OHM, J, 5W	1	
⚠	T201	ETB58LZ12GAD	TRANSFORMER	1	
⚠	T301	ETB50LZ1DGAD	TRANSFORMER	1	
⚠	T501	ETB25BG128AH	TRANSFORMER	1	
	VR251	EVMEASA01B55	VARIABLE RESIS- TOR	1	
	VR401	EVMEASA01B14	VARIABLE RESIS- TOR	1	
⚠	Z501	ERZVGAD471	VARISTOR	1	
⚠	Z502	ERZVGAD471	VARISTOR	1	
⚠	Z601	ERZVGED751	VARISTOR	1	
⚠	Z602	ERZVGED751	VARISTOR	1	
⚠	Z603	ERZVGAD471	VARISTOR	1	
⚠	Z801	ERZVGED751	VARISTOR	1	
⚠	Z802	ERZVGED751	VARISTOR	1	
	ZD201	MA4270NMTA	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ZD203	MA4270NMTA	ZENER DIODE	1	
	ZD204	MA4270NMTA	ZENER DIODE	1	
	ZD206	MA4270NMTA	ZENER DIODE	1	
	ZD207	MA4270NMTA	ZENER DIODE	1	
	ZD251	MA4330NMTA	ZENER DIODE	1	
	ZD301	MA4270NMTA	ZENER DIODE	1	
	ZD302	MA4270NMTA	ZENER DIODE	1	
	ZD305	MA4270NMTA	ZENER DIODE	1	
	ZD351	MA4330NMTA	ZENER DIODE	1	
	ZD401	MA4360NM	ZENER DIODE	1	
	ZD451	MAZ4068NMF	ZENER DIODE	1	
	ZD501	MA4300NMTA	ZENER DIODE	1	
	ZD502	MA4300NMTA	ZENER DIODE	1	
	ZD503	MA4082NM	ZENER DIODE	1	
	ZD555	MA4330NMTA	ZENER DIODE	1	
	ZD601	MA4047NM	ZENER DIODE	1	
	ZD801	MA4047NM	ZENER DIODE	1	