




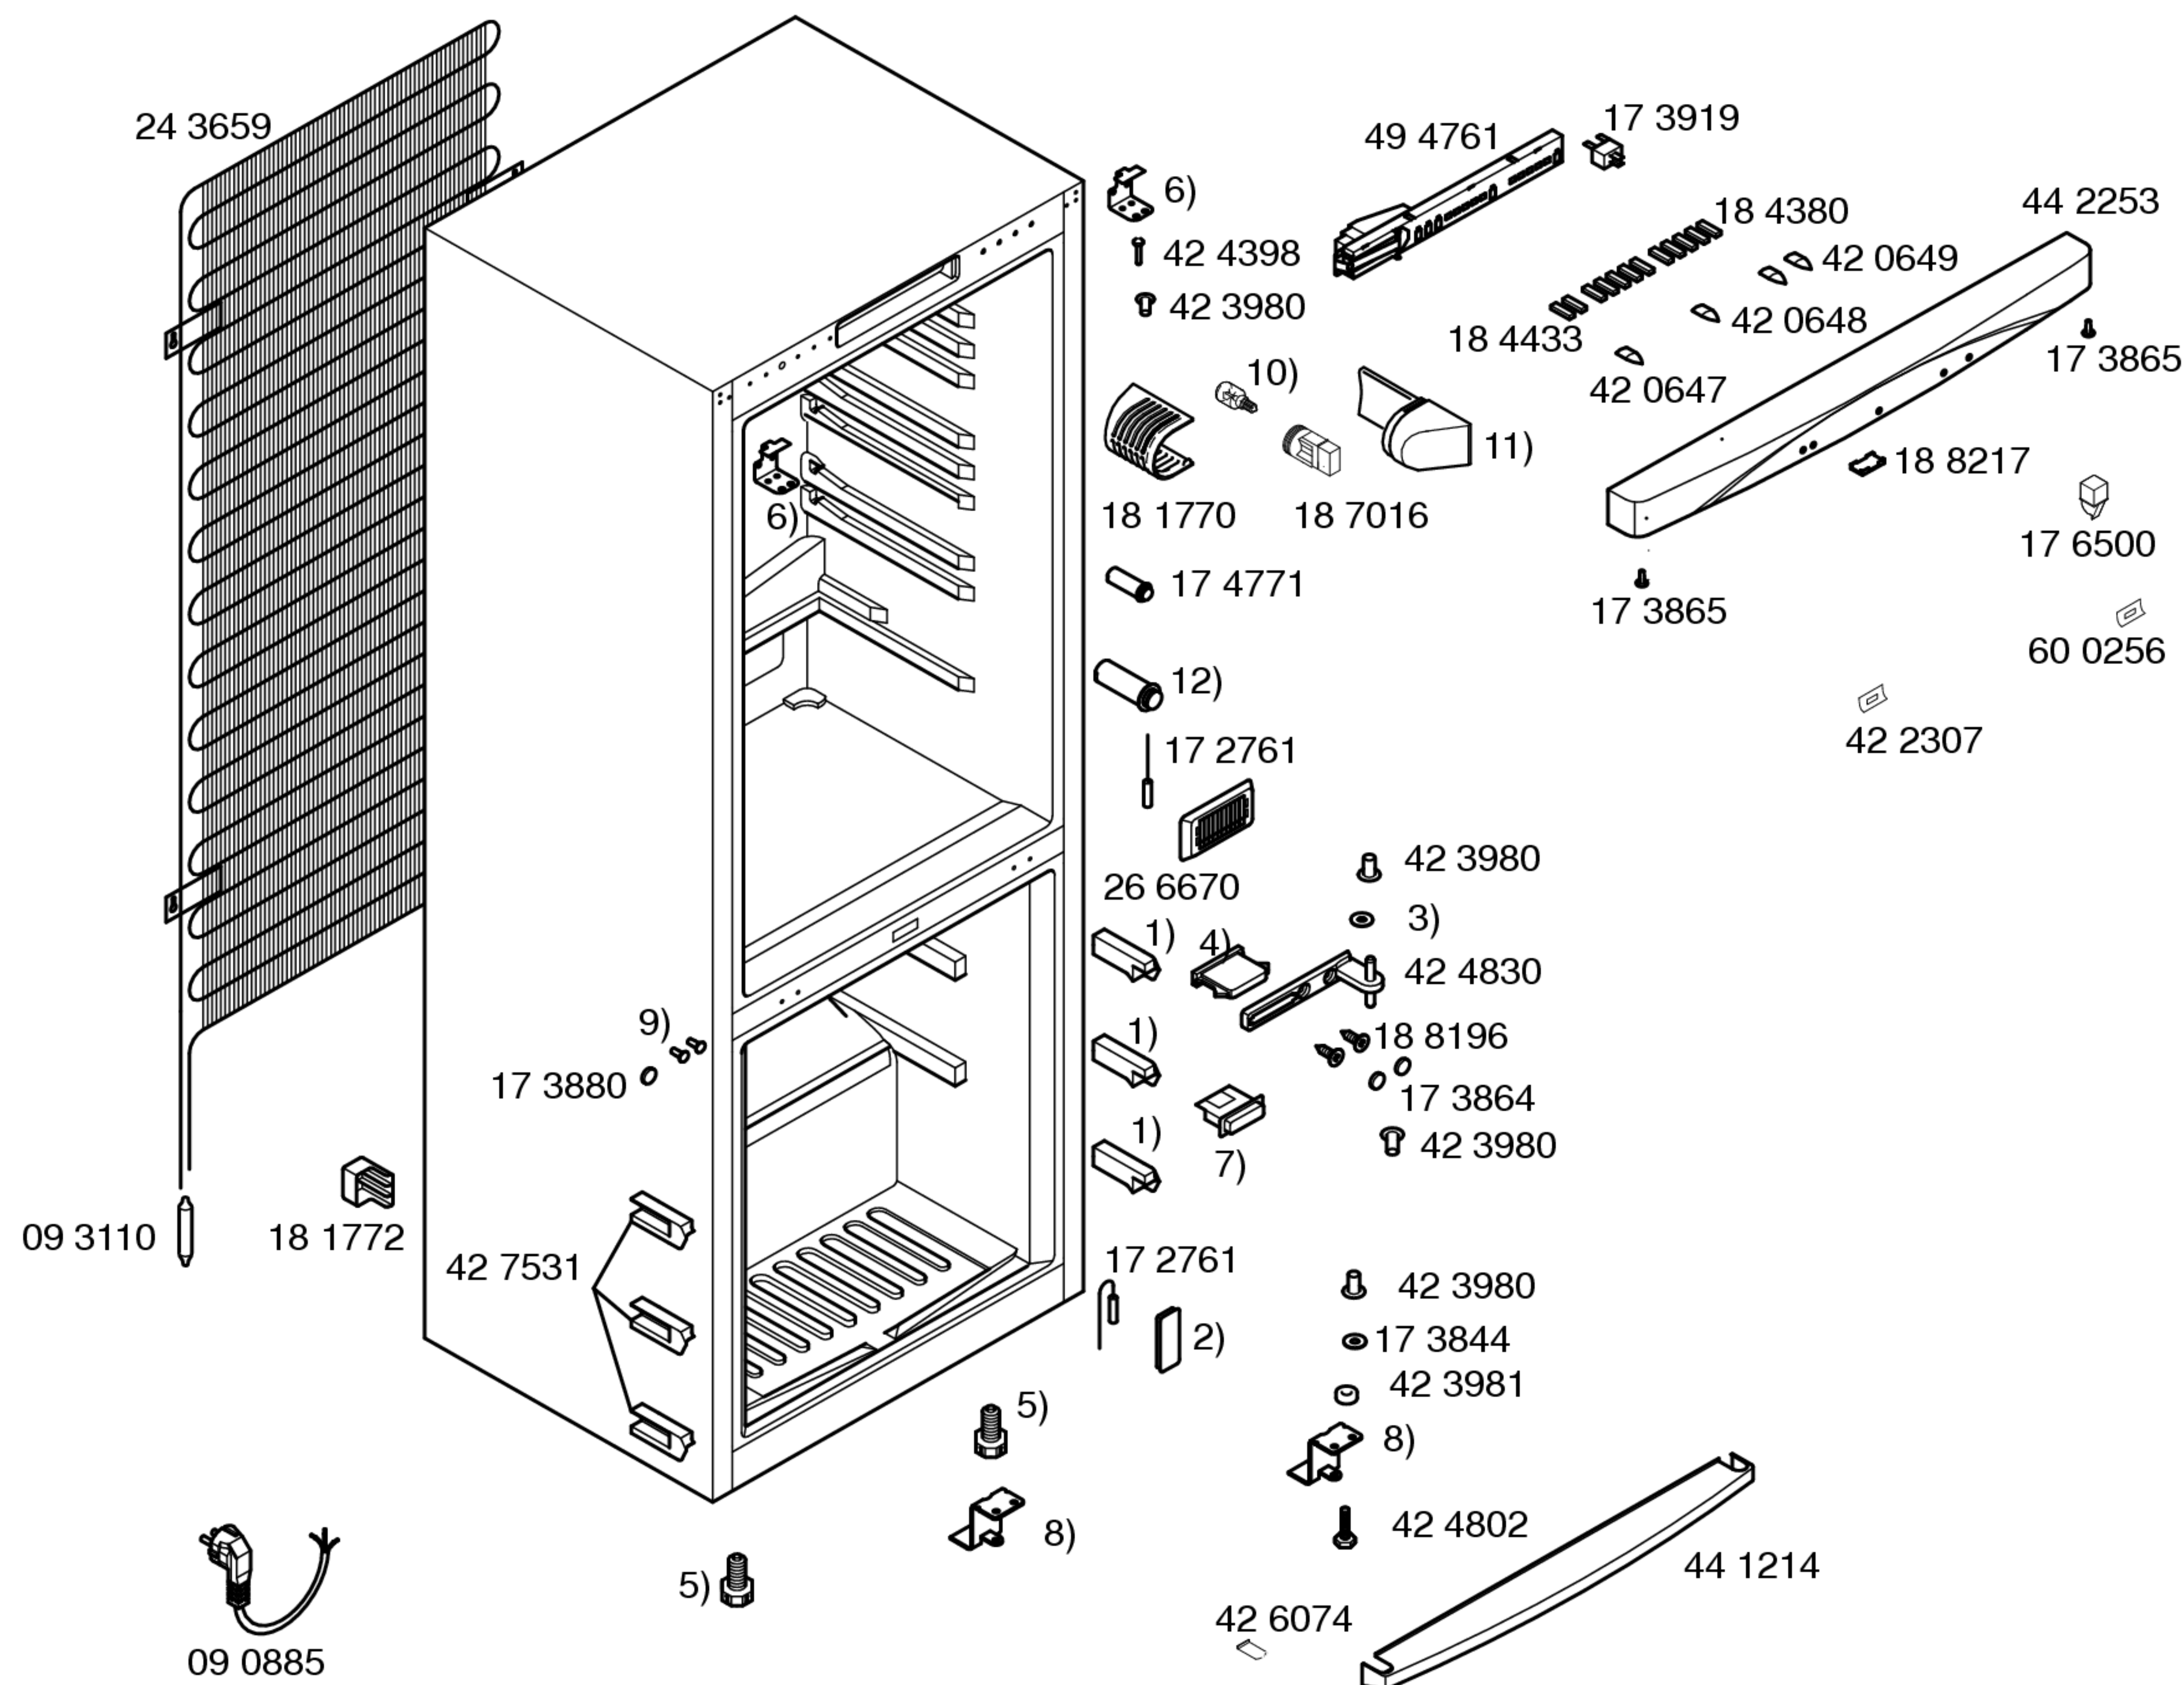


Gebrauchsanweisung  
59 1422  
(ES,PT)

- |     |         |
|-----|---------|
| 1)  | 42 7532 |
| 2)  | 17 2293 |
| 3)  | 17 3844 |
| 4)  | 41 8165 |
| 5)  | 42 3754 |
| 6)  | 17 1312 |
| 7)  | 41 7908 |
| 8)  | 42 8184 |
| 9)  | 16 5552 |
| 10) | 17 0218 |
| 11) | 48 2971 |
| 12) | 42 5156 |
|     | V01,V02 |
|     | 60 5353 |
|     | V03,V04 |

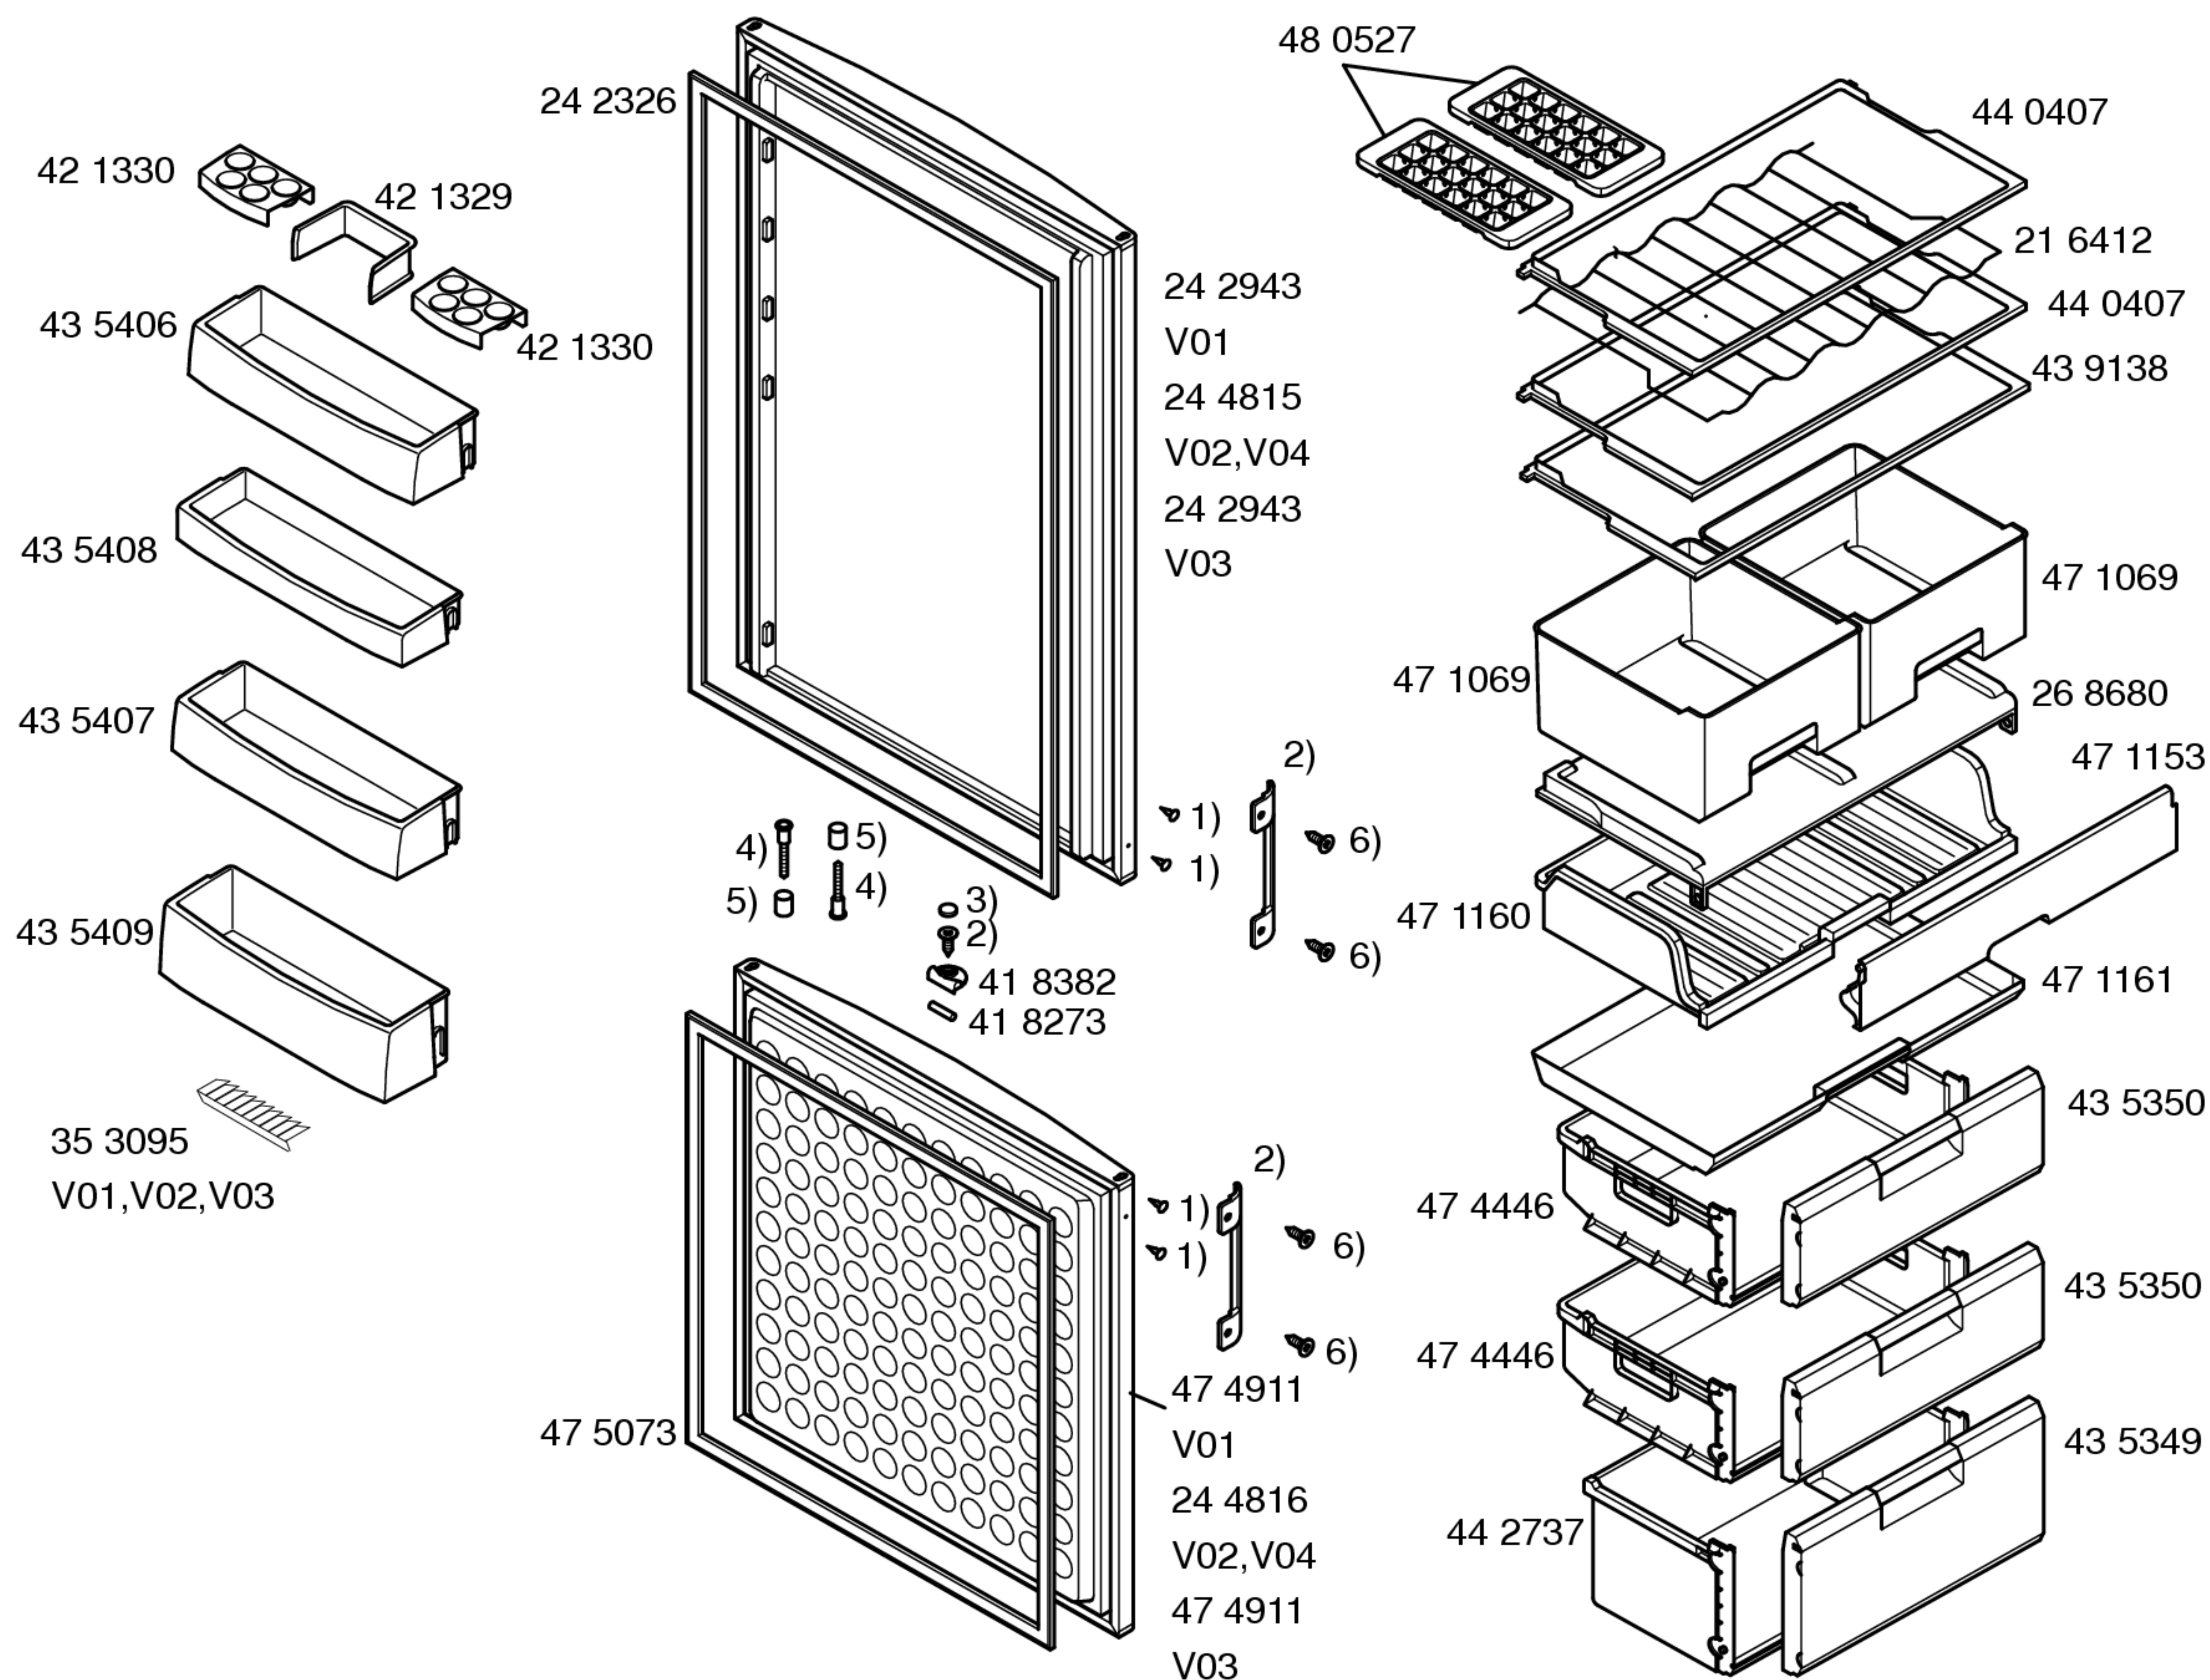

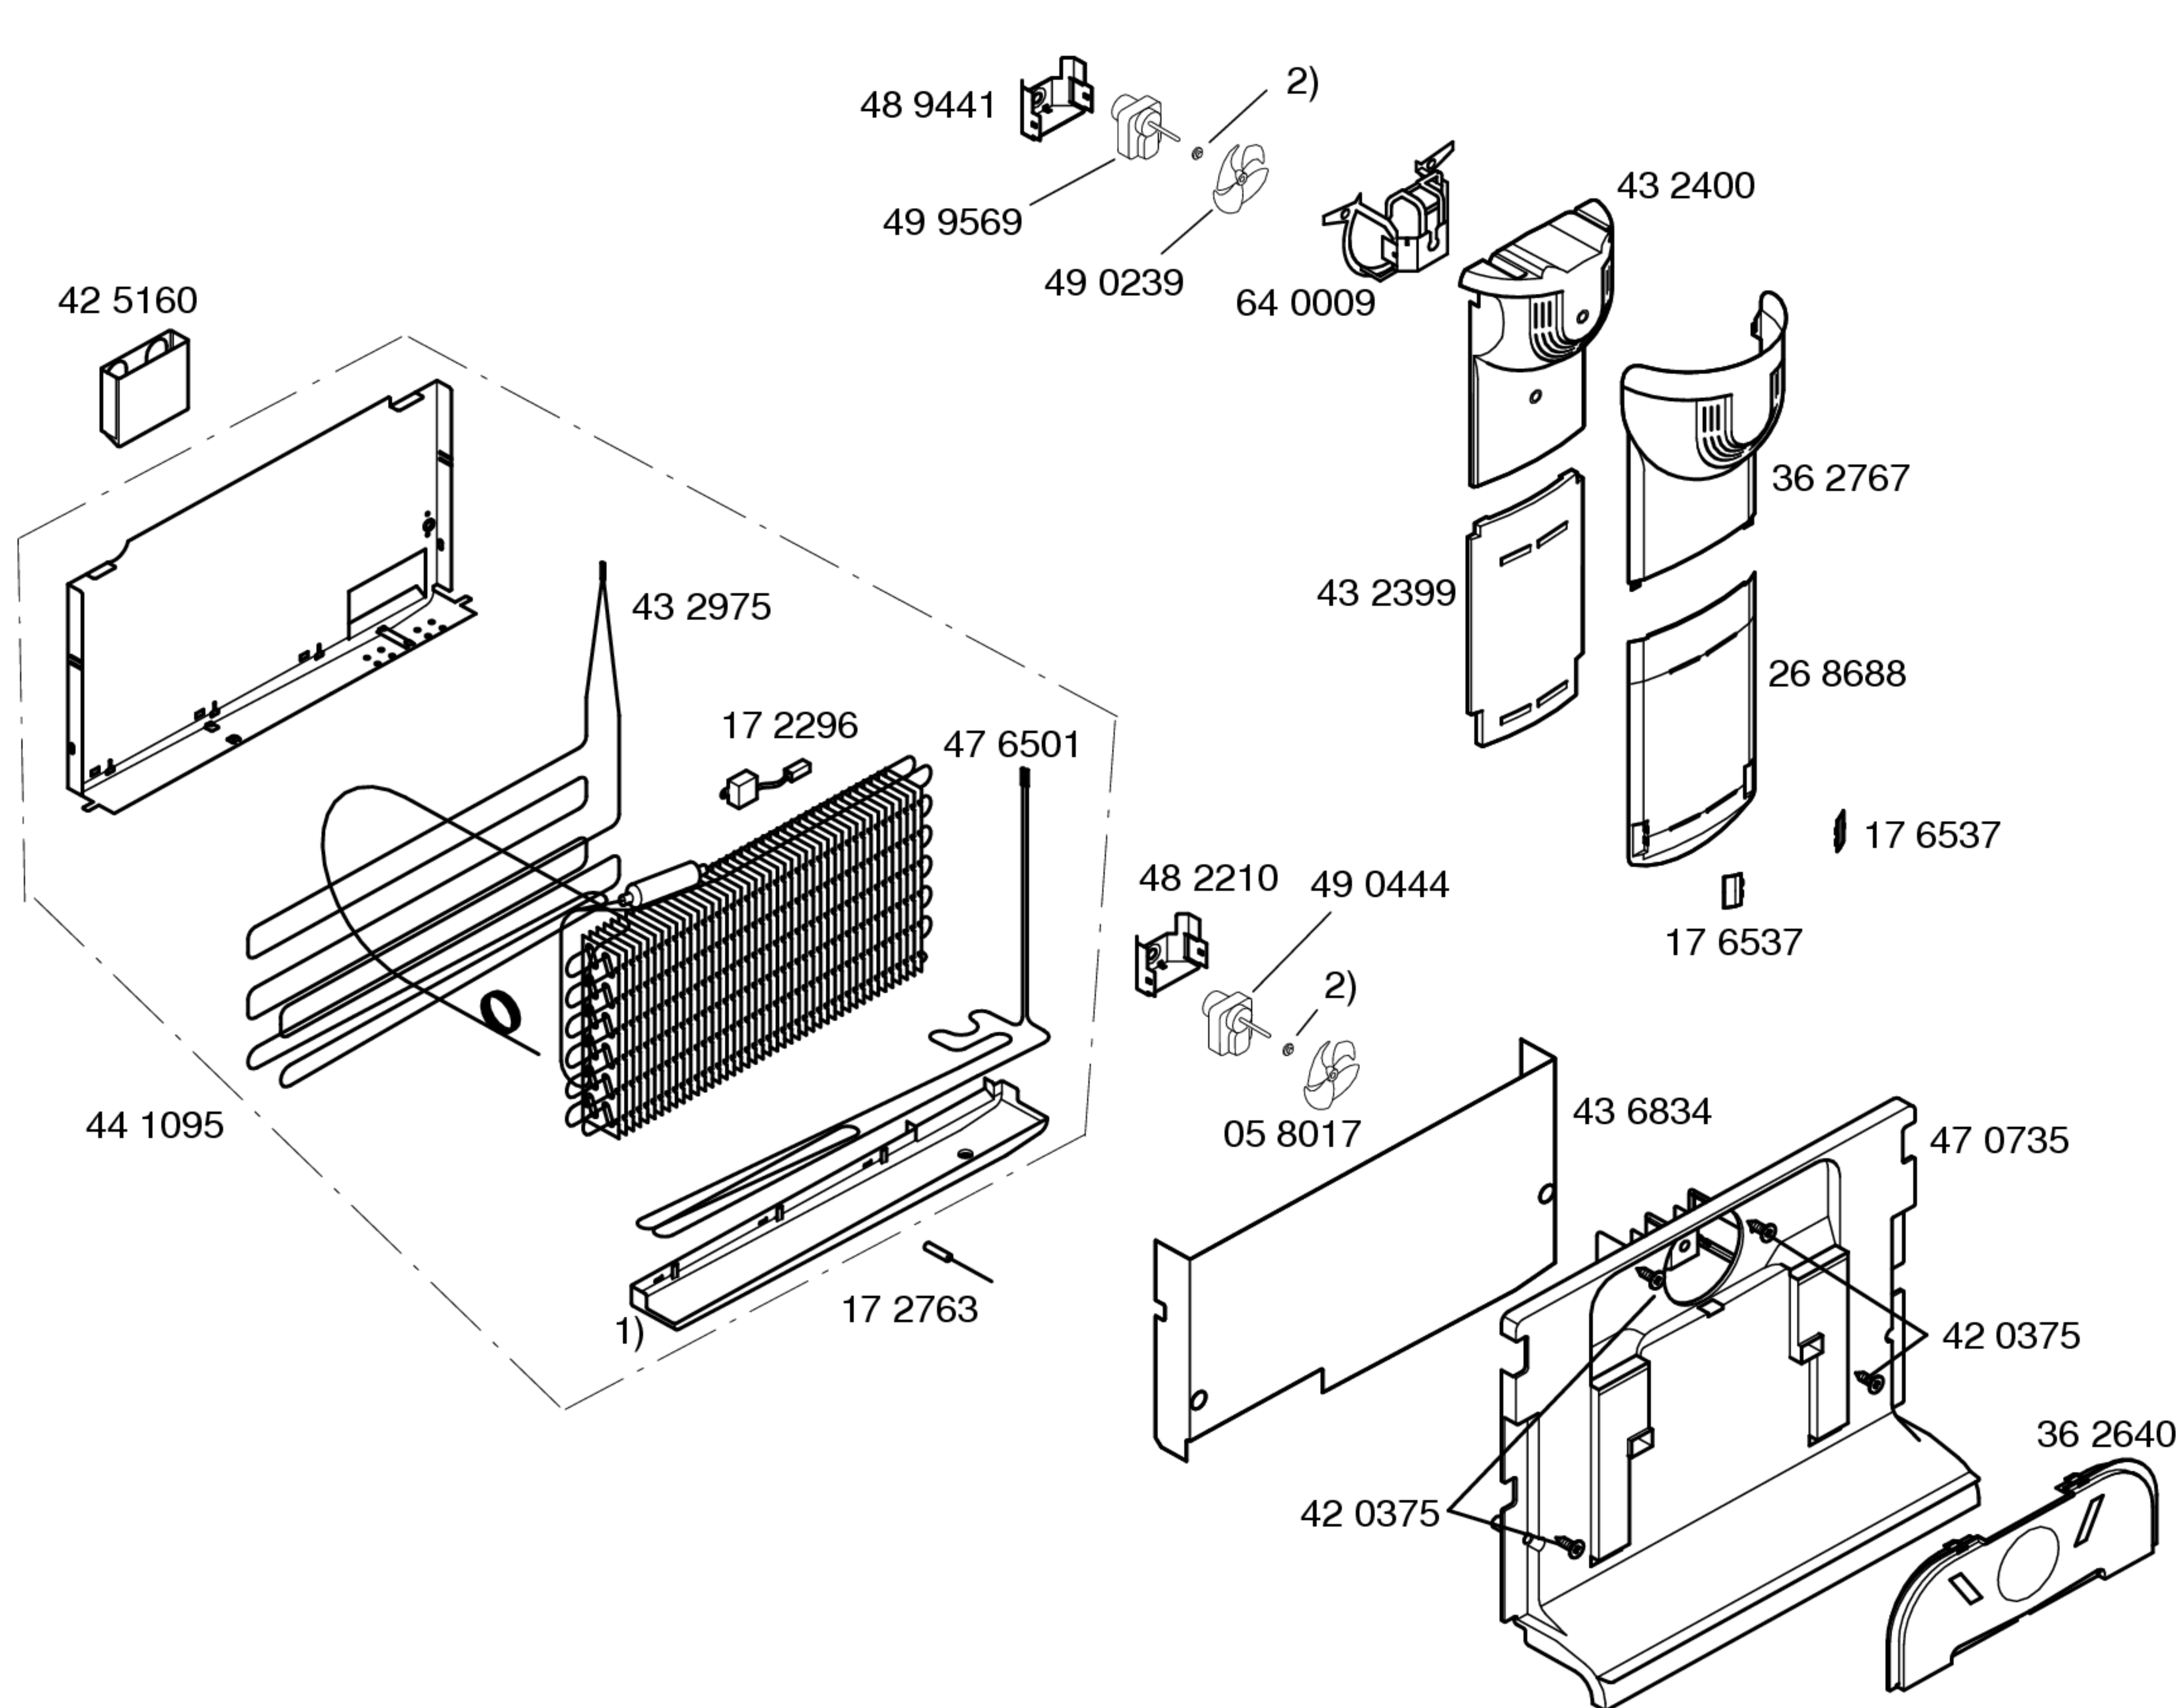

- 1) 43 2966
- 2) 17 1508
- V01,V02
- 60 8327
- V03,V04

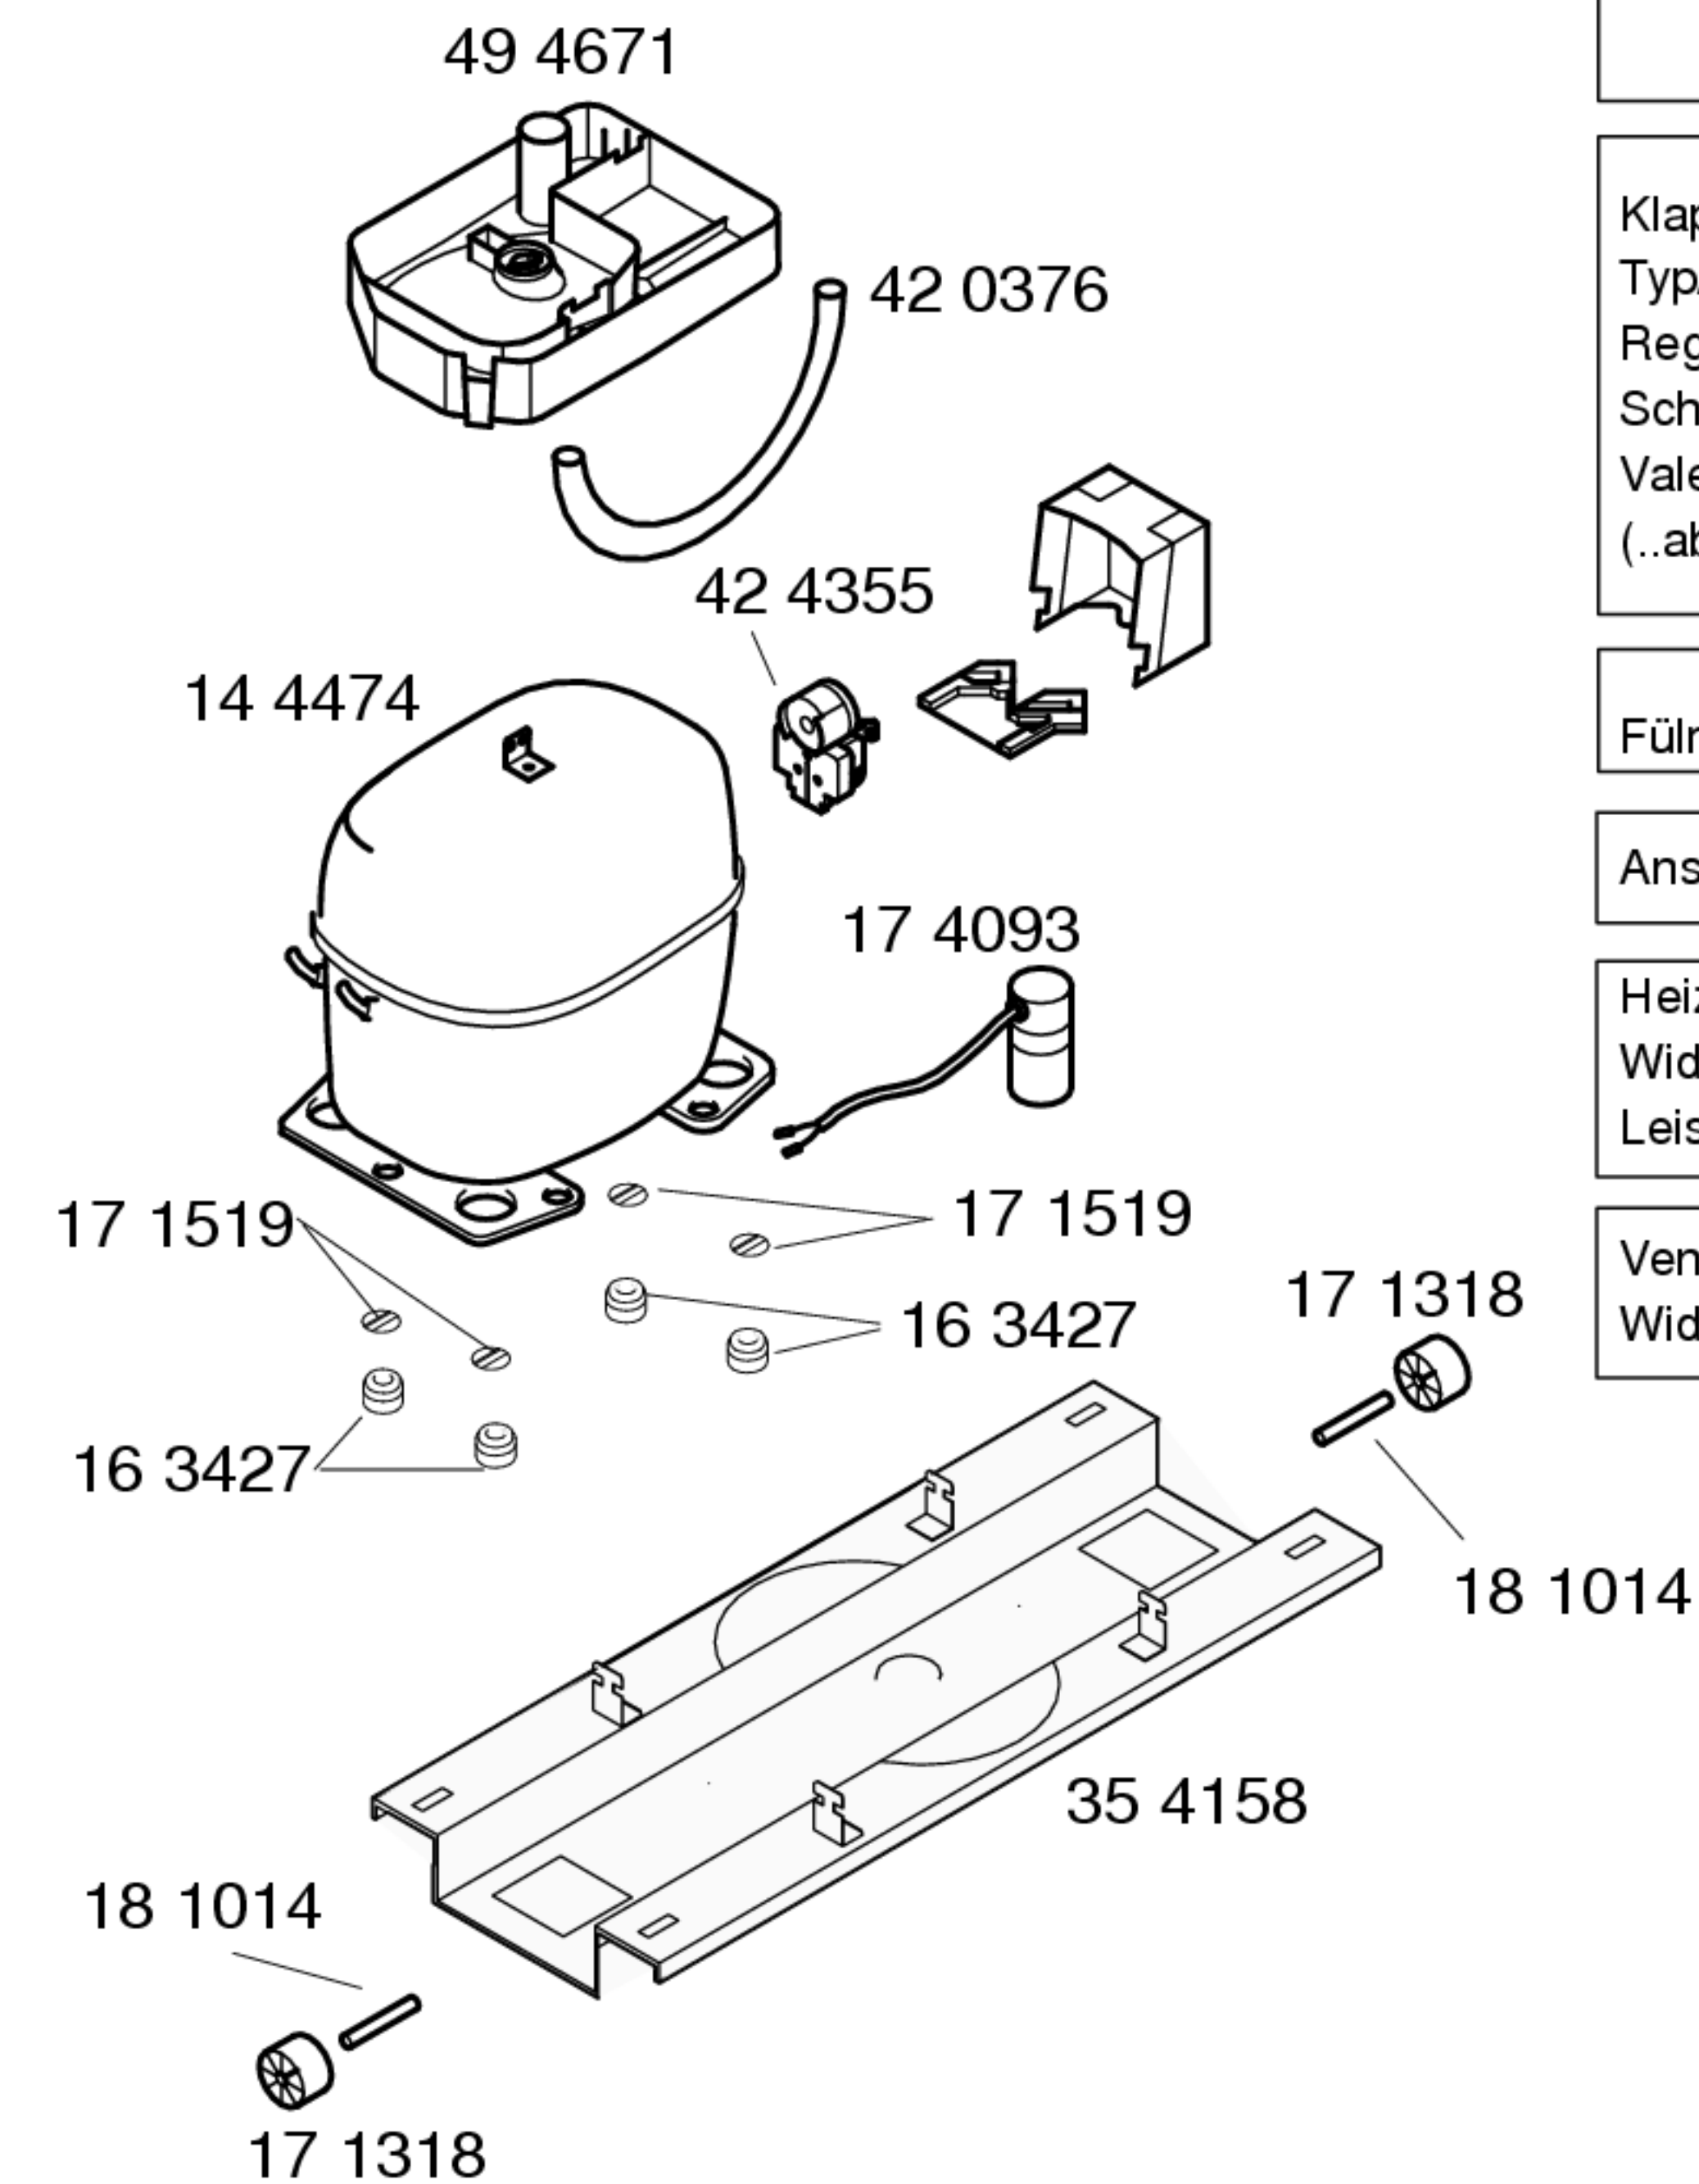

| TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS |                |             |    |
|-------------------------------------------------------------------|----------------|-------------|----|
|                                                                   |                |             |    |
| Verdichter/Compressor/Compresseur/Compresor                       | Danfoss        |             |    |
| Typ/Type/Tipo                                                     | NLX11KK2       |             |    |
| Leistung/Power/Puissance/Potencia                                 | W              |             |    |
| Anlaufstrom/Starting current/Cour.démarrage/Int.arranque          | A              | 6.4         |    |
| Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm              |                | 18.5        |    |
| Hi/aux.                                                           |                | 31.8        |    |
|                                                                   |                |             |    |
| Klape Therm./Thermostat/Termostat                                 |                |             |    |
| Typ/Type/Tipo                                                     |                |             |    |
| Reglerstellung/Position/Conexión                                  |                |             |    |
| Schaltwerte/Switching values/                                     | ..ein/conex.°C |             |    |
| Valeurs de commutation/Desconex.                                  | ..aus"/descon. |             |    |
| (..abtaven' od)                                                   | ..alarm'       |             |    |
|                                                                   |                |             |    |
| Füllmenge/Fill. quantily/Charge/Carga                             | R600           | g           | 49 |
|                                                                   |                |             |    |
| Anschlusswert/Comm. load/Puiss. Connect./Potenc.                  | W              |             |    |
|                                                                   |                |             |    |
| Heizung/Heater/Chauflage/Resistenc.descong.                       | Verdampfer     | Ablaufrinne |    |
| Widerstand/Resistance/Resistencia                                 | KΩ             |             |    |
| Leistung/Power/Puissance/Potencia                                 | W              | 267         | 81 |
|                                                                   |                |             |    |
| Ventilador/Blower/Ventilateur/Ventilador                          |                |             |    |
| Widerstand/Resistance/Resistencia                                 | KΩ             |             |    |