



Copyright © (2015) by Balay / 205502

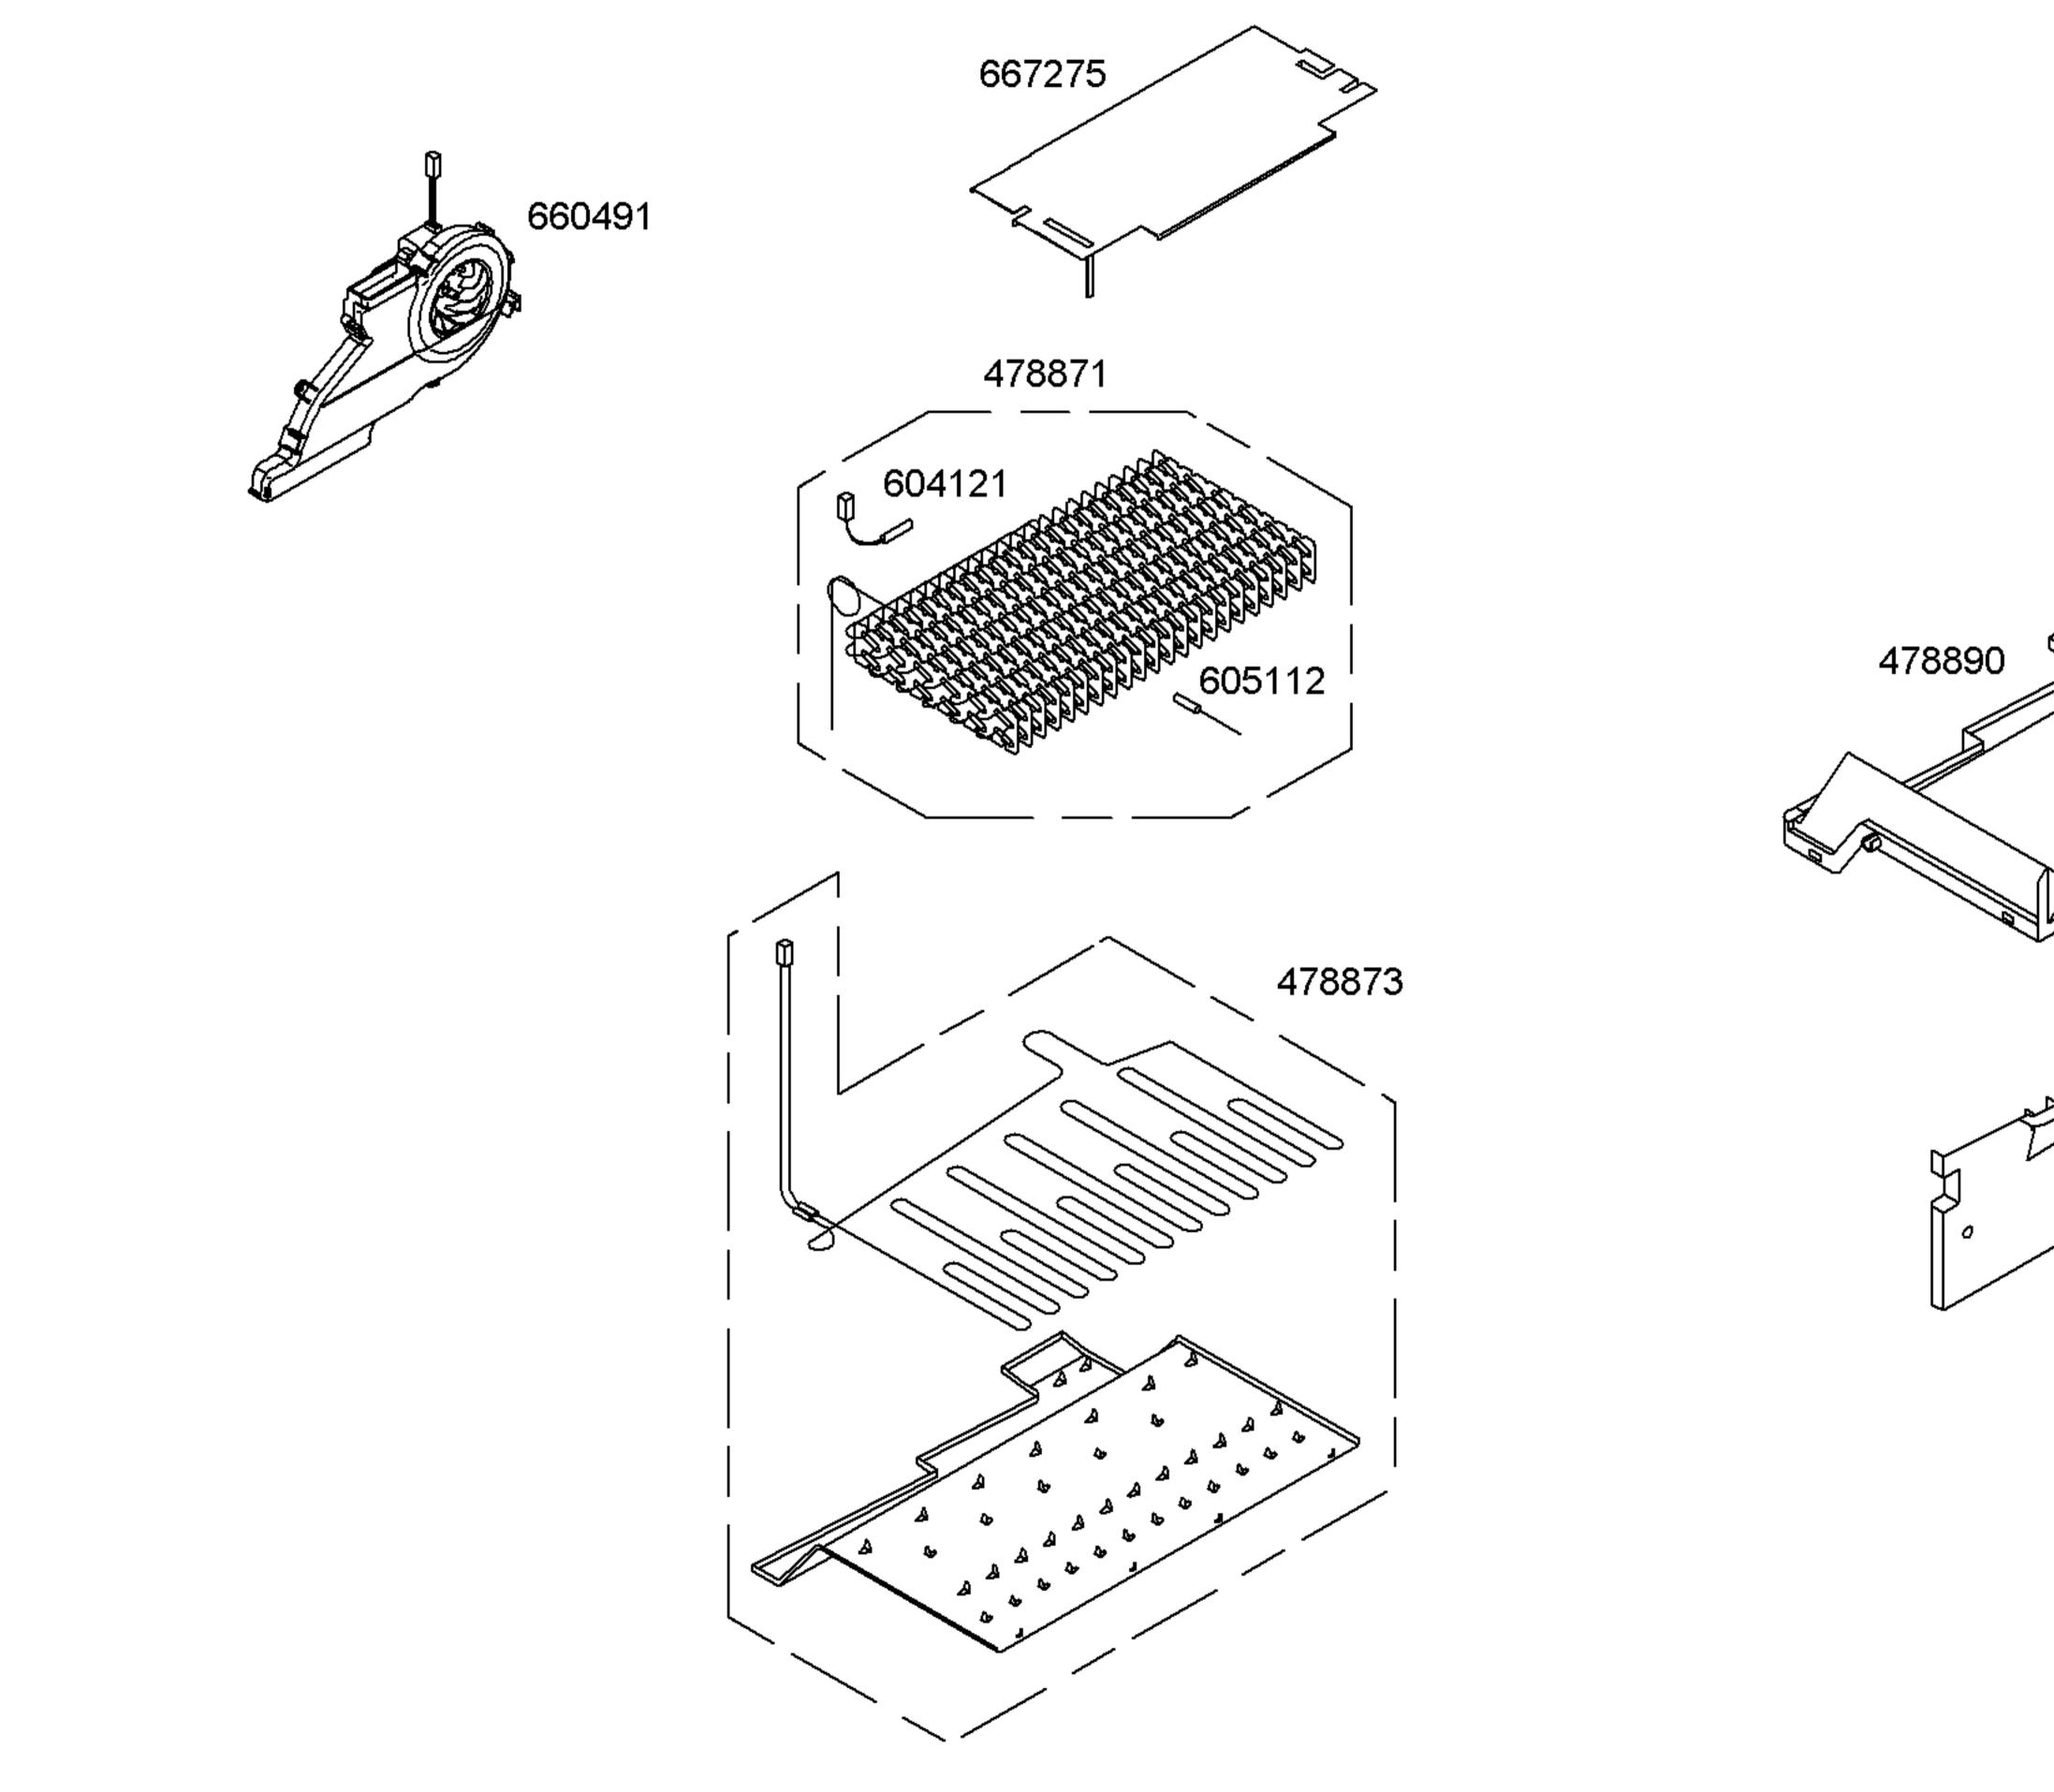


58300000129724 aet 000 a 3/4

Free-standing-refrigerator 2-door, Botto freestanding >= 60cm width

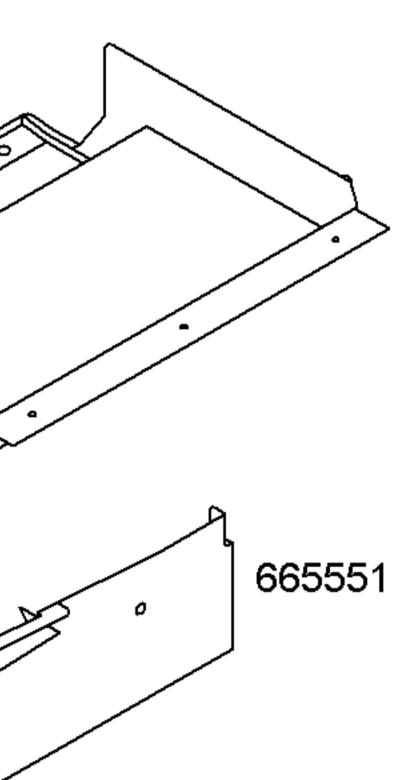

Copyright \bigcirc (2015) by Balay / 205502

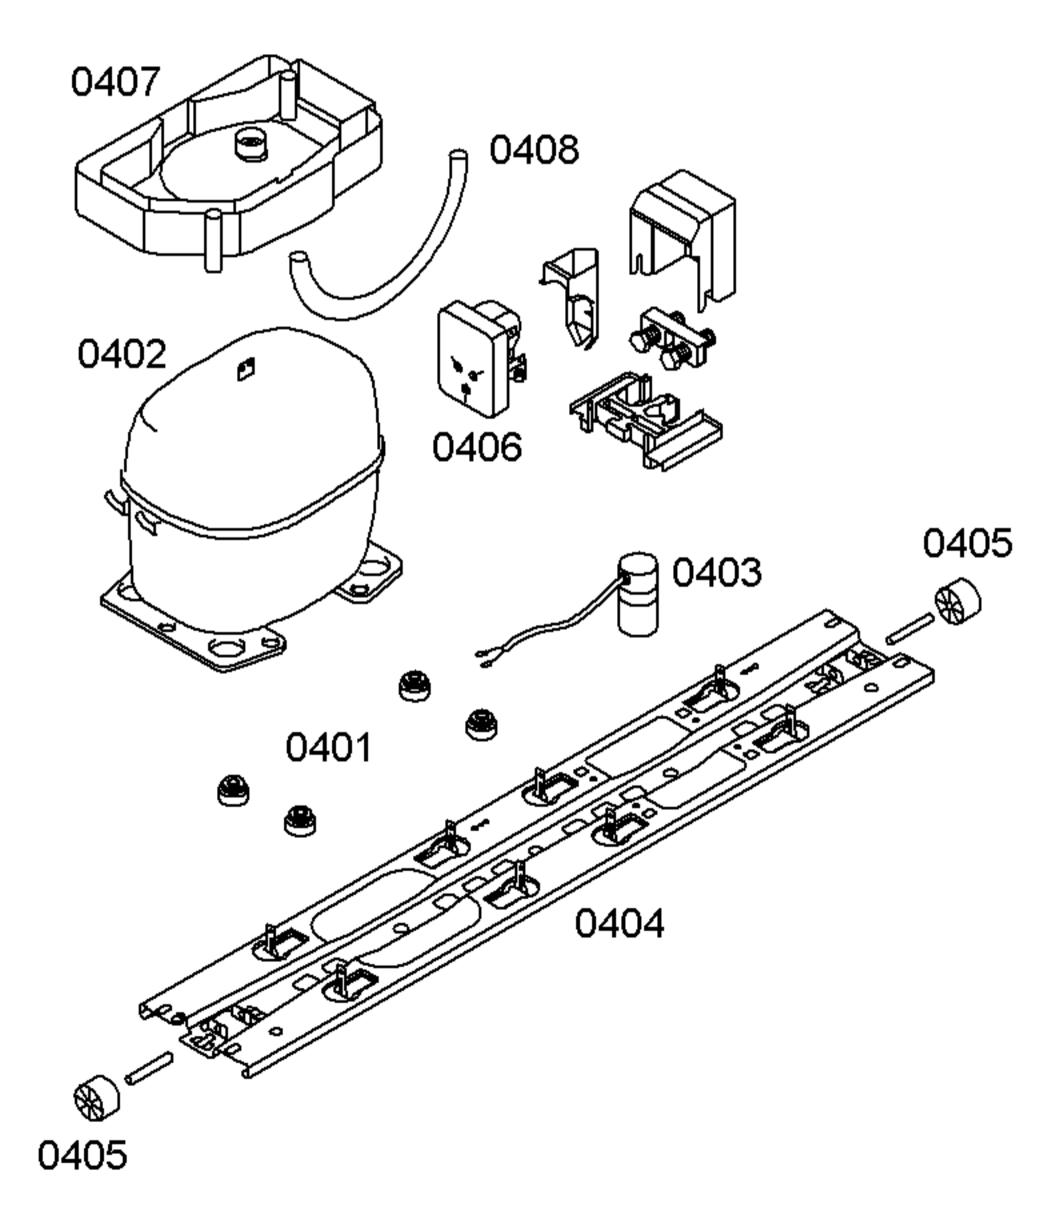

| | | <u> </u> |
|---|---|----------|
| Verdichter/Compressor/Compresseur/Compresor | | |
| Тур/Туре/Тіро | | |
| Förderleistung/Delivery/Debit/Aspiración I/h | | |
| Anlaufstromm/Starting current/Cour.démarrage/Int.arranque | A | |
| Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm | | |
| Hi/aux. | | |
| | | |

| TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNICUES/DATOS TECNICOS | | | |
|---|-----------|--|--|
| | | | |
| Verdichter/Compressor/Compresseur/Compresor | DANFOSS | | |
| Тур/Туре/Тіро | NLX11KK | | |
| Förderleistung/Delivery/Debit/Aspiración I/h | 0407 | | |
| Anlaufstromm/Starting current/Cour.démarrage/Int.arranque A | 7,80 | | |
| Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm | 16,50 | | |
| Hi/aux. | 20,50 | | |
| | | | |
| Klape Therm./Thermostat/Termostat | | | |
| Тур/Туре/Тіро | | | |
| Reglerstellung/Position/Conexión | kalt warm | | |
| Schaltwerte/Switching values/ein/conex.°C | | | |
| Valeurs de commutation/Desconexaus"/descon. | | | |
| (abtaven' od)alarm' | | | |
| Fülmenge/Fill. quantily/Charge/Carga R600 | 60 | | |
| r annongor m. quantify on a go, ou ga nooo | | | |
| Anschlusswert/Comm. load/Puiss. Connect./Potenc. W | 150 | | |
| Heizung/Heater/Chauflage/Resistenc.descong. | | | |
| Widerstand/Resistance/Resistencia K | | | |
| Leistung/Power/Puissance/Potencia W | | | |
| Ventilator/Blower/Ventilateur/Ventilador | | | |
| Widerstand/Resistance/Resistencia | | | |

| TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNICUES/DATOS TECNICOS | | |
|---|-----------|--|
| | | |
| Verdichter/Compressor/Compresseur/Compresor | DANFOSS | |
| Тур/Туре/Тіро | NLX11KK | |
| Förderleistung/Delivery/Debit/Aspiración I/h | 0407 | |
| Anlaufstromm/Starting current/Cour.démarrage/Int.arranque A | 7,80 | |
| Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm | 16,50 | |
| Hi/aux. | 20,50 | |
| Klape Therm./Thermostat/Termostat | | |
| Тур/Туре/Тіро | | |
| Reglerstellung/Position/Conexión | kalt warm | |
| Schaltwerte/Switching values/ein/conex.ºC | | |
| Valeurs de commutation/Desconexaus"/descon. | | |
| (abtaven' od)alarm' | | |
| Fülmenge/Fill. quantily/Charge/Carga R600 | g 60 | |
| | | |
| Anschlusswert/Comm. load/Puiss. Connect./Potenc. W | 150 | |
| Heizung/Heater/Chauflage/Resistenc.descong. | | |
| Widerstand/Resistance/Resistencia K | | |
| Leistung/Power/Puissance/Potencia W | | |
| Ventilator/Blower/Ventilateur/Ventilador | | |
| Widerstand/Resistance/Resistencia | | |

Free-standing-refrigerator 2-door, Botto freestanding >= 60cm width