


3-2. KDL-42W*B

3-2-1. Disassembly, Exploded View

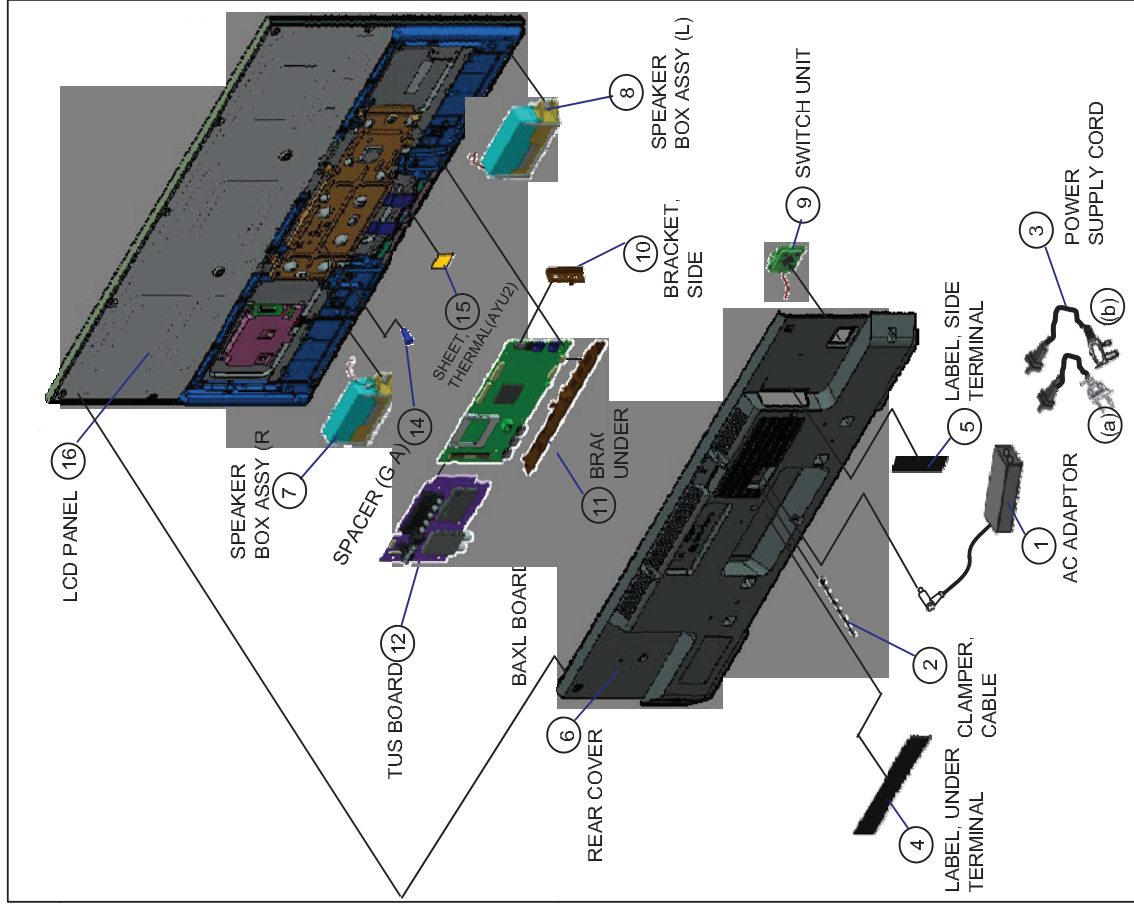

A. KDL-42W*B (CEL, CEI, UKA, EEN, NOR)

REMARK

DESCRIPTION

PART NO.

REF. NO.

REF. NO.	PART NO.	DESCRIPTION	REMARK
1	1-492-731-12	AC ADAPTOR (120W)	
2	4-262-708-04	CLAMPER, CABLE	
3	1-846-093-11 (a)	CORD SET, POWER-SUPPLY	(CEL, CEI, EEN, NOR)
3	1-846-094-11 (b)	CORD SET, POWER-SUPPLY	(UKA)
4	4-484-999-31	LABEL, UNDER TERMINAL	
5	4-484-997-31	LABEL, SIDE TERMINAL	
6	4-528-673-01	REAR COVER (42 CEB) A	
7	1-858-963-21	SPEAKER BOX ASSY (R)	
8	1-858-963-11	SPEAKER BOX ASSY (L)	
9	1-798-510-11	SWITCH UNIT (SM-WW)	
10	4-487-940-02	BRACKET, SIDE (CEB)	
11	4-487-941-12	BRACKET, UNDER (CEB)	
12	A-1998-238-A	COMPL SVC TUS L_AEP_T2S2_1	
13	A-1998-277-A	COMPL SVC BAX_L_HE_AEP_	(CEI, UKA, EEN, NOR)(PIN FOR CEL WILL BE ADDED LATER)
14	4-256-454-02	SPACER (G A)	
15	4-440-057-01	SHEET, THERMAL (AYU2)	
16	1-811-952-11	LCD PANEL (A42V6)	(W705B)
16	1-811-952-21	LCD PANEL (A42V6S)	(W706B)
16	1-811-987-11	LCD PANEL (A42V2)	(W805B, W828B, W829B)
16	1-811-987-21	LCD PANEL (A42V2S)	(W815B)

B. KDL-42W*B (RU3, EC3)

REMARK


DESCRIPTION

PART NO.

REF. NO.

REF. NO.	PART NO.	DESCRIPTION	REMARK
1	1-492-733-11	AC ADAPTOR (120W)	
2	4-262-708-04	CLAMPER, CABLE	
3	1-837-427-11 (a)	POWER-SUPPLY CORD SET	
4	4-484-999-31	LABEL, UNDER TERMINAL	
5	4-484-997-31	LABEL, SIDE TERMINAL	
6	4-528-673-01	REAR COVER (42 CEB) A	
7	1-858-963-21	SPEAKER BOX ASSY (R)	
8	1-858-963-11	SPEAKER BOX ASSY (L)	
9	1-798-510-11	SWITCH UNIT (SM-WW)	
10	4-487-940-02	BRACKET, SIDE (CEB)	
11	4-487-941-12	BRACKET, UNDER (CEB)	
12	A-1998-238-A	COMPL SVC TUS L_AEP_T2S2_1	(W817B (7,000,001-7,200,000))
13	A-1998-278-A	COMPL SVC BAX_L_HE_AEP_RU	(W705B, W706B, W817B (Serial No.:2,000,001+2,200,000), W828B)
13	A-2042-160-A	COMPL SVC BAX_L_HE_AEP_EC3	(EC3)
14	4-256-454-02	SPACER (G A)	
15	4-440-057-01	SHEET, THERMAL (AYU2)	
16	1-811-952-11	LCD PANEL (A42V6)	(W705B)
16	1-811-952-21	LCD PANEL (A42V6S)	(W706B)
16	1-811-987-11	LCD PANEL (A42V2)	(W805B, W828B)
16	1-811-987-21	LCD PANEL (A42V2S)	(W817B)

3-2. KDL- 42W*B
3-2-1. Disassembly, Exploded View

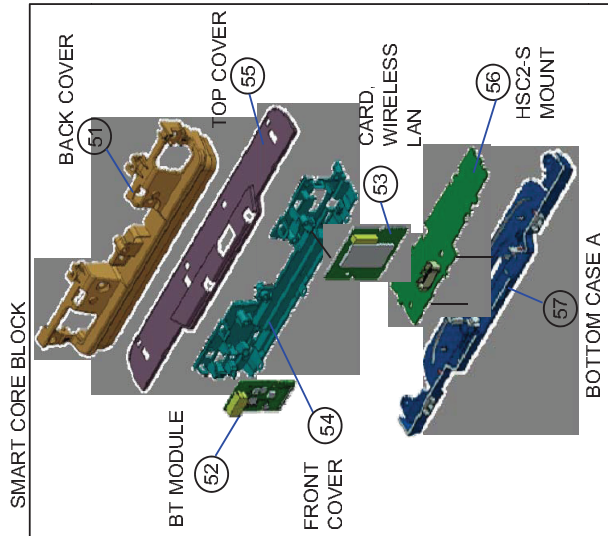

<u>REF.NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>REMARK</u>
51	4-474-894-01	BACK COVER	
52	1-492-760-12	BT MODULE	
53	1-458-723-11	CARD, WIRELESS LAN	
54	4-474-893-01	FRONT COVER	
55	4-474-892-01	TOP COVER	
56	A-1969-162-A	HSC2-S MOUNT	
57	4-474-888-02	BOTTOM CASE A	

**Stand exploded view below are for reference purpose.

(*** Child parts are UNSTOCKED except for Screw. +PSW M5X16. (For detail please refer to page 19))

A. KDL-42W*B (CEL, CEI, UKA, EEN, NOR)

<u>REF.NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>REMARK</u>
71	4-462-165-02	STAND, NECK(MMB)	
72	4-485-110-01	STAND,PIPE ML CEB	(W706B, W805B , W815B)
72	4-485-110-11	STAND,PIPE ML CEB	(W705B, W828B ,W829B)

B. KDL-42W*B (RU3, EC3)

<u>REF.NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>REMARK</u>
71	4-462-165-02	STAND, NECK(MMB)	
72	4-485-110-01	STAND,PIPE ML CEB	(W706B, W805B, W815B, W817B)
72	4-485-110-11	STAND,PIPE ML CEB	(W705B , W828B)

