


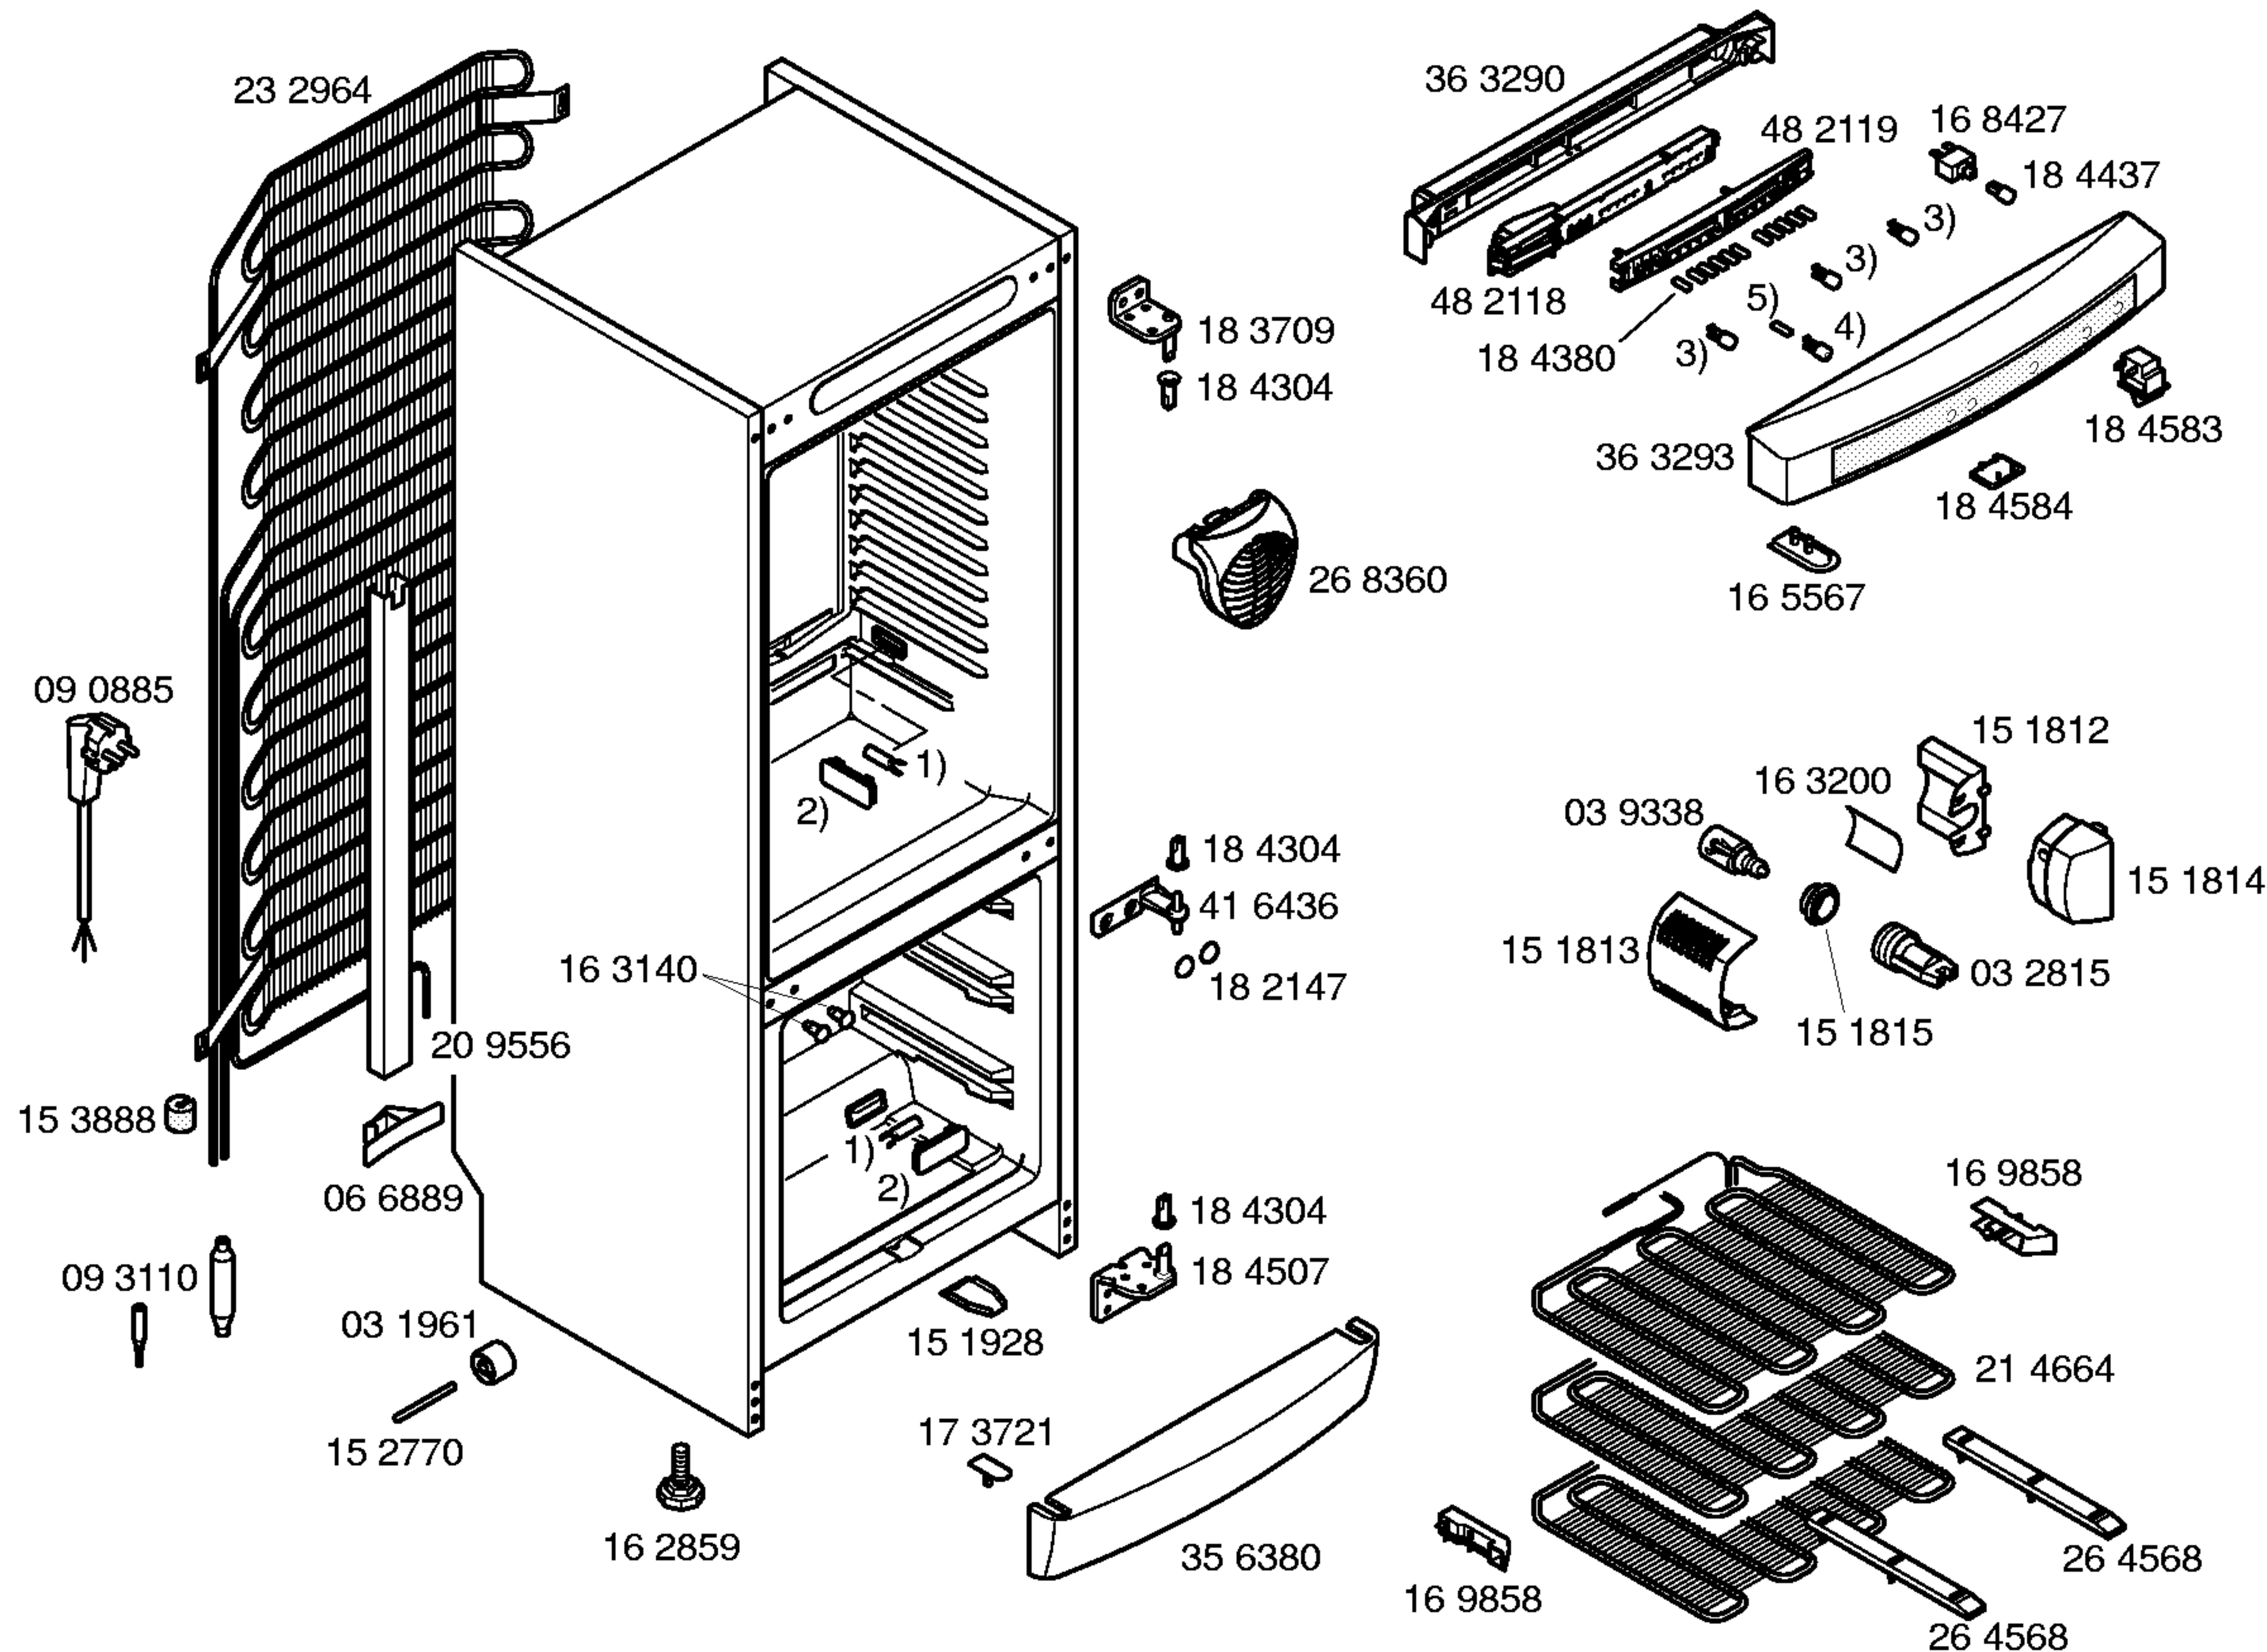


Ident – Nummern – Konstante
3740


Gebrauchsanweisung
52 9594
(de,en,fr,es,it,pt,el)
52 9595
(sv,no,fi,da)
52 9596
(ru,ro)

Montageanweisung
52 4888
(de,en,fr,nl,es,it,pt,el,pl,
sv,no,fi,da,ru)

- 1) 16 8766
Rep. Satz
- 2) 16 9176
- 3) 18 4425
- 4) 18 4427
- 5) 18 4433

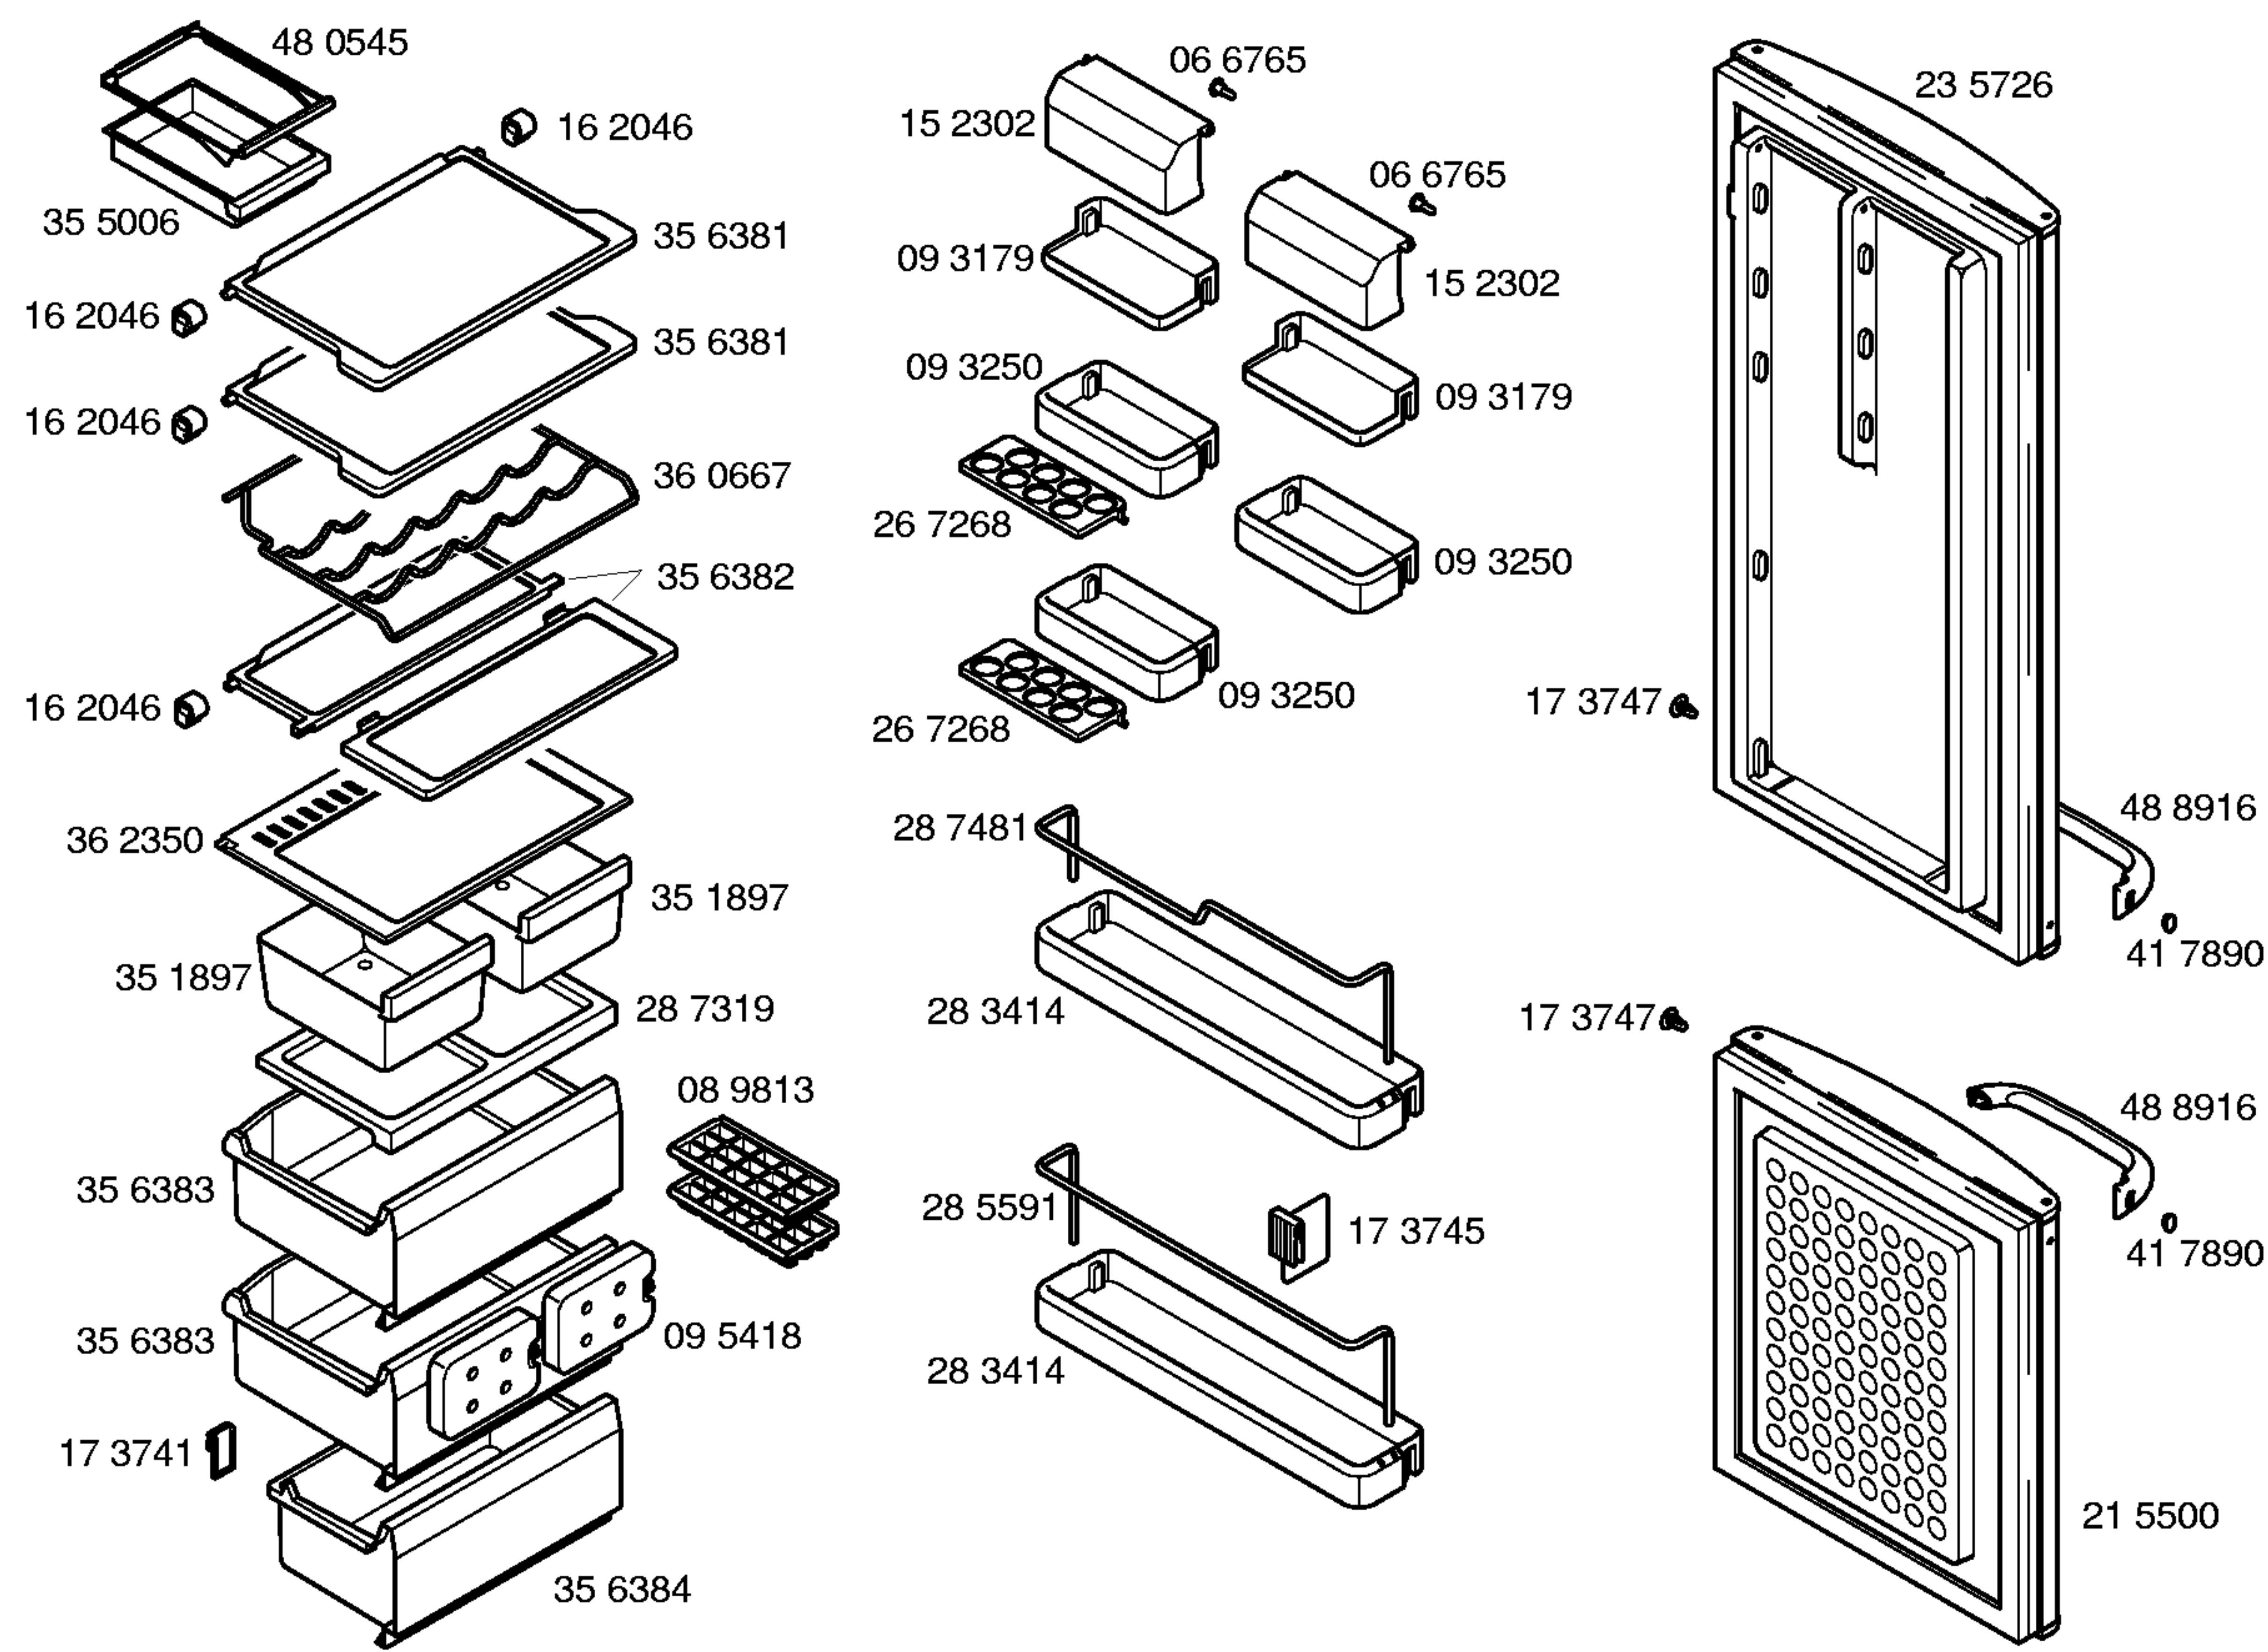

Ident – Nummern – Konstante
3740

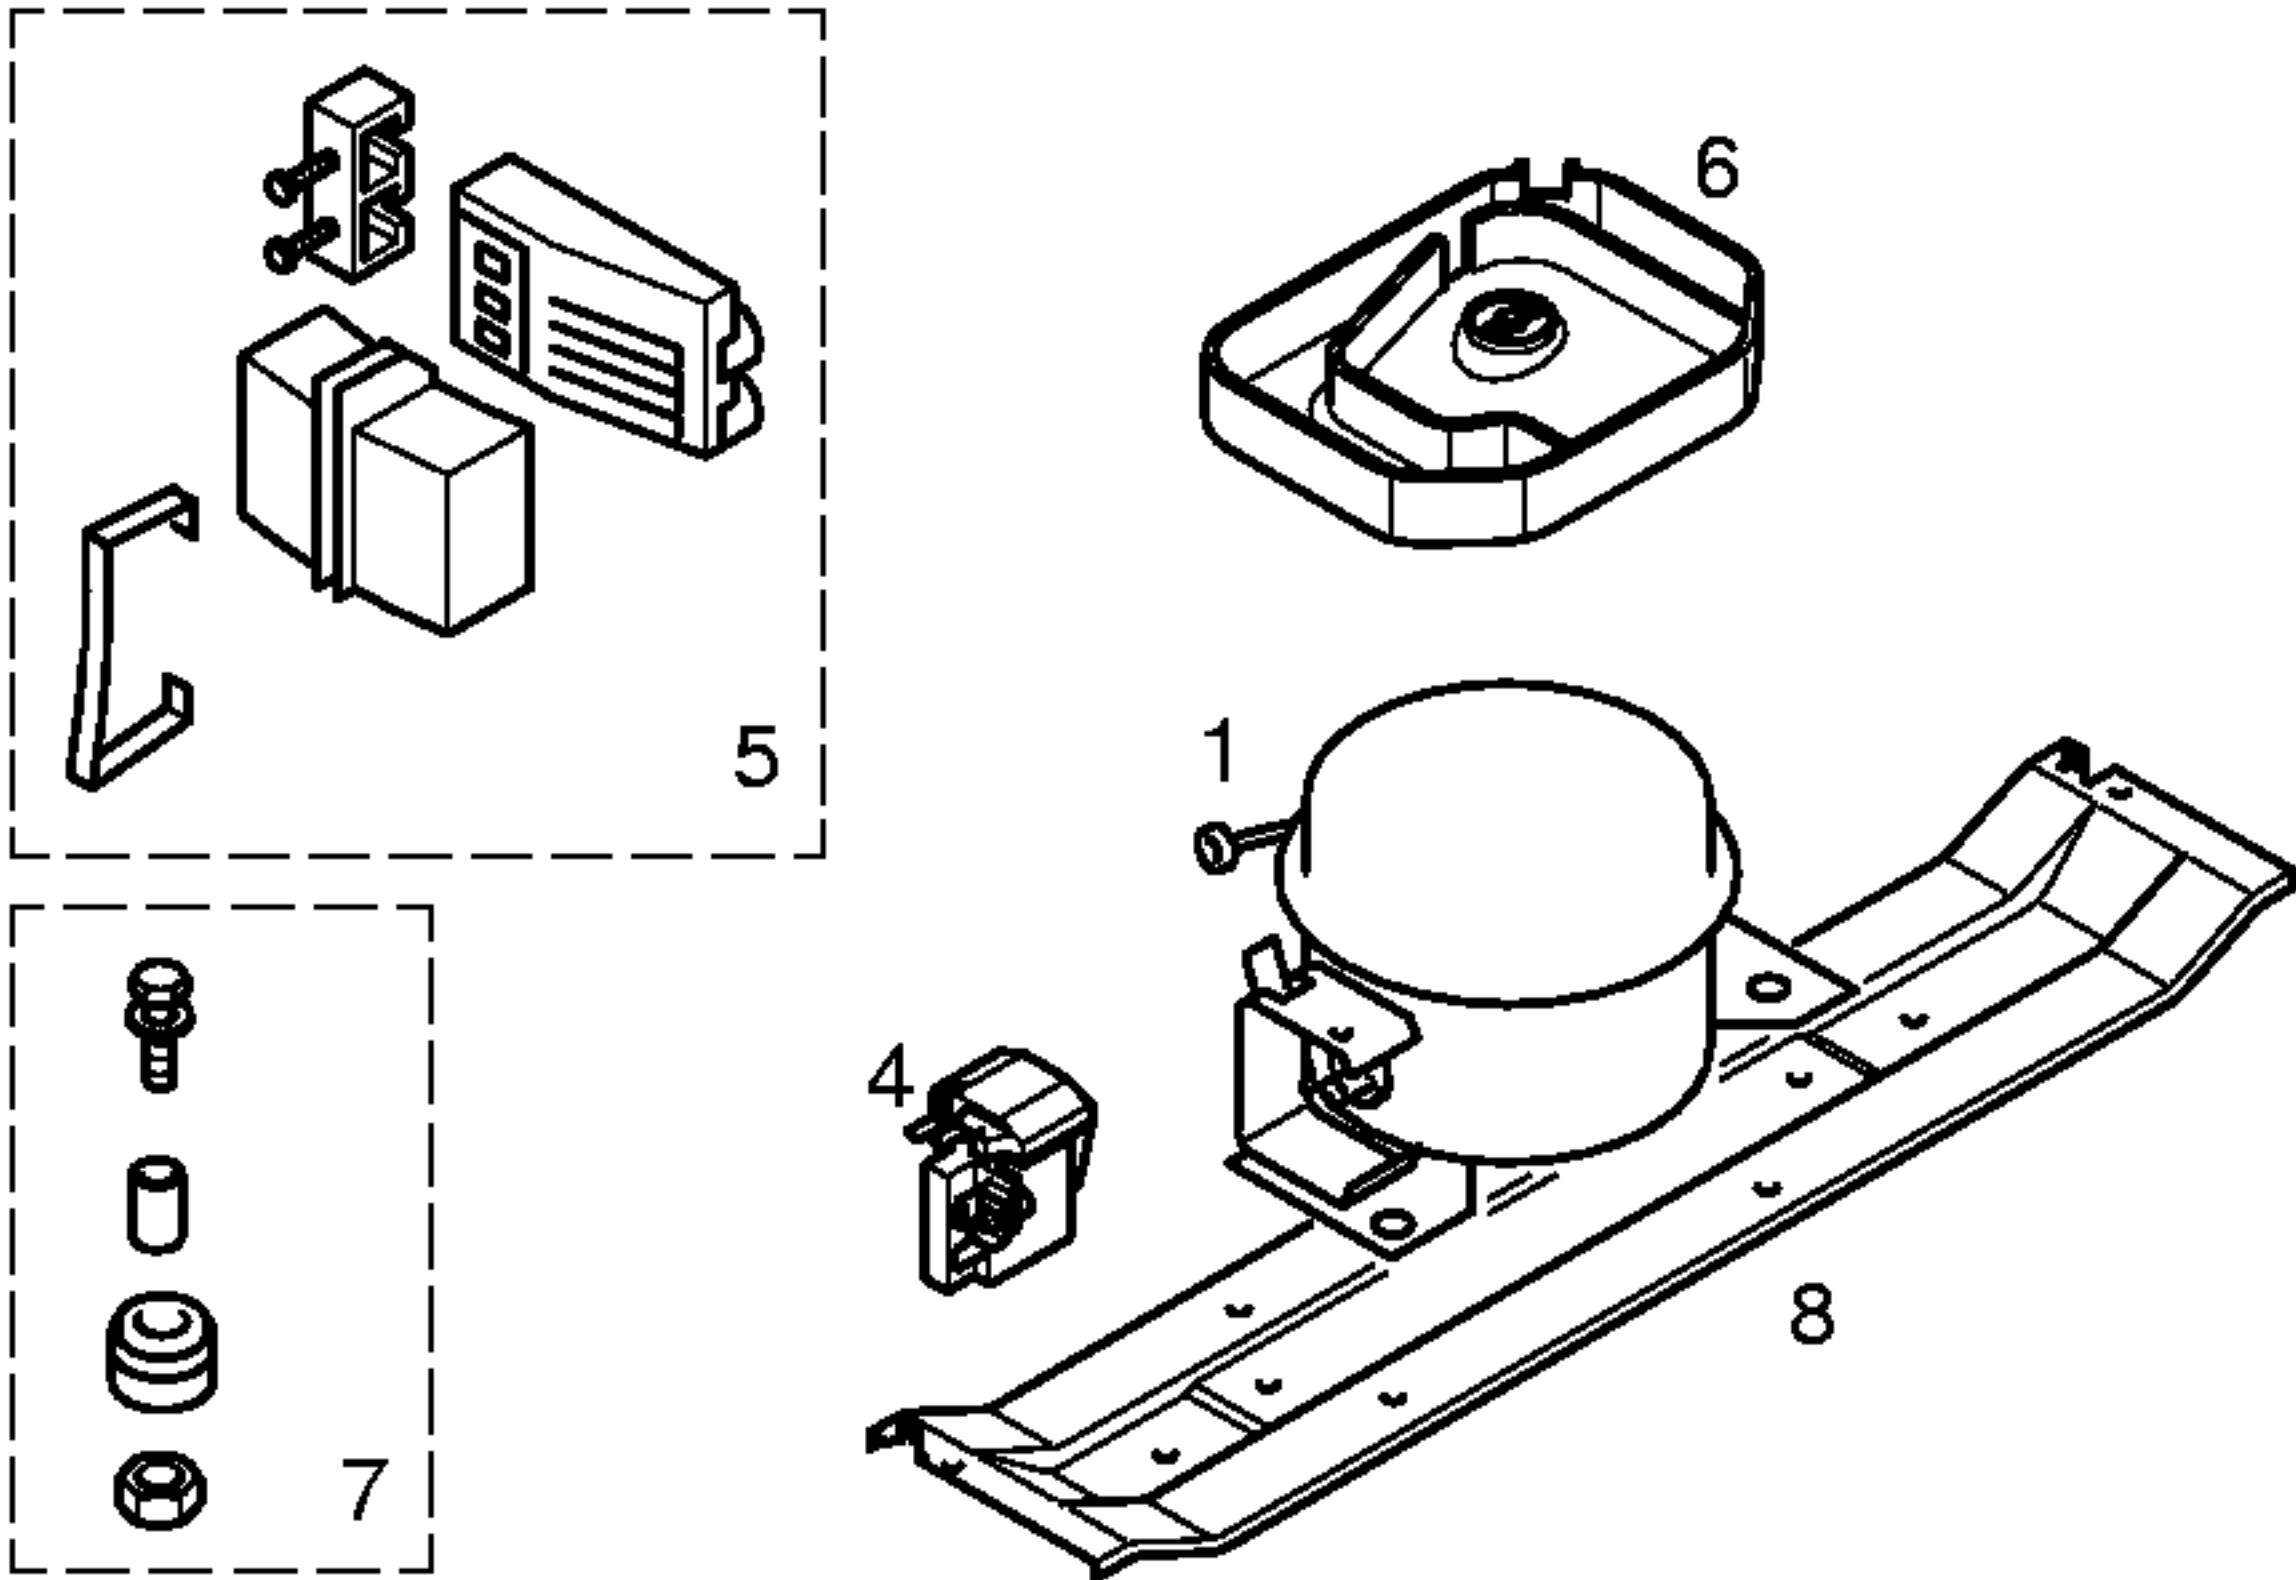

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS				

		V01	V02	
Verdichter/Compressor/Compresseur/Compresor	LG	LG	Aspera	
Typ/Type/Tipo	NDA62NAEG	NDA69NAEG	EMT40-CLP	
Förderleistung/Delivery/Debit/Aspiración l/h				
Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A	0,48	0,50	0,63	
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	35,21	35,21	32,05	
Hi/aux. Ohm	21,49	21,49	26,59	
Temp.Reyler/Thermostat/Termostato	Electronic KS	Electronic GS		
Typ/Type/Tipo	E2000-K	E2000-K		
Reglerstellung/Position/Conexión	MIN. MAX.	MIN. MAX.		
Schaltwerte/Switching values/ ..ein/conex. °C	11 1	-12,5 -24'5		
Valeurs de commutation/Desconex. ..aus"/descon.°C	10 0	-14 -26		
(..abtaven' od) ..alarm' °C				
Verdampfersensor/Evaporator sensor/Sonda evaporador				
Schaltwerte/Switching values/ ..ein/conex. °C	4 4			
Valeurs de commutation/Desconex. ..aus"/descon.°C	— —			
Füllmenge/Fill. quantily/Charge/Carga R600a. g	*	*	*	
Anschlusswert/Comm. load/Puiss. Connect./Potenc. W	71	83	90	
Heizung/Heater/Chaufrage/Resistenc.descong.				
Widerstand/Resistance/Resistencia Ohm				
Leistung/Power/Puissance/Potencia W				
Ventilador/Blower/Ventilateur/Ventilador				
Widerstand/Resistance/Resistencia Ohm				
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula				
Widerstand/Resistance/Resistencia Ohm				
Spannung/Voltage/Tension/Tensión V				
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild / See identification plate / Voir plaque de caractéristiques / Ver plaqueta de características

Pos.	*****		
		V01	V02
	LG	LG	Aspera
	NDA62NAEG	NDA69NAEG	EMT40-CLP
1	14 2000	14 2001	14 2001
2			
3			
4	17 1011	17 1011	41 6671
5			
6	48 4330		
7	05 0166	05 0166	05 0166
8	28 8253	28 8253	28 8253
9			
10			
11			
12			
13			