


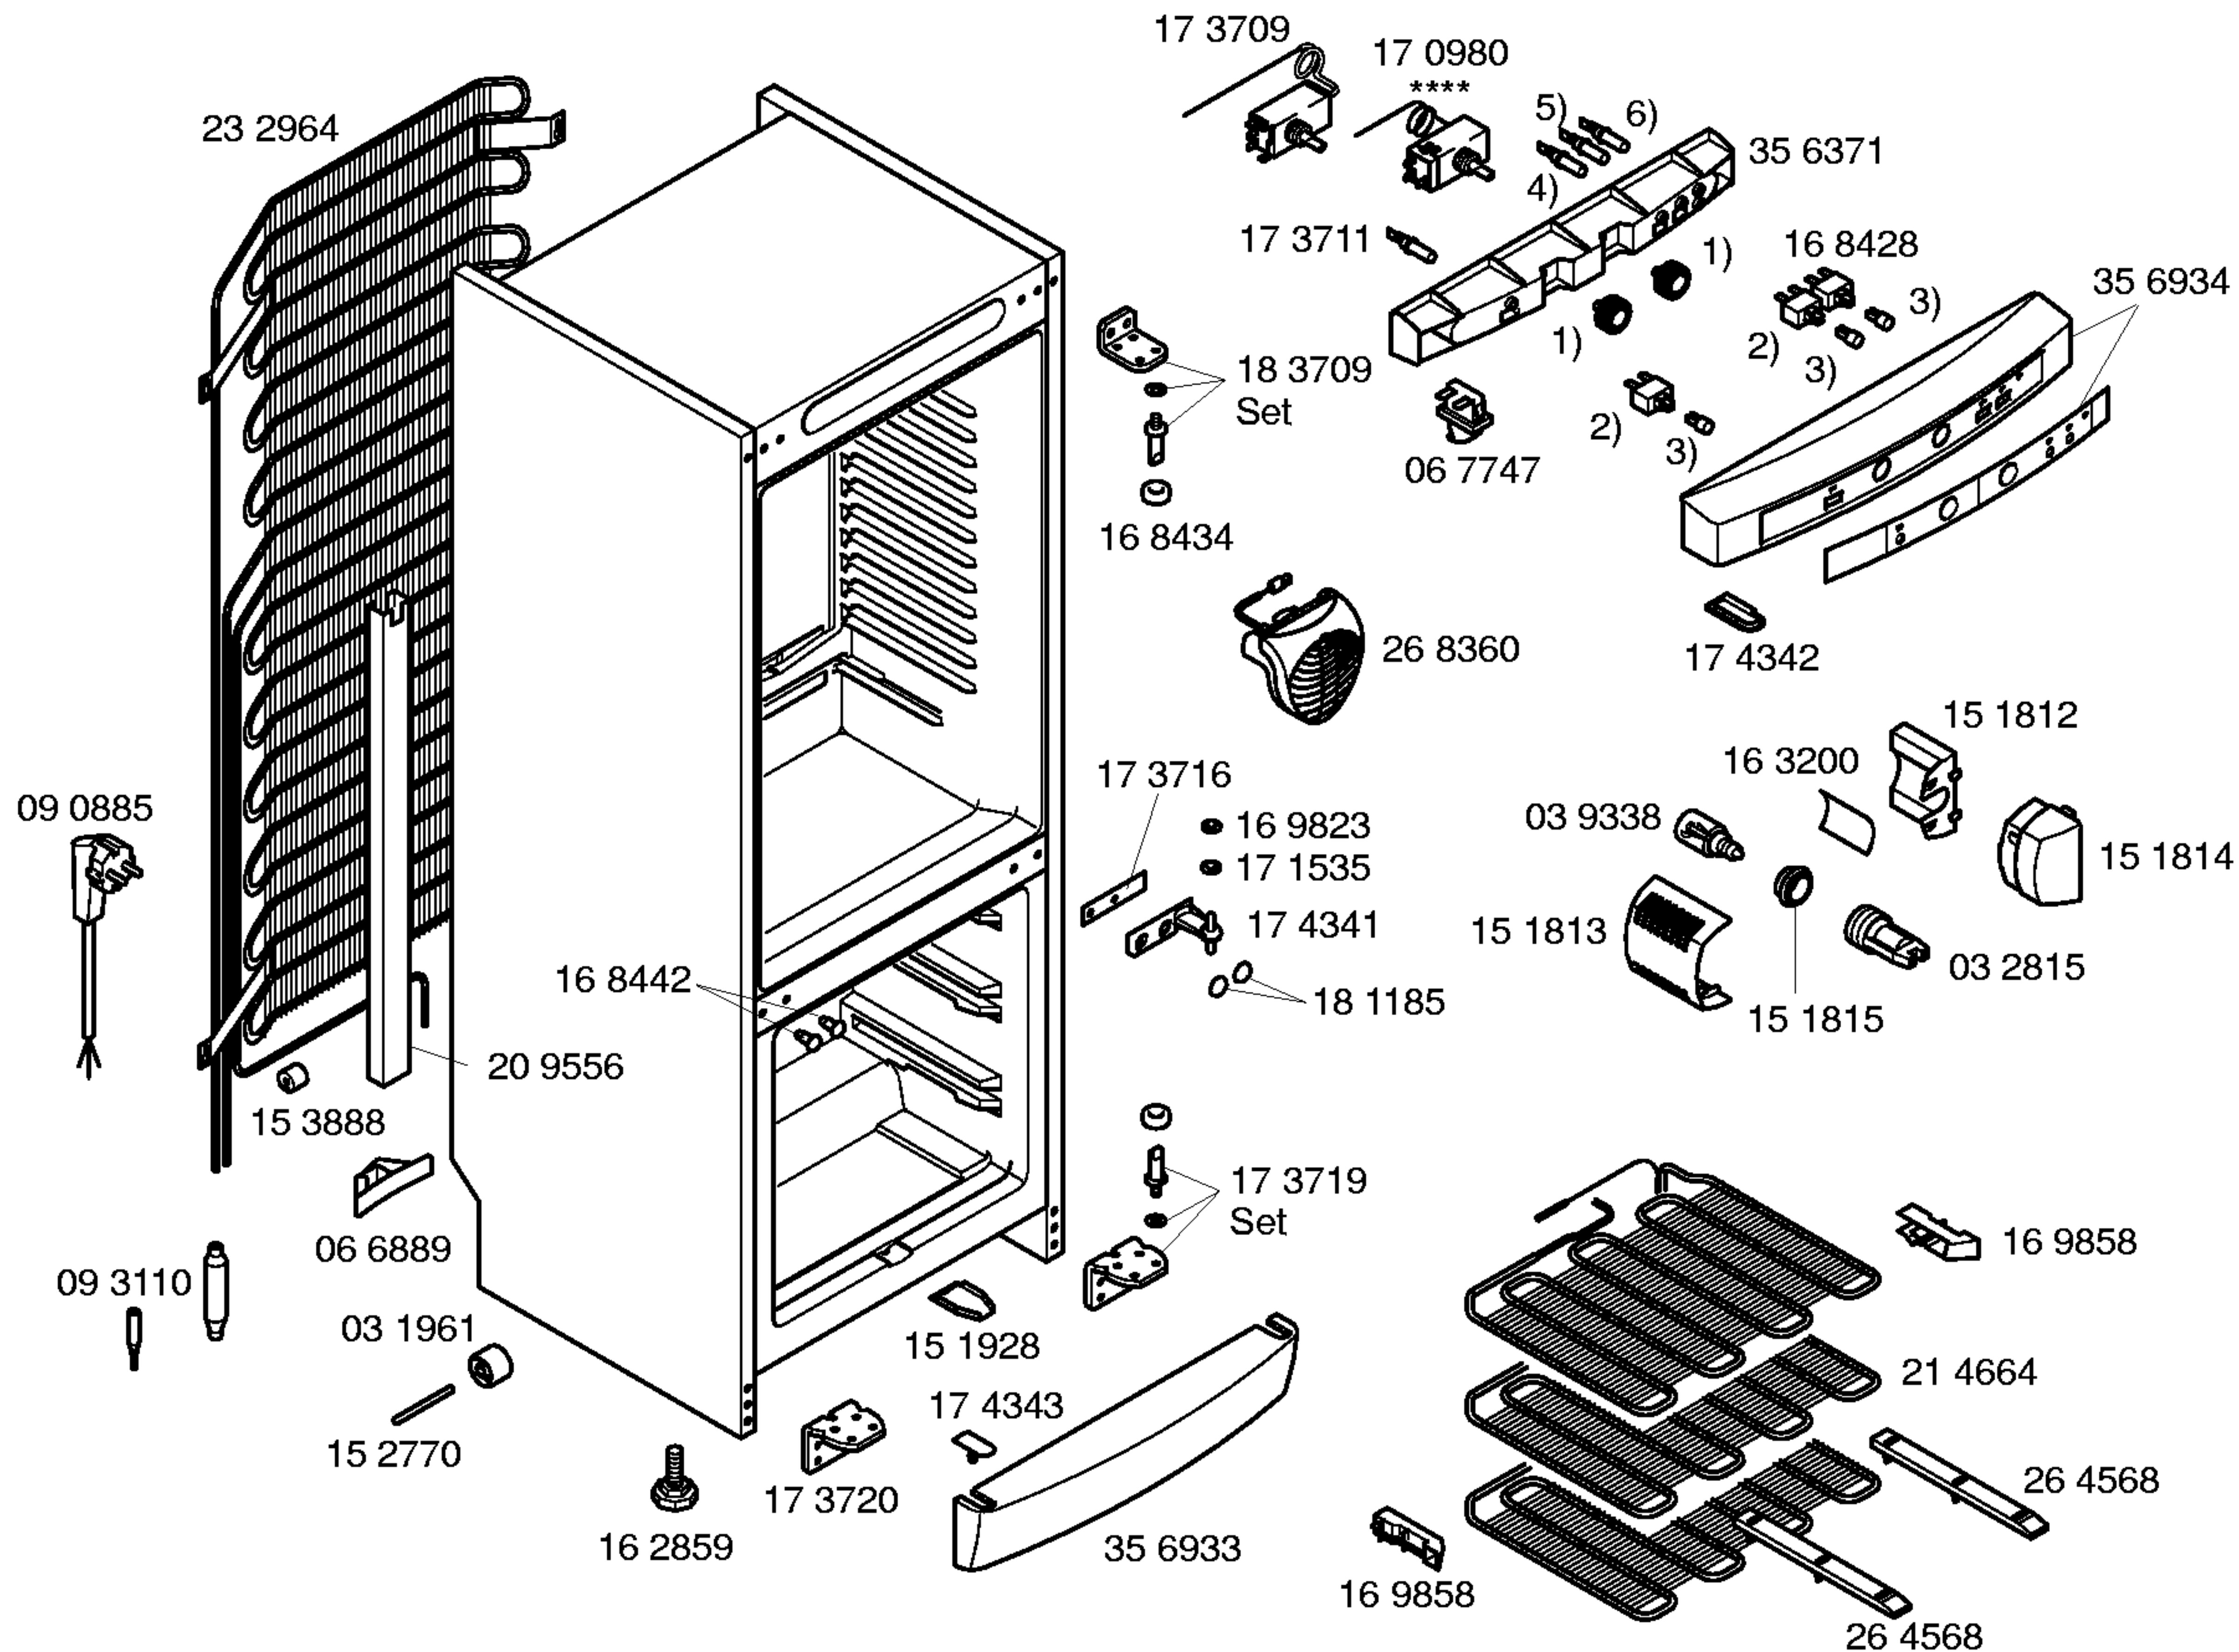

Ident – Nummern – Konstante	
3740	

Gebrauchsanweisung
52 4133
(de,en,fr,nl,es,it,pt,el,
pl)

Montageanweisung
52 4134
(de,en,fr,nl,es,it,pt,el,
sv,no,fi,da,ru)


- 1) 16 5417
- 2) 16 8427
- 3) 17 3715
- 4) 17 3711
Verde
- 5) 17 3712
Ambar
- 6) 17 3713
Rojo



BOSCH

KGS3765IE/10-V01, silver metallic.


KUEHL-,GEFRIERGERAETE
Kuehl-,Gefrierkombinationen

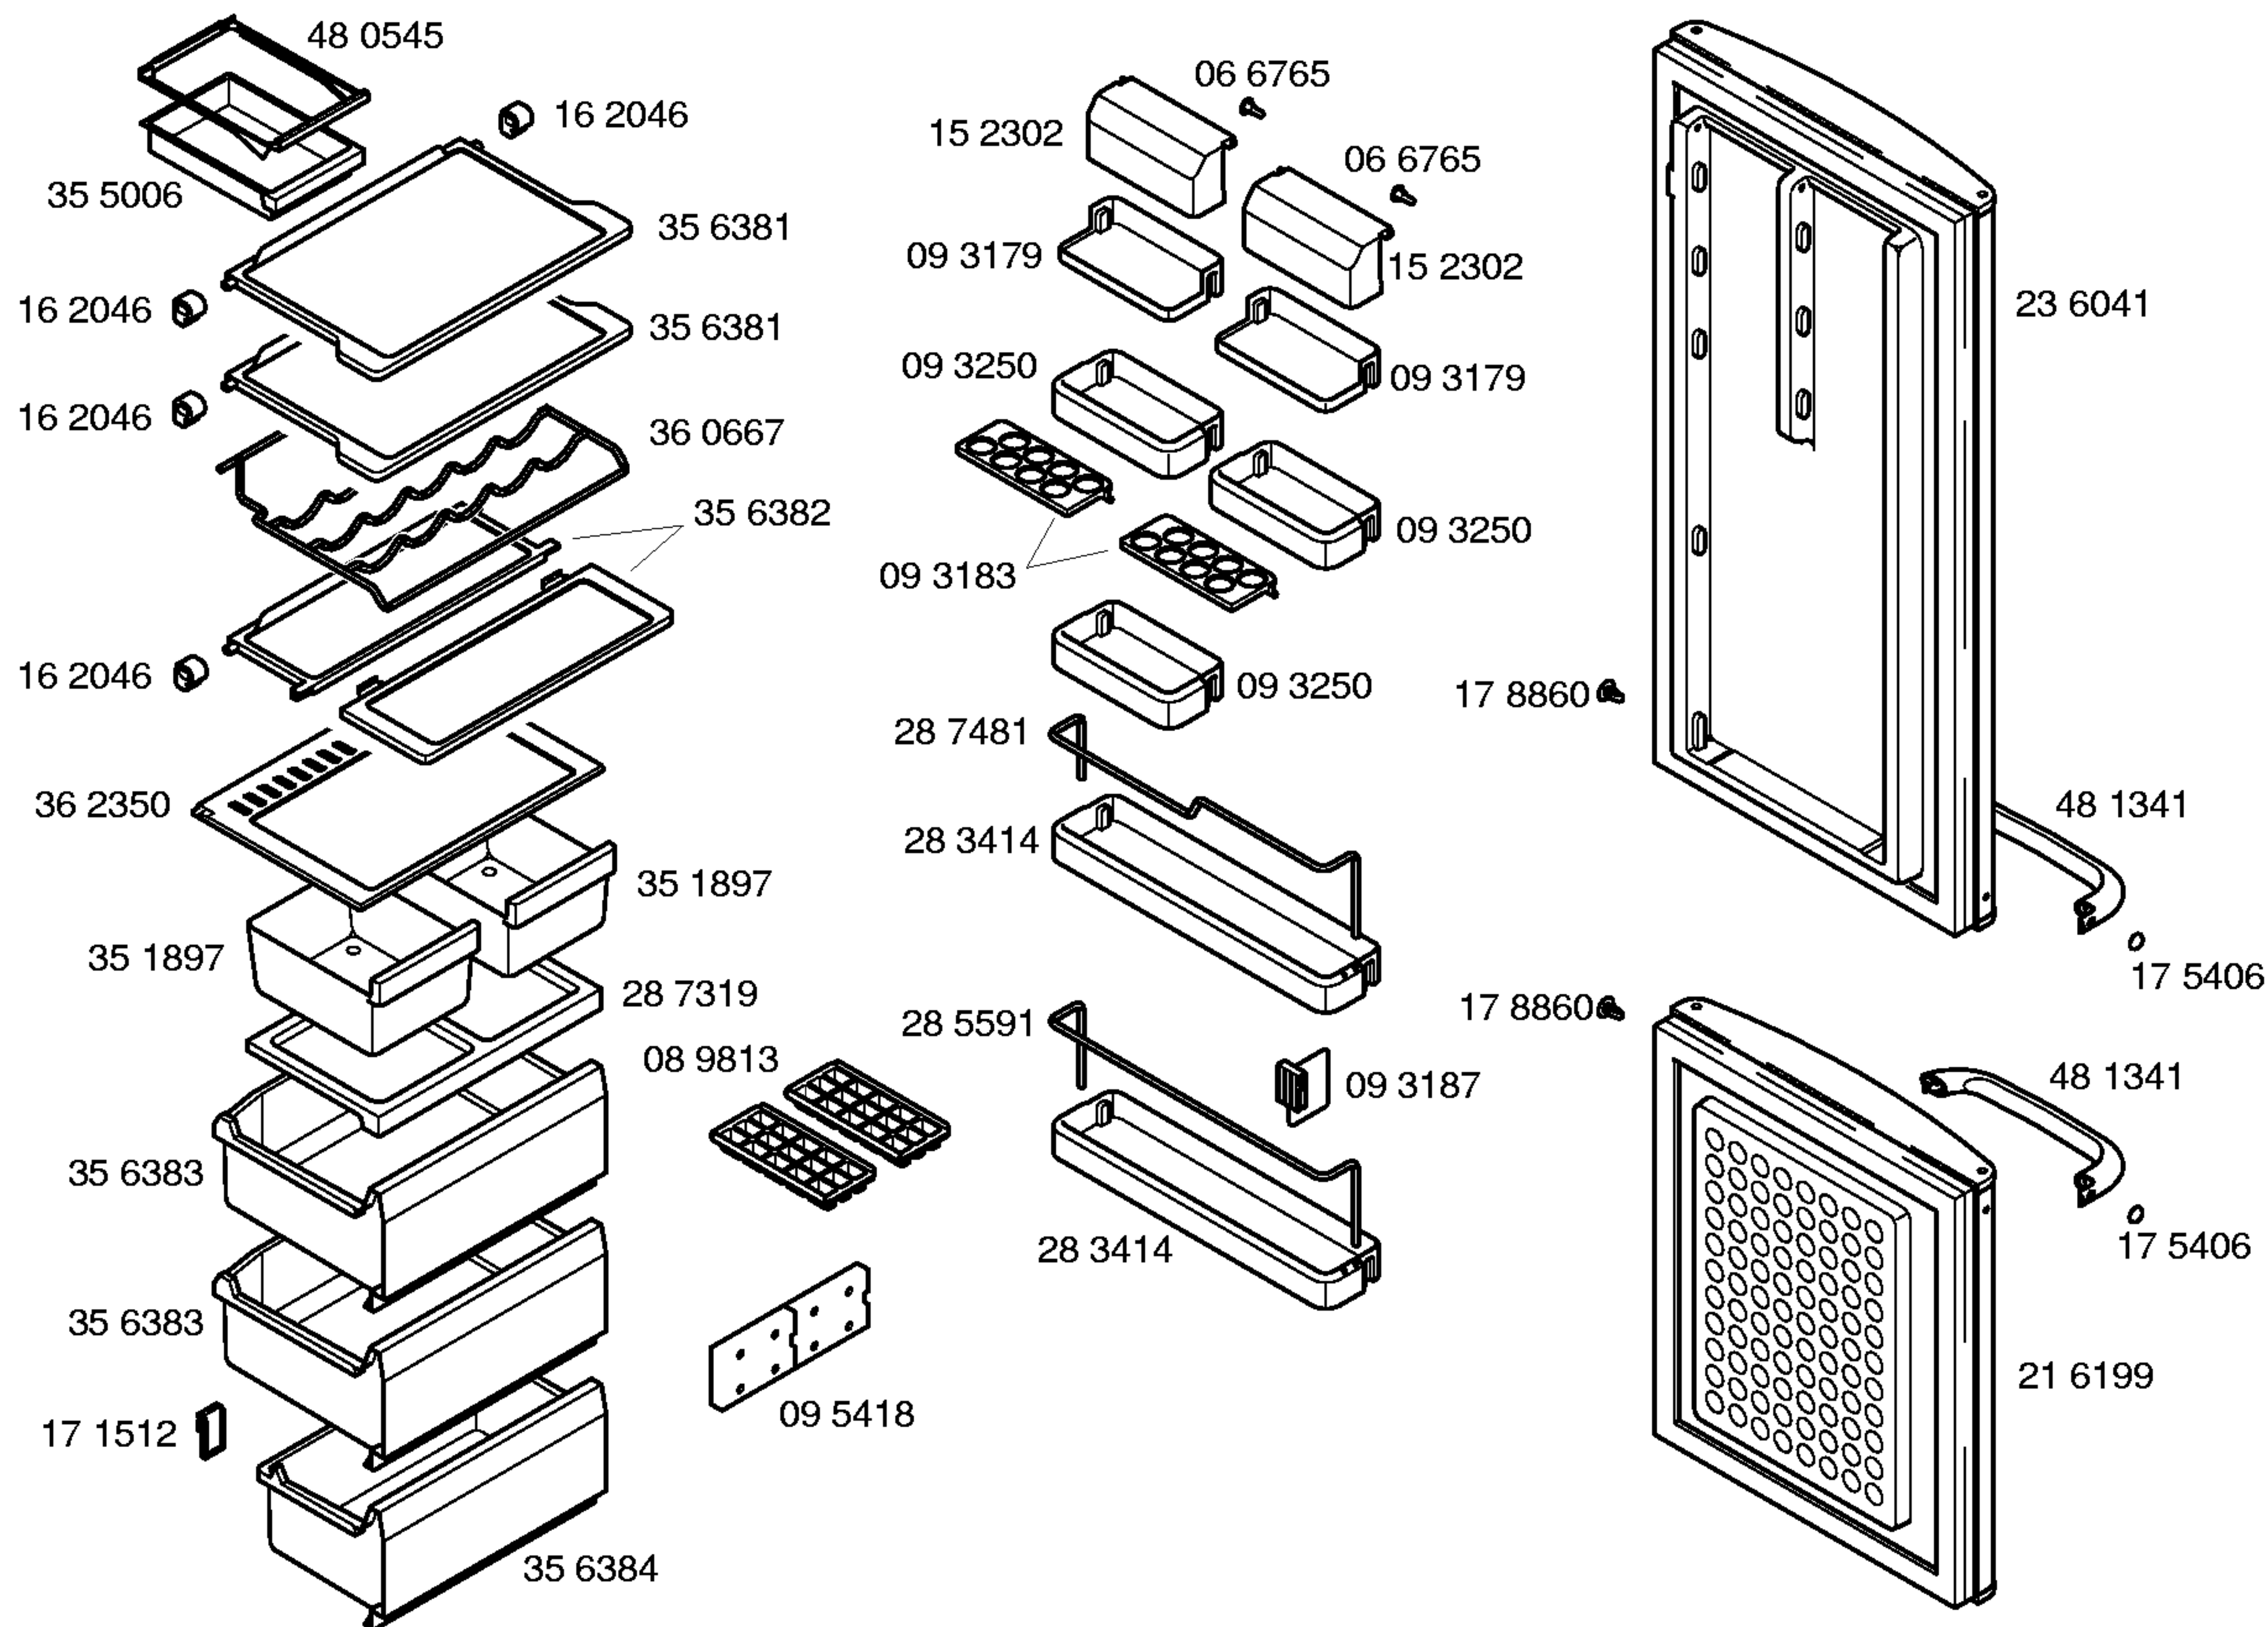

Ident – Nummern – Konstante
3740


BOSCH

KGS3765IE/10–V01, silver metallic.

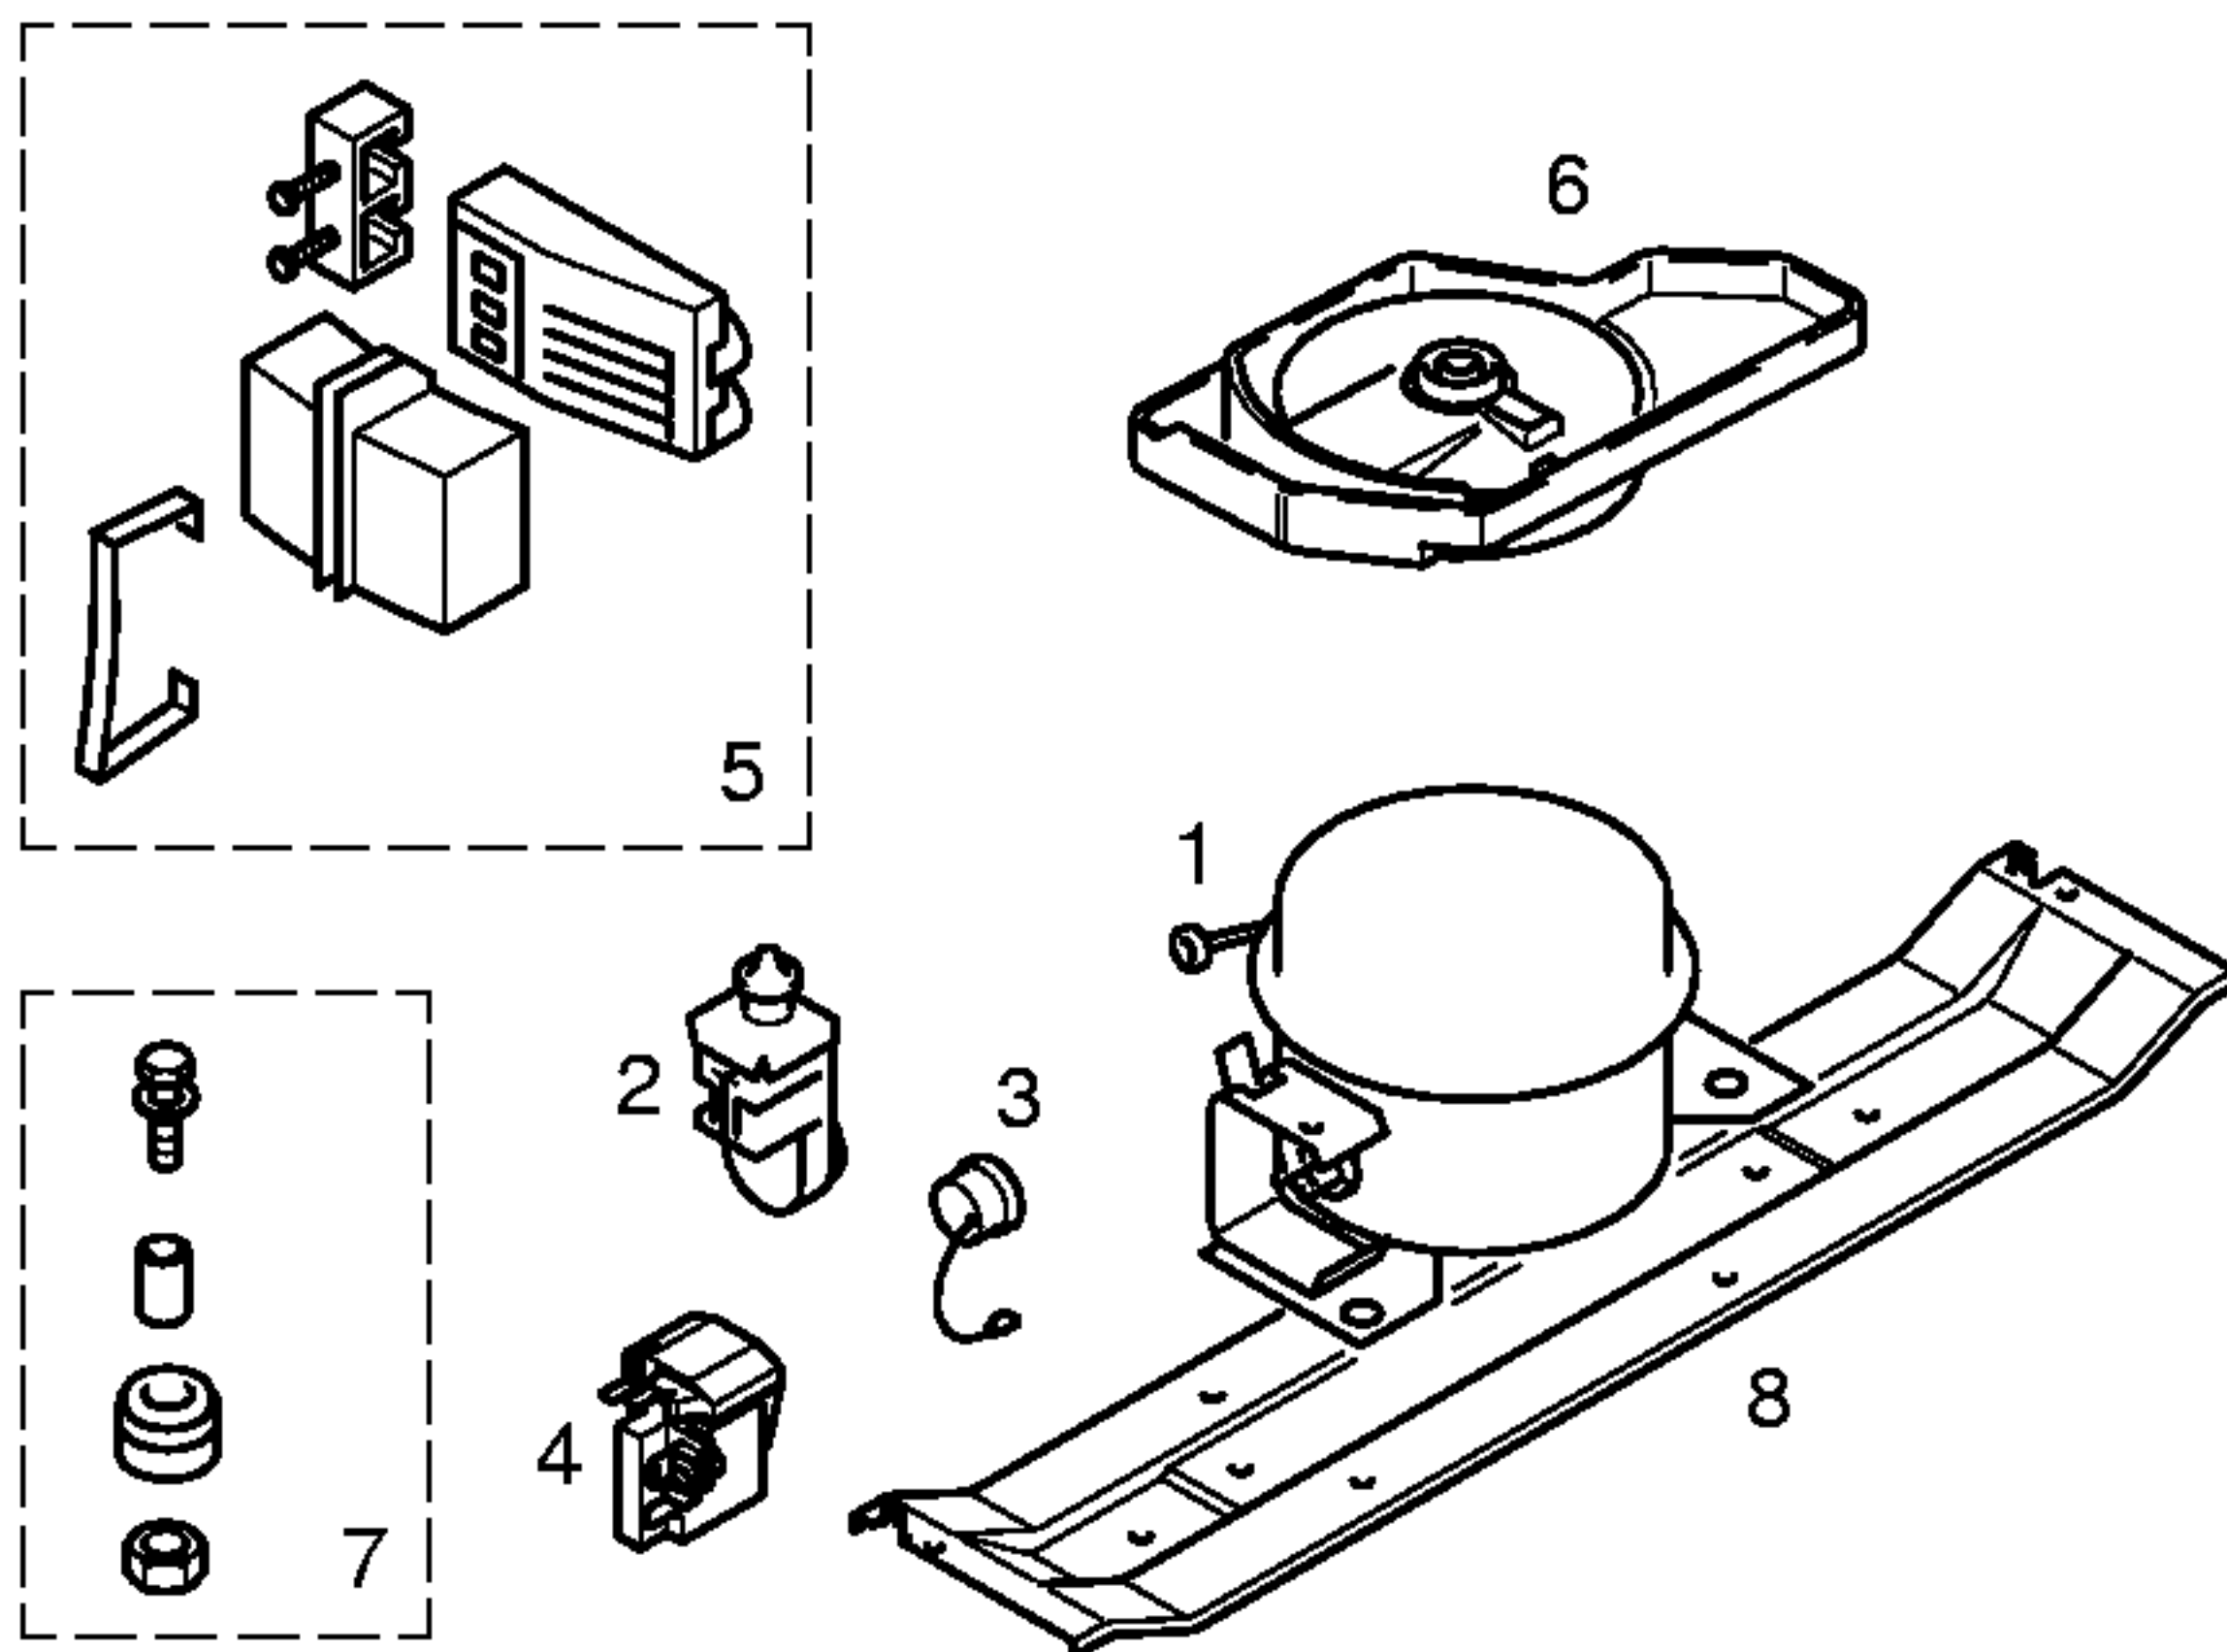KUEHL–,GEFRIERGERAETE
Kuehl–,Gefrierkombinationen


Pos.	****			
	Aspera BPK1072Y	Gold Star NR69NAEG		
1	14 2000	14 2001		
2	15 4315			
3	17 3748			
4		17 1011		
5				
6	26 4123			
7	05 0166	05 0166		
8	28 8253	28 8253		
9				
10				
11				
12				
13				

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				

Verdichter/Compressor/Compresseur/Compresor Typ/Type/Tipo Förderleistung/Delivery/Debit/Aspiración l/h Anlaufstrom/Starting current/Cour.démarrage/Int.arranq. A Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm Hi/aux.	Aspera BPK1072Y 0,47 33,10 38,20	Gold Star NR69NAEG		
Temp.Reyler/Thermostat/Termostato Typ/Type/Tipo Reglerstellung/Position/Conexión Schaltwerte/Switching values/ ..ein/conex.°C Valeurs de commutation/Desconex. ..aus"/descon. (..abtaven' od) ..alarm'	Danfoss 077B6181 MIN. MAX. +6° –11° –28°	Ranco K54–L2006 MIN. MAX. –14° –22° –20° –28° –10° –18°		
Füllmenge/Fill. quantily/Charge/Carga R600a g	*	*		
Anschlusswert/Comm. load/Puiss. Connect./Potenc. W	79	83		
Heizung/Heater/Chauflage/Resistenc.descong. Widerstand/Resistance/Resistencia Ohm Leistung/Power/Puissance/Potencia W				
Ventilador/Blower/Ventilateur/Ventilador Widerstand/Resistance/Resistencia Ohm				
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula Widerstand/Resistance/Resistencia Ohm Spannung/Voltage/Tension/Tensión V				
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild / See identification plate / Voir plaque de caractéristiques / Ver plaqueta de características