


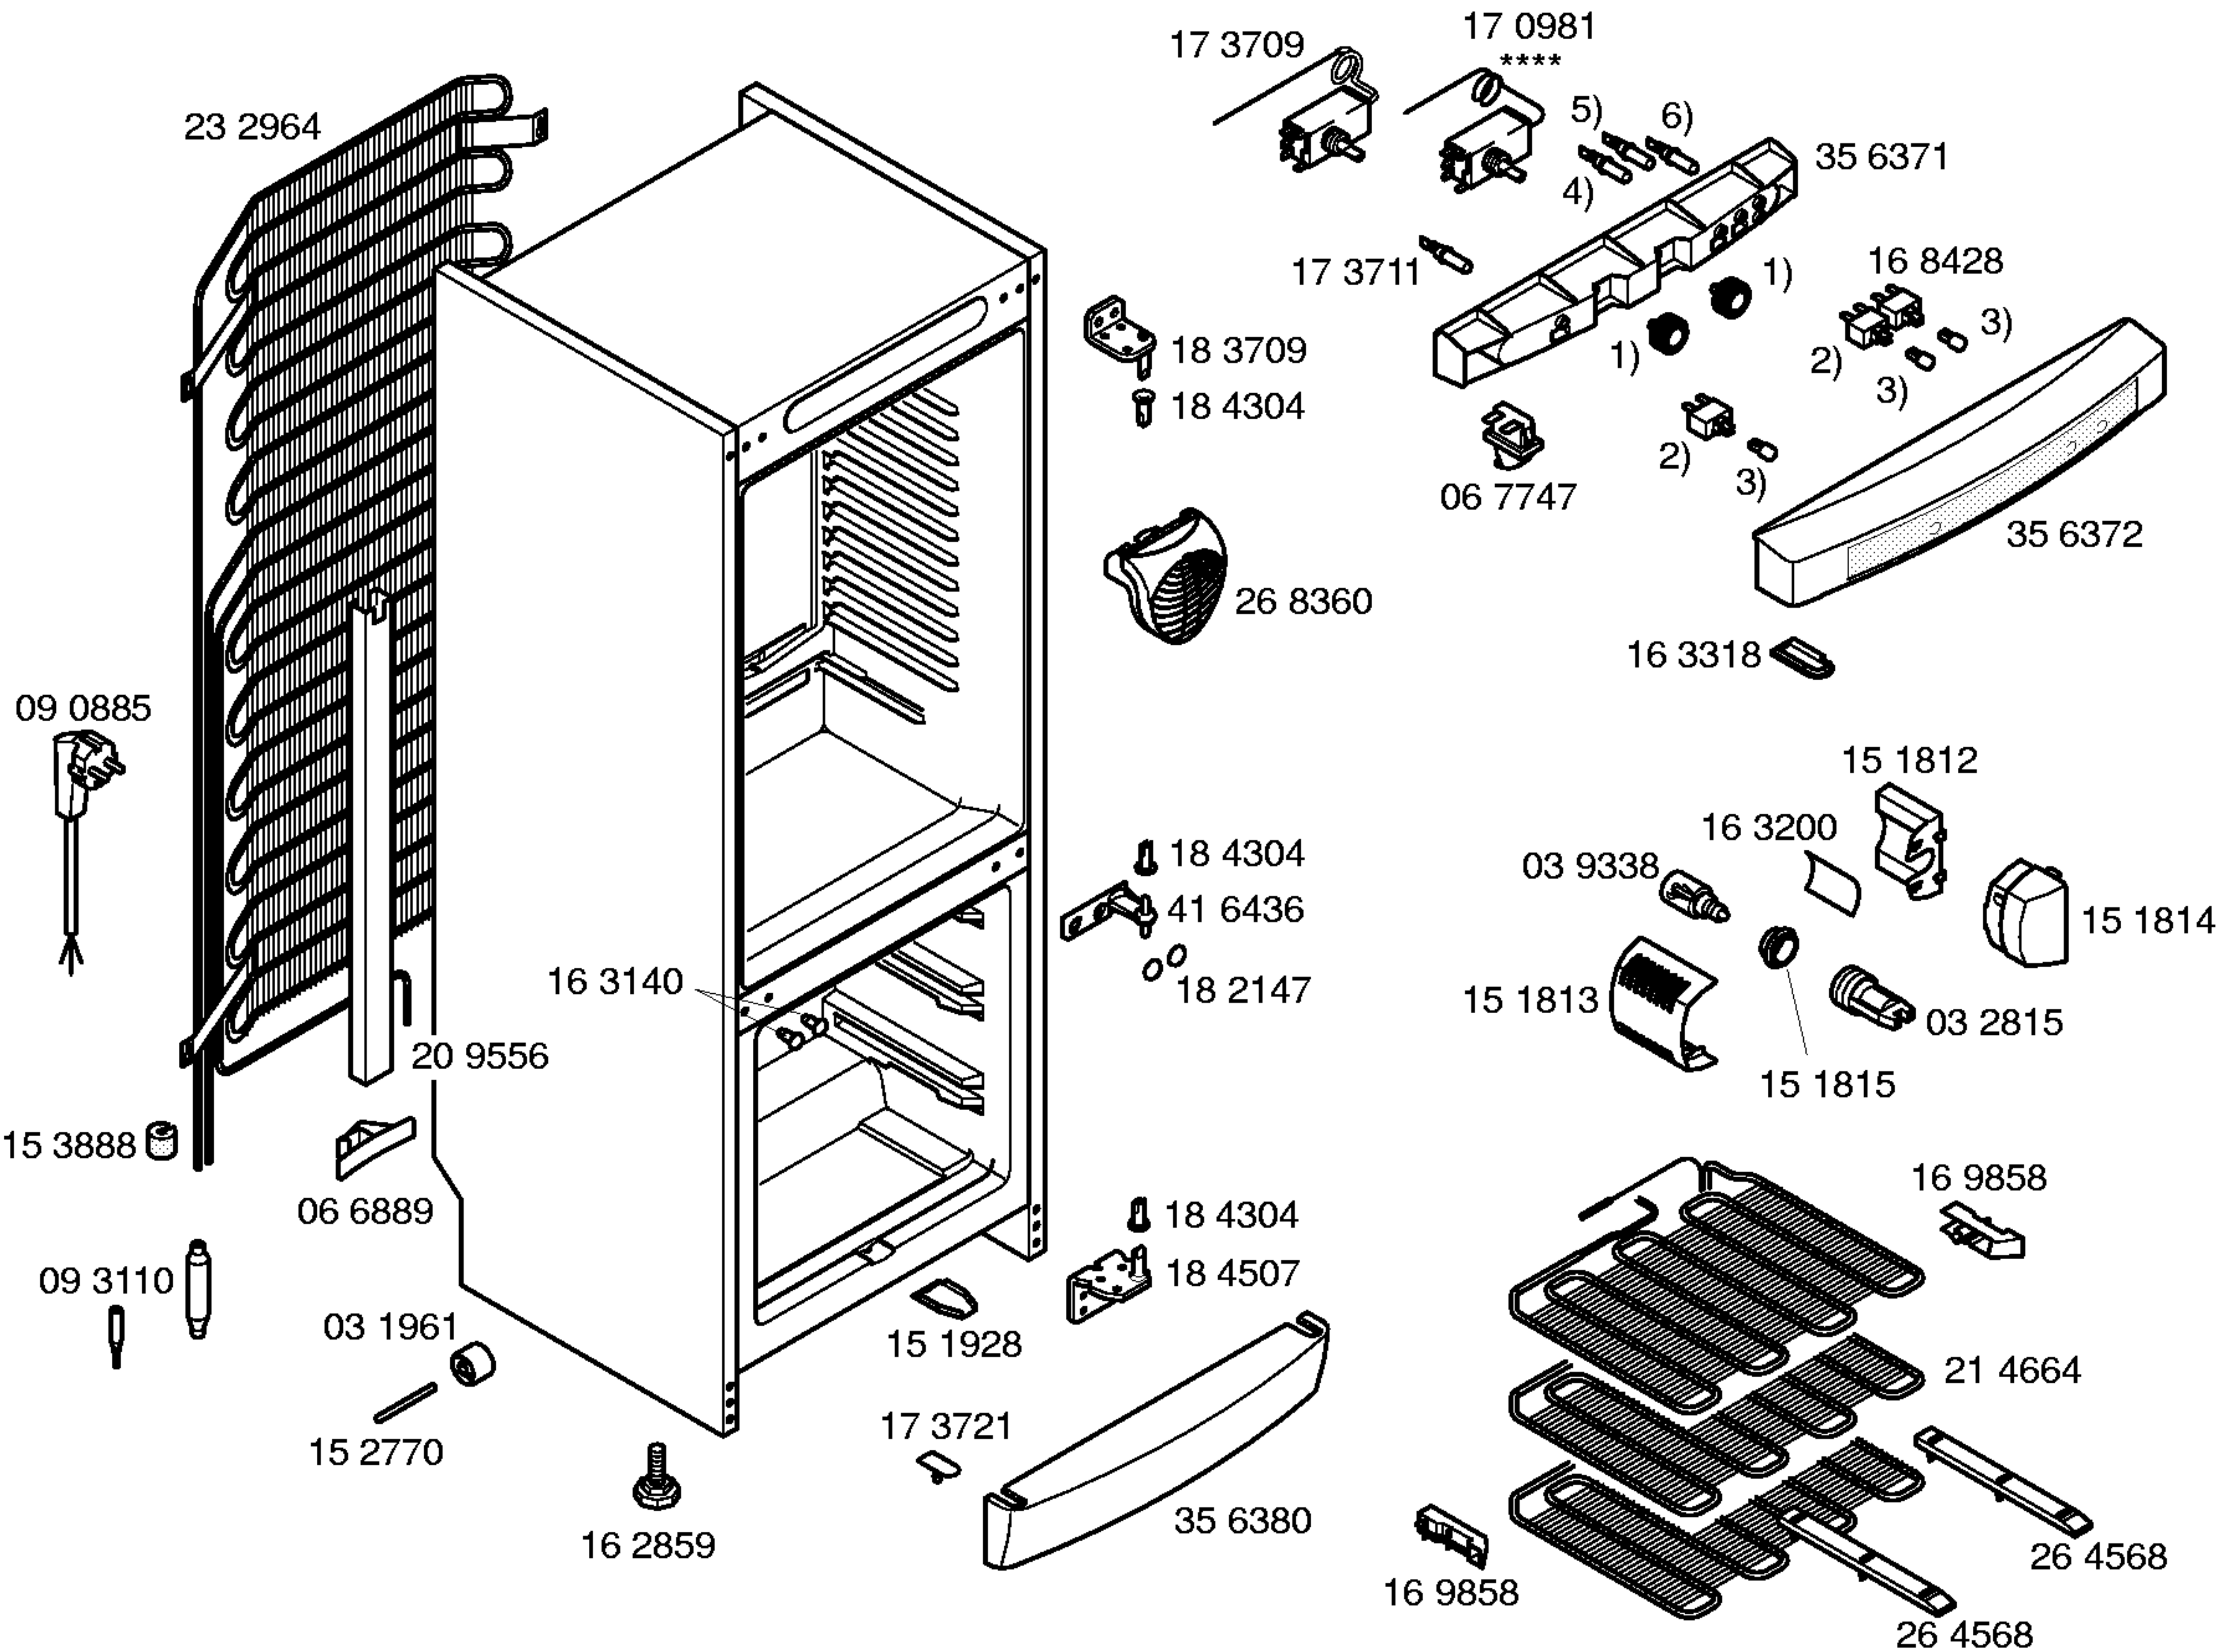


Ident – Nummern – Konstante
3740


Gebrauchsanweisung
52 4133
(de,en,fr,nl,es,it,pt,el,pl)

Montageanweisung
52 9365
(de,en,fr,nl,es,it,pt,el,pl,
sv,no,fi,da,cs,hu)

Verkleidenanweisung
52 9568
(de,en,fr,es,pt,it,el)

- 1) 16 5417
- 2) 16 8427
- 3) 17 3715
- 4) 17 3711
- grün
- 5) 17 3712
- gelb
- 6) 17 3713
- rot

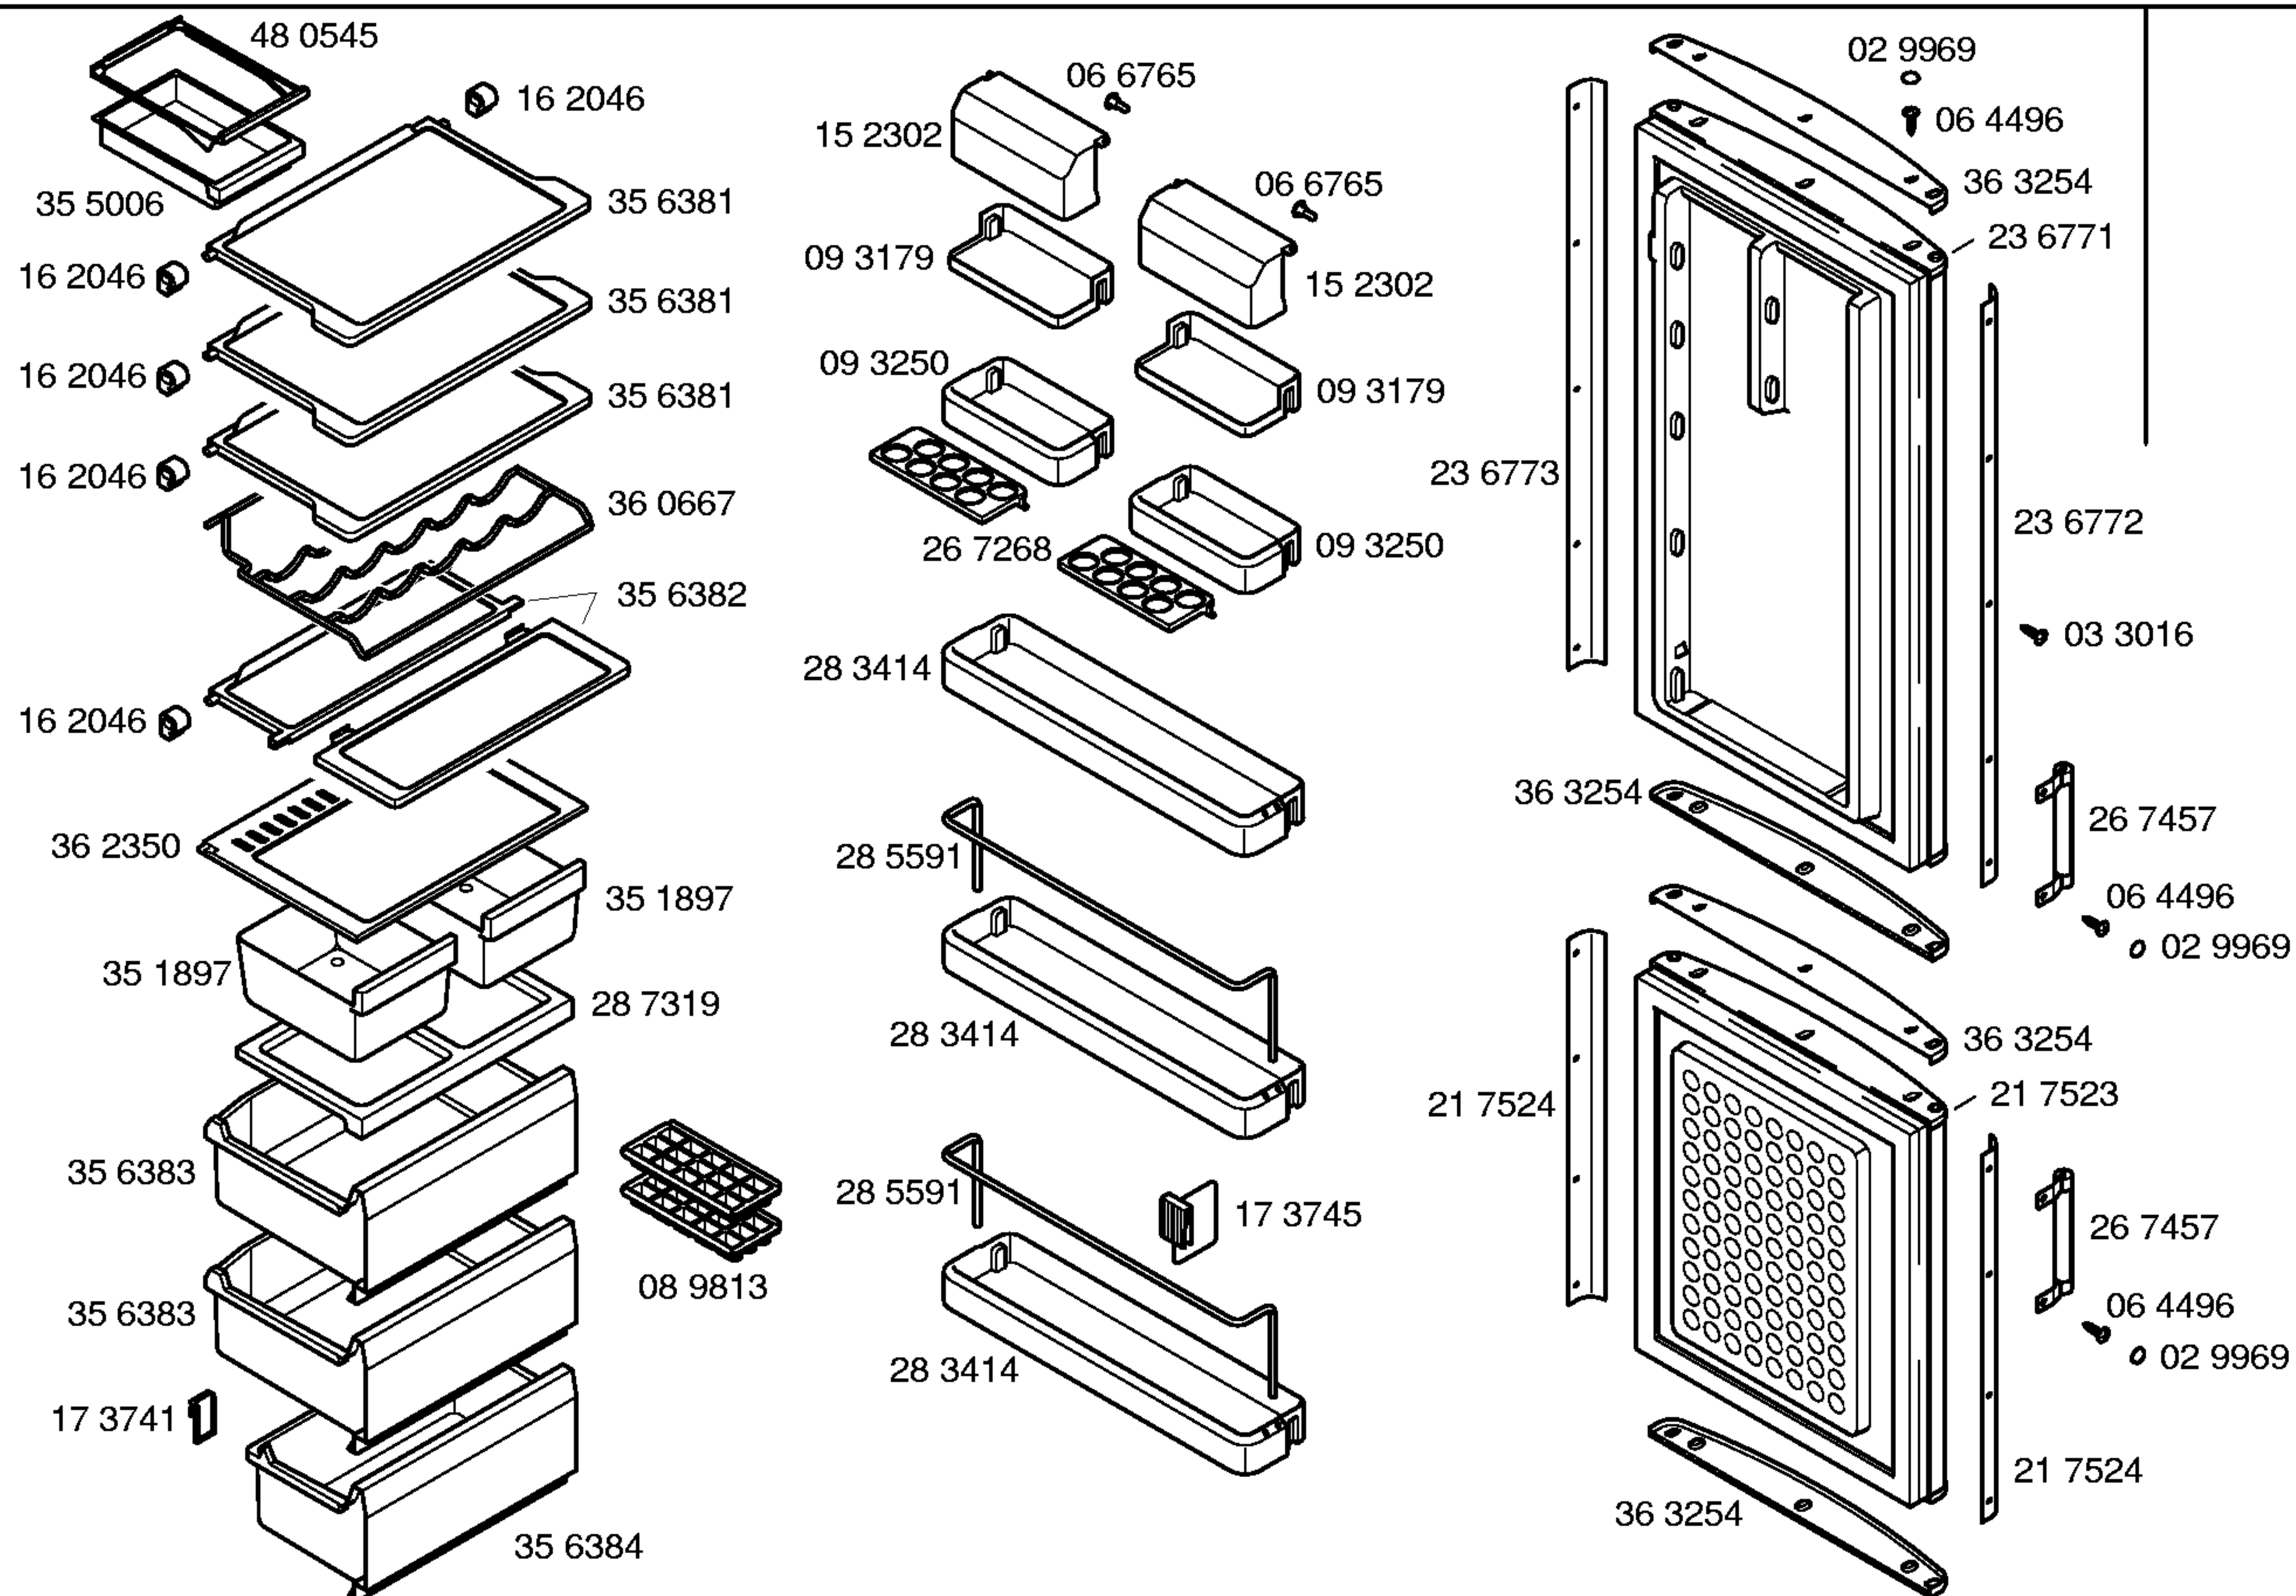

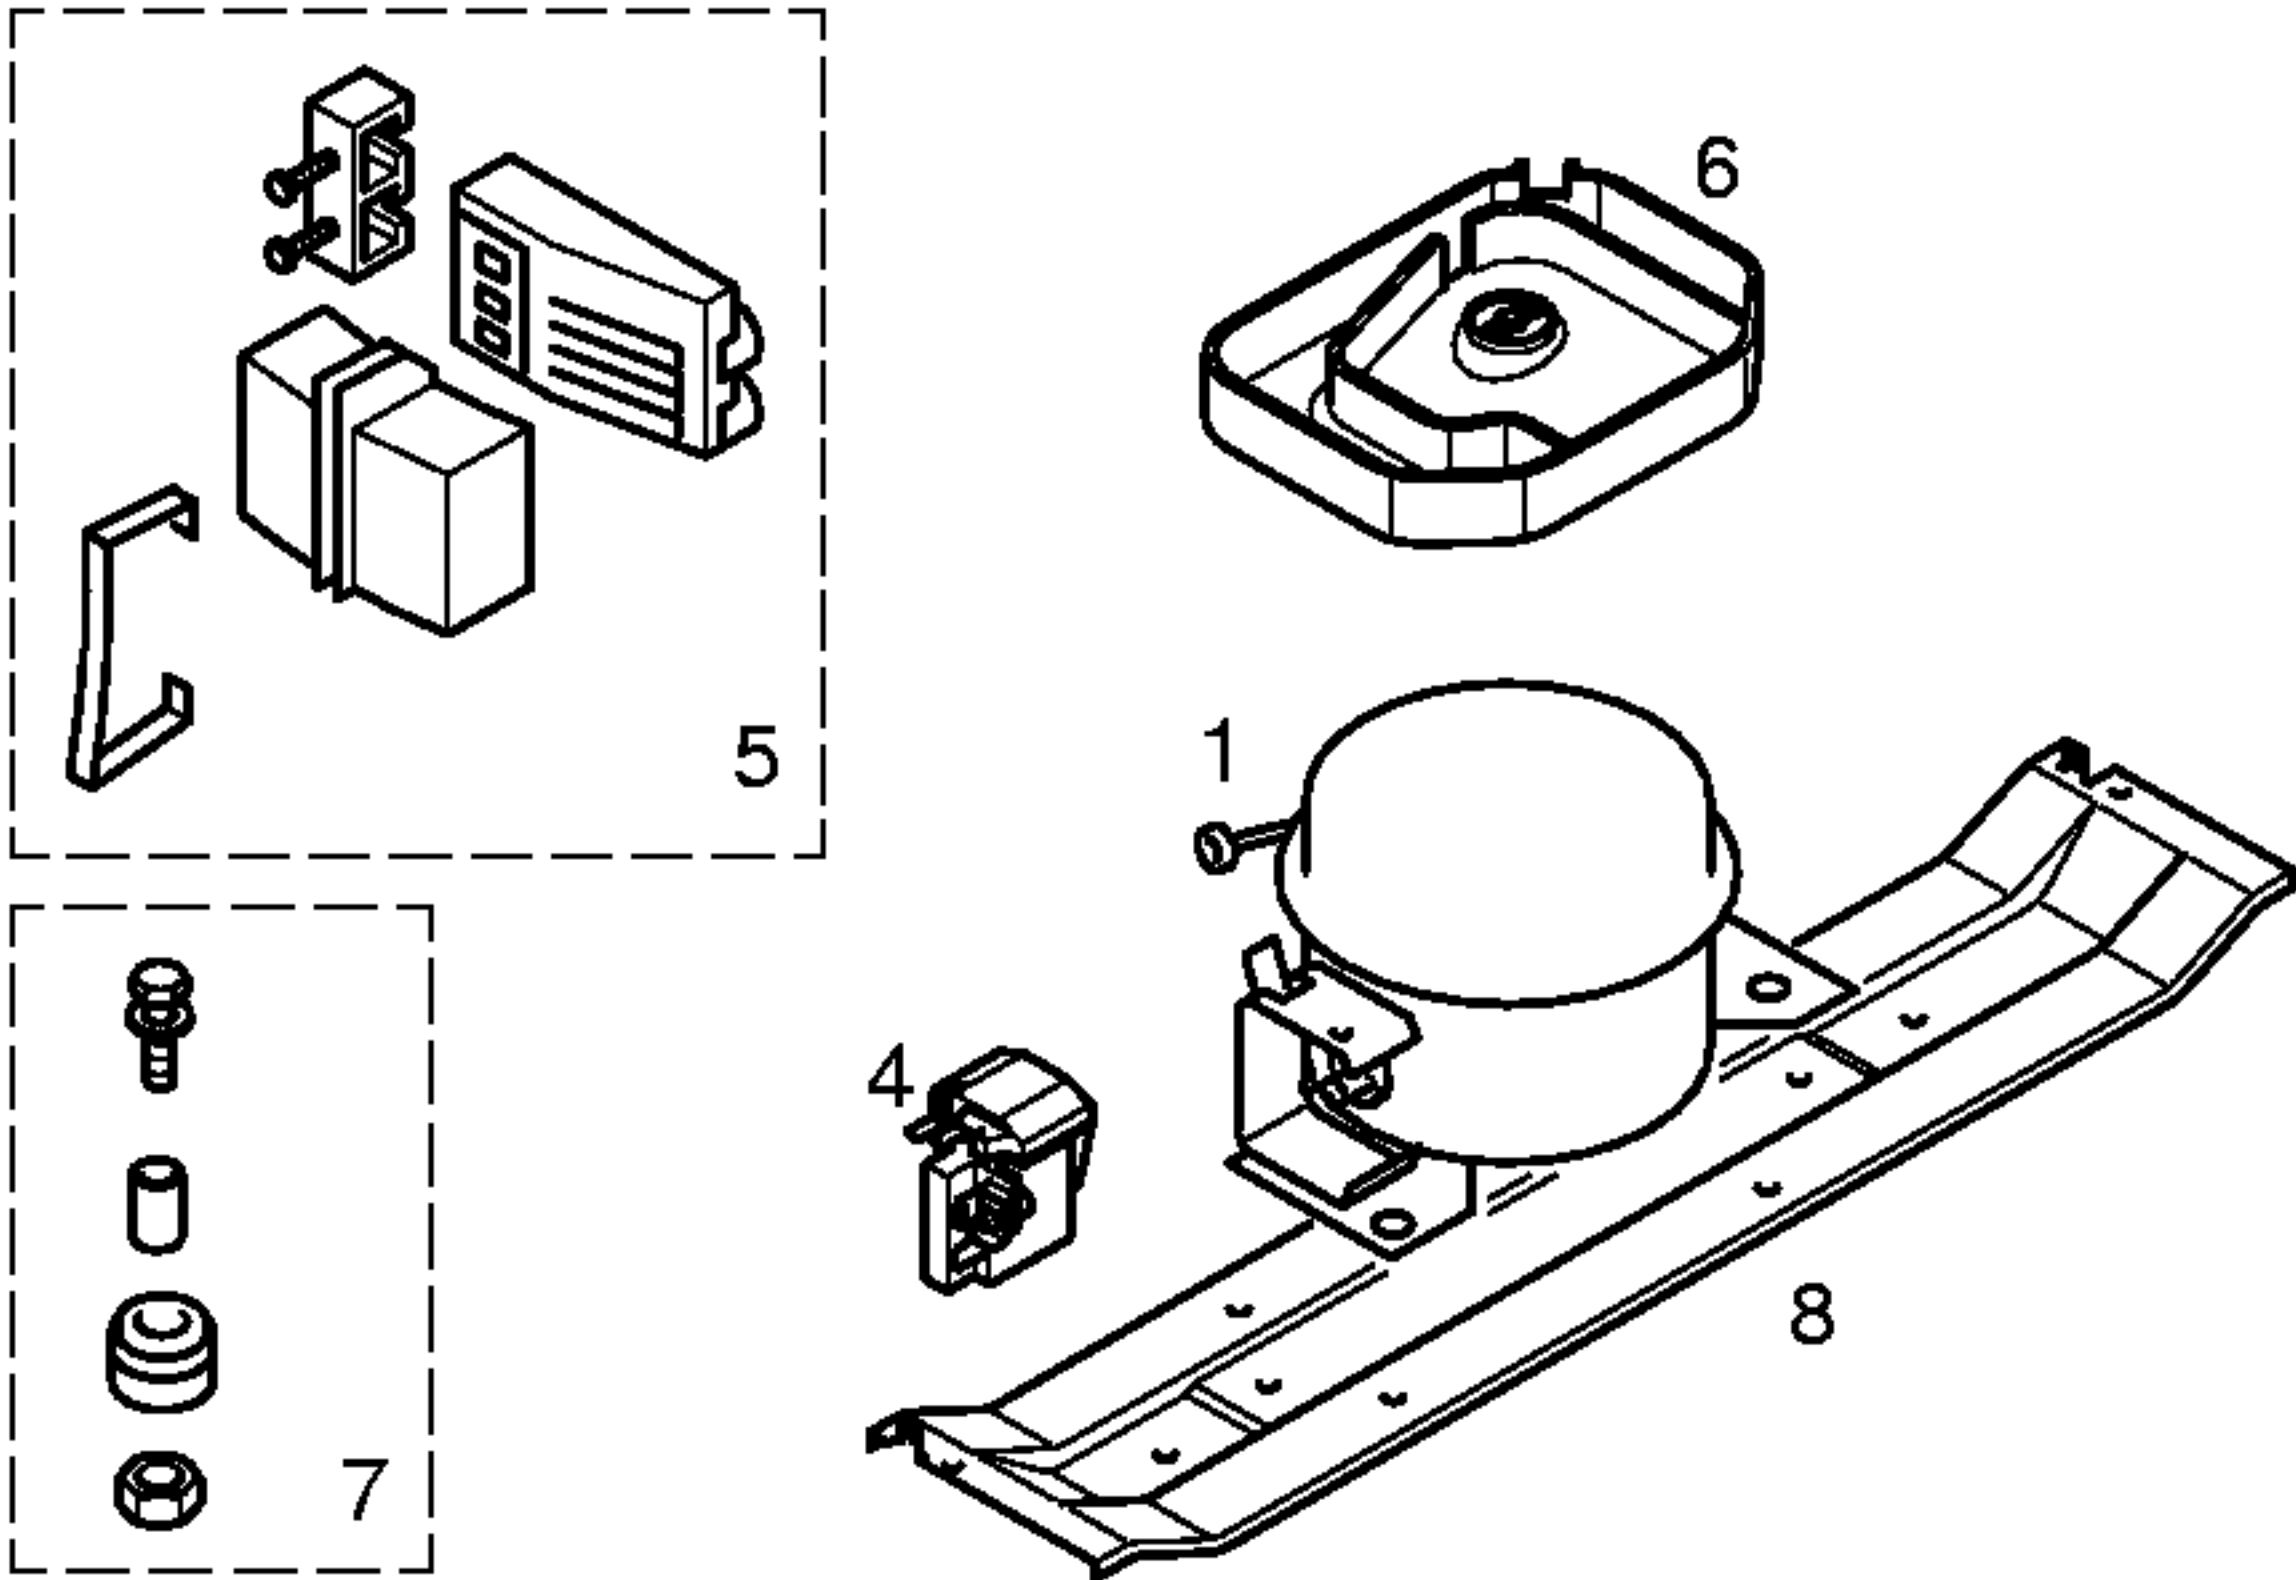

Pos.	*****		
		V01	V02
	LG	LG	Aspera
	NDA62NAEG	NDA69NAEG	EMT40-CLP
1	14 2000	14 2001	14 2001
2			
3			
4	17 1011	17 1011	41 6671
5			
6	48 4330		
7	05 0166	05 0166	05 0166
8	28 8253	28 8253	28 8253
9			
10			
11			
12			
13			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS			
		V01	V02
Verdichter/Compressor/Compresseur/Compresor	LG	LG	Aspera
Typ/Type/Tipo	NDA62NAEG	NDA69NAEG	EMT40-CLP
Förderleistung/Delivery/Debit/Aspiración l/h			
Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A	0,48	0,50	0,63
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	35,21	35,21	32,05
Hi/aux. Ohm	21,49	21,49	26,59
Temp.Reyler/Thermostat/Termostato	Danfoss	Ranco	
Typ/Type/Tipo	077B6181	K54-L2007	
Reglerstellung/Position/Conexión	MIN. MAX.	MIN. MAX.	
Schaltwerte/Switching values/ ..ein/conex. °C	+6°	-14° -22°	
Valeurs de commutation/Desconex. ..aus"/descon. °C	-11° -28°	-20° -28°	
(..abtaven' od) ..alarm' °C		-10° -18°	
Füllmenge/Fill. quantily/Charge/Carga R600a.	g	*	*
Anschlusswert/Comm. load/Puiss. Connect./Potenc.	W	71	83
Heizung/Heater/Chauflage/Resistenc.descong.			
Widerstand/Resistance/Resistencia Ohm			
Leistung/Power/Puissance/Potencia W			
Ventilador/Blower/Ventilateur/Ventilador			
Widerstand/Resistance/Resistencia Ohm			
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula			
Widerstand/Resistance/Resistencia Ohm			
Spannung/Voltage/Tension/Tensión V			
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador			

* Siehe Typenschild / See identification plate / Voir plaque de caractéristiques / Ver plaqueta de características