


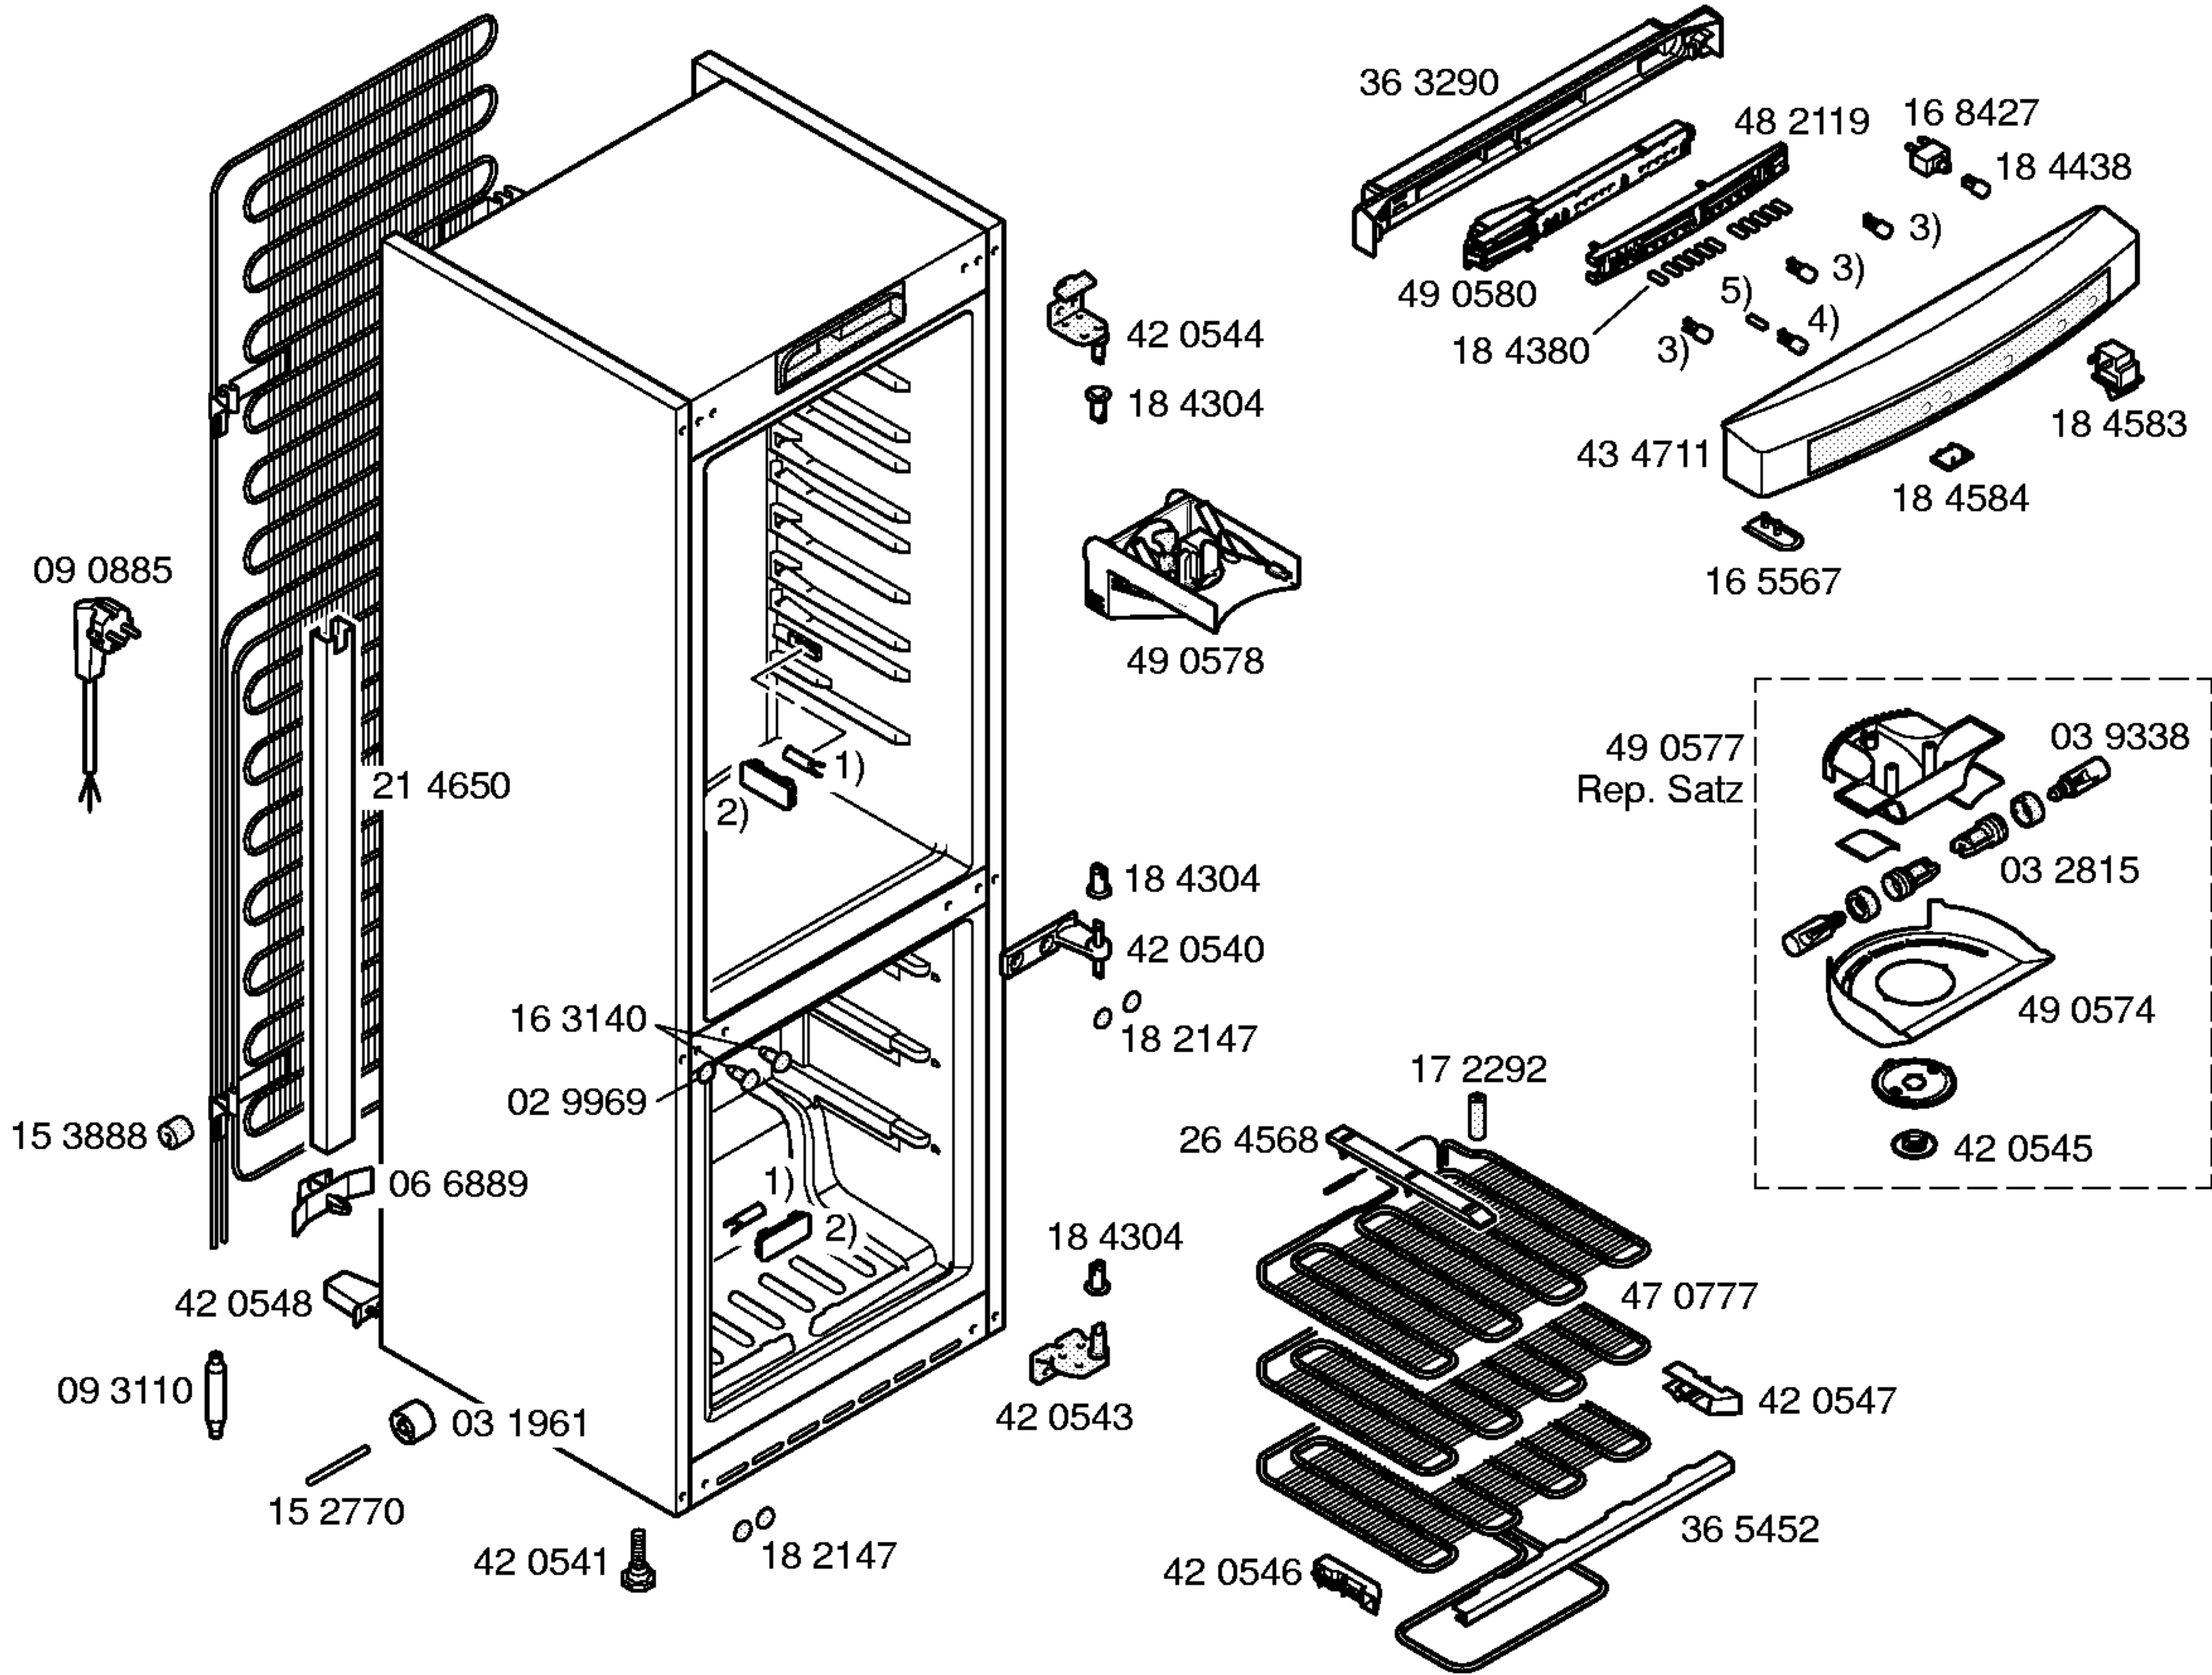



Ident – Nummern – Konstante
3740

Gebrauchsanweisung
58 6457
(de,en,fr,it,es,pt,el,nl)
58 6458
(sv,no,fi,da,pl,ro,hu,ru)

Montageanweisung
58 6459
(de,en,fr,it,es,pt,el,nl,cs,
no,fi,da,pl,ro,hu,ru)

- 1) 16 8766
Rep. Satz
- 2) 16 9176
- 3) 18 4426
- 4) 18 4428
- 5) 18 4433

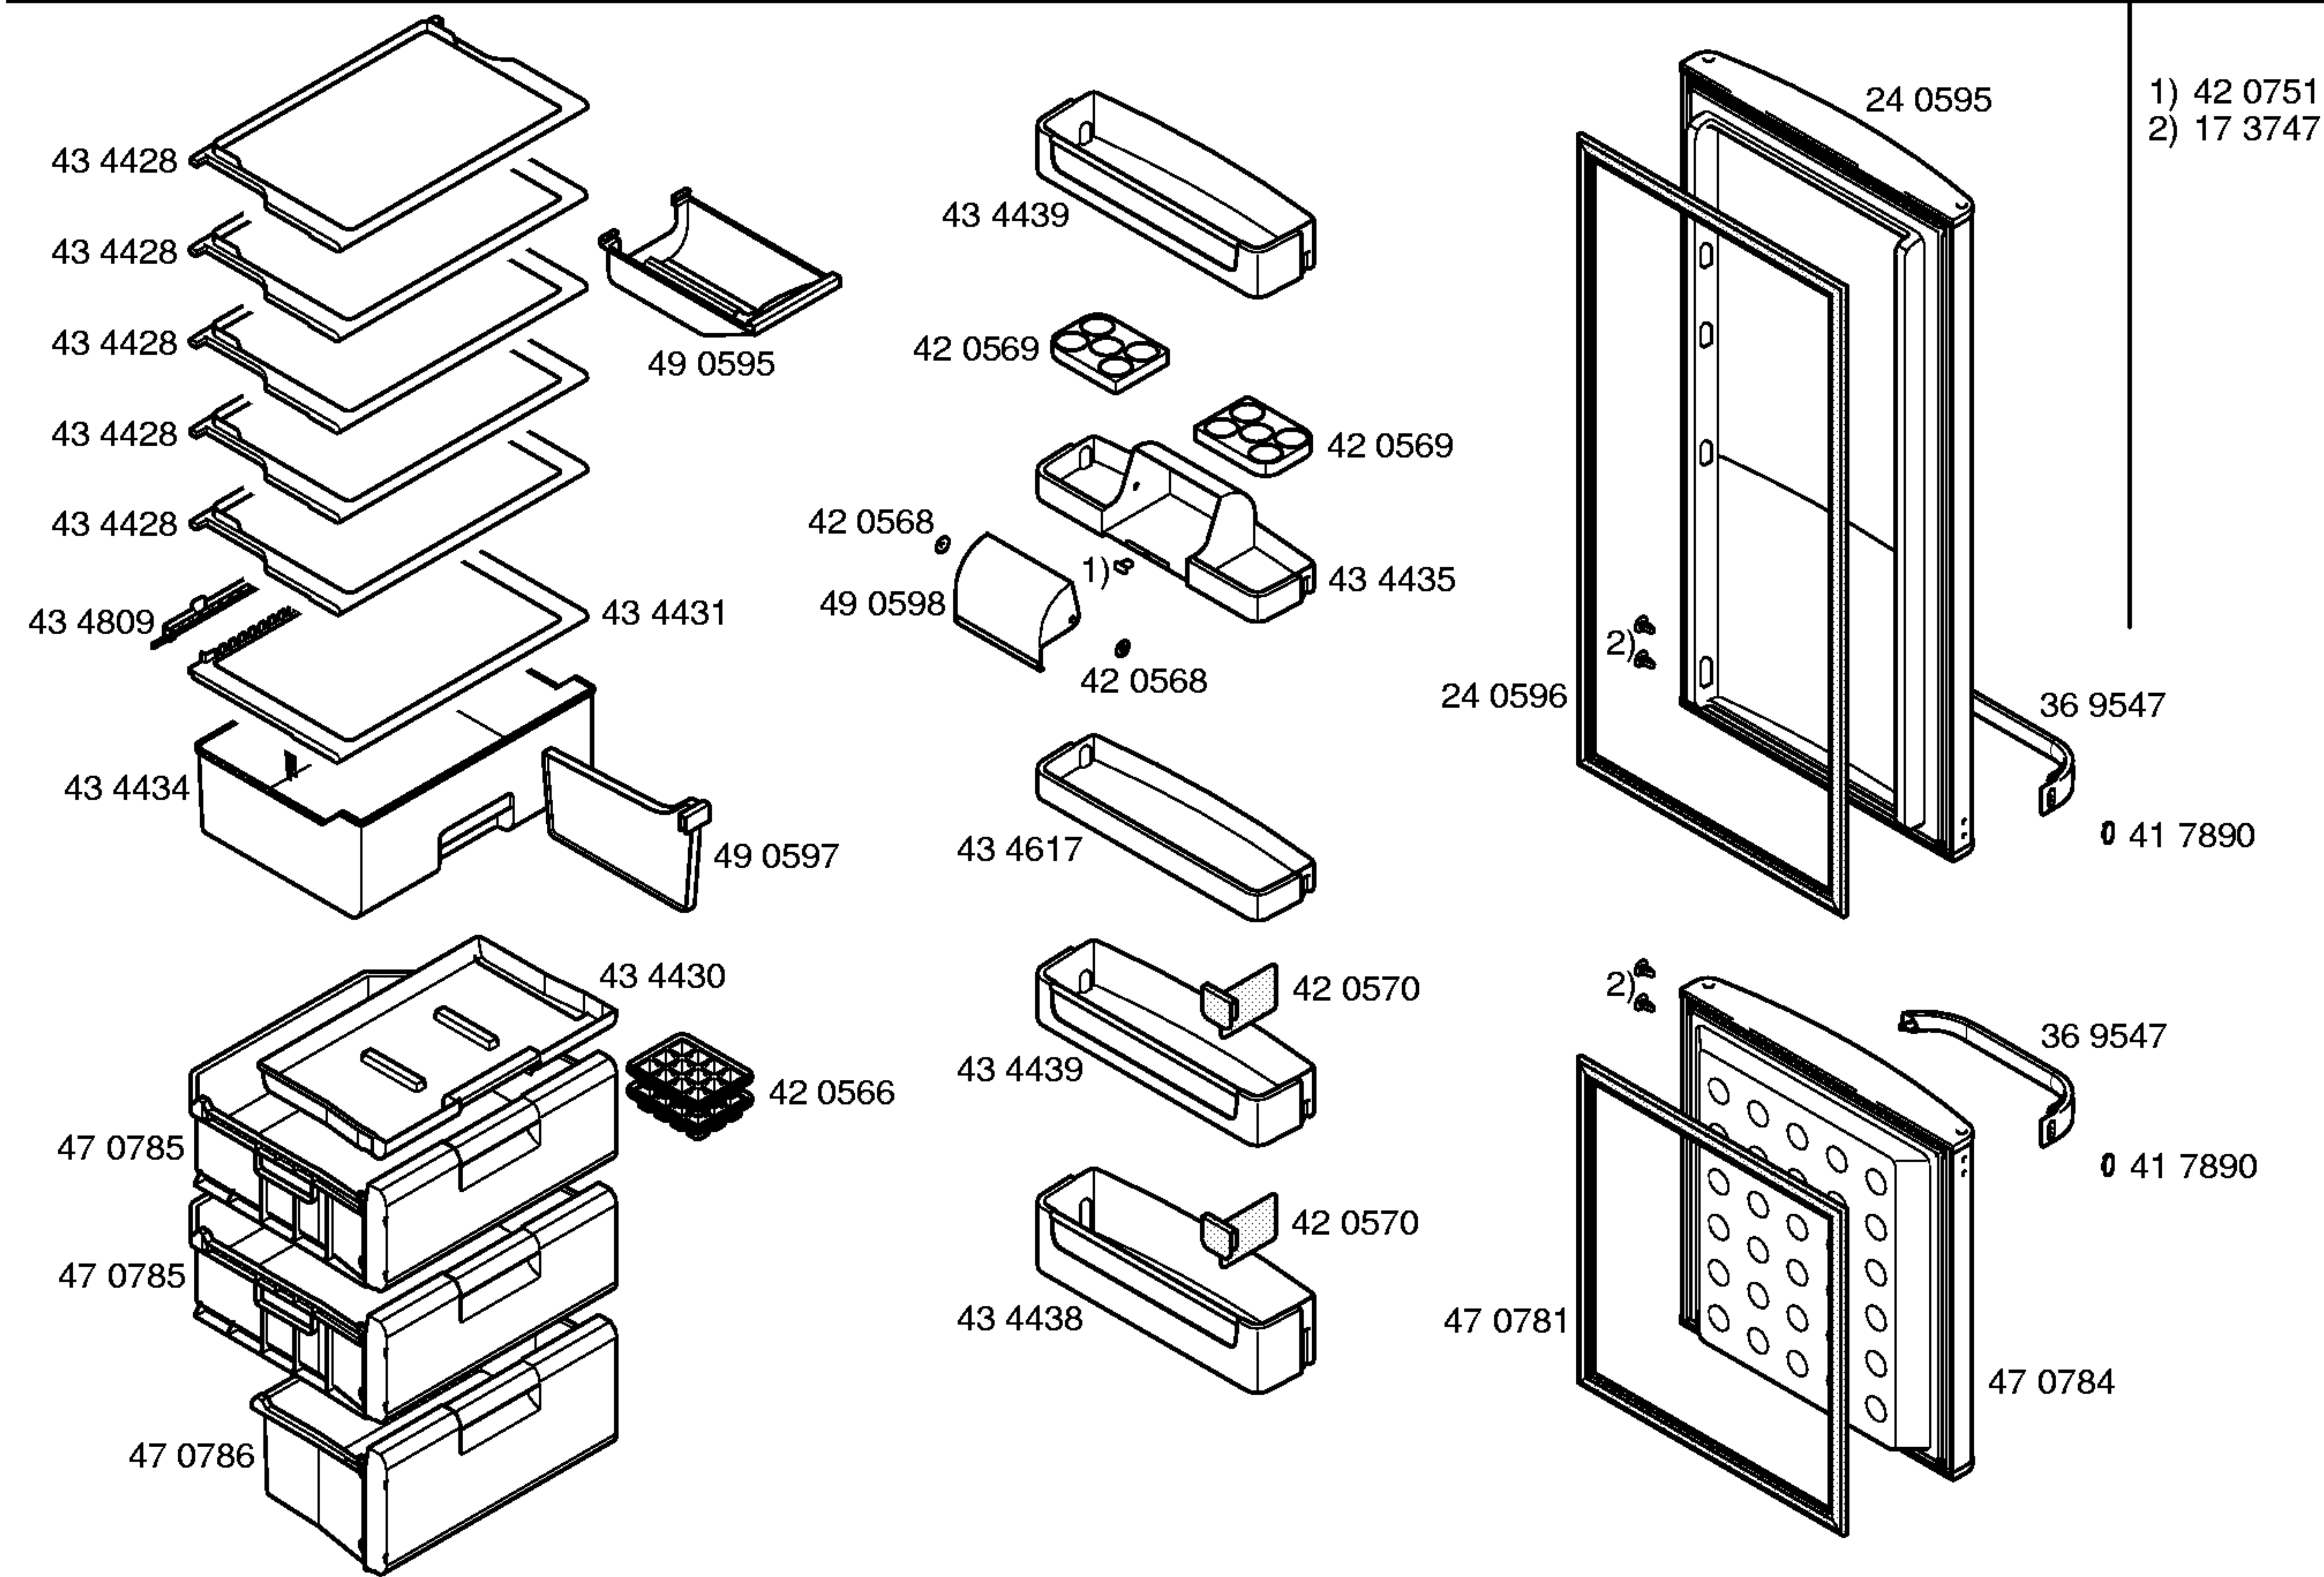

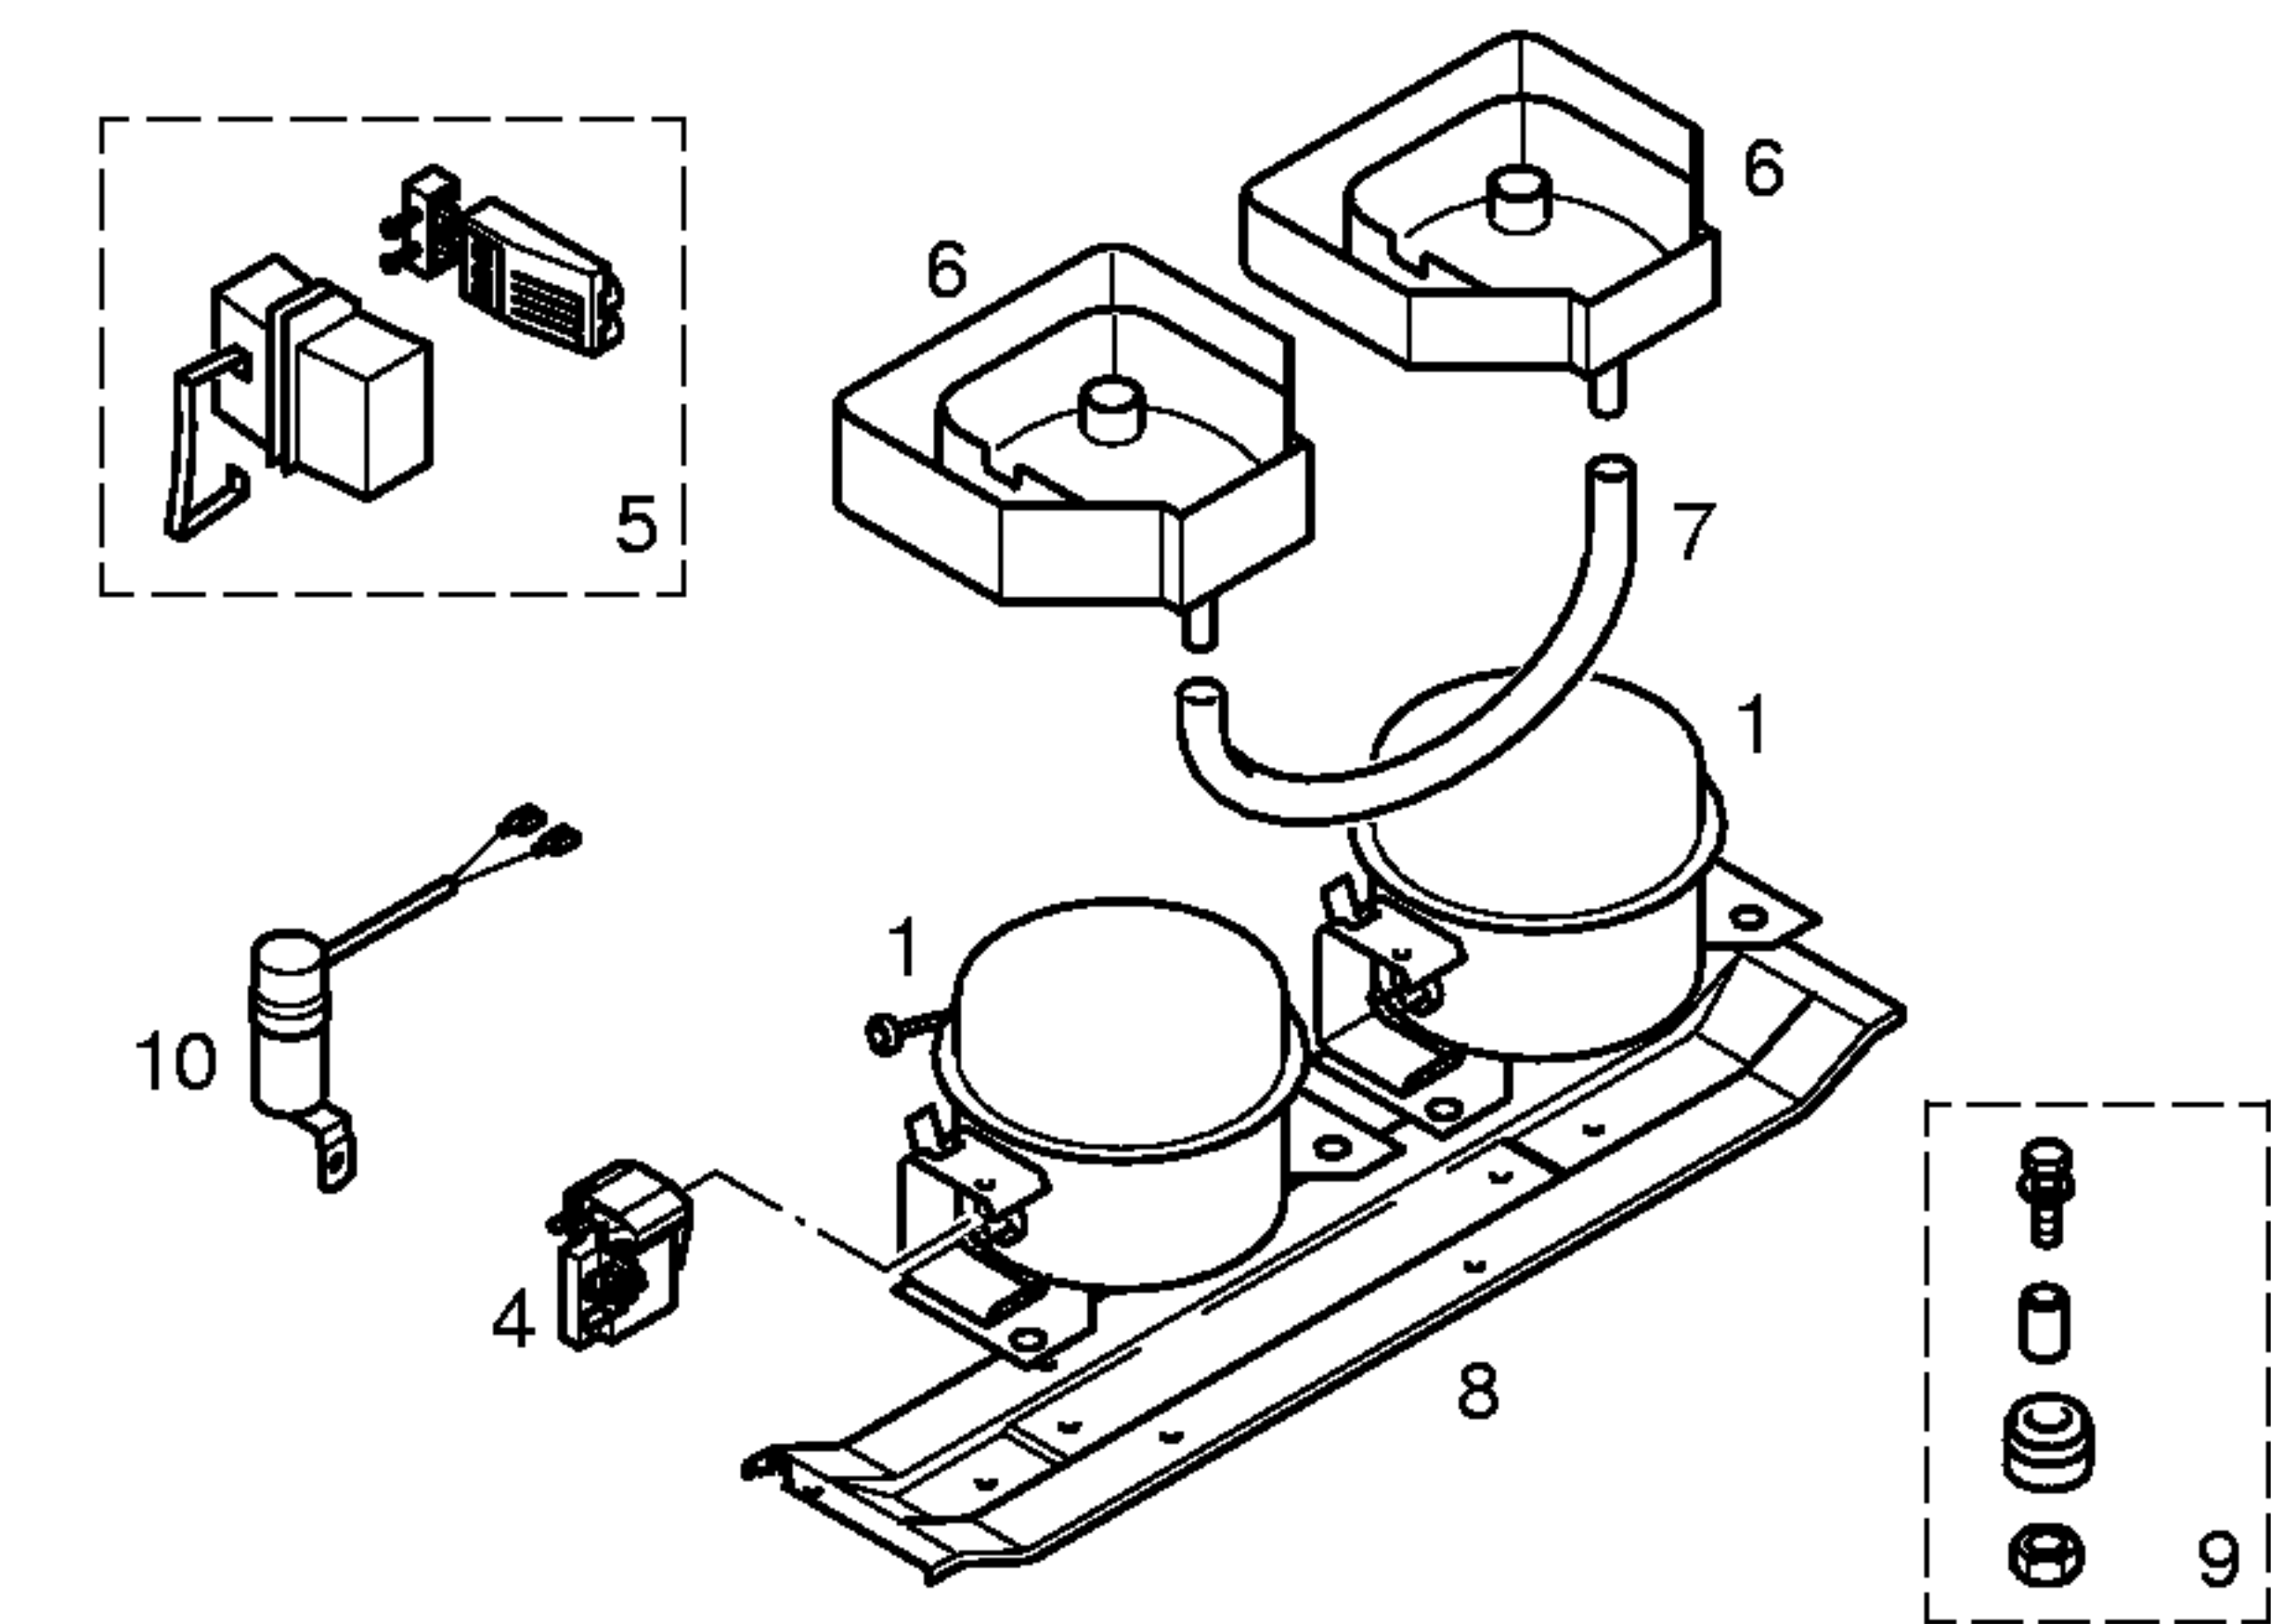

Pos.	****			
	LG	Aspera		
	NDA62NAEG	EMU32CLC		
1	14 2000	14 2004		
2				
3				
4	17 1011	42 0759		
5				
6	49 0594	49 0596		
7	49 0755	49 0755		
8	43 2600	43 2600		
9	05 0166	05 0166		
10				
11				
12				
13				

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS					

Verdichter/Compressor/Compresseur/Compresor		LG		Aspera	
Typ/Type/Tipo		NDA62NAEG		EMU32CLC	
Förderleistung/Delivery/Debit/Aspiración l/h					
Stromm/Current (FLA)/Courant/Intensidad		LMBP	A	0,48	0,44
Widerstand/Resistance/Resistencia.		Ha/main/prin.	Ohm	35,21	38,90
		Hi/sub/aux.	Ohm	21,49	28,30
Temp.Reyler/Thermostat/Termostato		Electronic. KS		Electronic. GS	
Typ/Type/Tipo		E2000 Komfort		E2000 Komfort	
Reglerstellung/Position/Conexión		MIN.	MAX.	MIN.	MAX.
Schaltwerte/Switching values/		..ein/conexión	°C	11	1
Valeurs de commutation/Desconex.		..aus"/desconex.	°C	10	0
(..abtaven' od)		..alarm'	°C		
Verdampfersensor/Evaporator sensor/Sonda evaporador					
Schaltwerte/Switching values/		..ein/conex.	°C	4	4
Valeurs de commutation/Desconex.		..aus"/descon.	°C	—	—
Füllmenge/Fill. quantily/Charge/Carga		R600a.	g	*	*
Anschlusswert/Comm. load/Puiss. Connect./Potencia		W		71	71
Heizung/Heater/Chauflage/Resistenc.descong.					
Widerstand/Resistance/Resistencia		Ohm			
Leistung/Power/Puissance/Potencia		W			
Ventilador/Blower/Ventilateur/Ventilador					
Widerstand/Resistance/Resistencia		Ohm			
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula					
Widerstand/Resistance/Resistencia		Ohm			
Spannung/Voltage/Tension/Tensión		V			
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador					

* Siehe Typenschild /See identification plate /Voir plaquette de caractéristiques /Ver plaqueta de características