


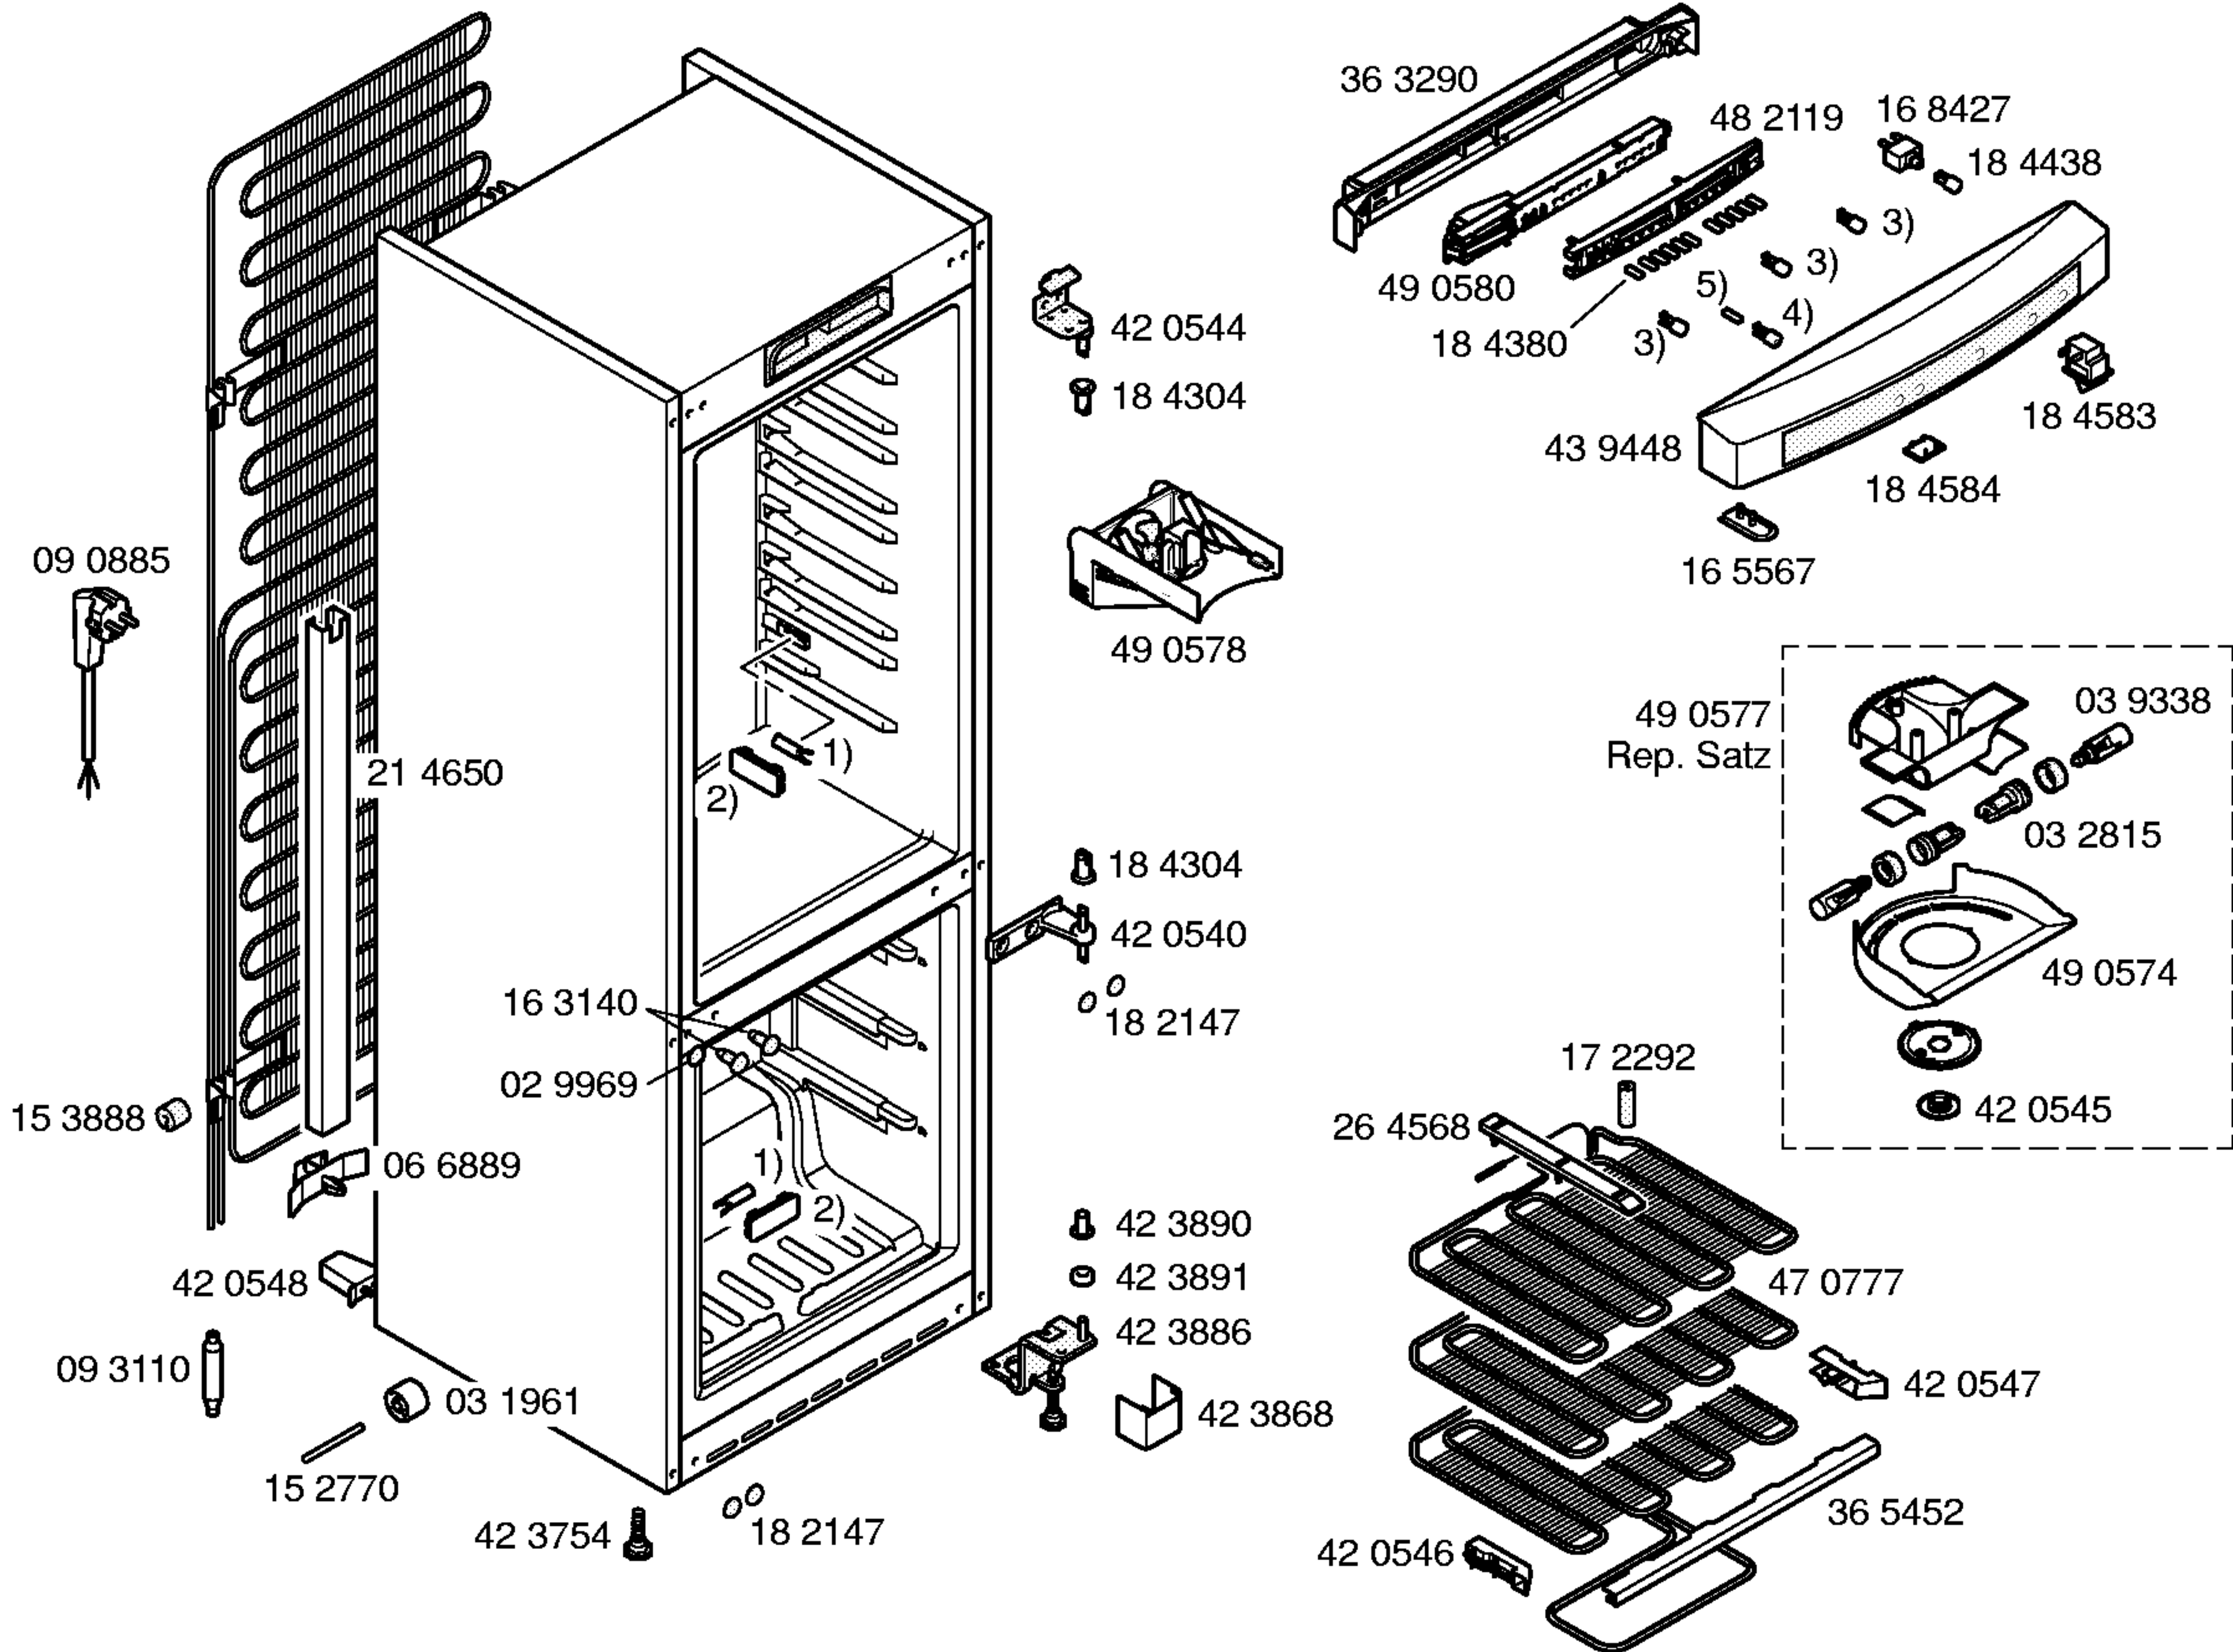



Ident – Nummern – Konstante
3740

Gebrauchsanweisung
58 6457
(de,en,fr,it,es,pt,el,nl)
58 6458
(sv,no,fi,da,pl,ro,hu,ru)

Montageanweisung
58 9156
(de,en,fr,it,es,pt,el,nl,cs,
no,fi,da,pl,ro,hu,ru)

- 1) 16 8766
Rep. Satz
- 2) 16 9176
- 3) 18 4426
- 4) 18 4428
- 5) 18 4433

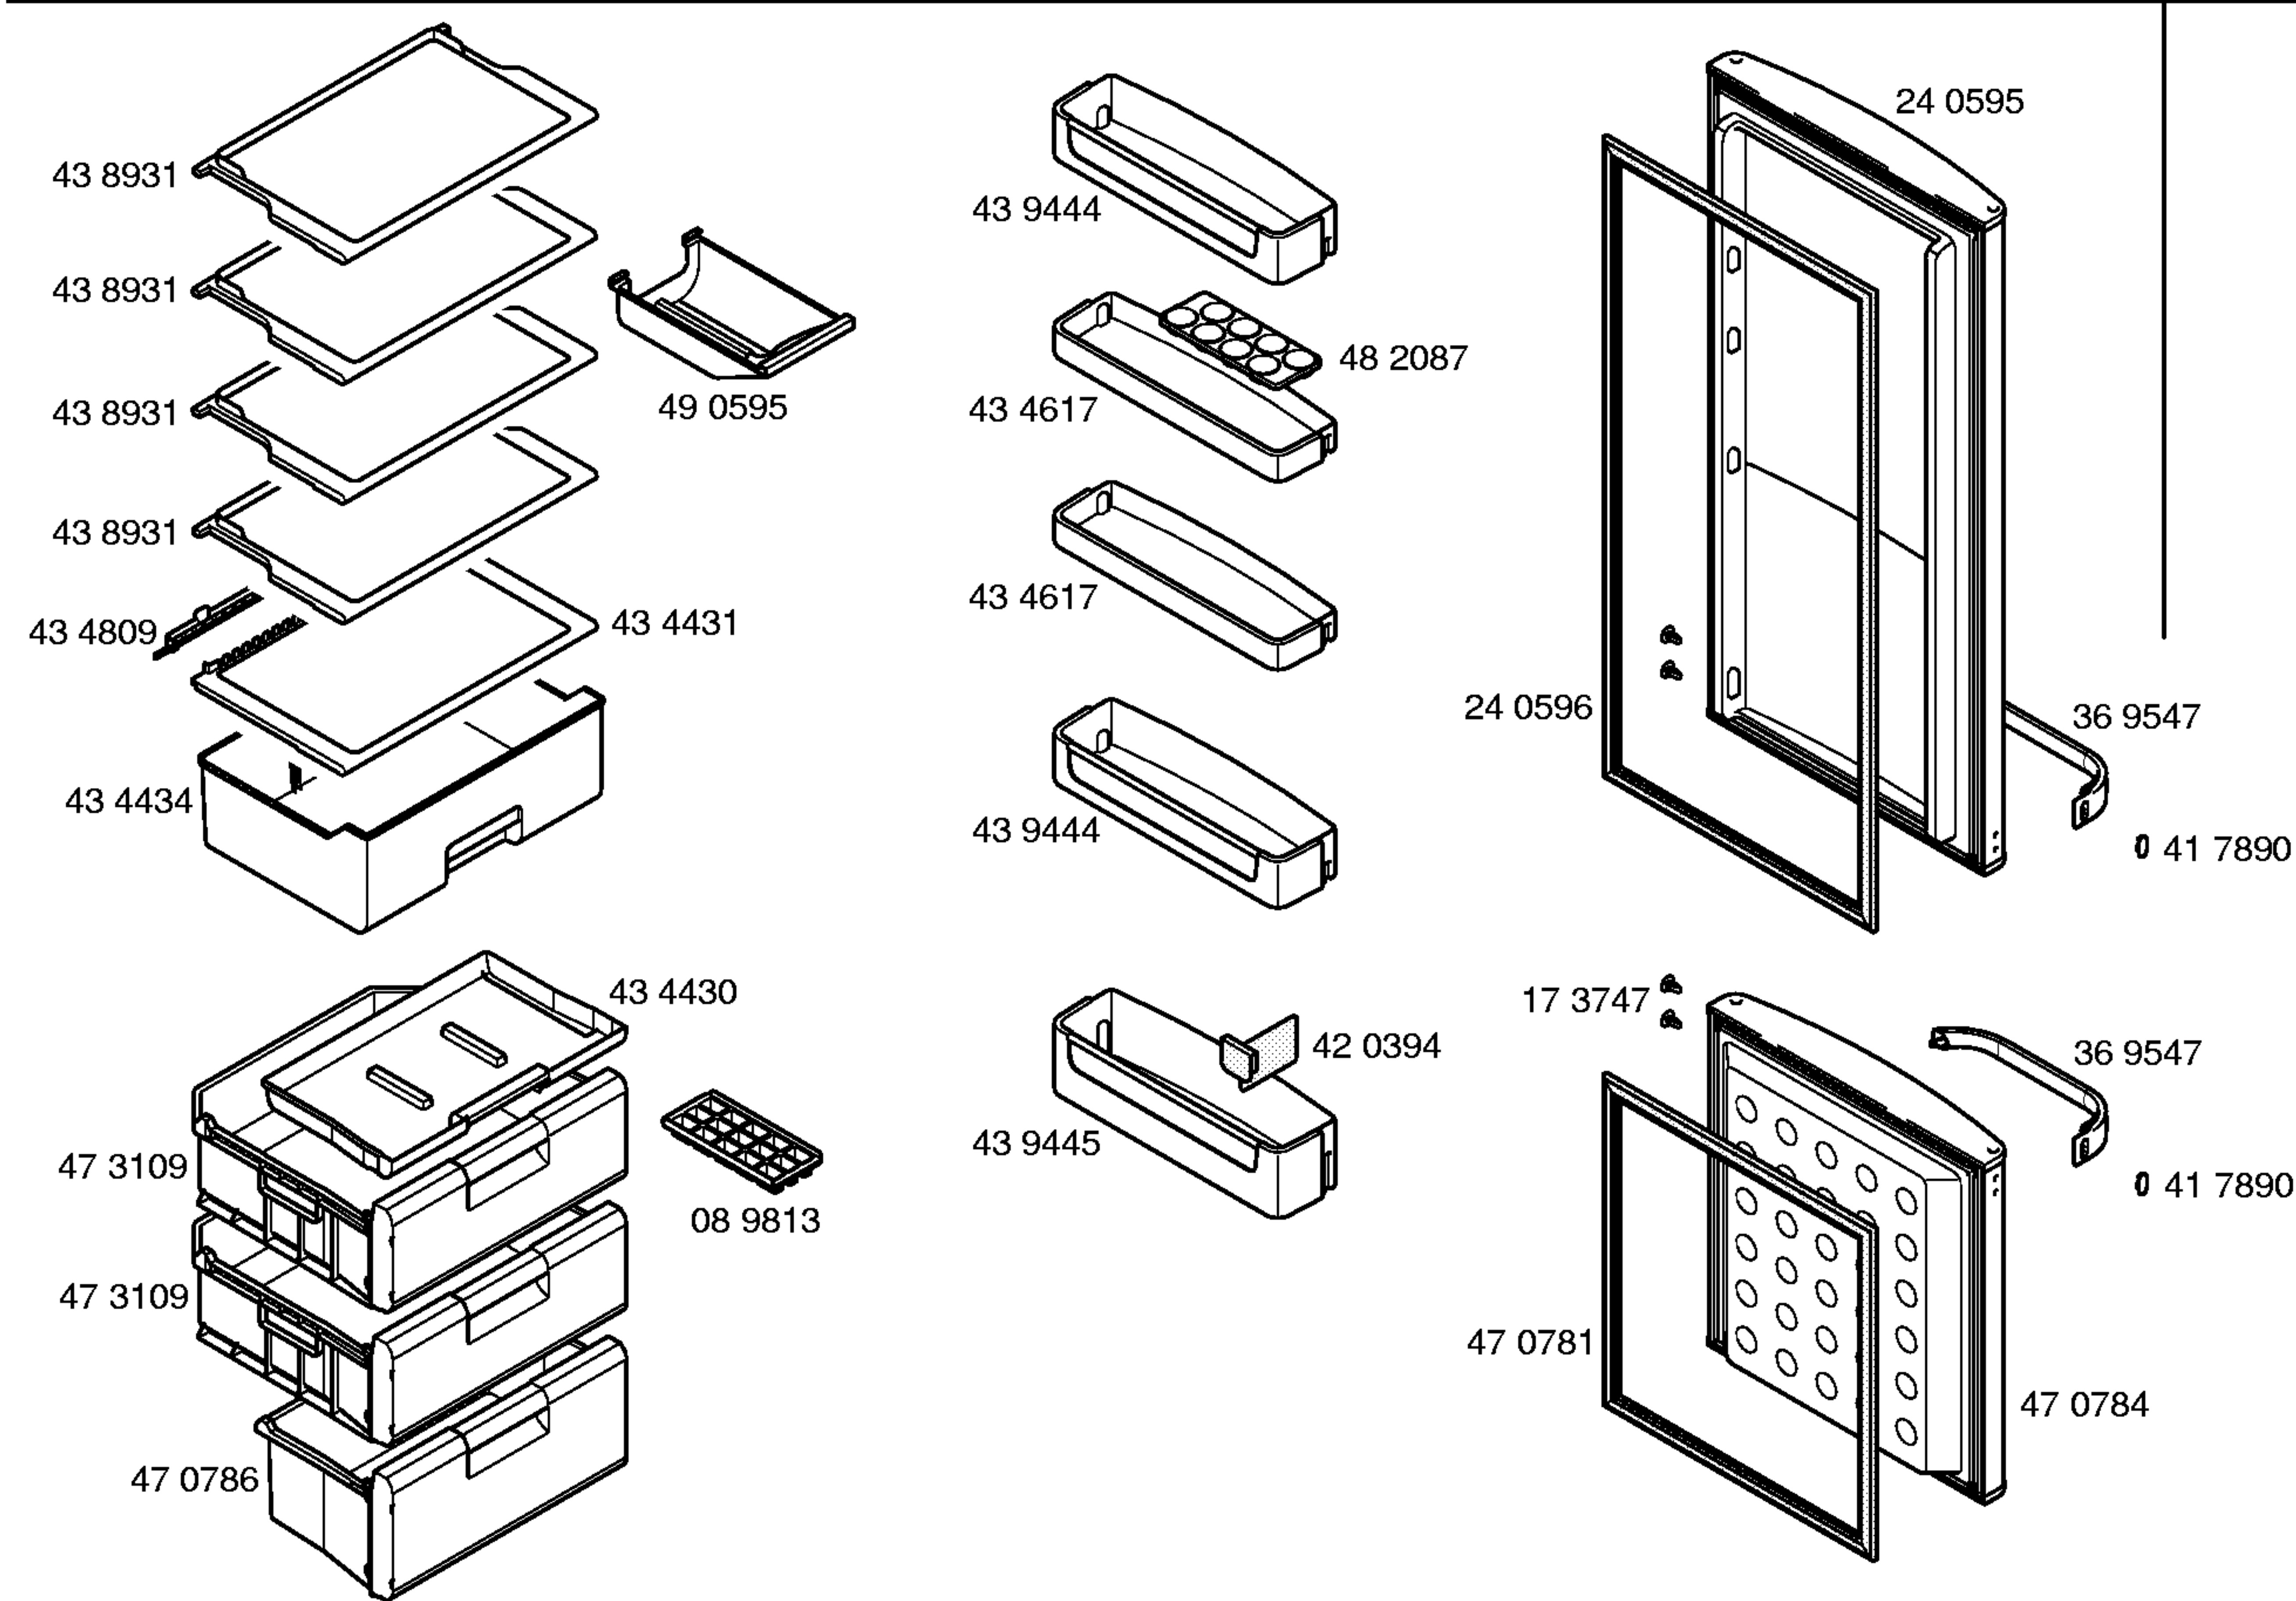

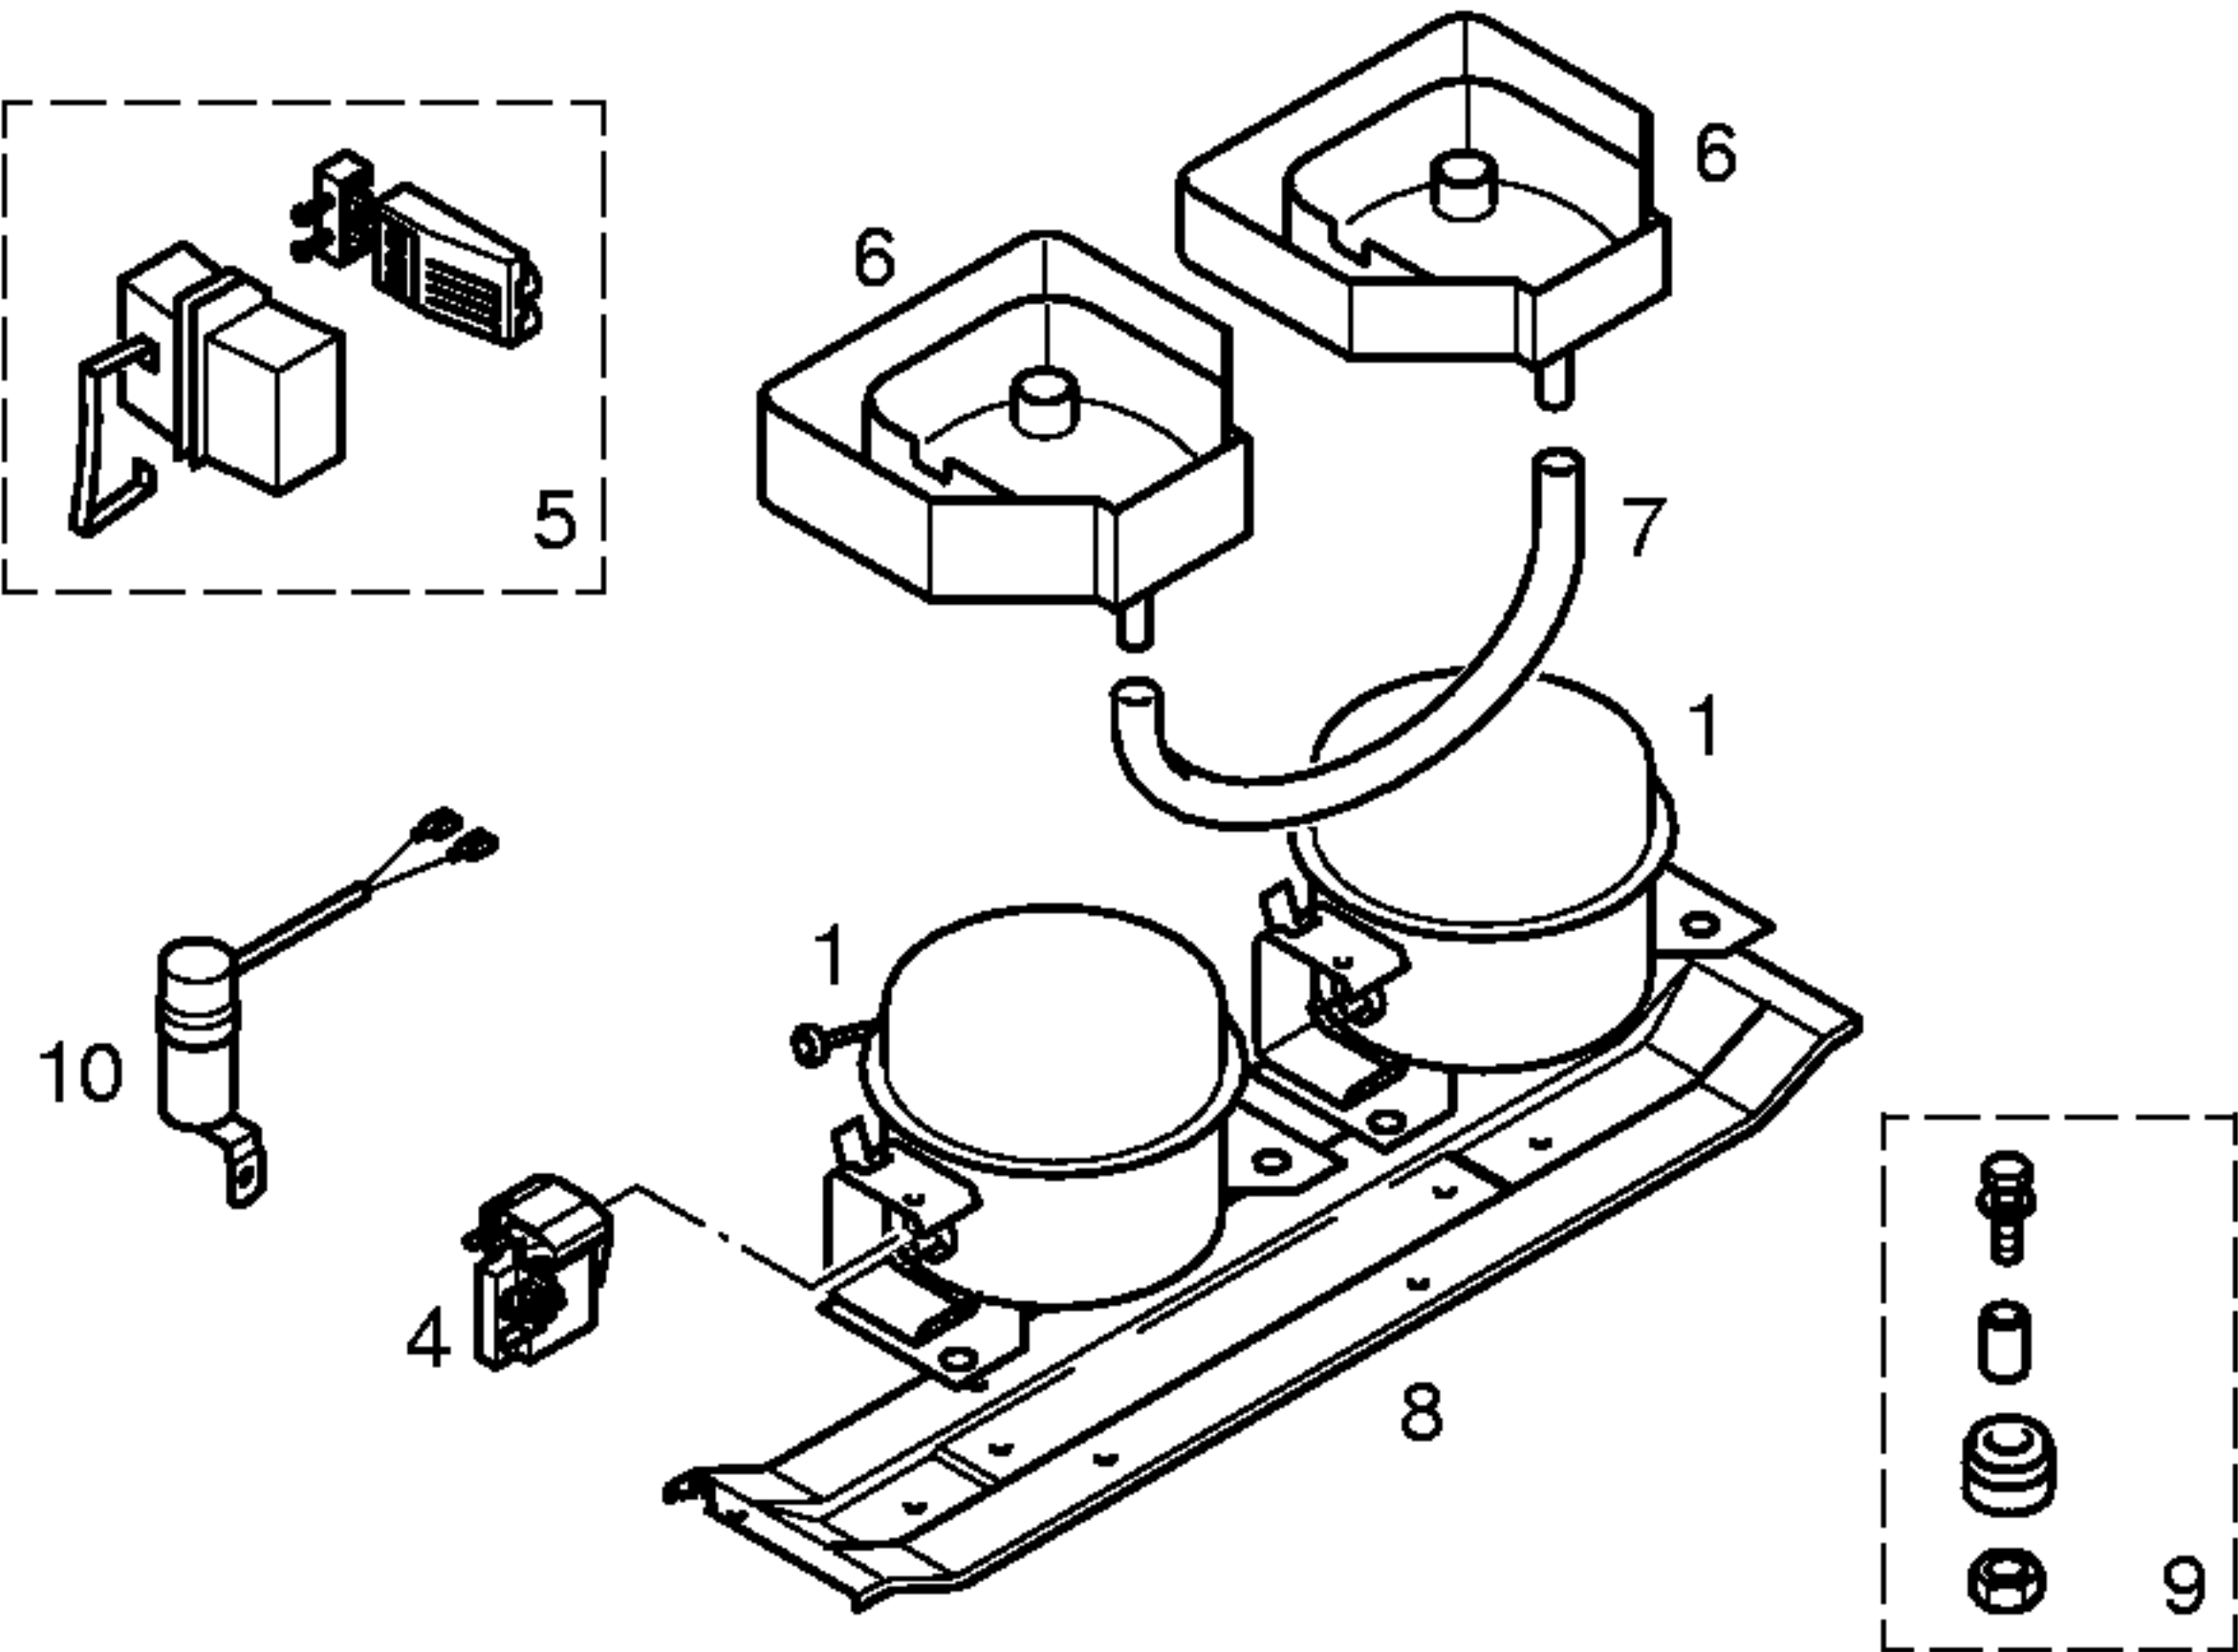

Pos.	****			
	LG	LG		
	NDA62NAEG	NDA62NAEG		
1	14 2000	14 2000		
2				
3				
4	17 1011	17 1011		
5				
6	49 0594	49 0594		
7	49 0755	49 0755		
8	43 2600	43 2600		
9	05 0166	05 0166		
10				
11				
12				
13				

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS				

Verdichter/Compressor/Compresseur/Compresor		LG	LG	
Typ/Type/Tipo		NDA62NAEG	NDA62NAEG	
Förderleistung/Delivery/Debit/Aspiración l/h				
Stromm/Current (FLA)/Courant/Intensidad	LMBP	A	0,48	0,48
Widerstand/Resistance/Resistencia.	Ha/main/prin.	Ohm	35,21	35,21
	Hi/sub/aux.	Ohm	21,49	21,49
Temp.Reyler/Thermostat/Termostato		Electronic. KS	Electronic. GS	
Typ/Type/Tipo		E2000 Komfort	E2000 Komfort	
Reglerstellung/Position/Conexión		MIN. MAX.	MIN.	MAX.
Schaltwerte/Switching values/	..ein/conexión	°C	11	1
Valeurs de commutation/Desconex.	..aus"/desconex.	°C	10	0
(..abtaven' od)	..alarm'	°C		
Verdampfersensor/Evaporator sensor/Sonda evaporador				
Schaltwerte/Switching values/	..ein/conex.	°C	4	4
Valeurs de commutation/Desconex.	..aus"/descon.	°C	—	—
Füllmenge/Fill. quantily/Charge/Carga	R600a.	g	*	*
Anschlusswert/Comm. load/Puiss. Connect./Potencia	W		71	71
Heizung/Heater/Chauflage/Resistenc.descong.				
Widerstand/Resistance/Resistencia	Ohm			
Leistung/Power/Puissance/Potencia	W			
Ventilador/Blower/Ventilateur/Ventilador				
Widerstand/Resistance/Resistencia	Ohm			
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula				
Widerstand/Resistance/Resistencia	Ohm			
Spannung/Voltage/Tension/Tensión	V			
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild /See identification plate /Voir plaquette de caractéristiques /Ver plaqueta de características