


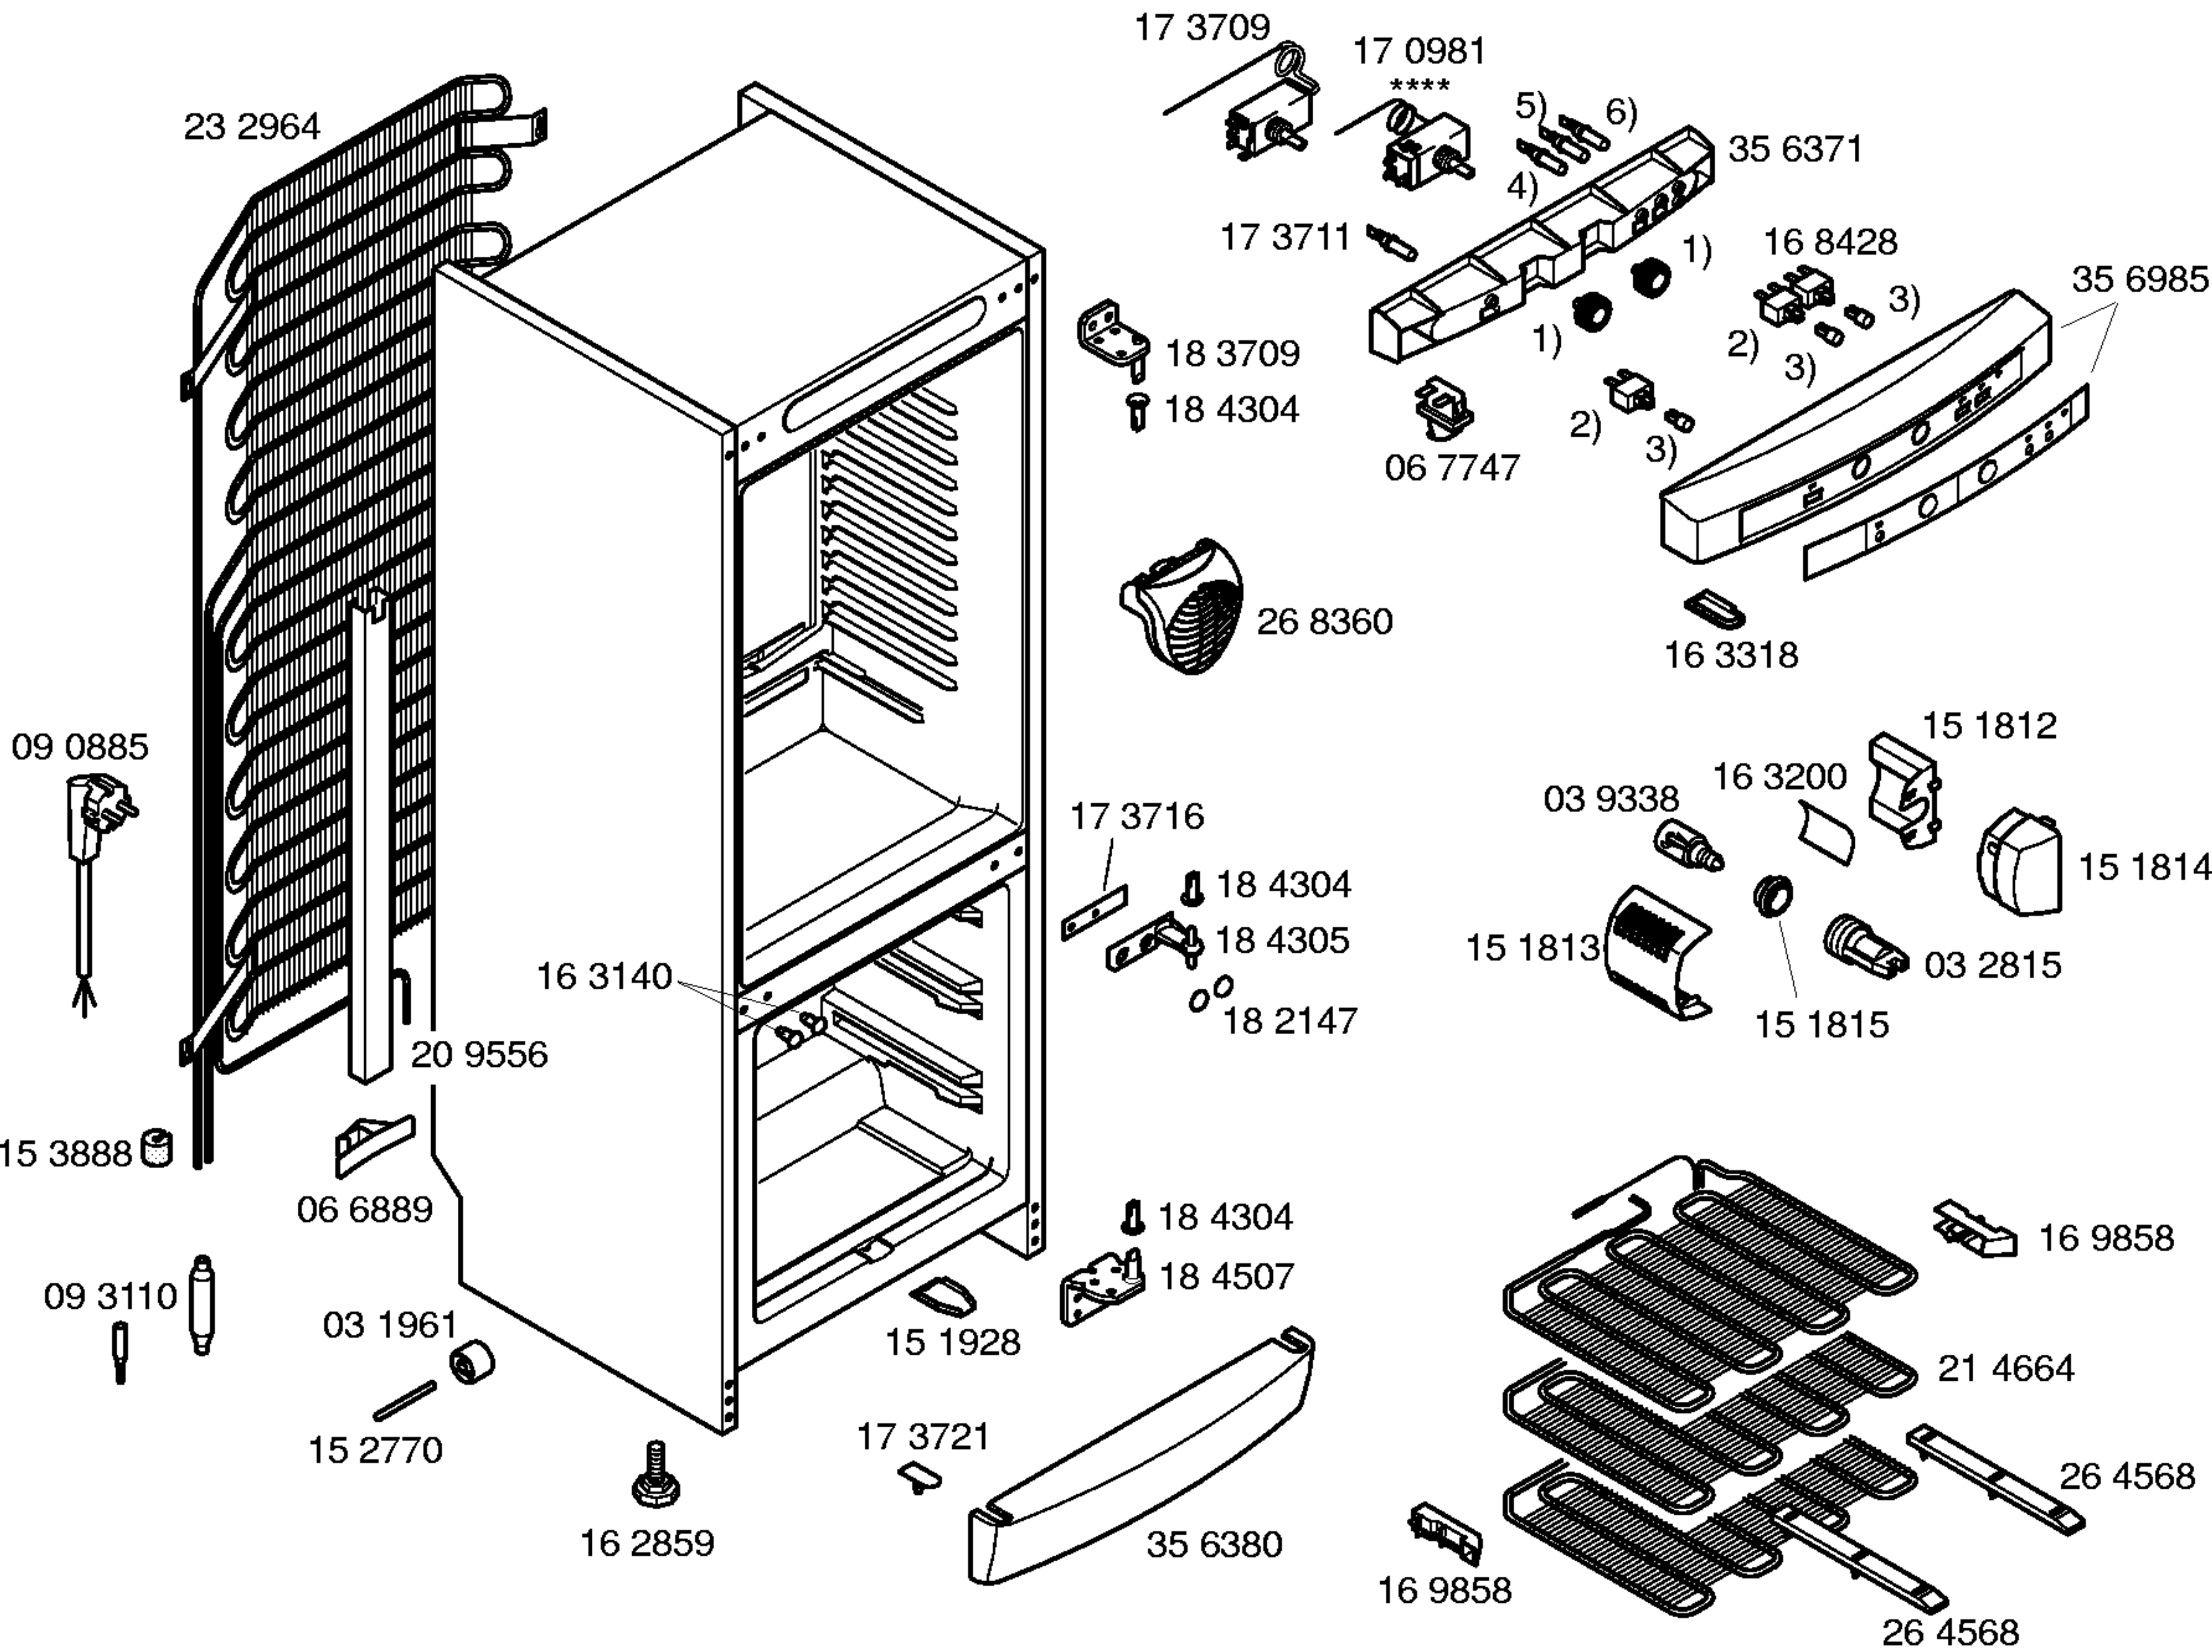


Ident – Nummern – Konstante  
3740 . . . . .

Gebrauchsanweisung  
52 4133  
(de,en,fr,nl,es,it,pt,pl,el)


Montageanweisung  
52 9365  
(de,en,fr,nl,es,it,pt,el,pl,  
sv,no,fi,da,cs,hu)

- 1) 16 5458
- 2) 16 8427
- 3) 17 4468
- 4) 17 3711  
Verde
- 5) 17 3712  
Ambar
- 6) 17 3713  
Rojo

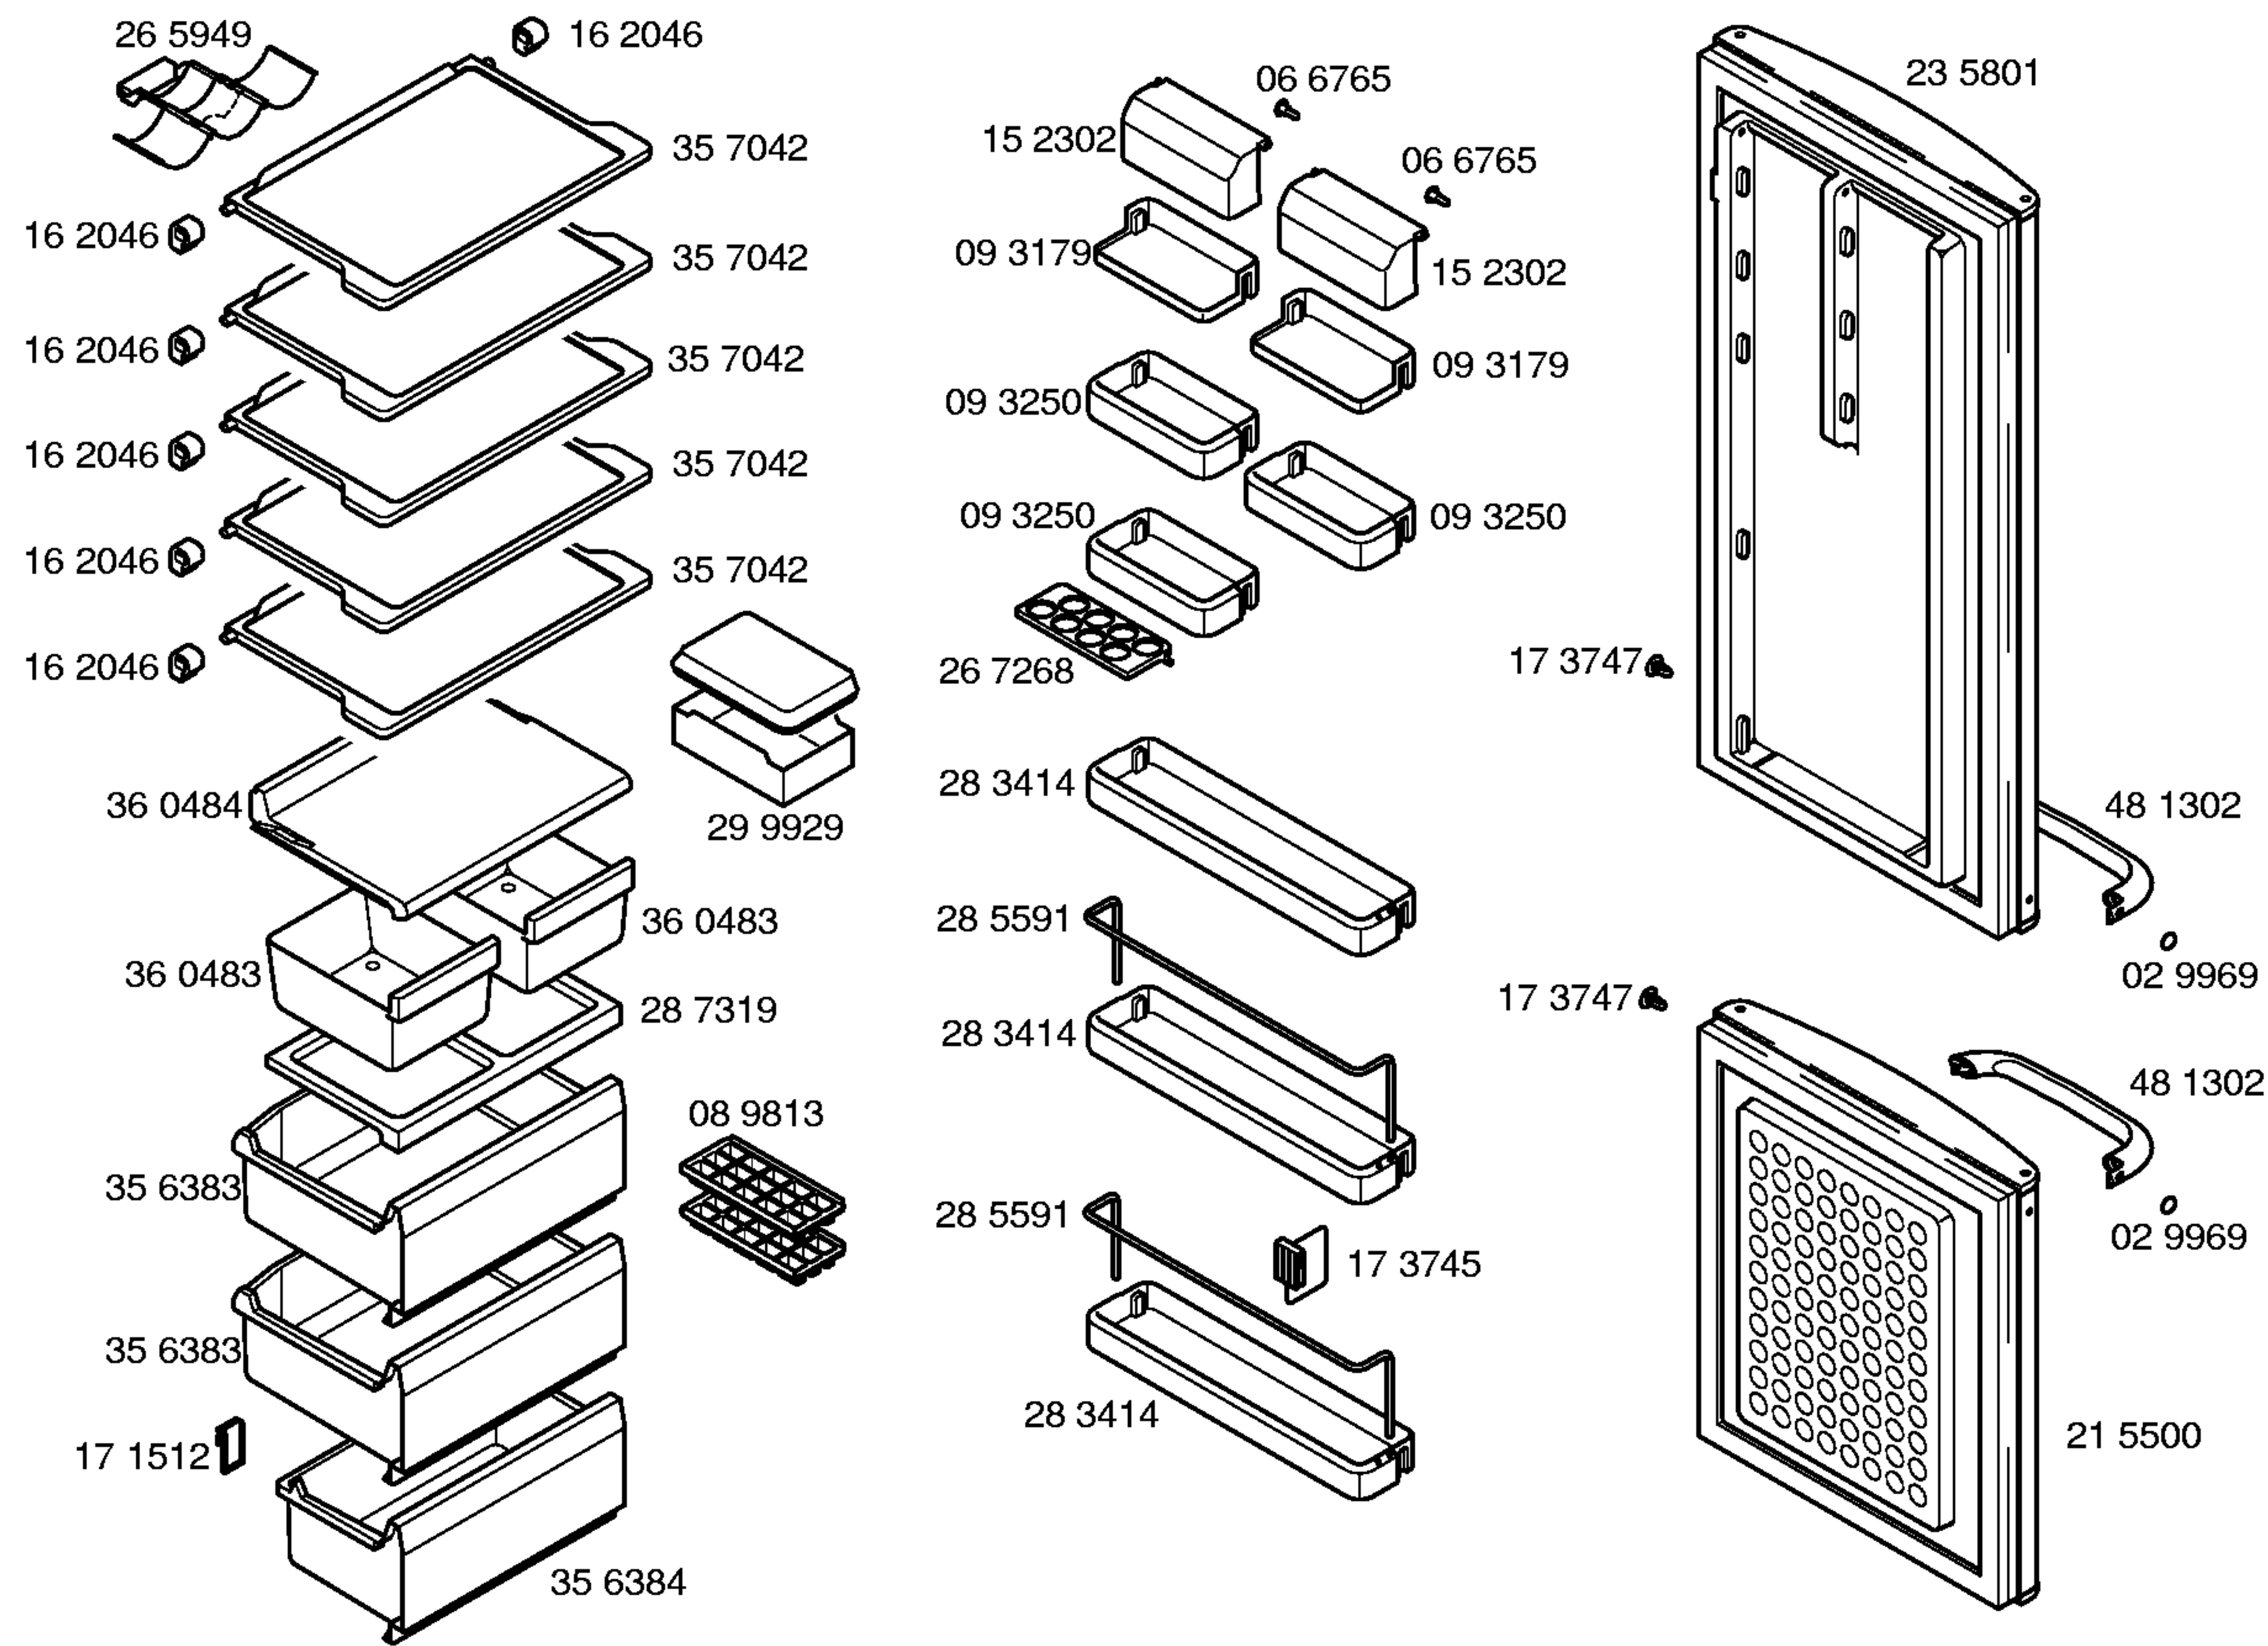

Ident – Nummern – Konstante  
3740 . . . . .

Ident – Nummern – Konstante  
3740 . . . . .

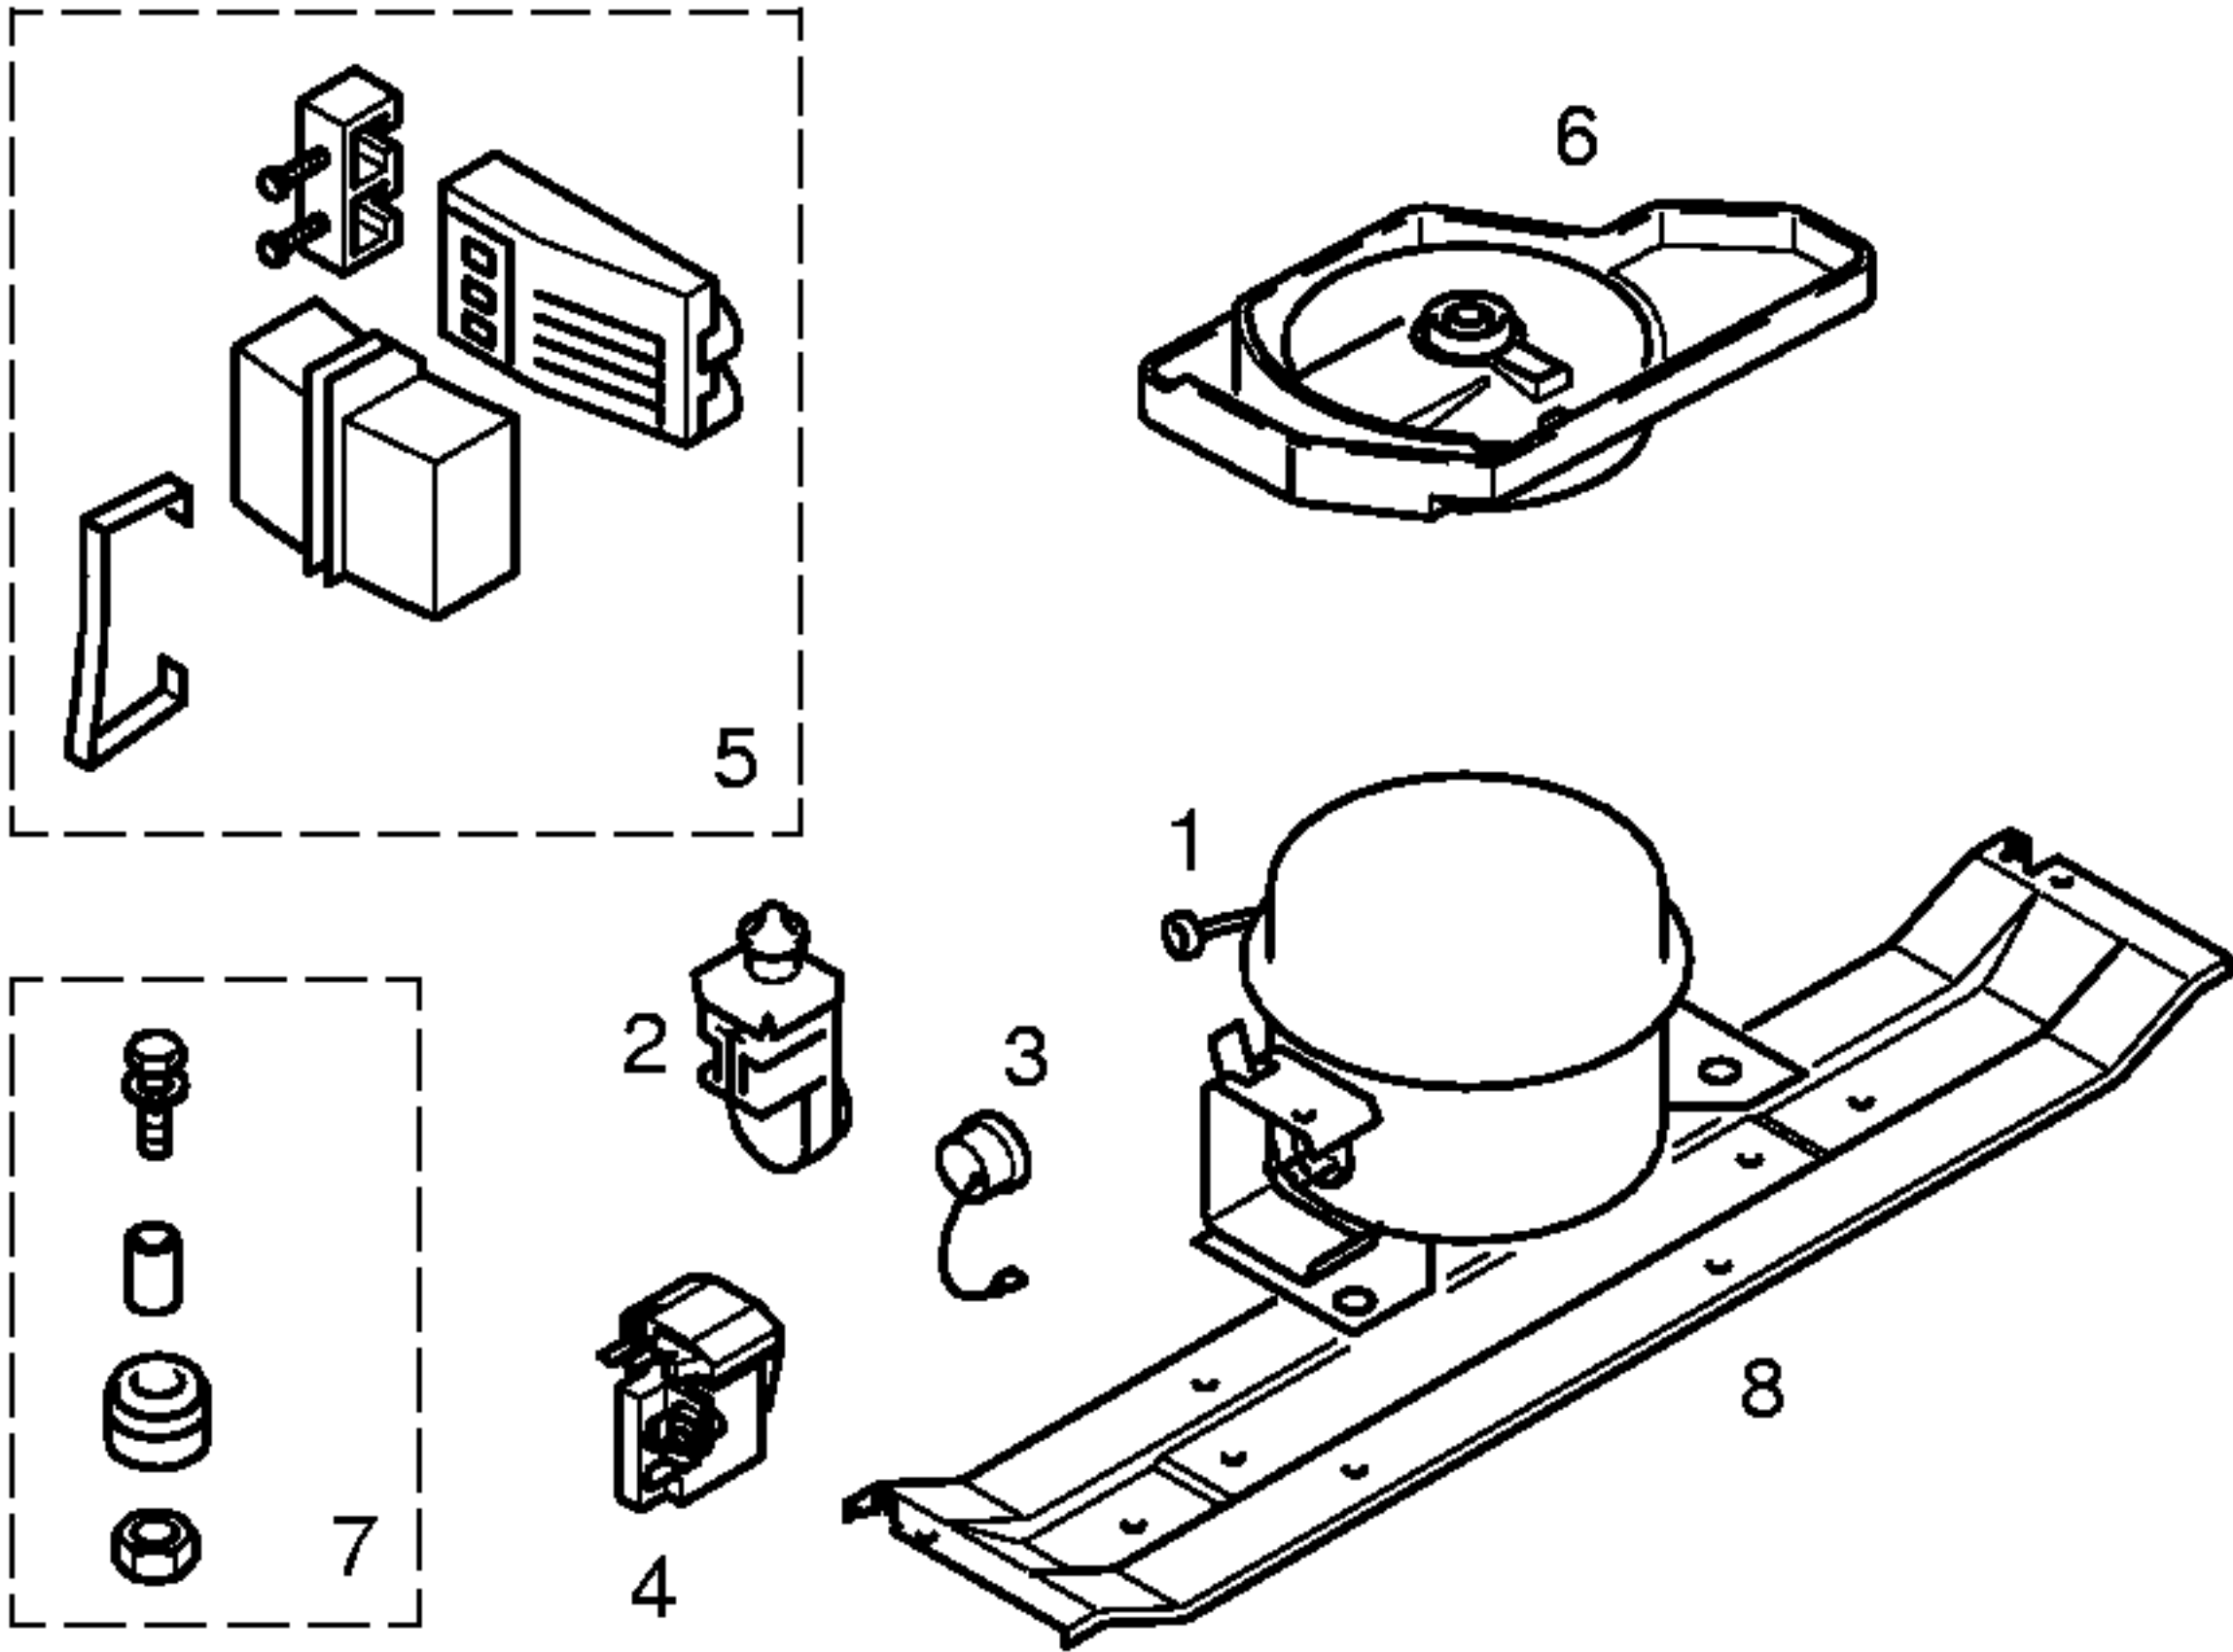

| TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS                                |                     |                       |   |  |
|--------------------------------------------------------------------------------------------------|---------------------|-----------------------|---|--|
|                                                                                                  |                     | ****                  |   |  |
| Verdichter/Compressor/Compresseur/Compresor<br>Typ/Type/Tipo                                     | Aspera<br>BPK1072Y  | Gold Star<br>ND69NAEG |   |  |
| Förderleistung/Delivery/Debit/Aspiración l/h                                                     |                     |                       |   |  |
| Anlaufstrom/Starting current/Cour.démarrage/Int.arranq. A                                        | 0,47                |                       |   |  |
| Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm                                             | 33,10               |                       |   |  |
|                                                                                                  | Hi/aux.             | 38,20                 |   |  |
| Temp.Reyler/Thermostat/Termostato<br>Typ/Type/Tipo                                               | Danfoss<br>077B6181 | Ranco<br>K54-L2007    |   |  |
| Reglerstellung/Position/Conexión                                                                 | MIN. MAX.           | MIN. MAX.             |   |  |
| Schaltwerte/Switching values/ ..ein/conex.°C                                                     | + 6°                | -14° -22°             |   |  |
| Valeurs de commutation/Desconex. ..aus"/descon.                                                  | -11° -28°           | -20° -28°             |   |  |
| (..abtaven' od) ..alarm'                                                                         |                     | -10° -18°             |   |  |
| Füllmenge/Fill. quantily/Charge/Carga R600a                                                      | g                   | *                     | * |  |
| Anschlusswert/Comm. load/Puiss. Connect./Potenc. W                                               | 79                  | 83                    |   |  |
| Heizung/Heater/Chauflage/Resistenc.descong.<br>Widerstand/Resistance/Resistencia Ohm             |                     |                       |   |  |
| Leistung/Power/Puissance/Potencia W                                                              |                     |                       |   |  |
| Ventilador/Blower/Ventilateur/Ventilador<br>Widerstand/Resistance/Resistencia Ohm                |                     |                       |   |  |
| Magnetventil/Magnetic valve/Electrovanne/Electrovalvula<br>Widerstand/Resistance/Resistencia Ohm |                     |                       |   |  |
| Spannung/Voltage/Tension/Tensión V                                                               |                     |                       |   |  |
| Temp.Reyler/Thermostat/Termostato ambiente para<br>ventilador refrigerador                       |                     |                       |   |  |

\* Siehe Typenschild / See identification plate / Voir plaque de caractéristiques / Ver plaqueta de características

| Pos. | ****     |           |  |  |
|------|----------|-----------|--|--|
|      | Aspera   | Gold Star |  |  |
|      | BPK1072Y | ND69NAEG  |  |  |
| 1    | 14 2000  | 14 2001   |  |  |
| 2    | 15 4315  |           |  |  |
| 3    | 17 3748  |           |  |  |
| 4    |          | 17 1011   |  |  |
| 5    |          |           |  |  |
| 6    | 26 4123  |           |  |  |
| 7    | 05 0166  | 05 0166   |  |  |
| 8    | 28 8253  | 28 8253   |  |  |
| 9    |          |           |  |  |
| 10   |          |           |  |  |
| 11   |          |           |  |  |
|      |          |           |  |  |