


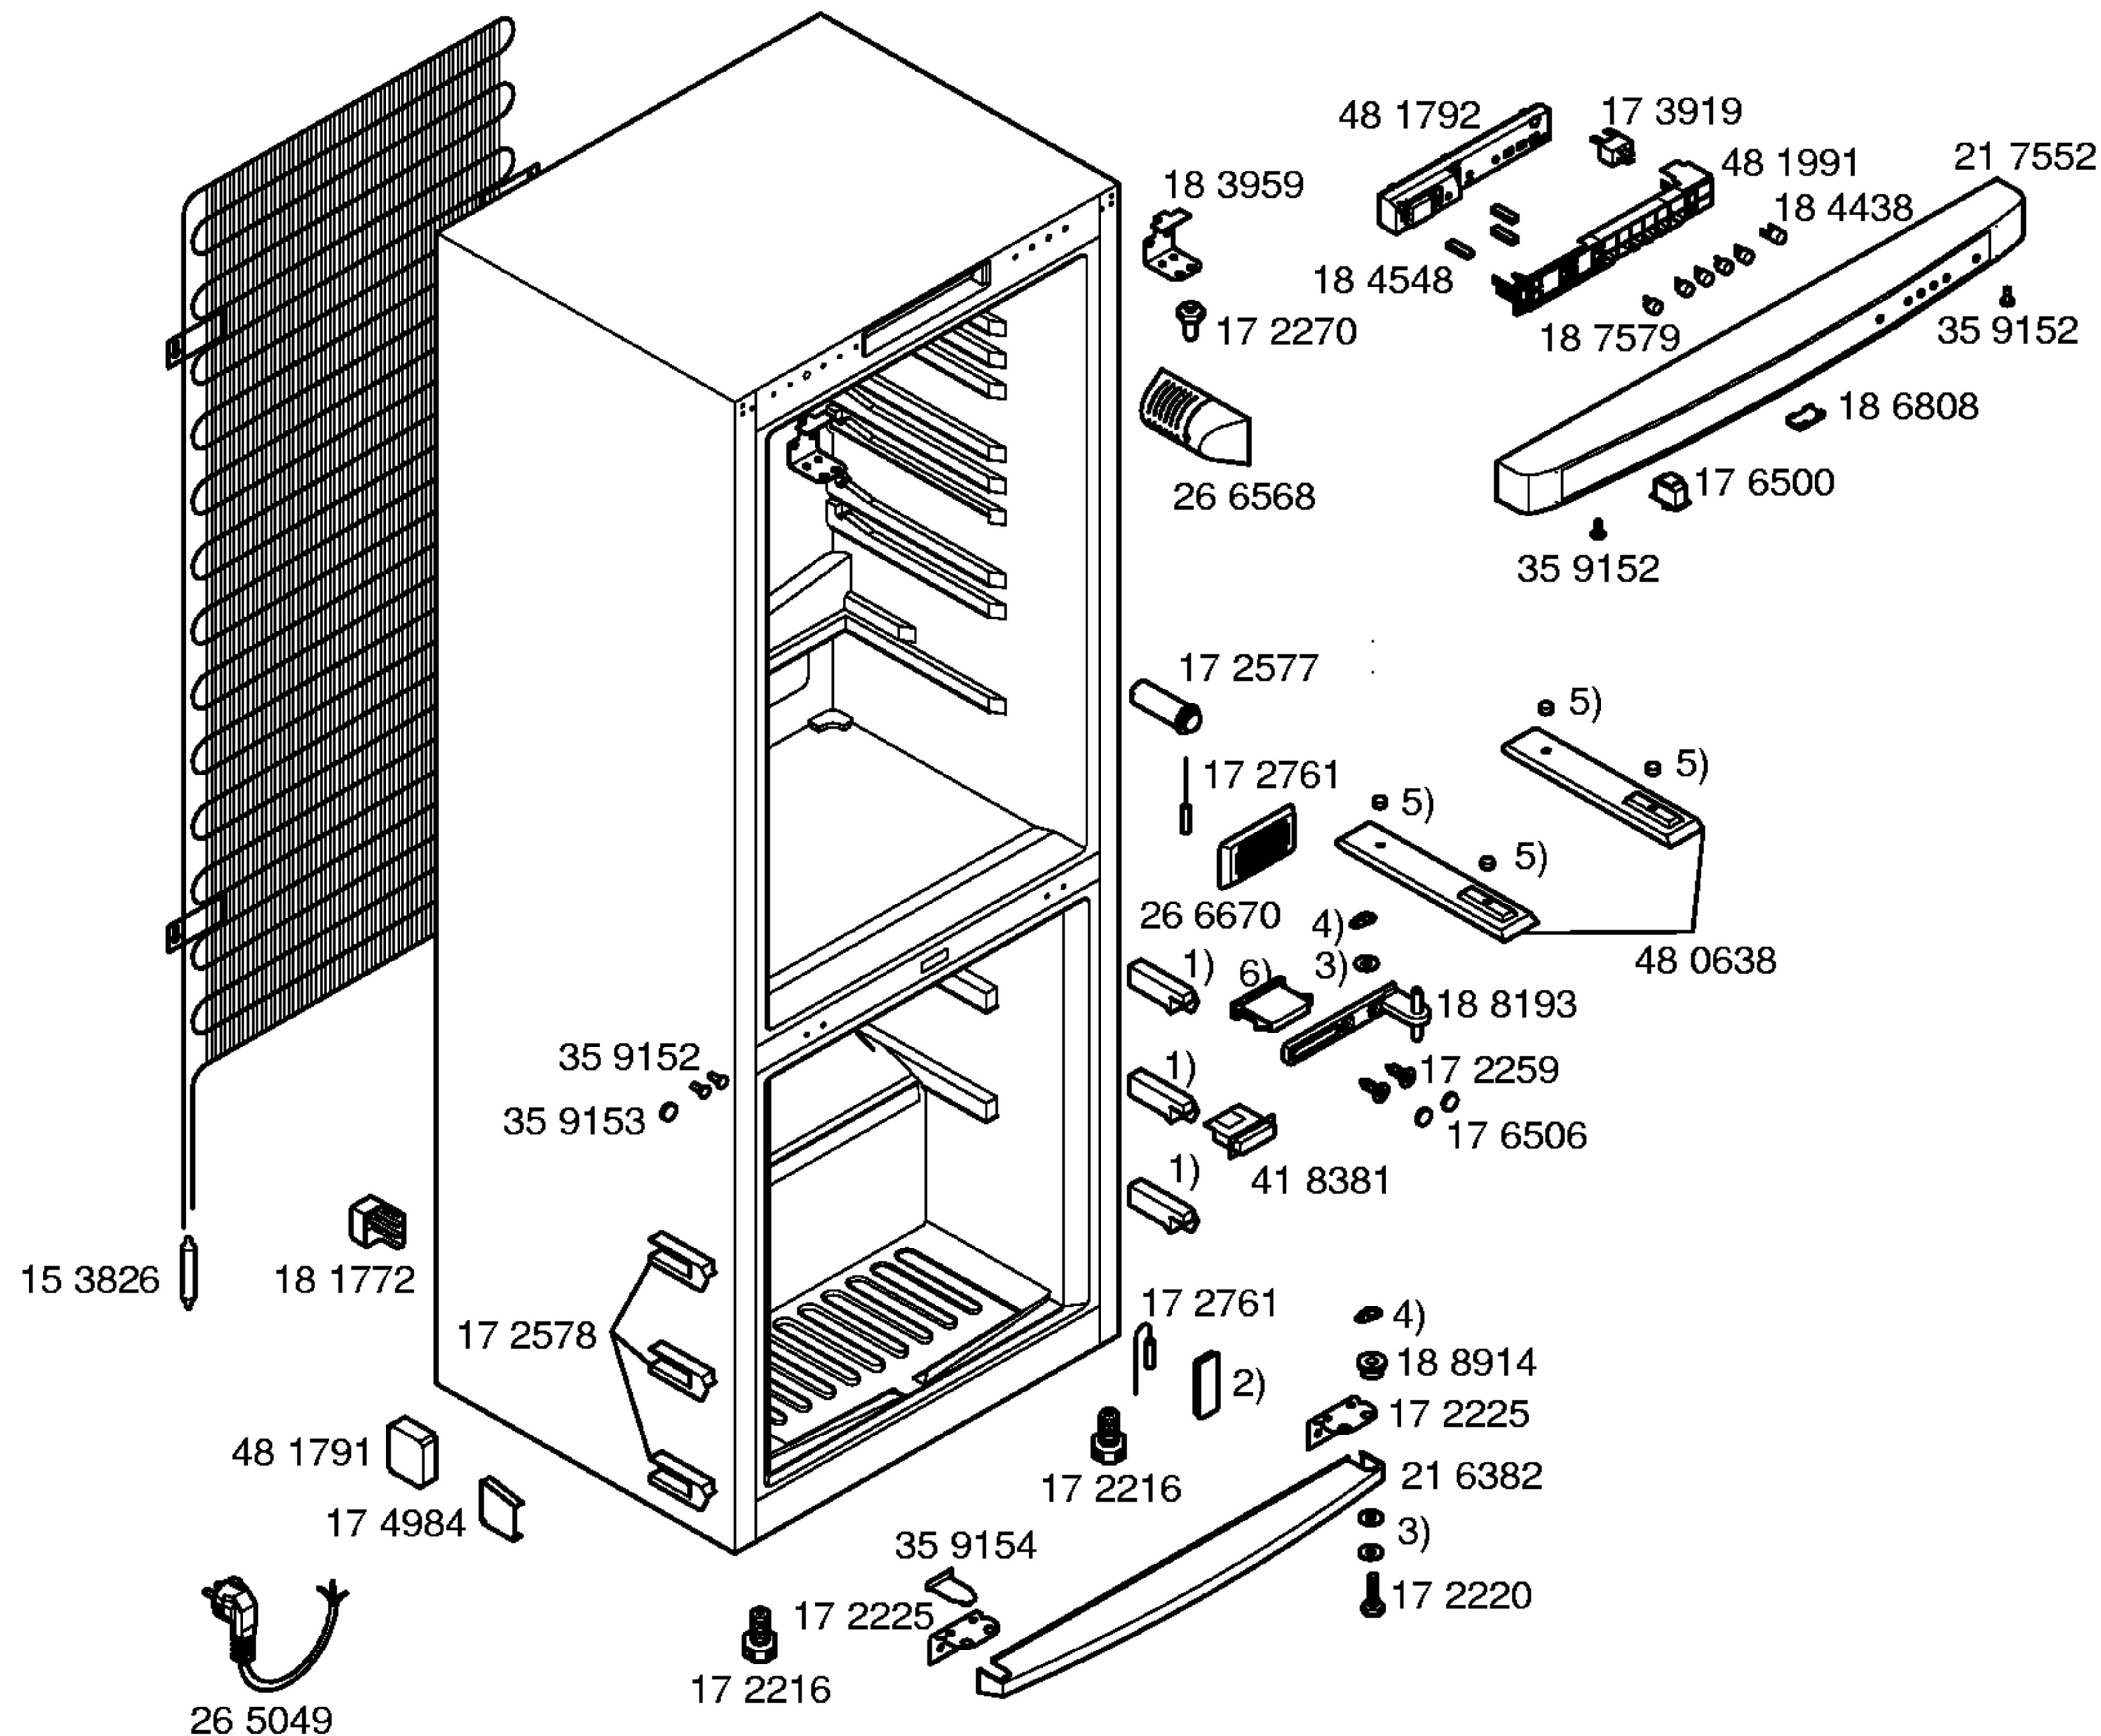


Mat. – Nr. – Konstante  
3740 . . . . .

## Gebrauchsanweisung

52 9650  
(de,en,fr,it,nl,  
el,es,pt,tr)


58 0519  
(da,no,sv,fi,  
ro,hu,pl,ru)


- 1) 17 2579
- 2) 17 2762
- 3) 17 6504
- 4) 17 6505
- 5) 06 0086
- 6) 18 8198

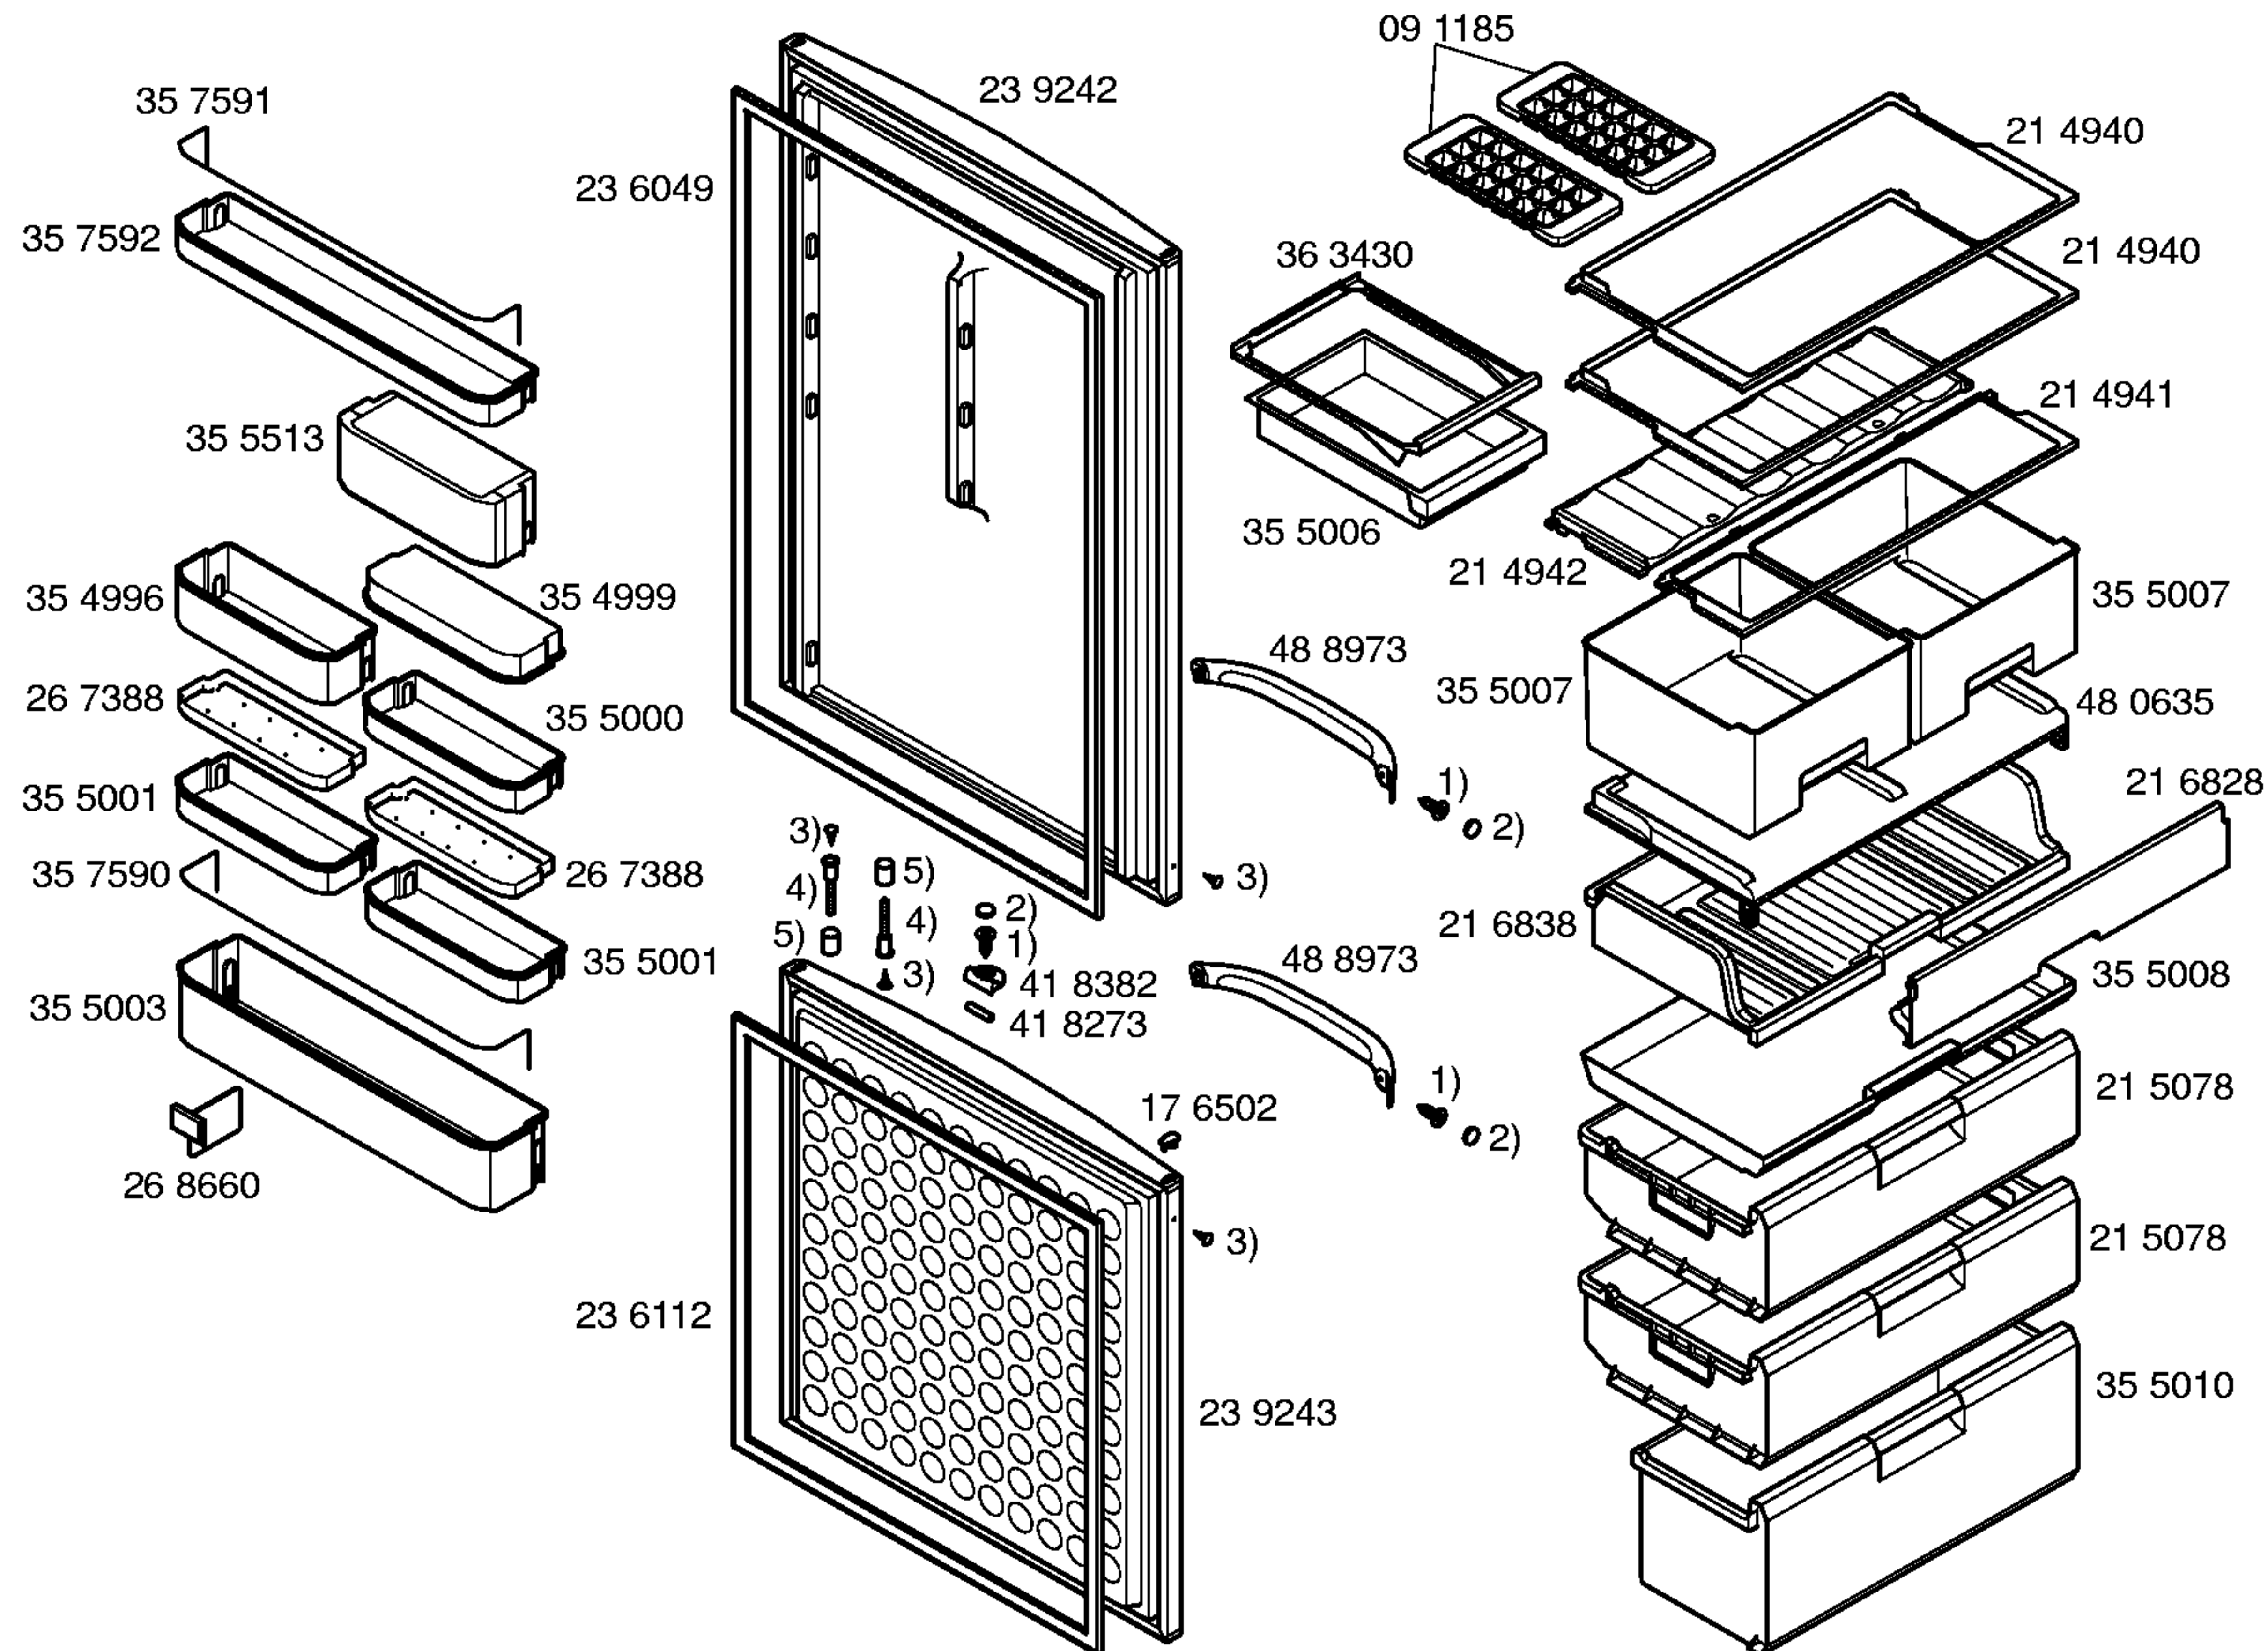

- 1) 17 2274
- 2) 35 9153
- 3) 17 6510
- 4) 18 8194
- 5) 18 9083

Mat. – Nr. – Konstante  
3740 . . . . .

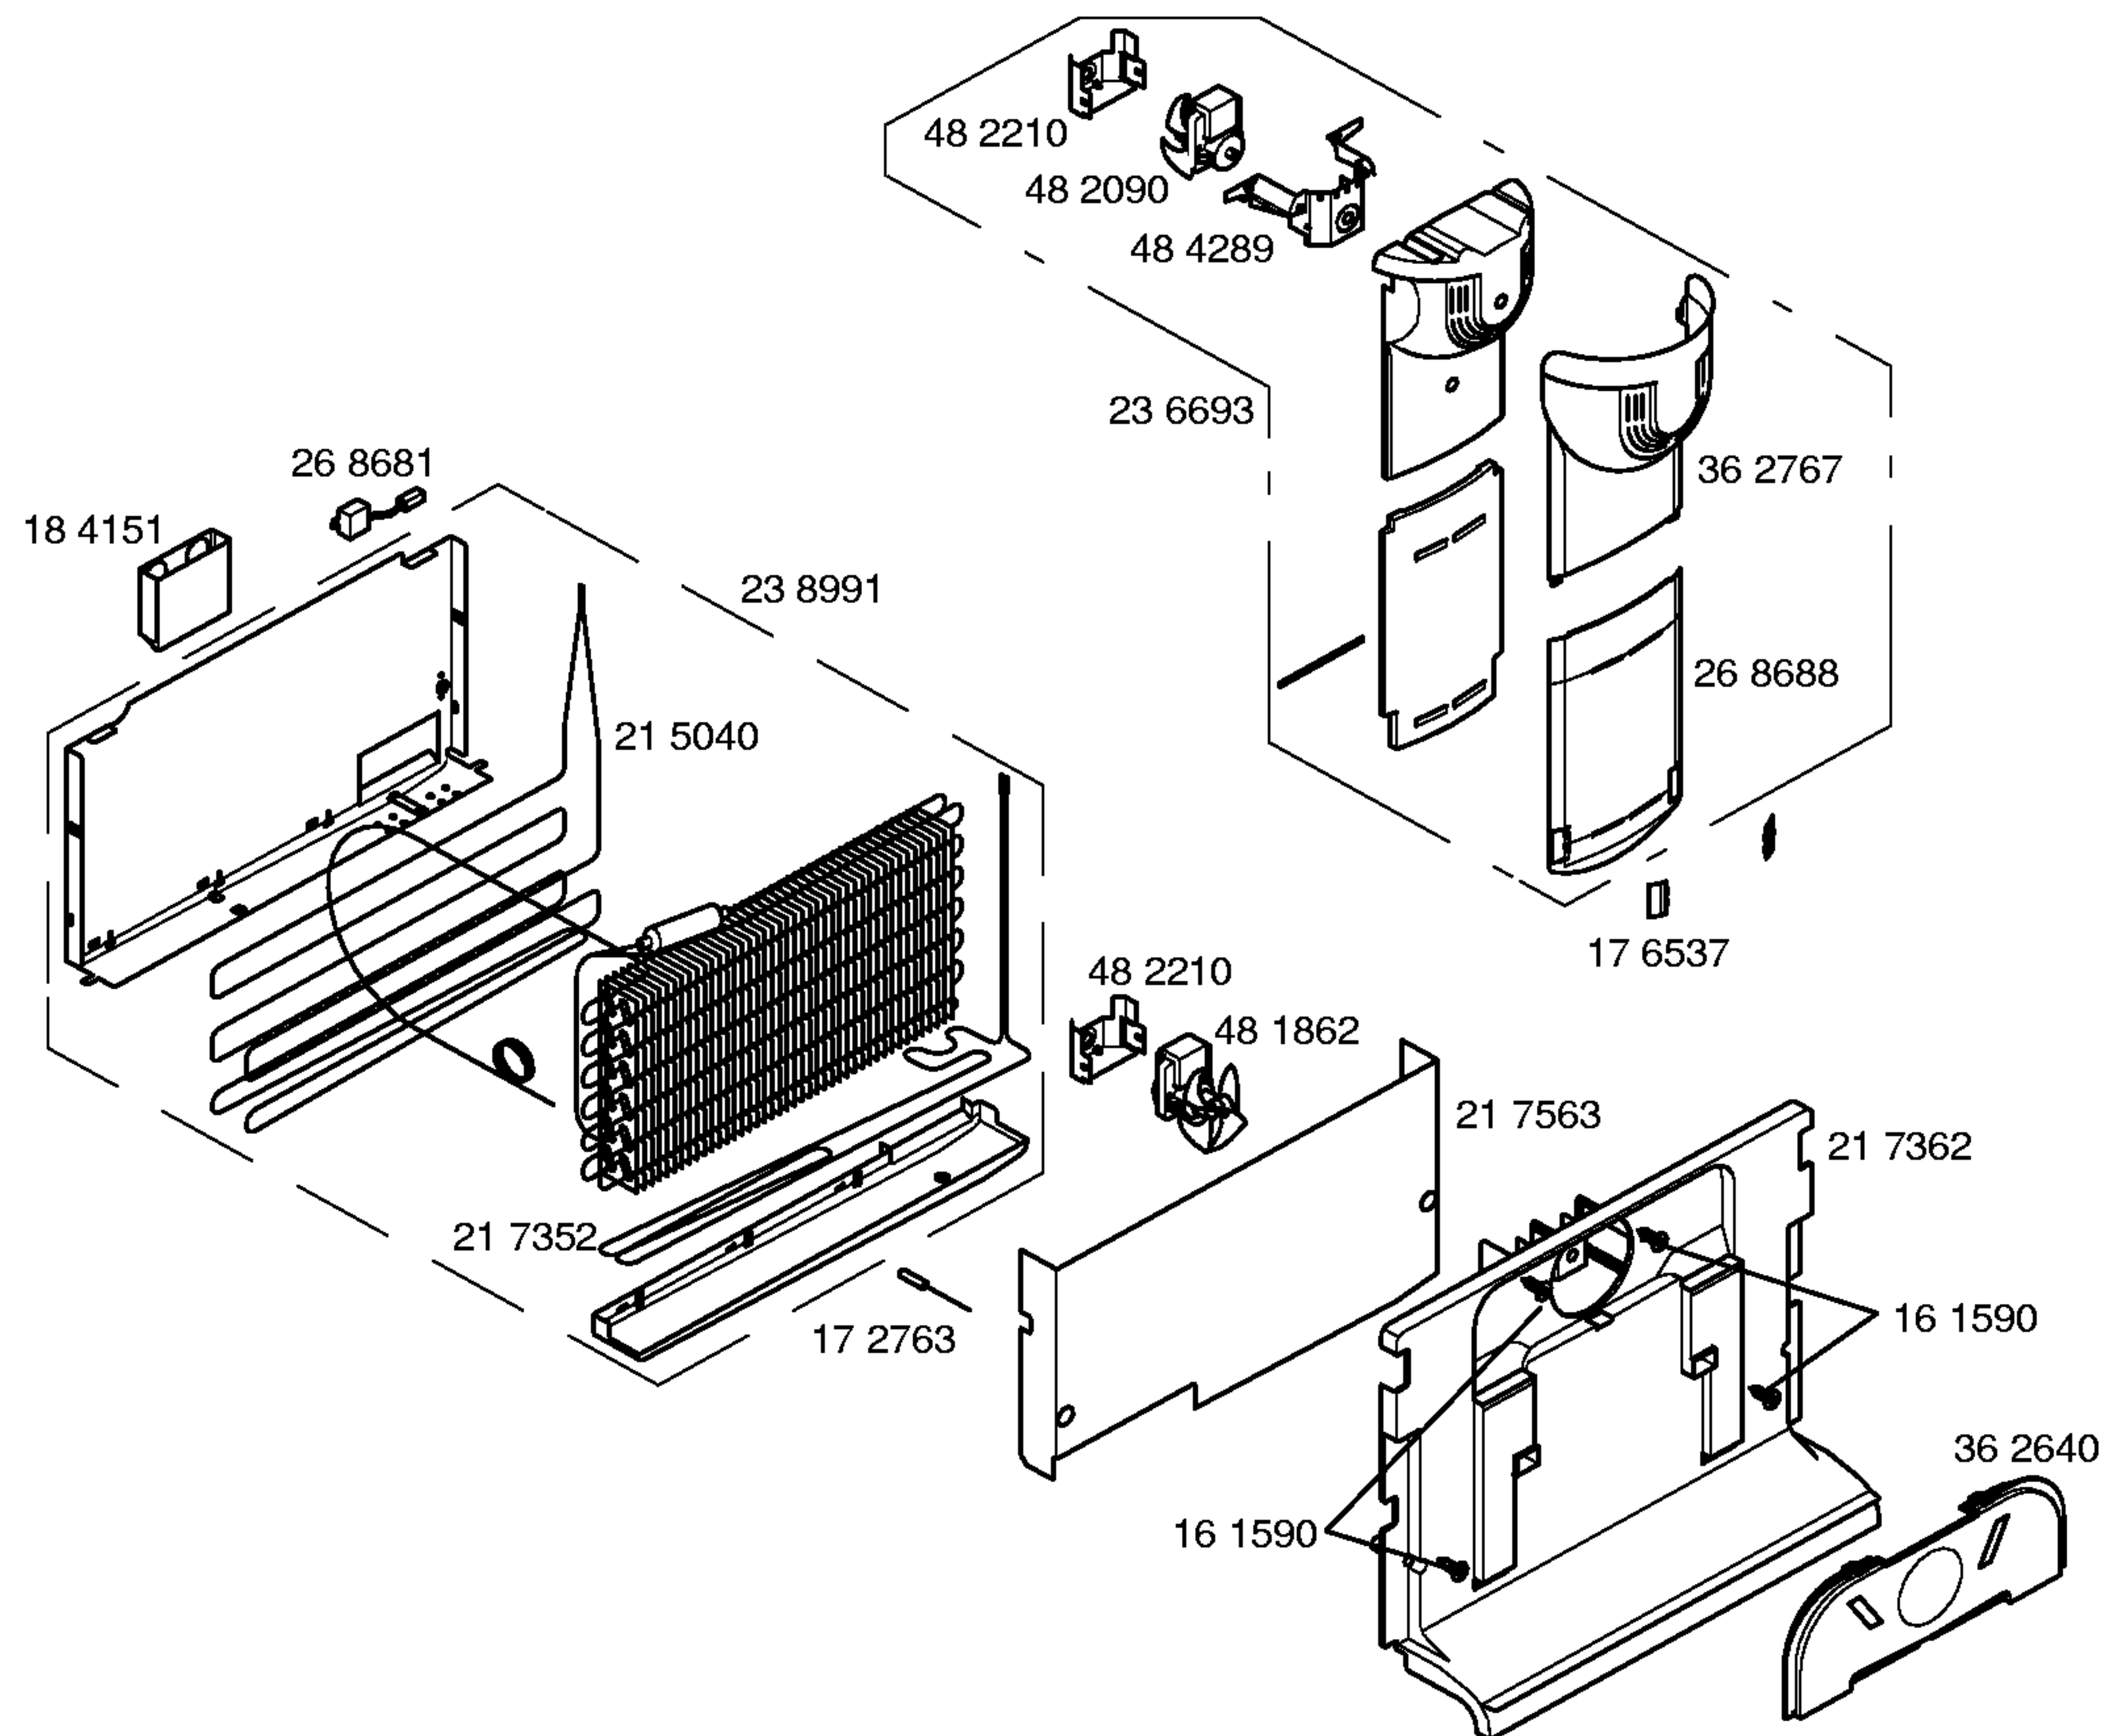

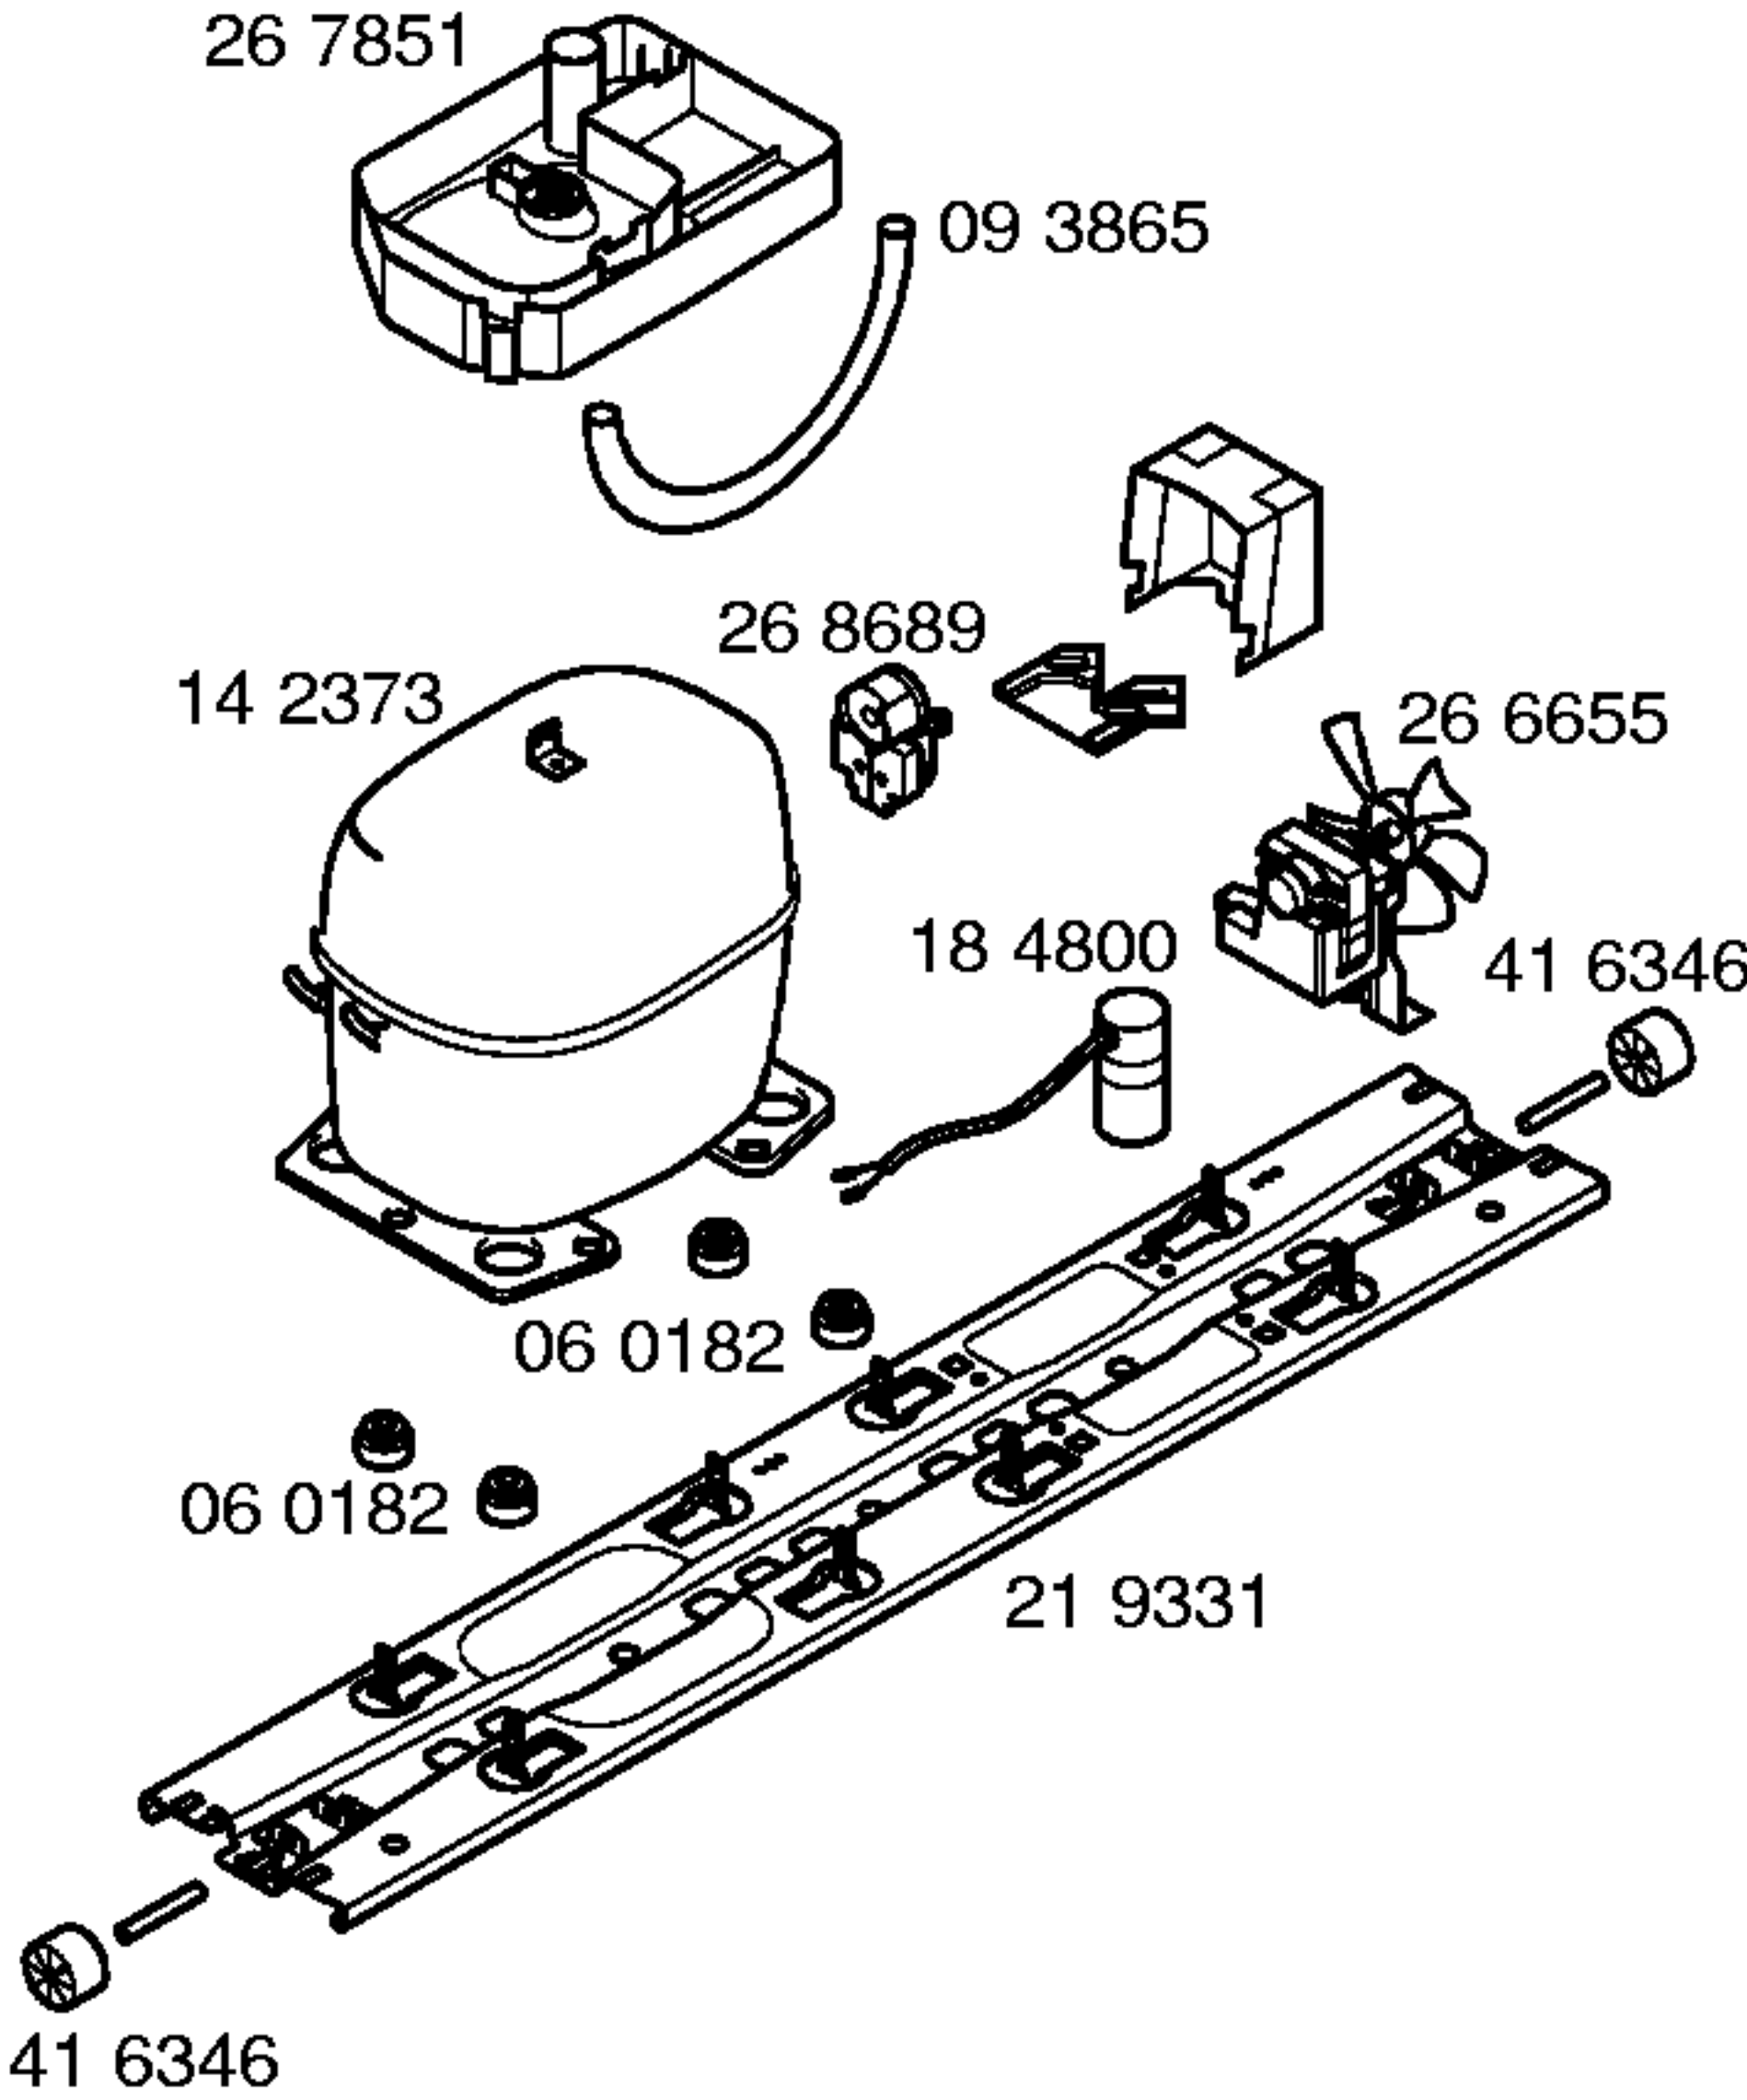

| TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS |                |            |             |           |
|-------------------------------------------------------------------|----------------|------------|-------------|-----------|
|                                                                   |                |            |             |           |
| Verdichter/Compressor/Compresseur/Compresor                       | ASPERA         |            |             |           |
| Typ/Type/Tipo                                                     | NBT 1118Y      |            |             |           |
| Förderleistung/Delivery/Debit/Aspiración l/h                      | 2574           |            |             |           |
| Anlaufstromm/Starting current/Cour.démarrage/Int.arranque A       | –              |            |             |           |
| Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm              | 11.0           |            |             |           |
| Hi/aux.                                                           | 16.4           |            |             |           |
|                                                                   |                |            |             |           |
| Klape Therm./Thermostat/Termostat                                 |                |            |             |           |
| Typ/Type/Tipo                                                     |                |            |             |           |
| Reglerstellung/Position/Conexión                                  |                |            |             |           |
| Schaltwerte/Switching values/                                     | ..ein/conex.°C |            |             |           |
| Valeurs de commutation/Desconex.                                  | ..aus"/descon. |            |             |           |
| (..abtaven' od)                                                   | ..alarm'       |            |             |           |
|                                                                   |                |            |             |           |
| Füllmenge/Fill. quantily/Charge/Carga R600                        | g              | 45         |             |           |
|                                                                   |                |            |             |           |
| Anschlusswert/Comm. load/Puiss. Connect./Potenc.                  | W              | 150        |             |           |
|                                                                   |                |            |             |           |
| Heizung/Heater/Chauflage/Resistenc.descong.                       |                | Verdampfer | Ablaufrinne | Luftkanal |
| Widerstand/Resistance/Resistencia                                 | KΩ             | 0.38       | 1.4         | 13.49     |
| Leistung/Power/Puissance/Potencia                                 | W              | 145/230    | 37.5/230    | 4/230     |
|                                                                   |                |            |             |           |
| Ventilador/Blower/Ventilateur/Ventilador                          |                | Verdichter | Verdampfer  |           |
| Widerstand/Resistance/Resistencia                                 | KΩ             | 0.61       | 0.41        |           |

Mat. – Nr. – Konstante  
3740 . . . . .