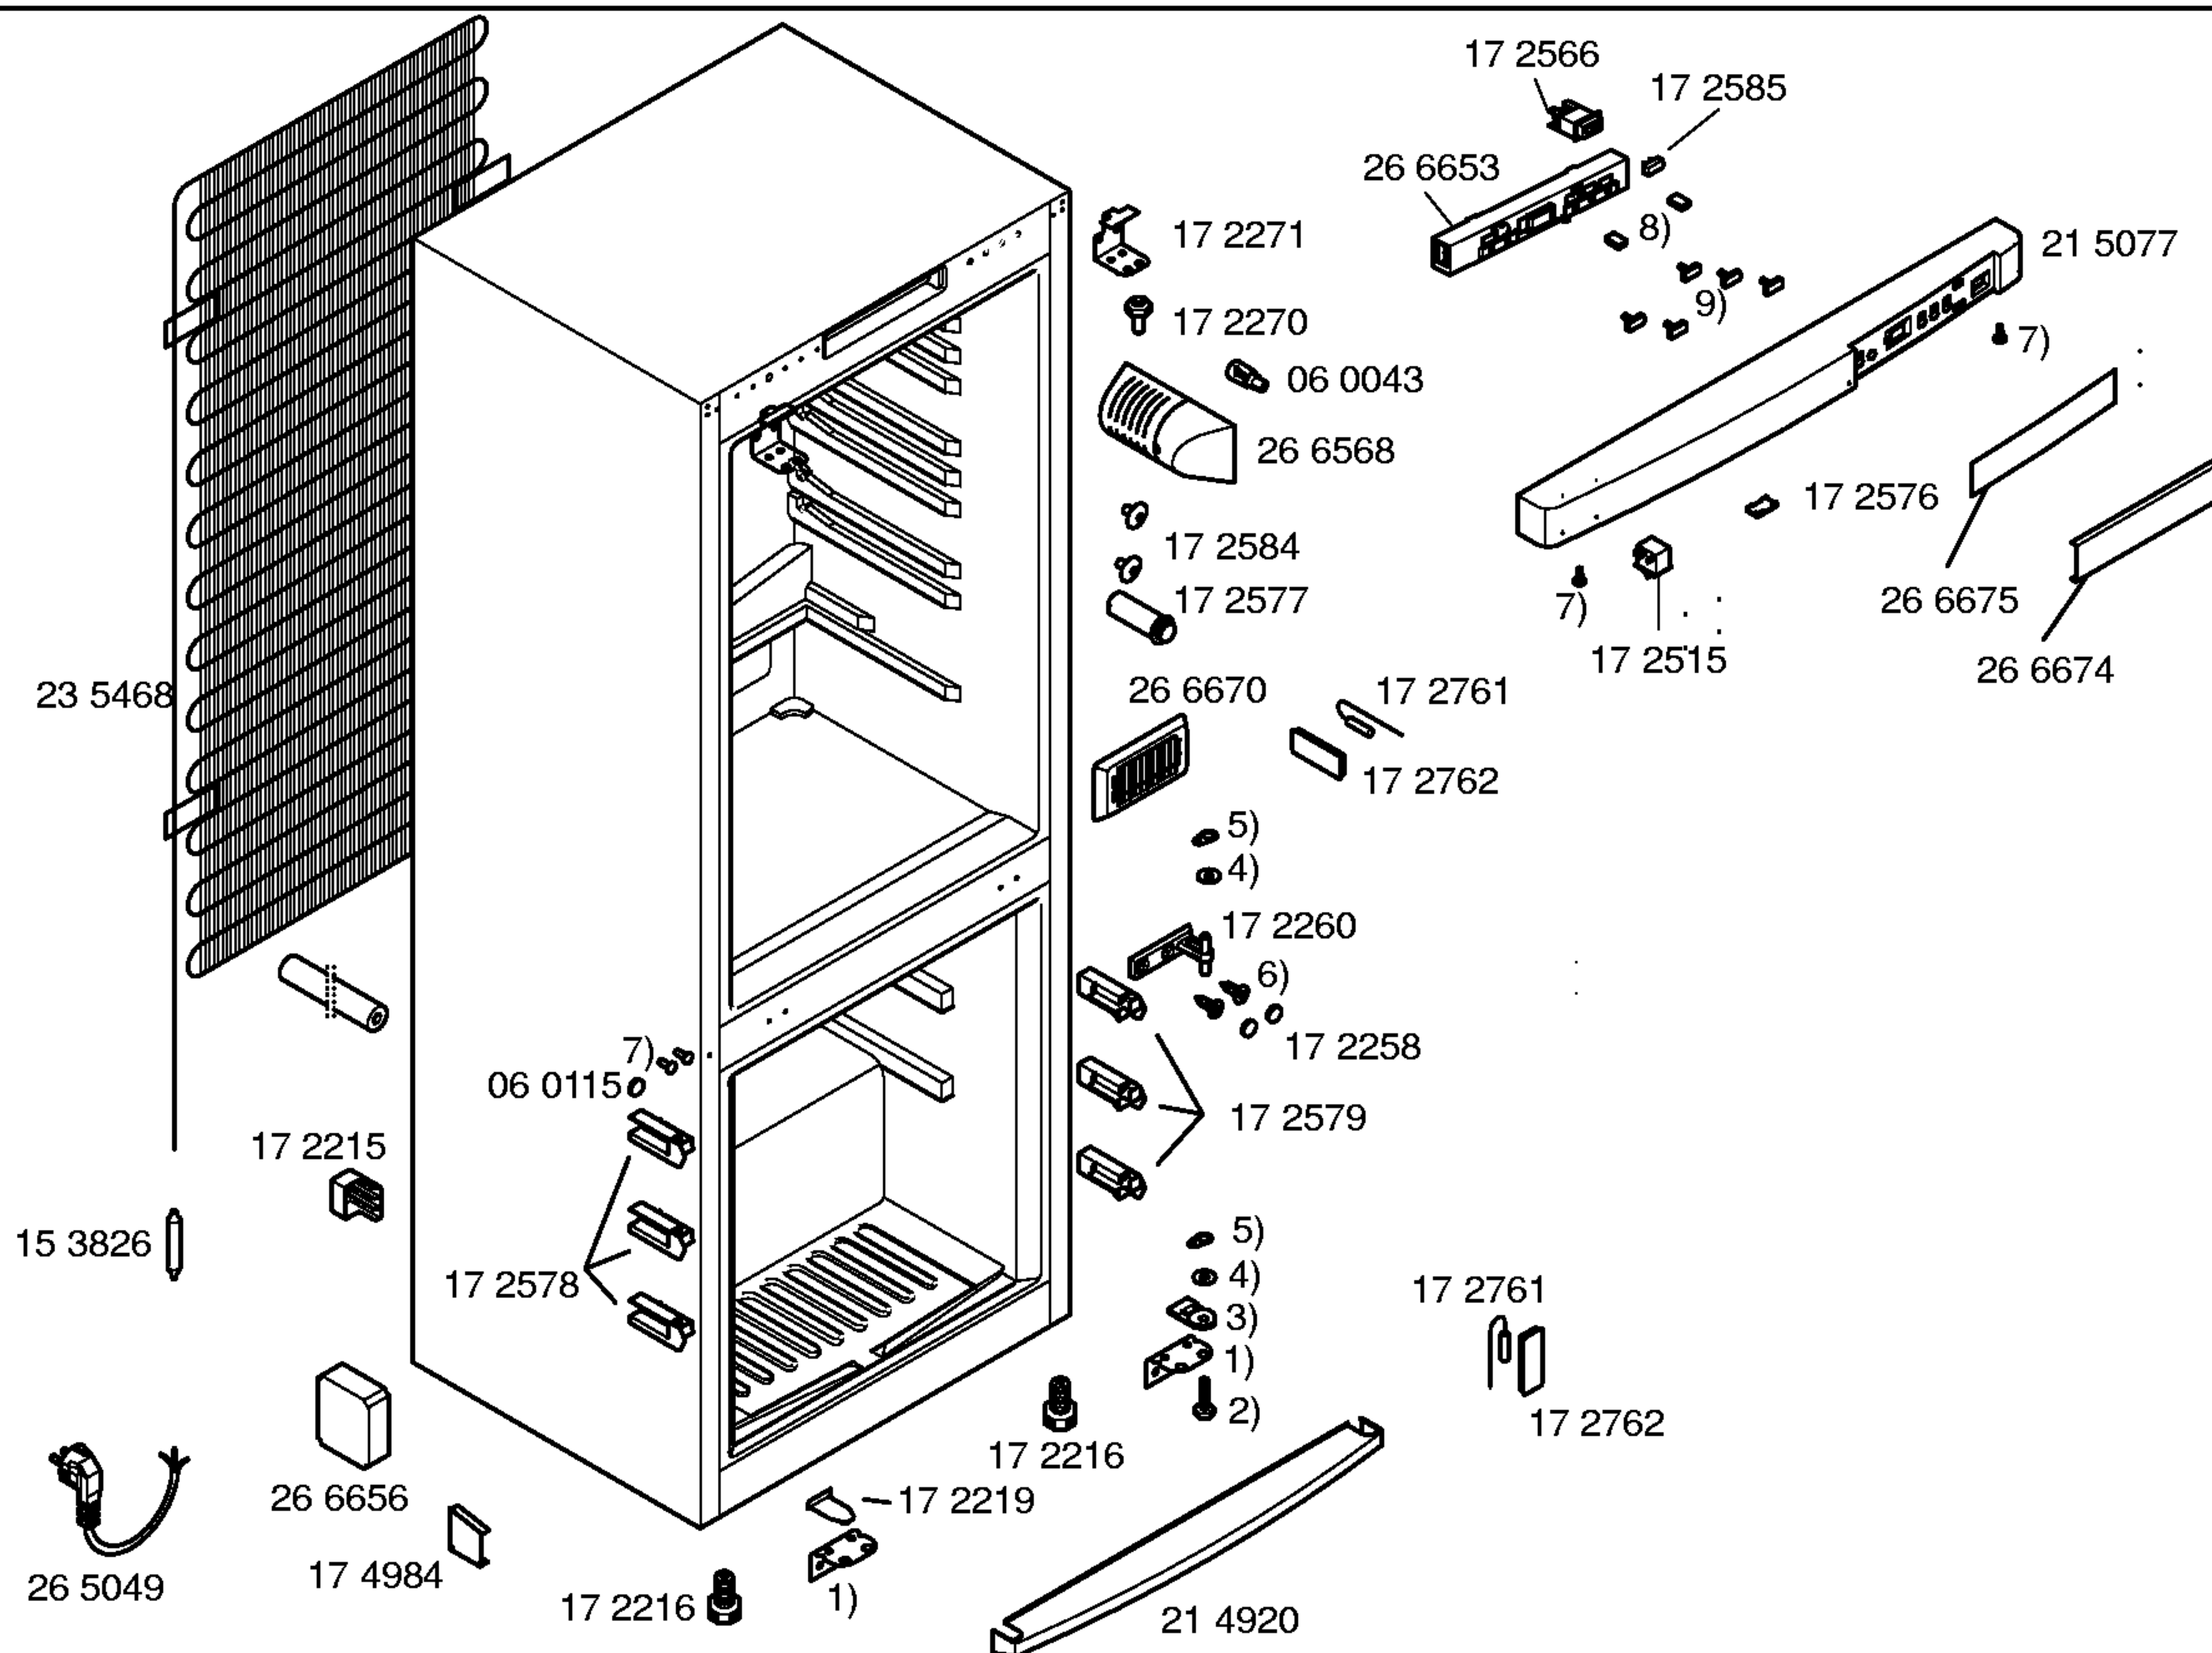


**BOSCH**

KGU 4420IE/02


KUEHL-GEFRIERGERAETE
Kuehl-Gefrierkombinationen

Gebrauchsanweisung
52 3542
(DE,GB,FR,IT,
NL,PT,ES)

- 1) 17 2225
- 2) 17 2220
- 3) 17 2255
- 4) 17 2256
- 5) 17 2257
- 6) 17 2259
- 7) 06 0087
- 8) 17 2574
- 9) 17 2586

**BOSCH**

KGU 4420IE/02

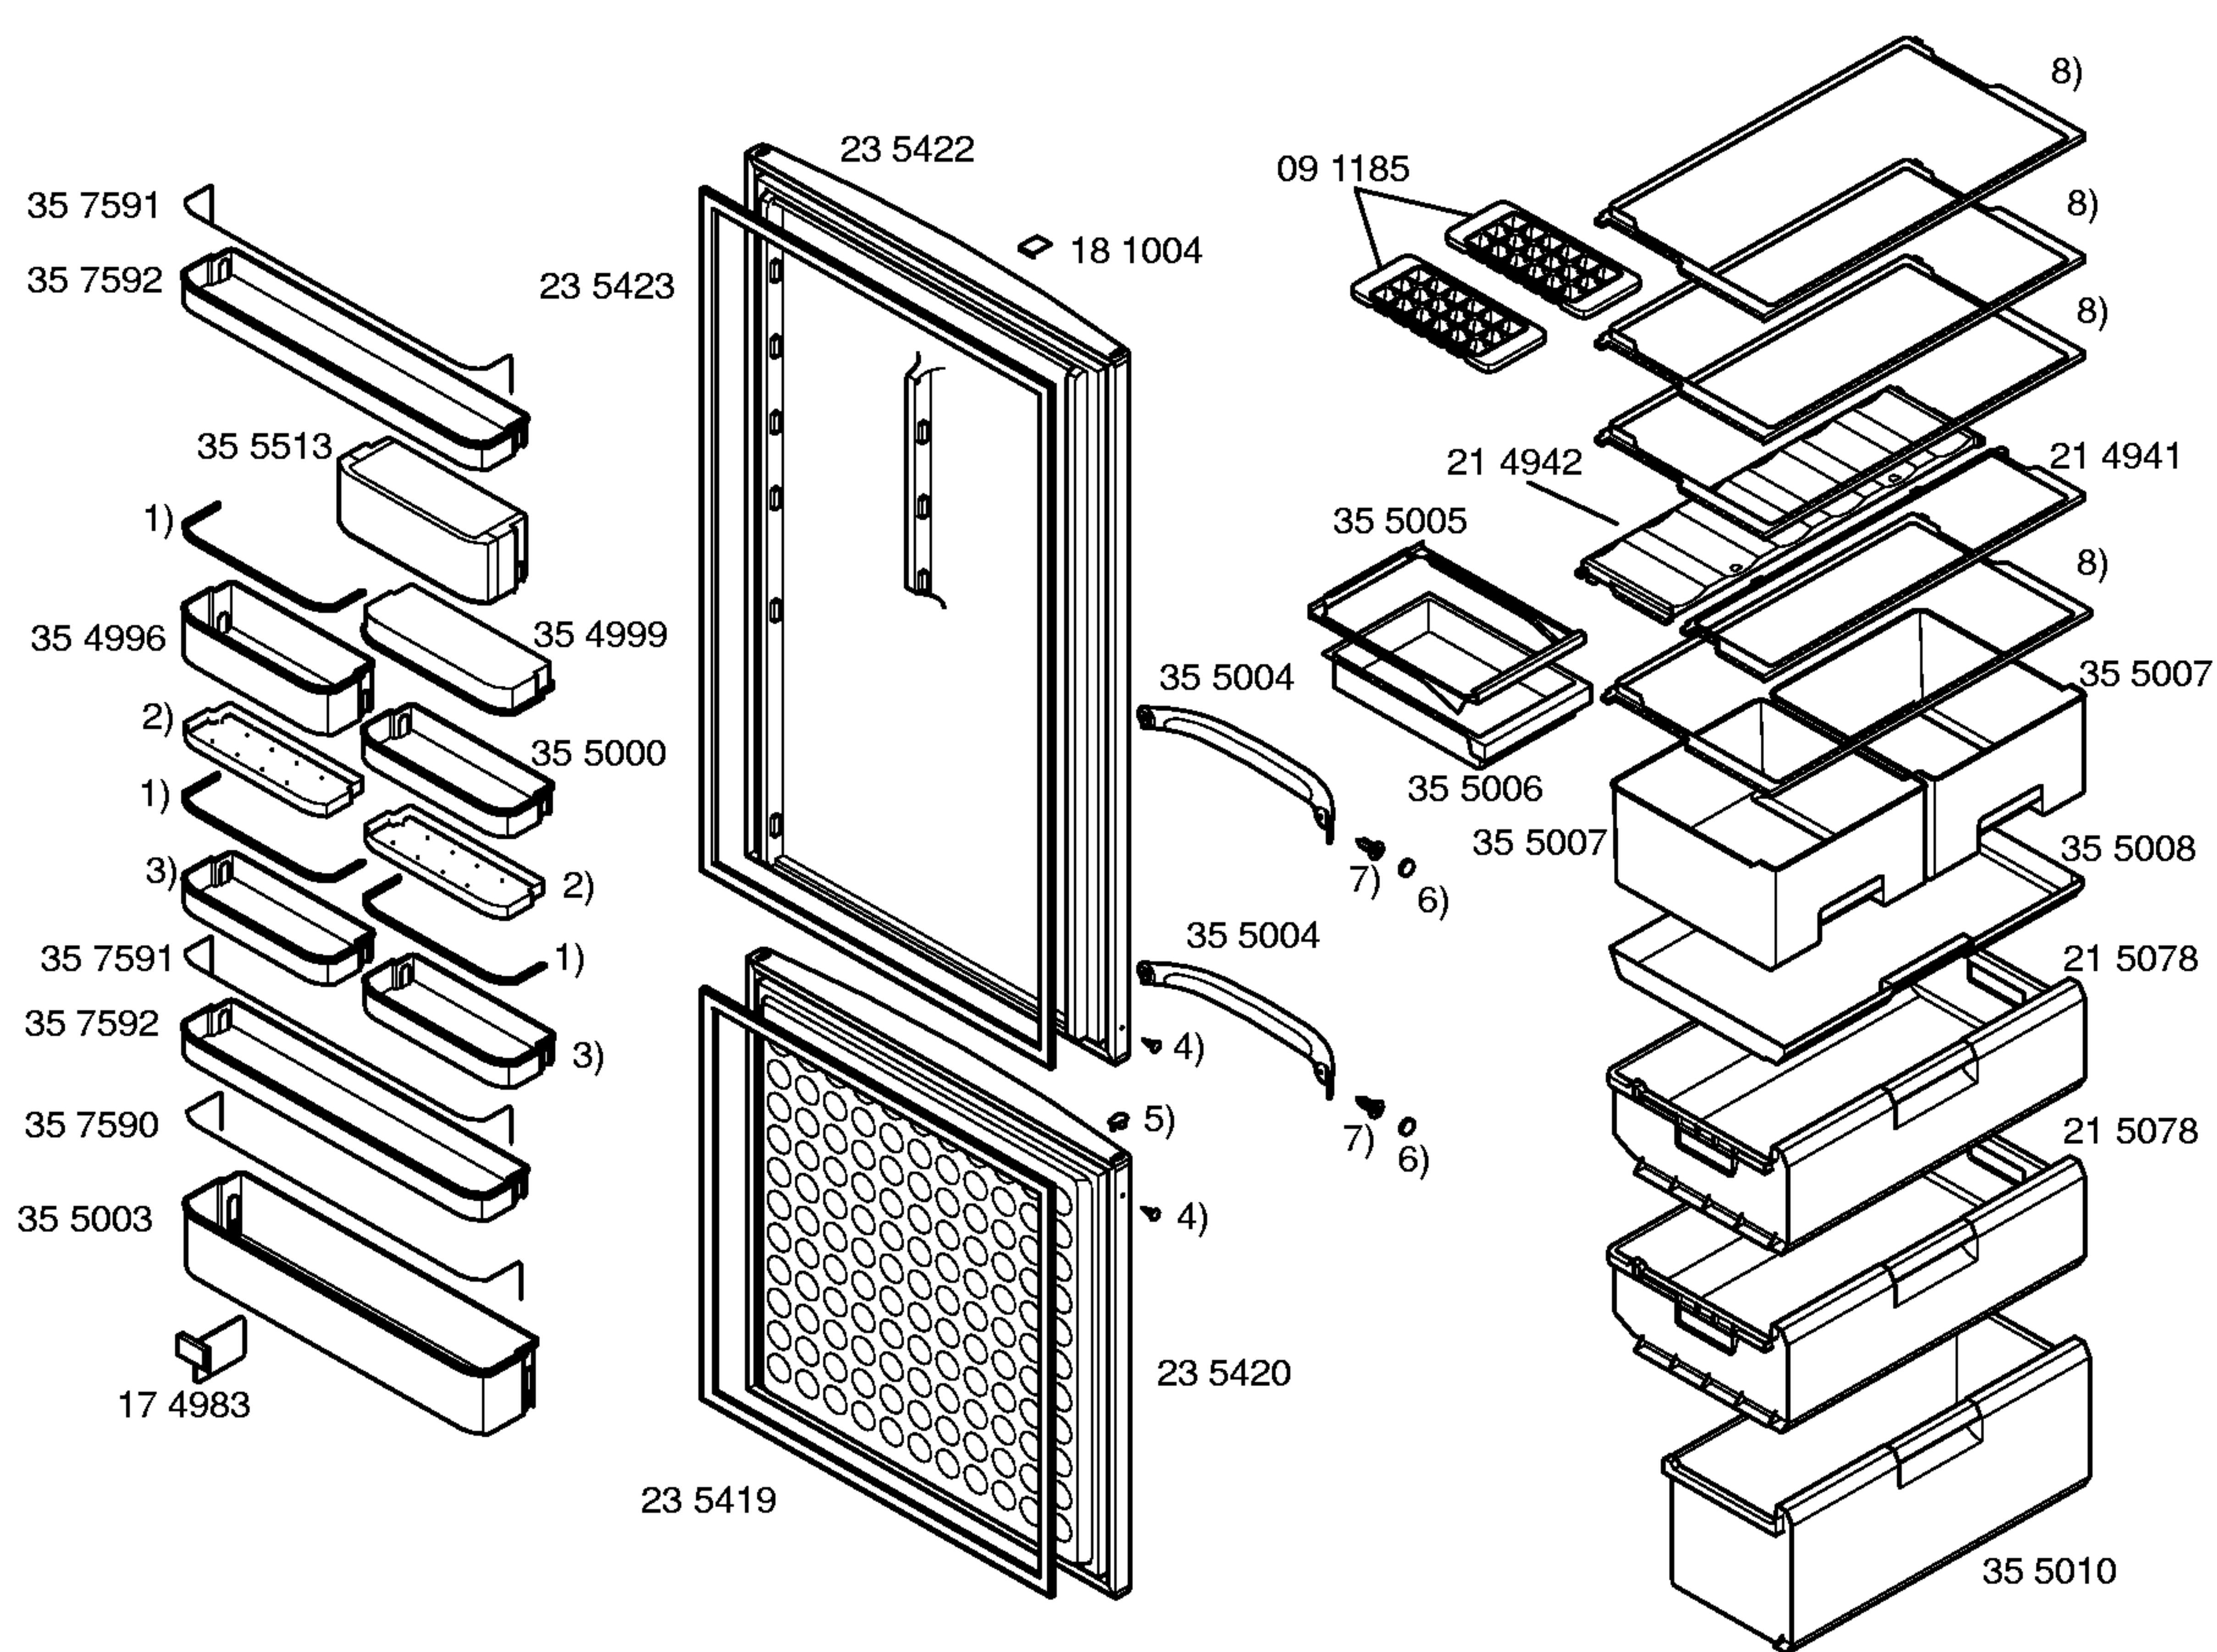KUEHL-GEFRIERGERAETE
Kuehl-Gefrierkombinationen


- 1) 35 4998
- 2) 35 4997
- 3) 35 5001
- 4) 06 0083
- 5) 17 2275
- 6) 06 0115
- 7) 17 2274
- 8) 21 4940



BOSCH

KGU 4420IE/02

KUEHL-GEFRIERGERAETE
Kuehl-Gefrierkombinationen

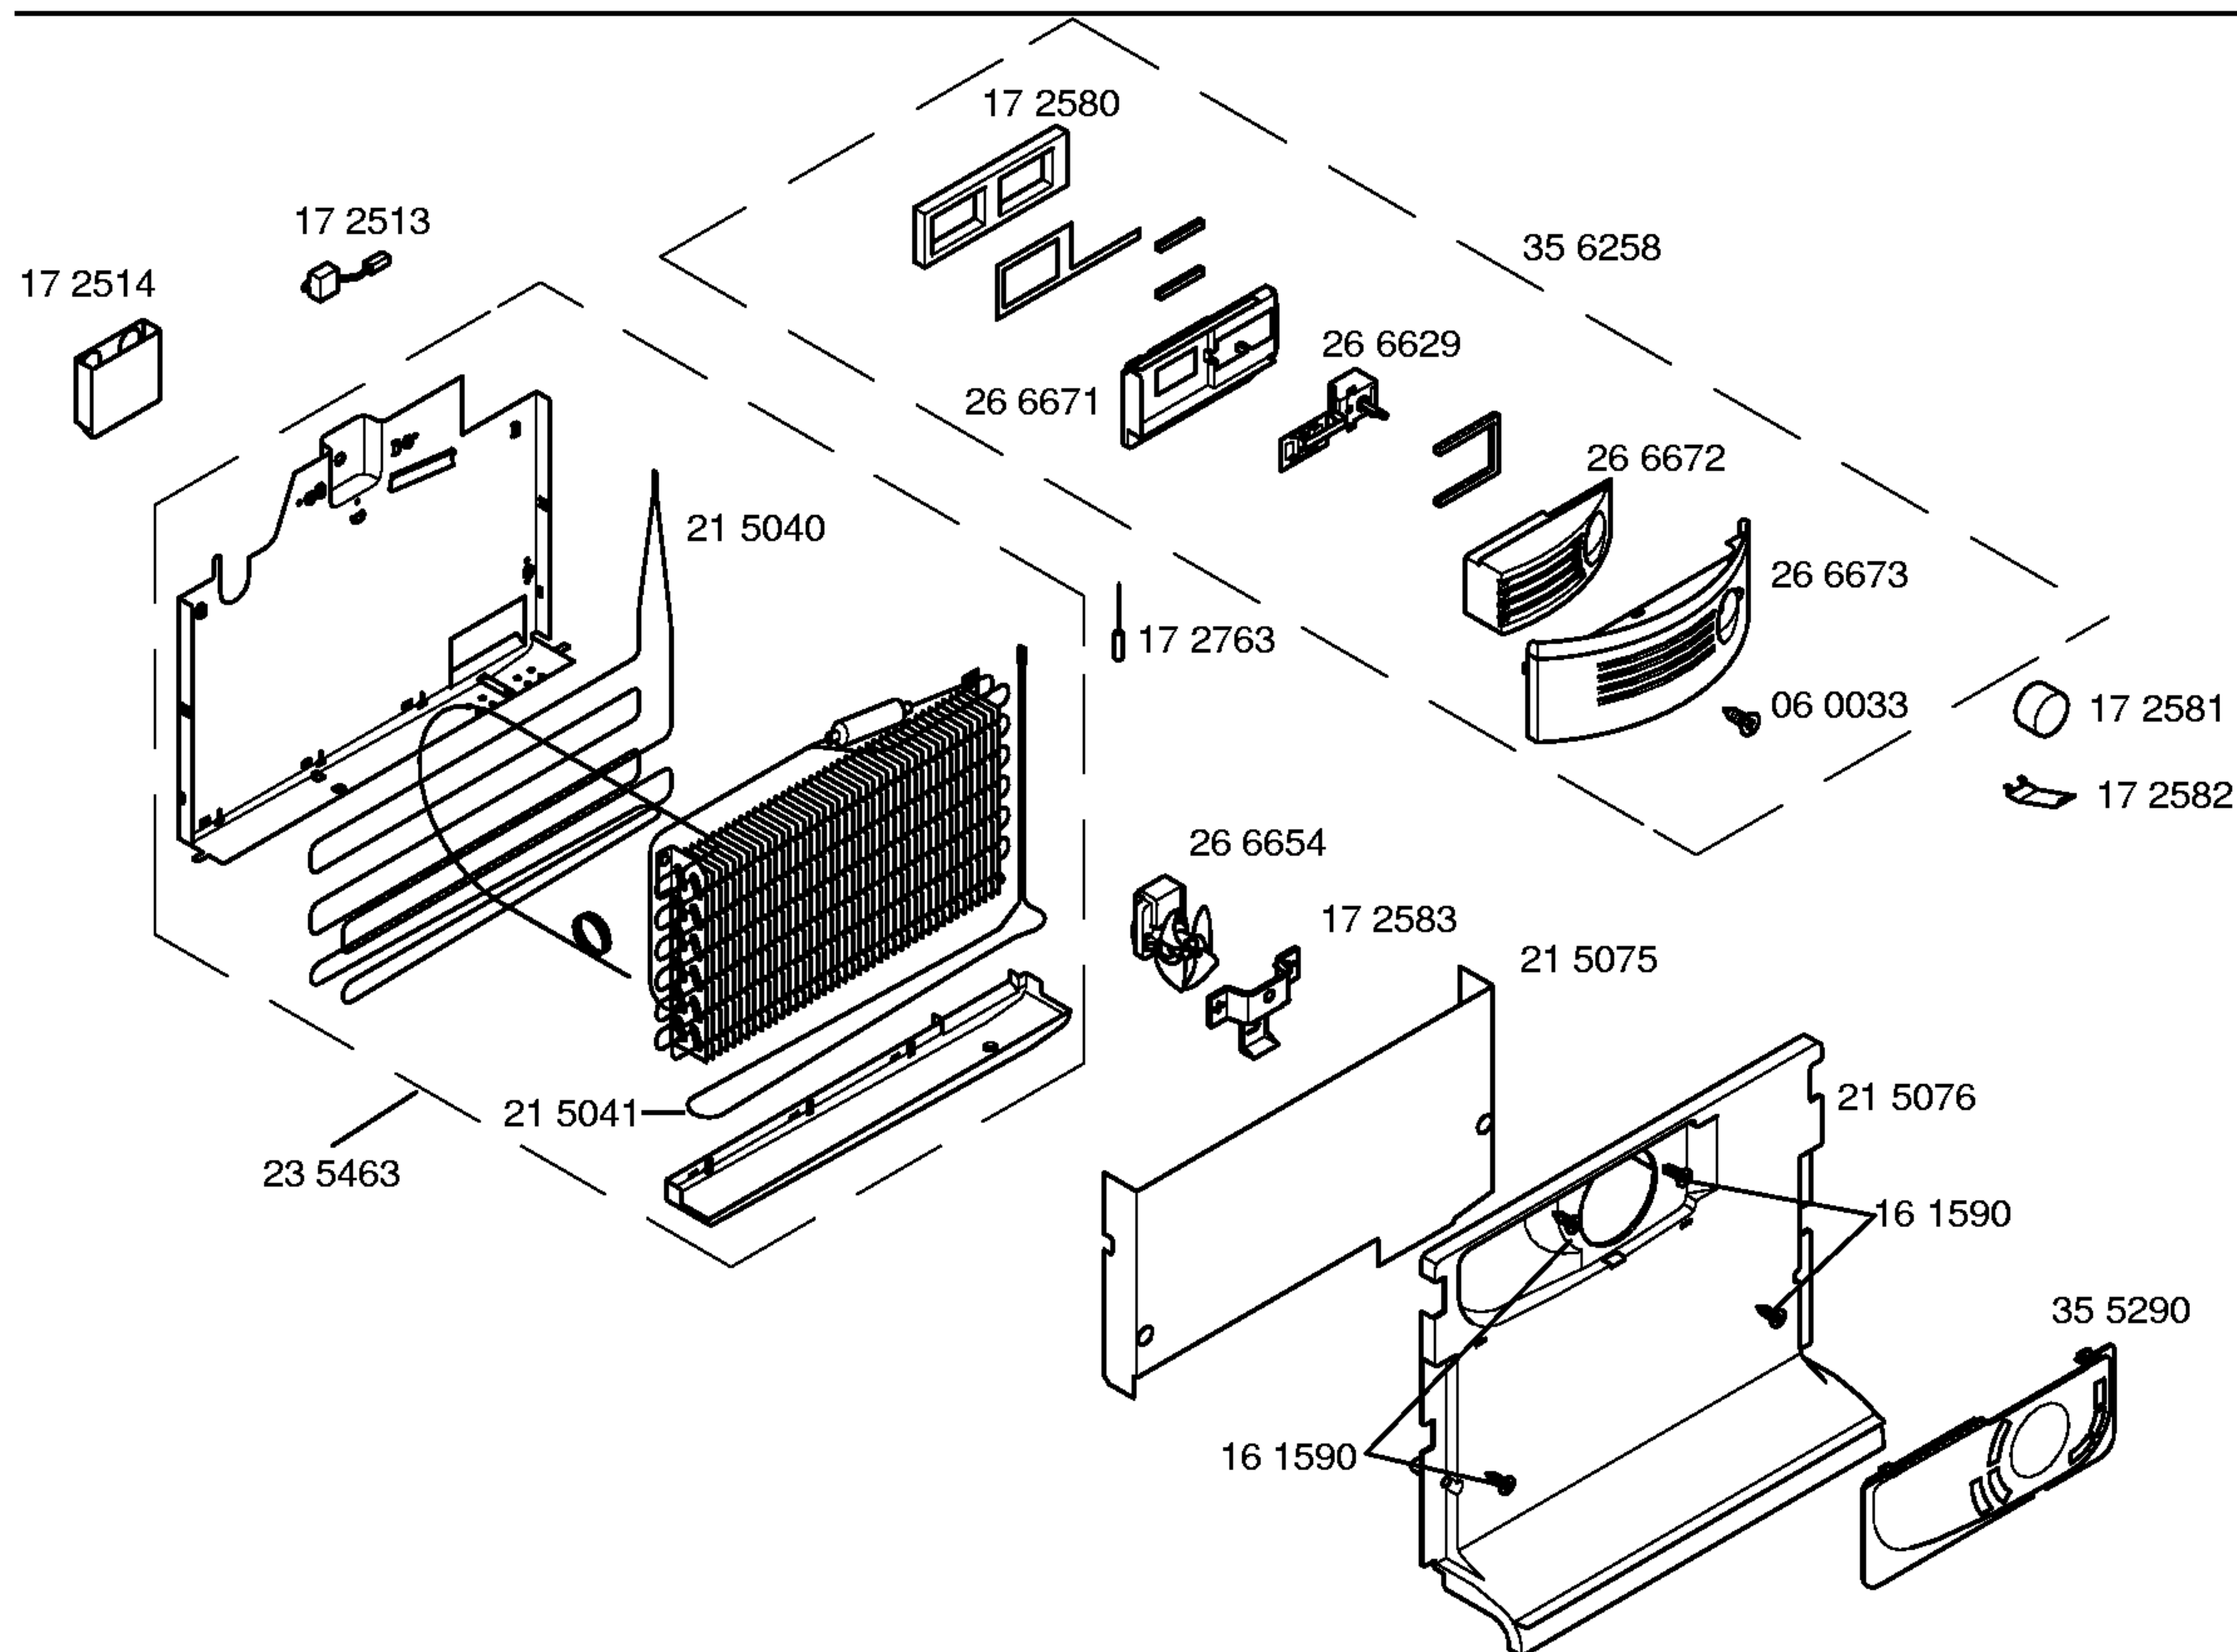


**BOSCH**

KGU 4420IE/02

KUEHL-GEFRIERGERAETE
Kuehl-Gefrierkombinationen

1) 06 0182

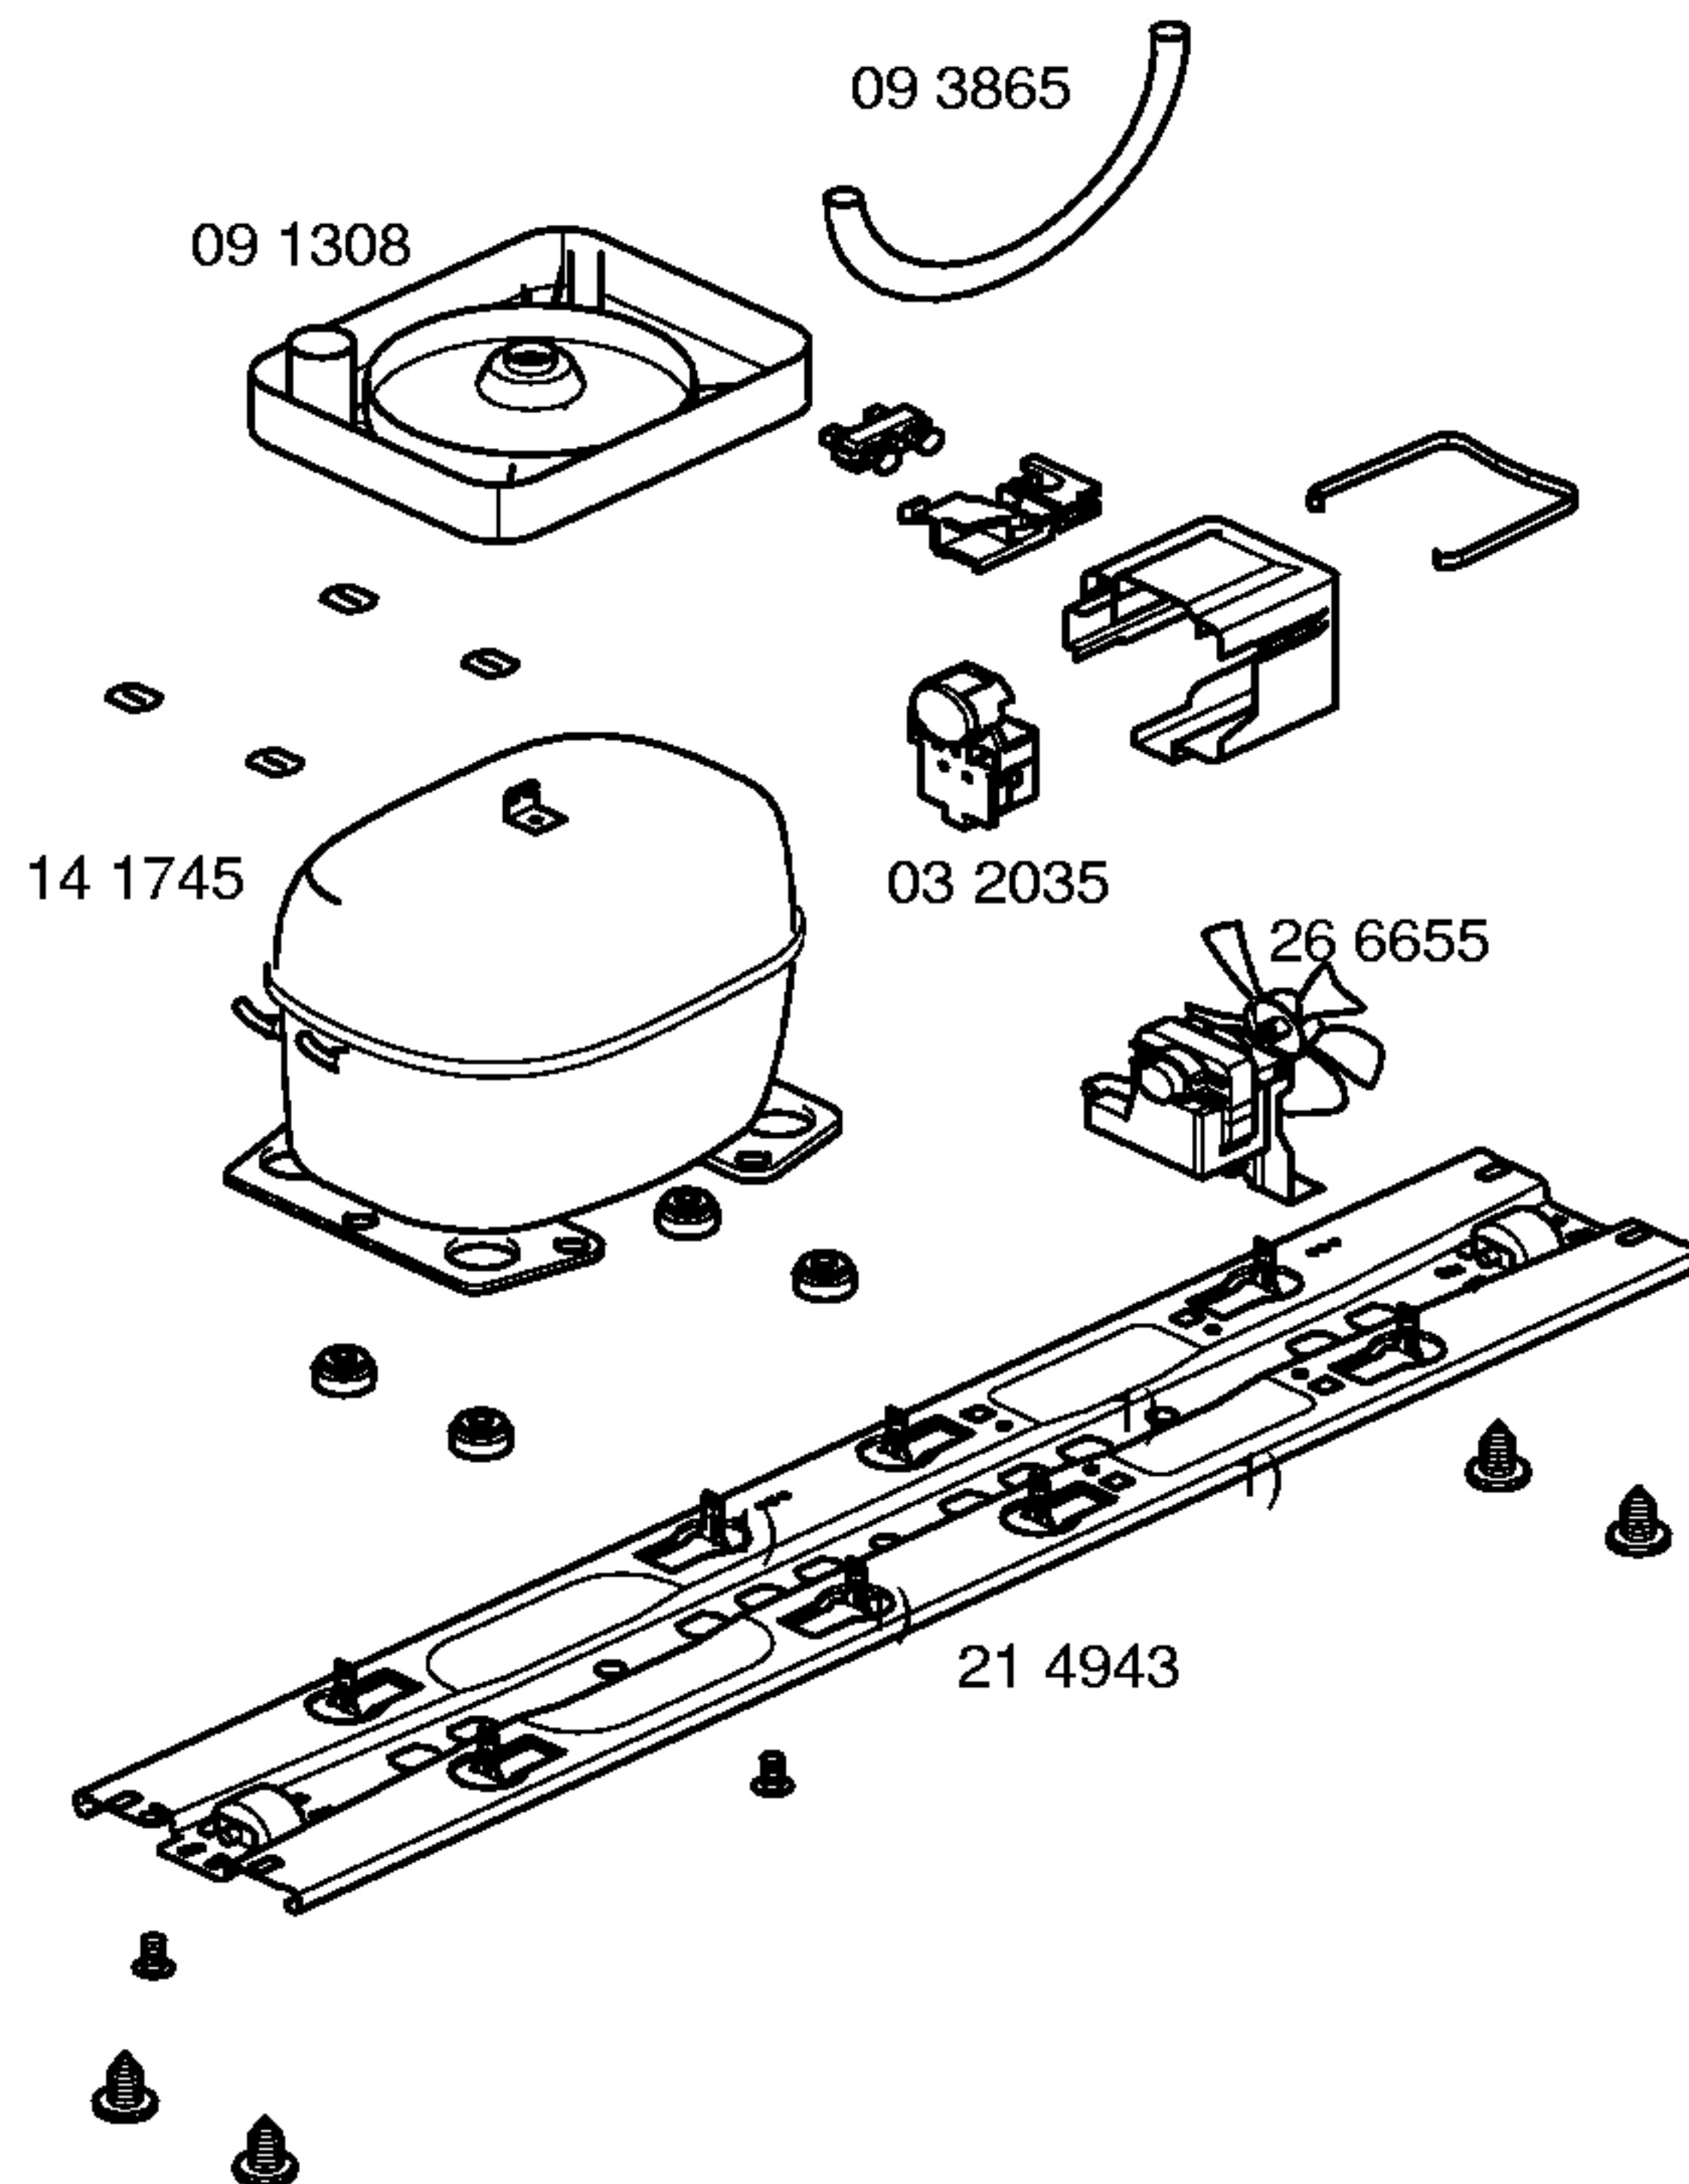

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				
Verdichter/Compressor/Compresseur/Compresor		Matsushita		
Typ/Type/Tipo		D110C21 RAX5		
Förderleistung/Delivery/Debit/Aspiración l/h		1955		
Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A		12,9		
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm		7,3		
Hi/aux.		17,5		
Klappe Therm./Thermostat/Termostat		ATEA		
Typ/Type/Tipo		MAX MED MIN.		
Reglerstellung/Position/Conexión		-		
Schaltwerte/Switching values/		..ein/conex. °C	-7,5°±2	
Valeurs de commutation/Desconex.		..aus"/descon.	-3°±1,5	+2°±2
(..abtaven' od)		..alarm'		
Füllmenge/Fill. quantily/Charge/Carga R134a		g	120	
Anschlusswert/Comm. load/Puiss. Connect./Potenc.		W	170	
Heizung/Heater/Chauflage/Resistenc.descong.		Verdampfer	Ablaufrinne	Luftkanal
Widerstand/Resistance/Resistencia	Ohm	296	1180	13490
Leistung/Power/Puissance/Potencia	W	185	45	4
Ventilador/Blower/Ventilateur/Ventilador		Verdichter	Verdampfer	
Widerstand/Resistance/Resistencia	Ohm	410	612	