


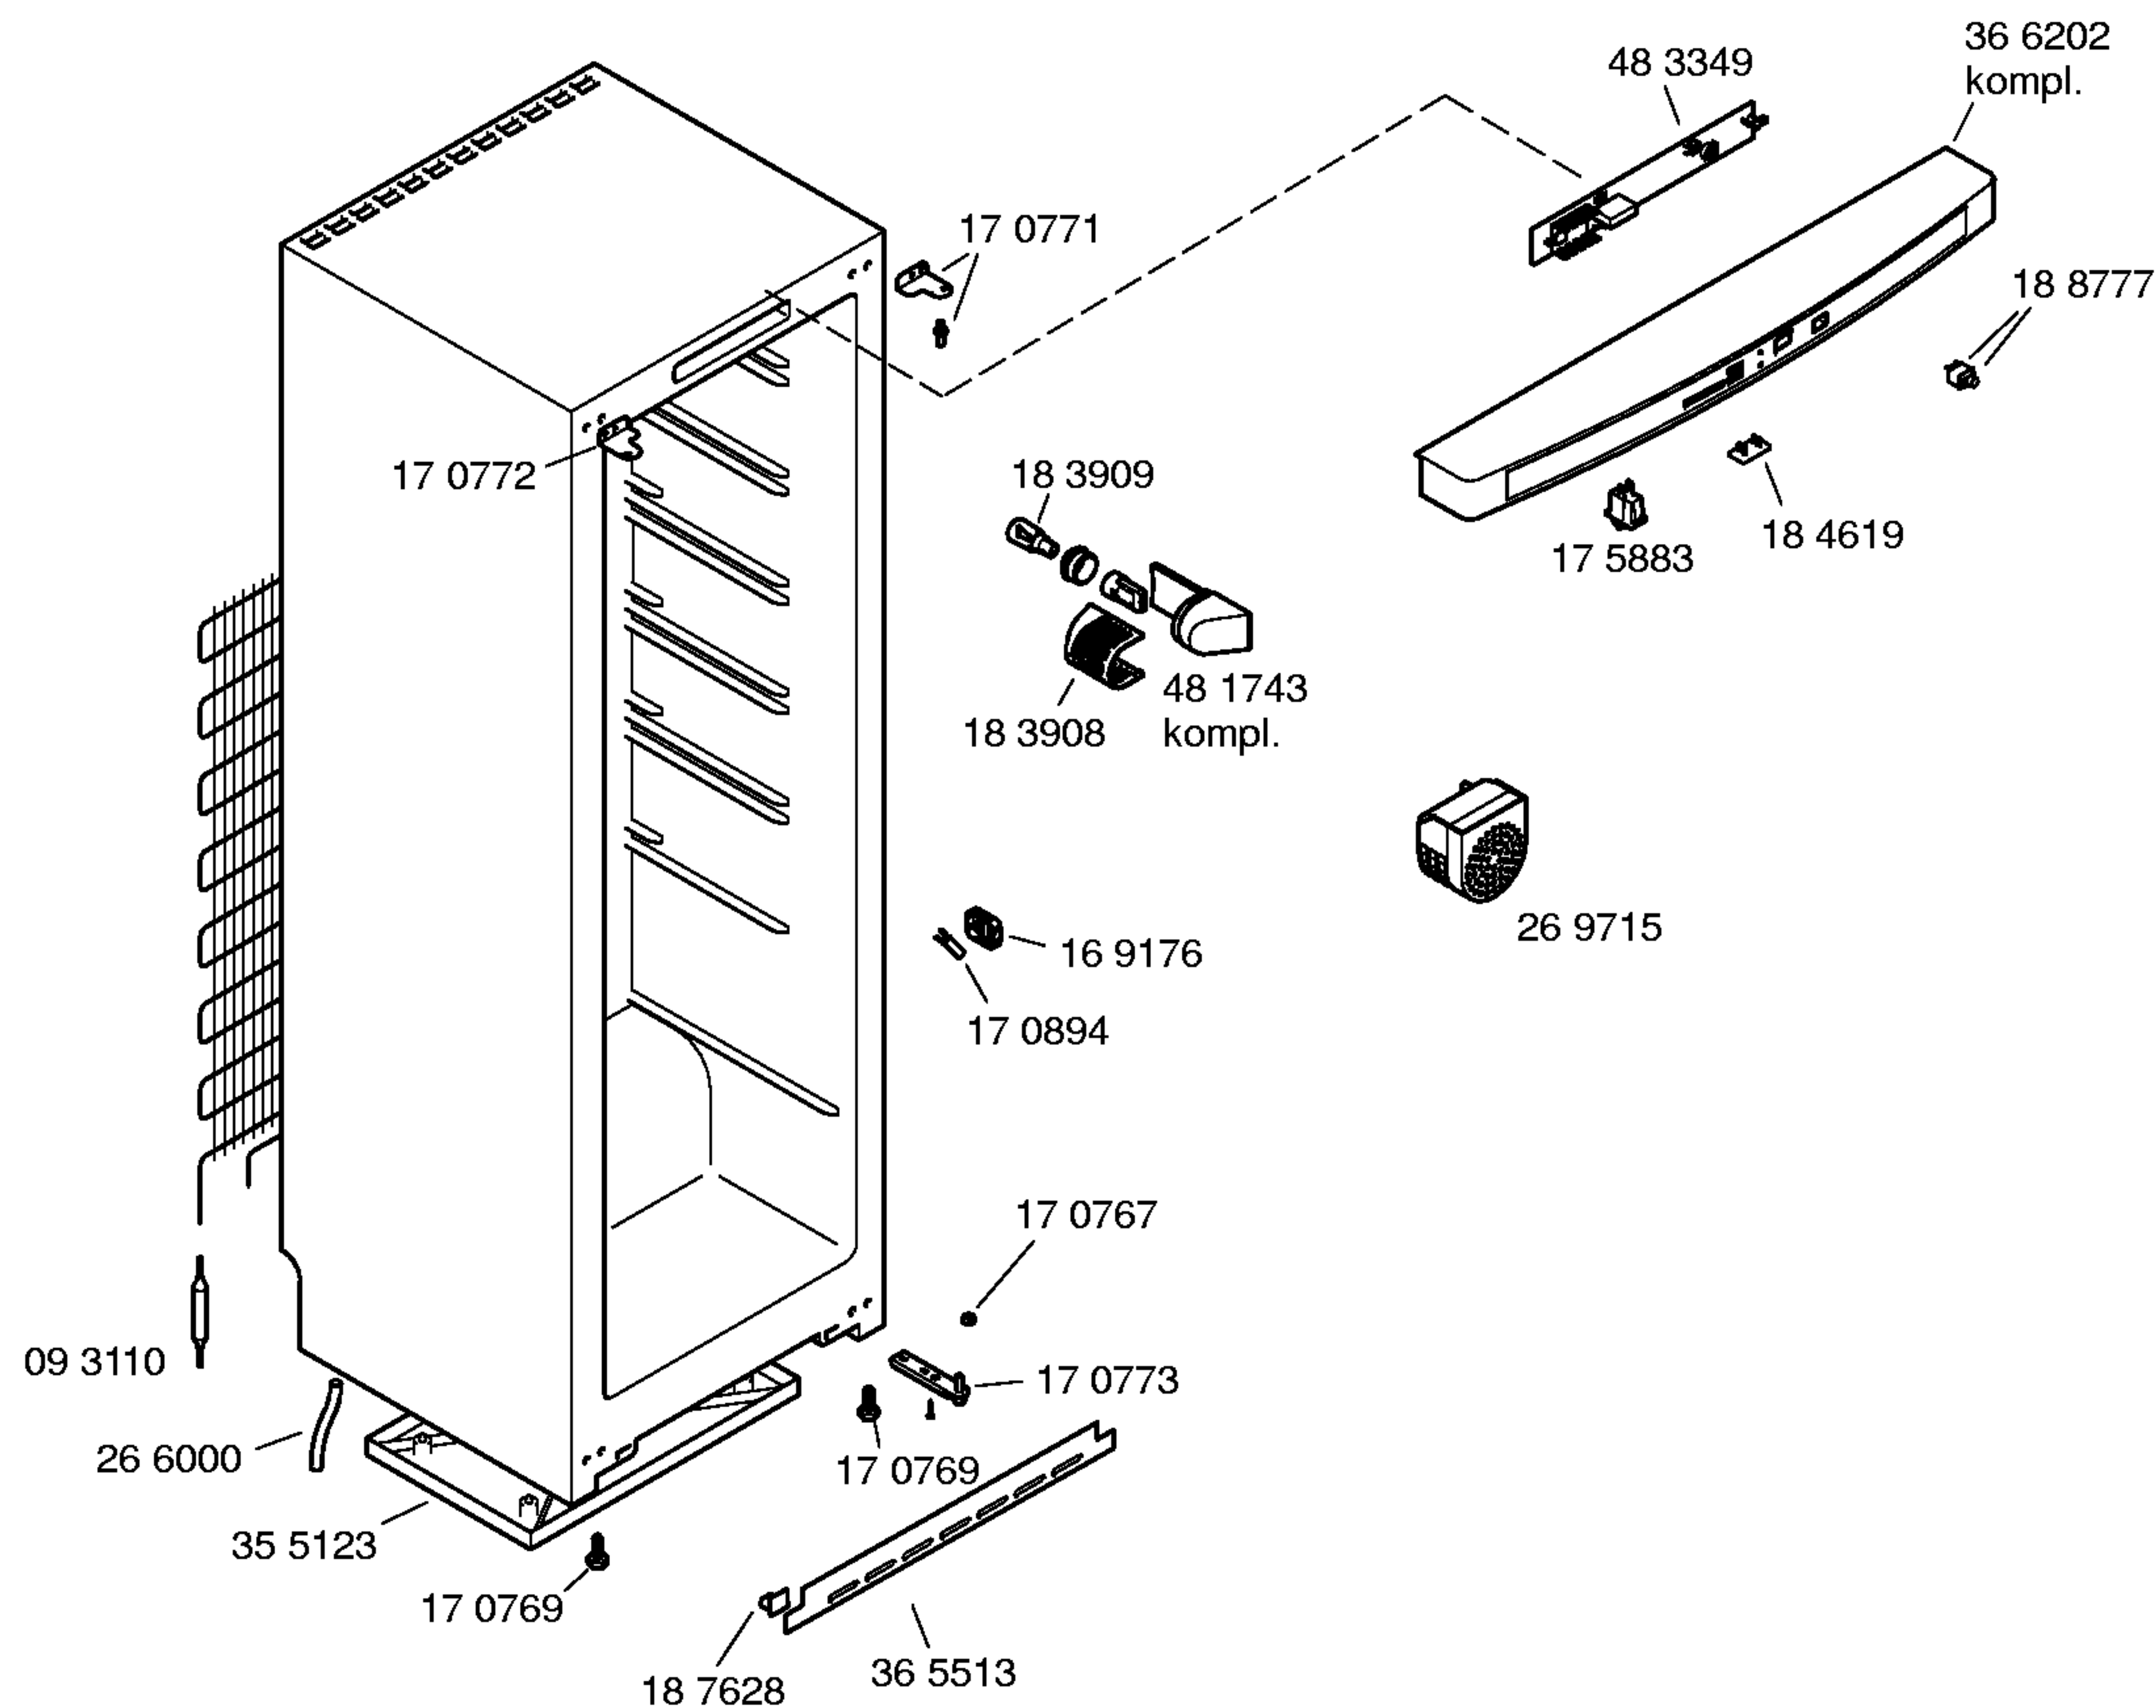

Mat. – Nr. – Konstante
3740


Gebrauchsanweisung
58 0240
(D,GB,F,I,NL,DK,N,S,SF,E,
P,GR,TR)

Montageanleitung
58 0241


Beistellsatz
17 2357

Side by Side
Beistellsatz zu GS
48 1044

Mat. – Nr. – Konstante
3740

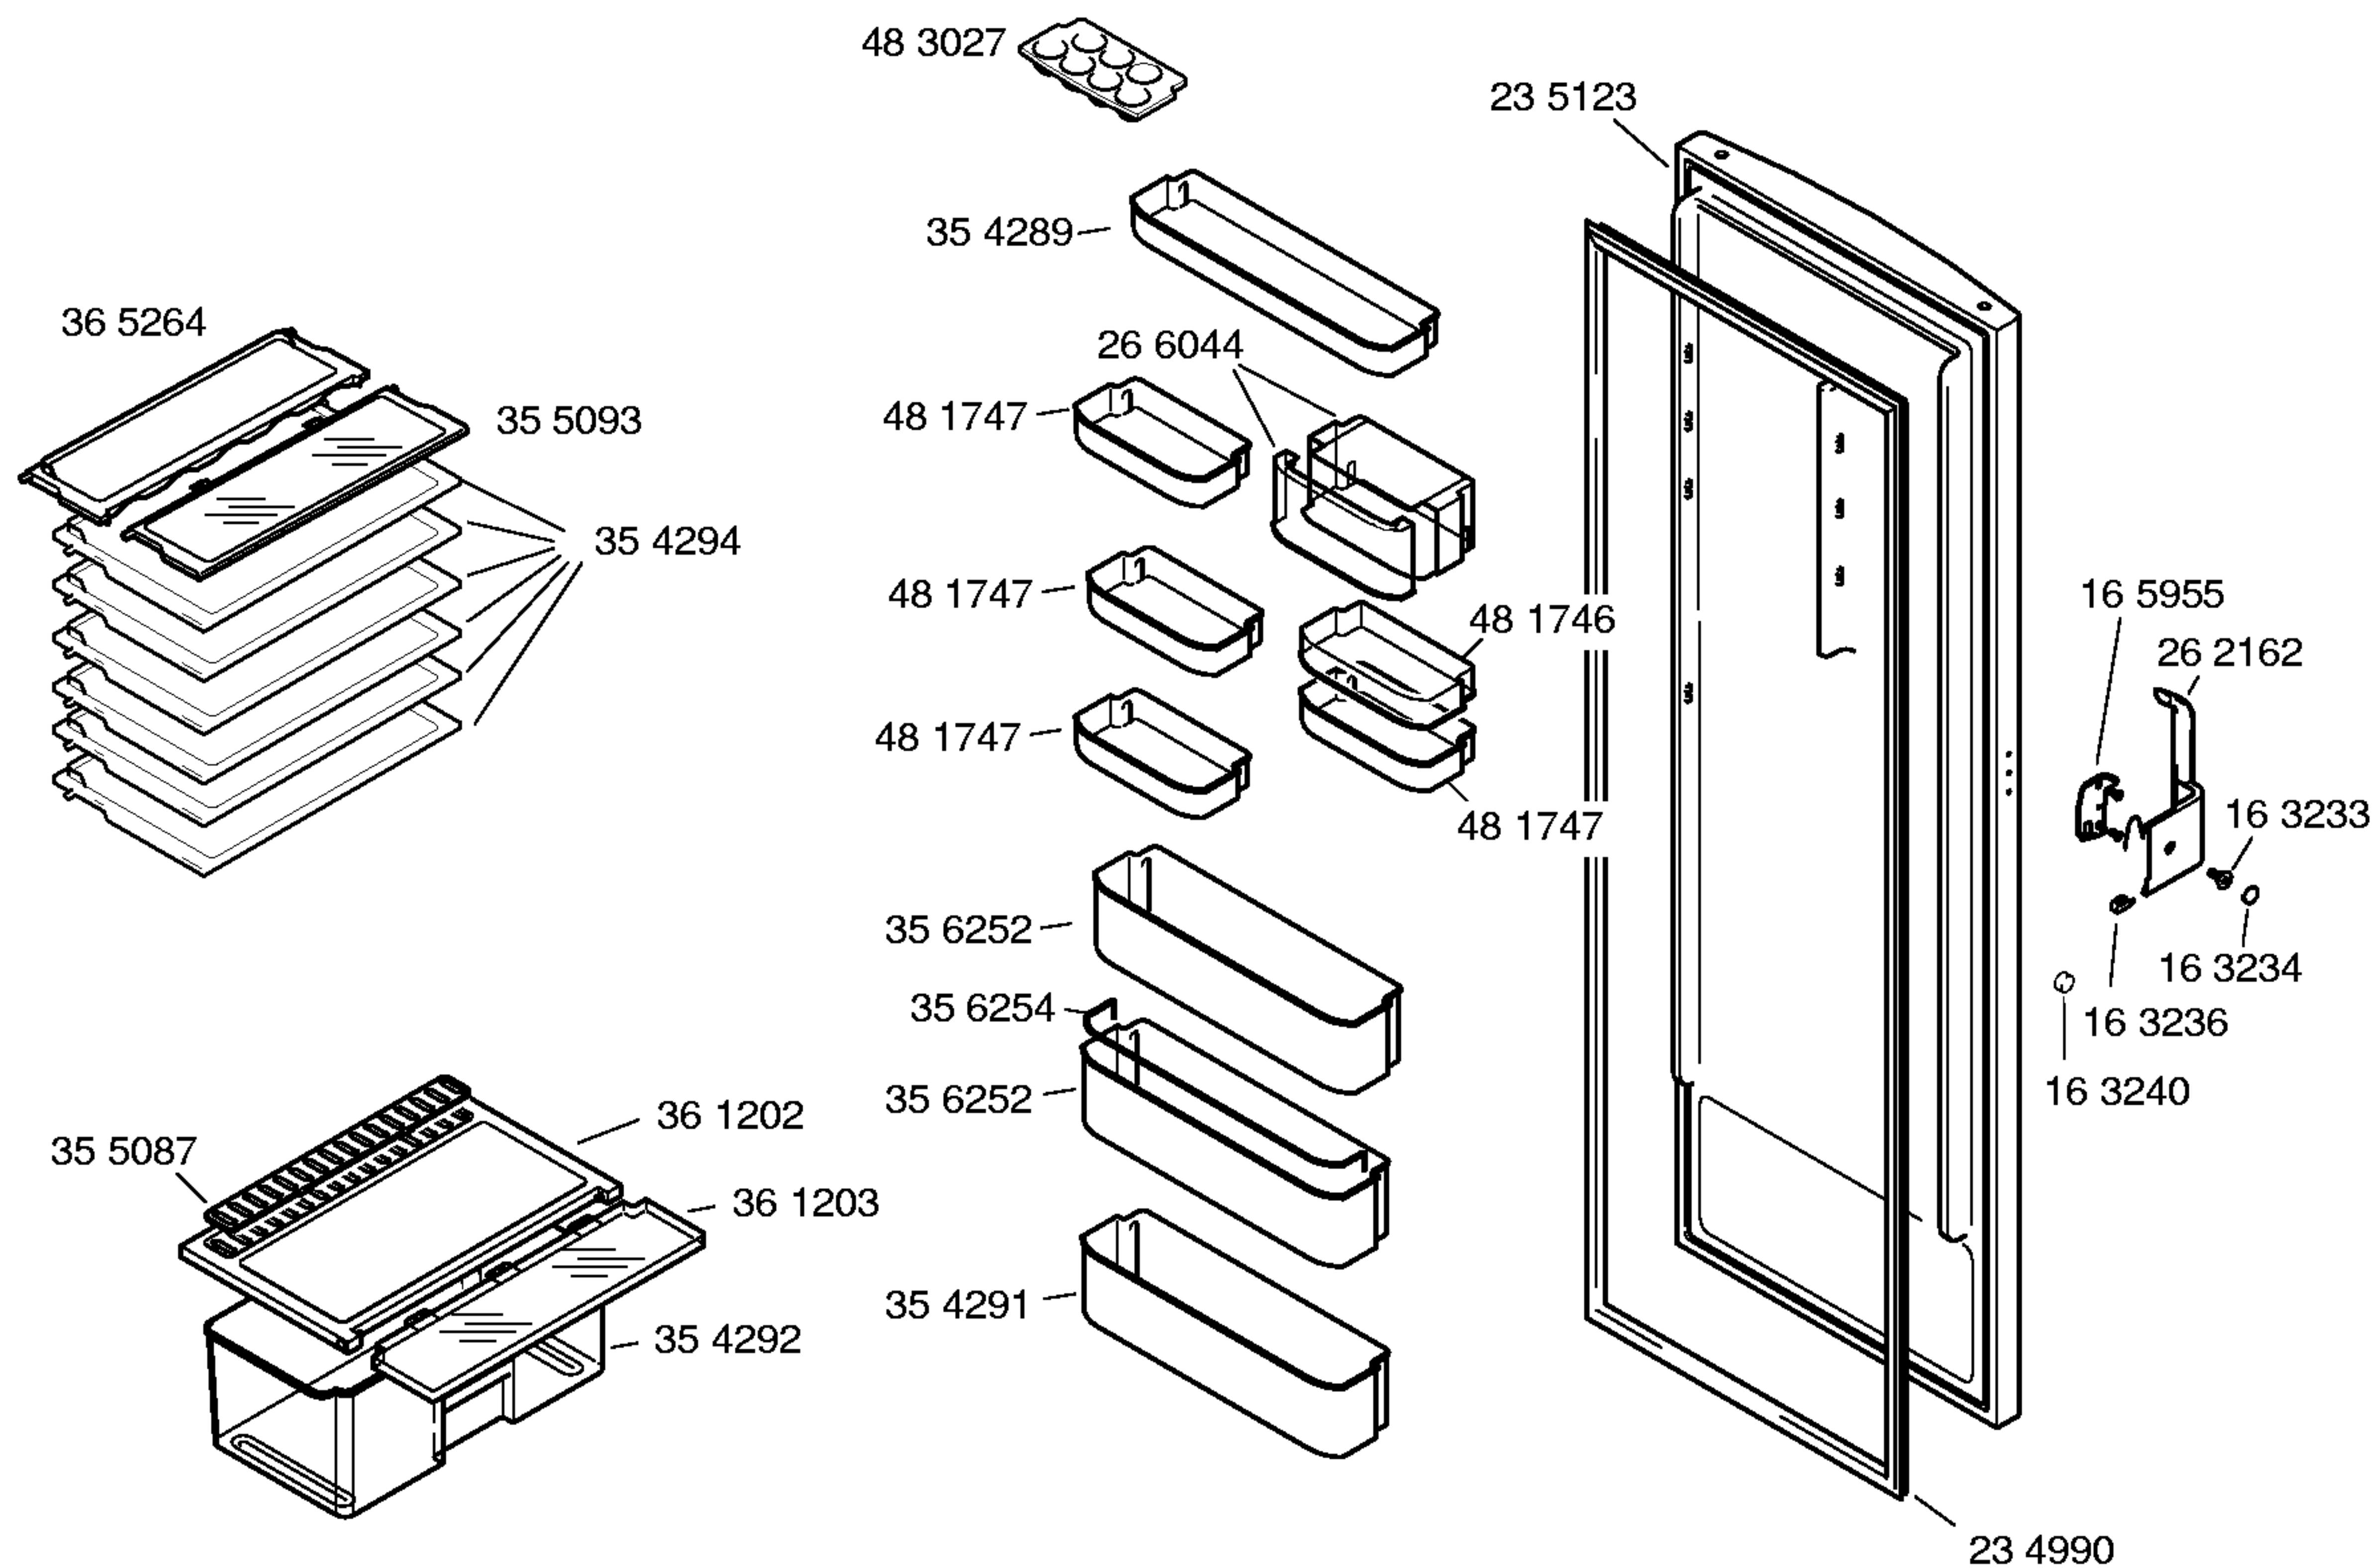

Ident – Nummern – Konstante
3740

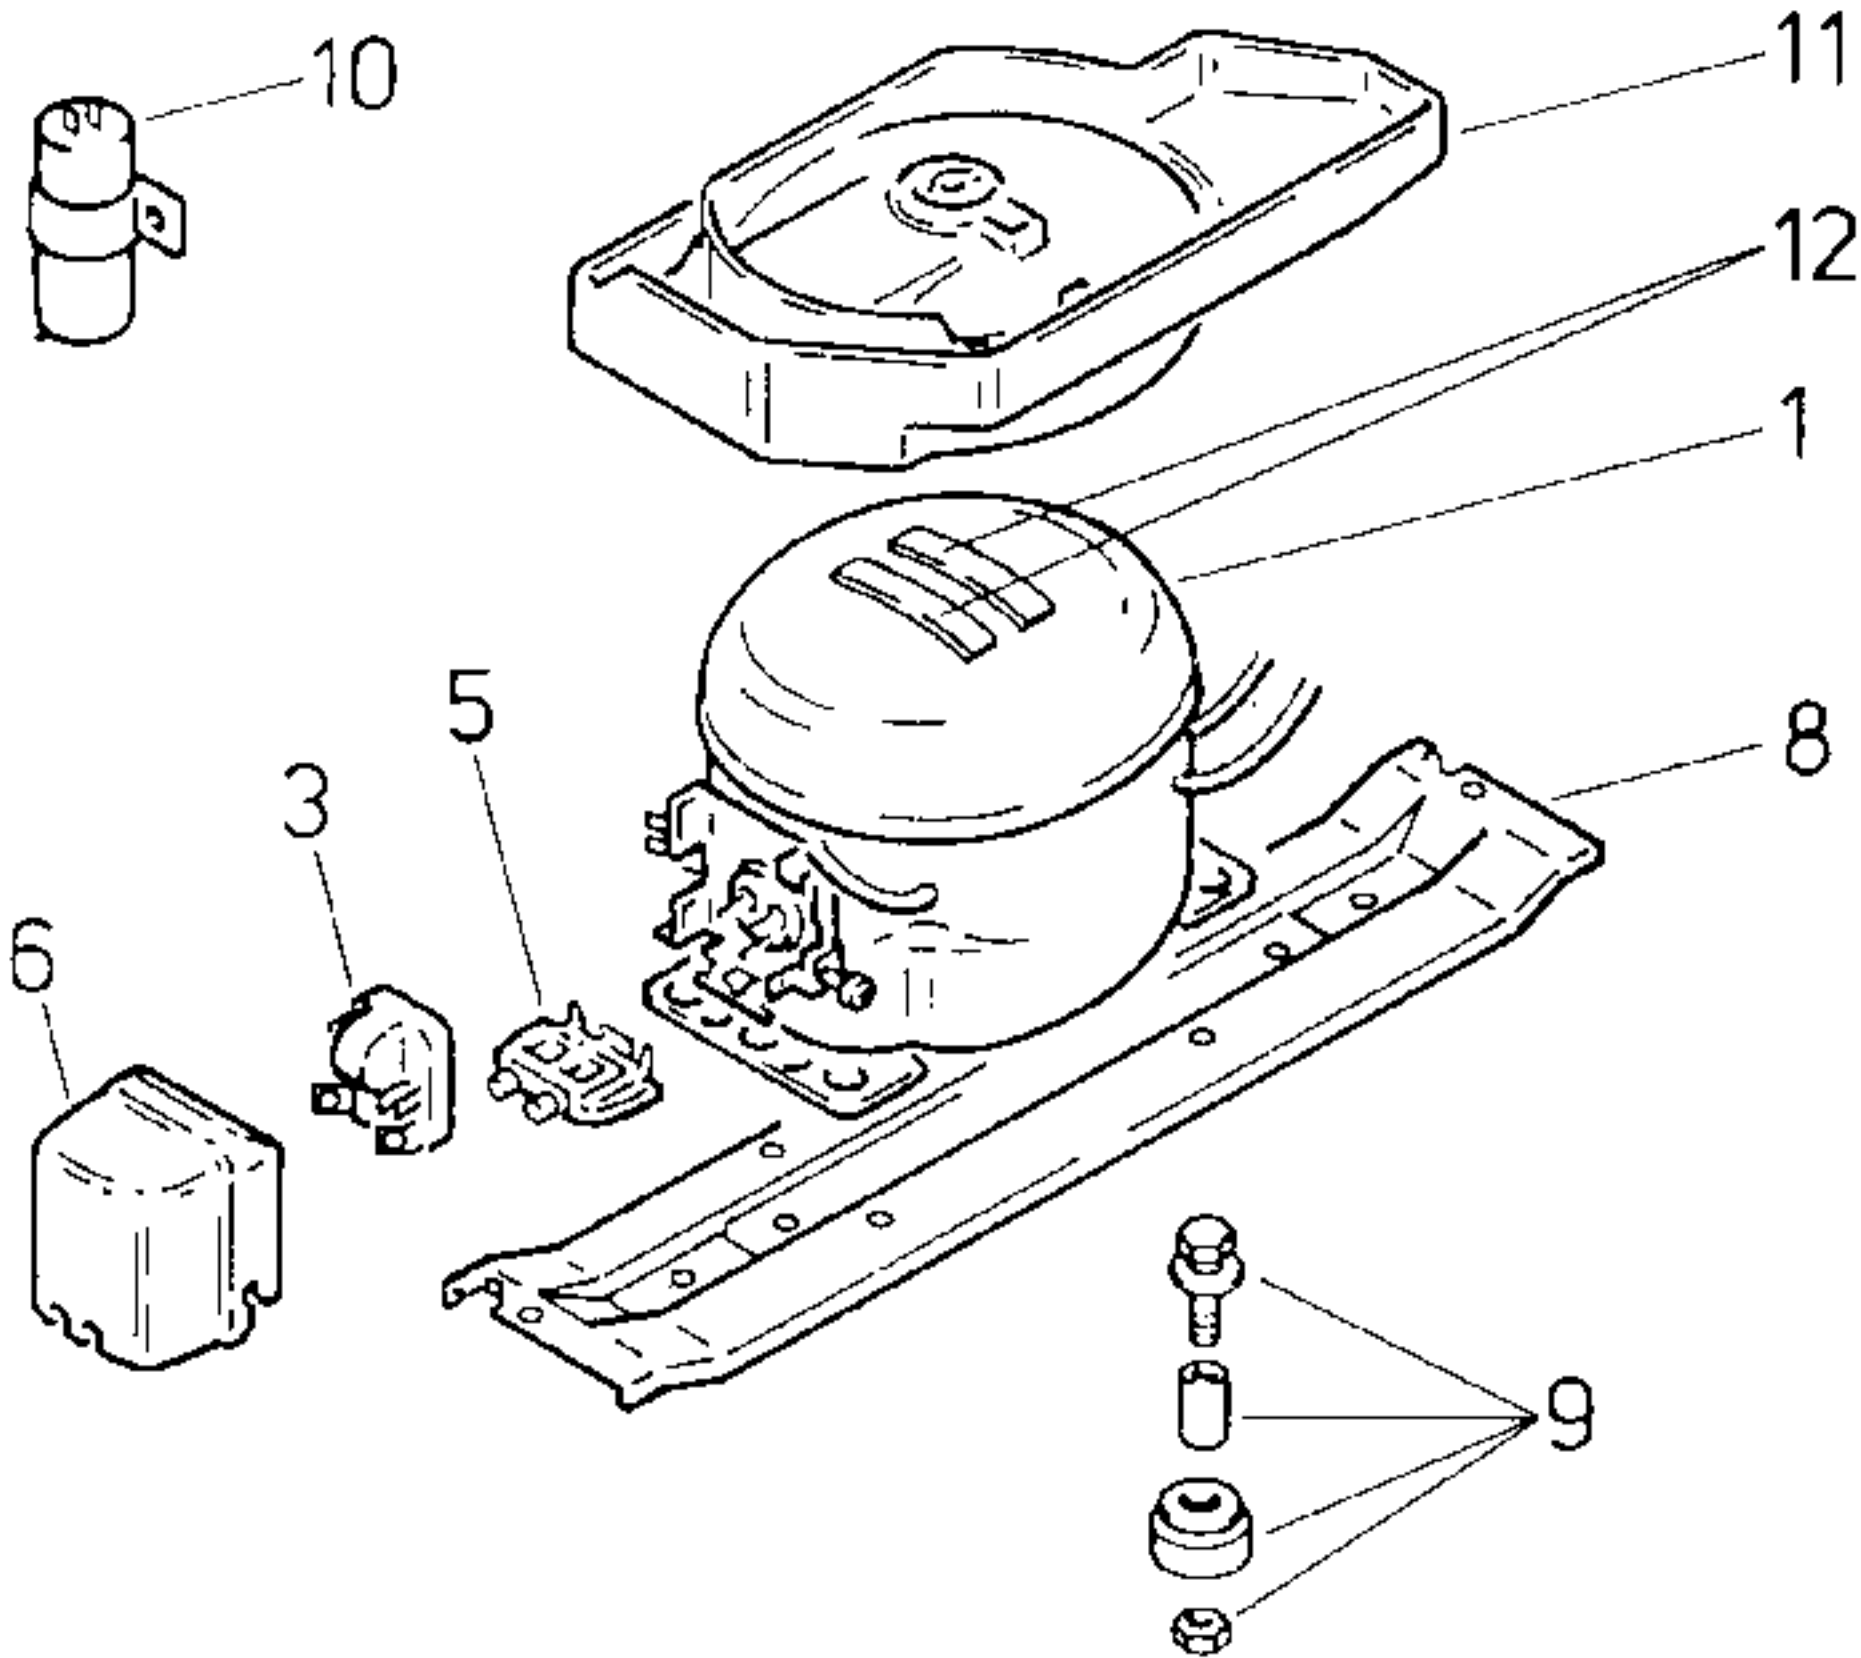

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Goldstar		
Typ/Type		ND62NAEM		
Förderleistung/Delivery/Débit	l/h	1242		
Anlaufstrom/Starting current/Cour de démarrage	A	2,2		
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	29,5		
	Hi/aux Ω	21,0		
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	+5,2 +5,2		
Valeurs de commutation	„aus“	–31,0 –13,5		
	(„abtauen“ od.) „alarm“			
Füllmenge/Fill.quantity/Charge	R600a	g		
Anschlußwert/Conn.load/Puiss. connectée	W			
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

Pos.	V01		
	Goldstar		
	ND62NAEM		
1	14 2037		
2			
3	17 4893		
4			
5	17 0745		
6	17 0744		
7	16 9319		
8	27 1375		
9	05 0166		
10			
11	08 4744		
12	05 6008		