


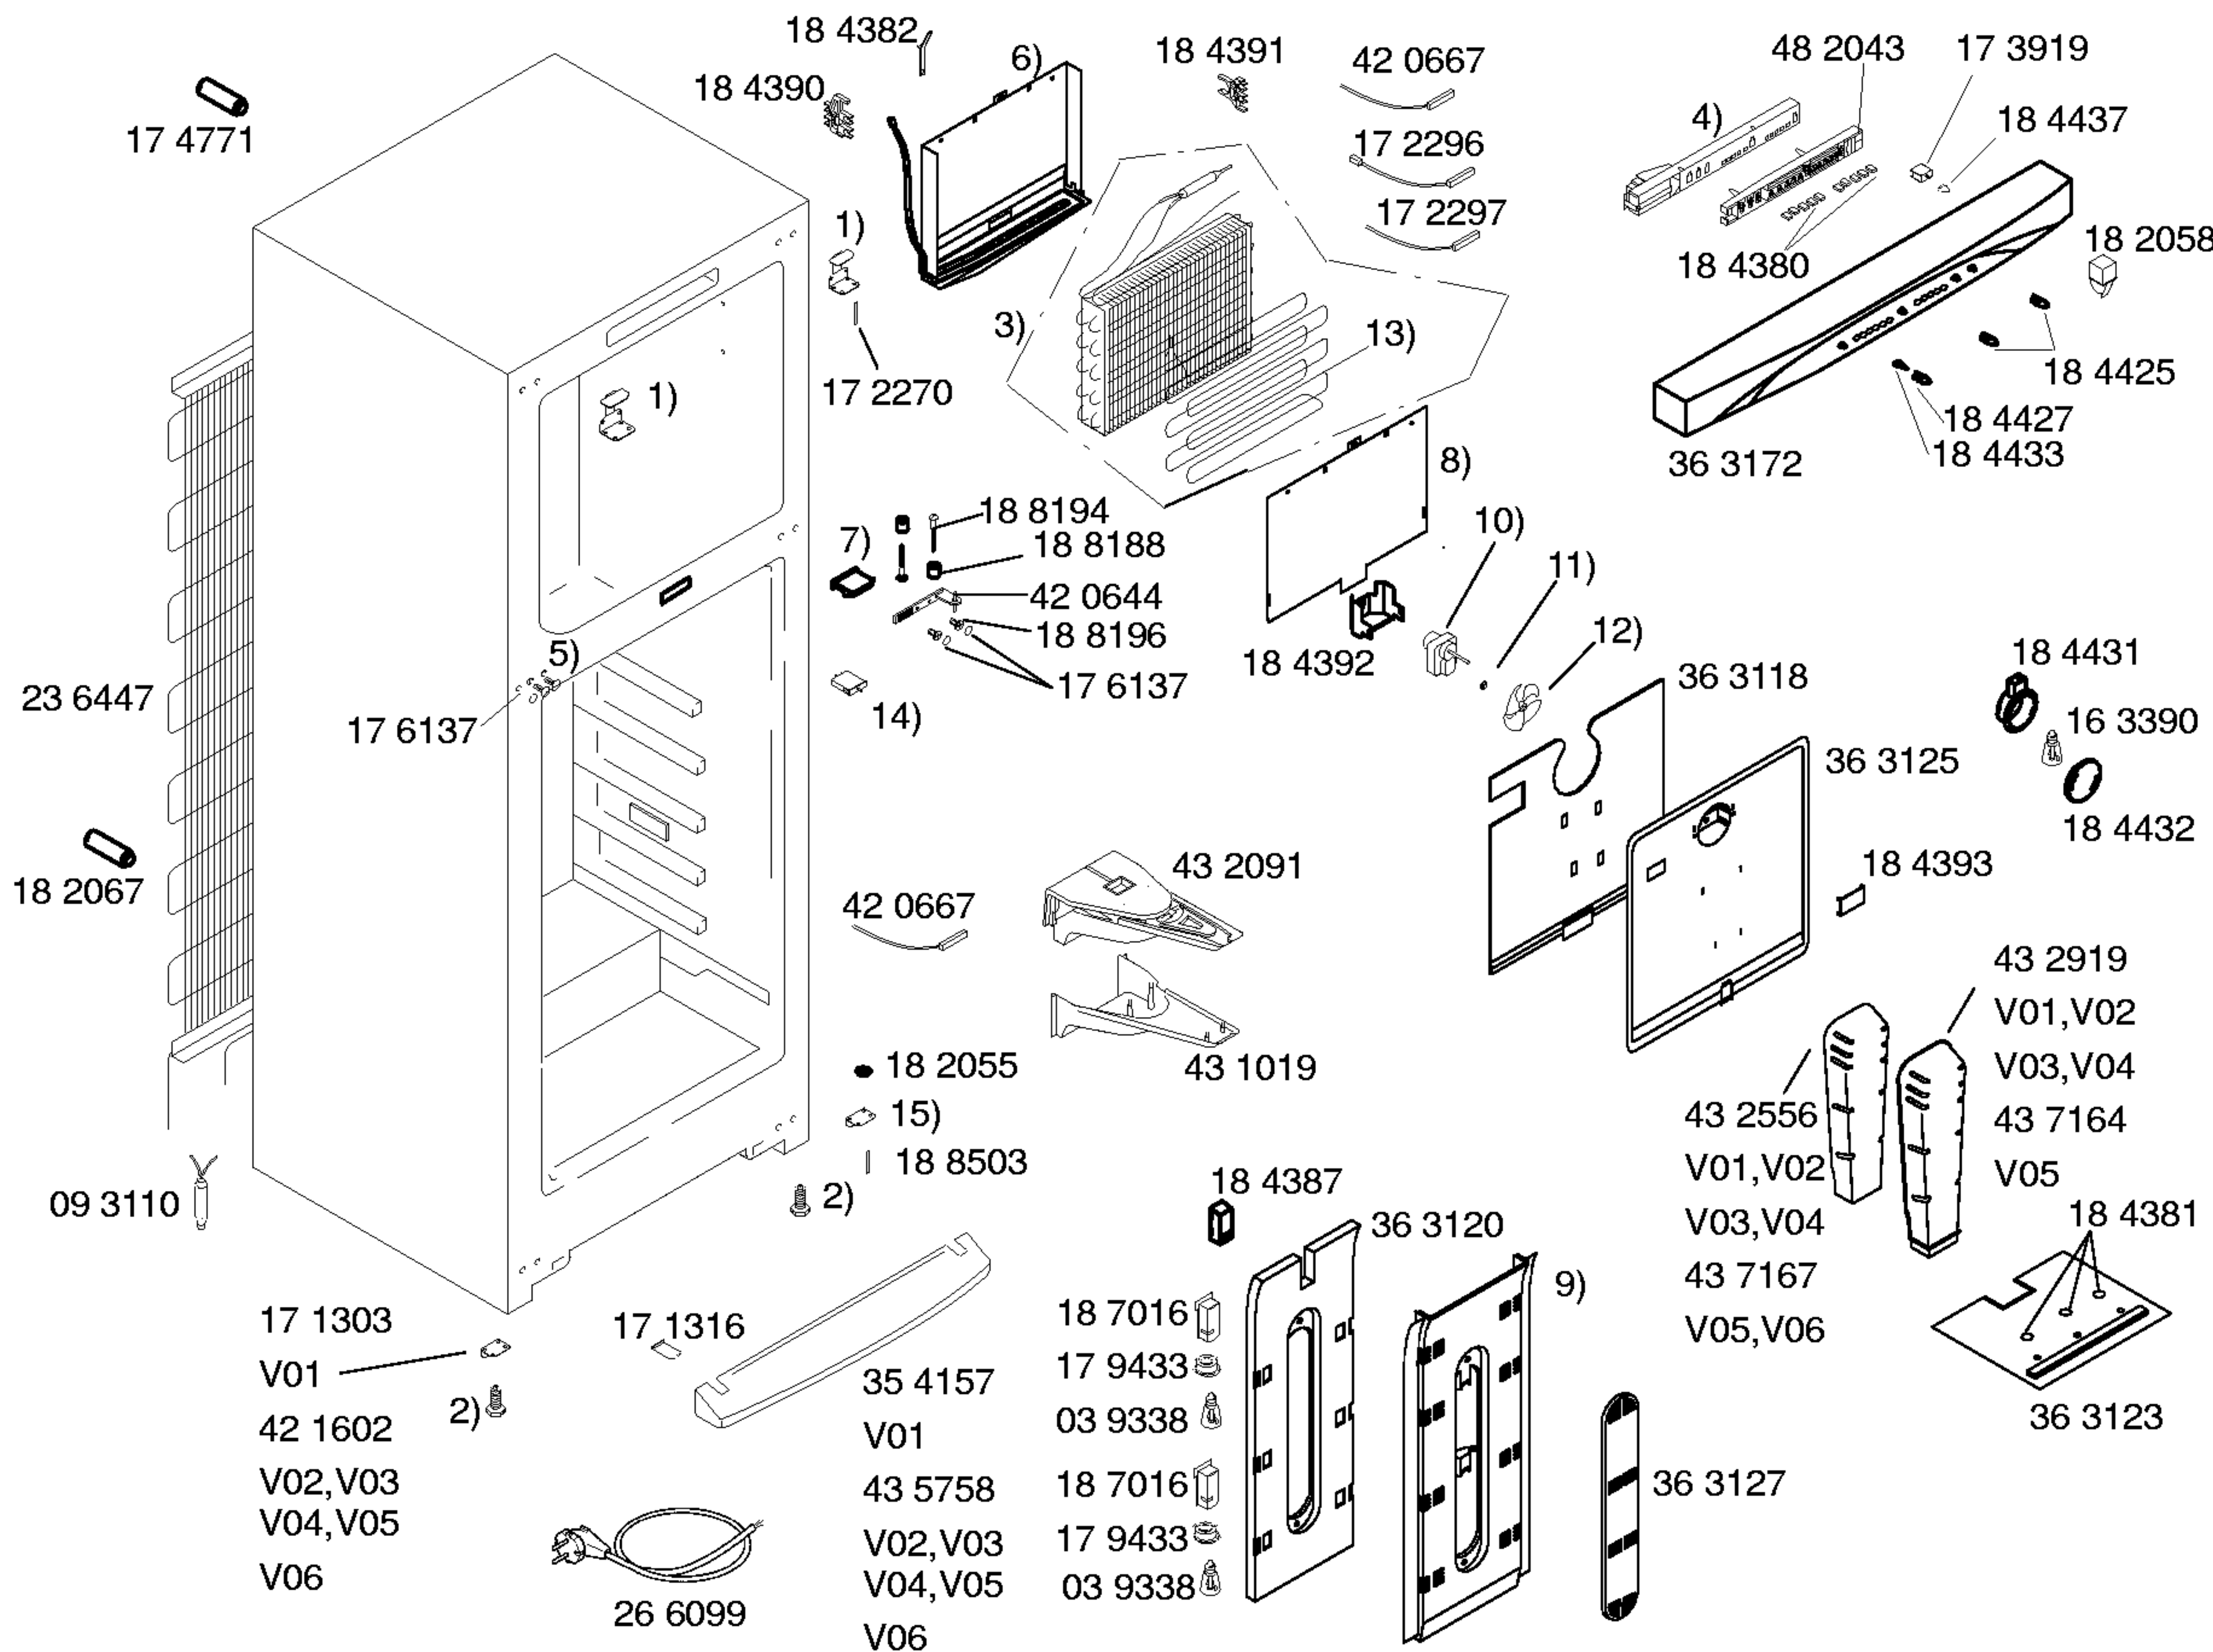

Mat. - Nr. - Konstante  
3740 . . . . .

## Gebrauchsanweisung

58 7170

1) 17 1312

2) 18 9089

V01

42 1516

V02,V03,V04,V05

V06

3) 36 9817

4) 48 9131

5) 16 5552

6) 36 9906

7) 41 8128

8) 36 6905

9) 43 1024

10) 48 8433

V01,V02,V03

49 1665

V04,V05,V06

11) 17 1508

12) 17 1565

13) 36 9820

14) 17 1307

V01,V02

42 2142

V03,V04,V05,V06


15) 17 1303-V01

42 1601


V02,V03,V04,V05

V06



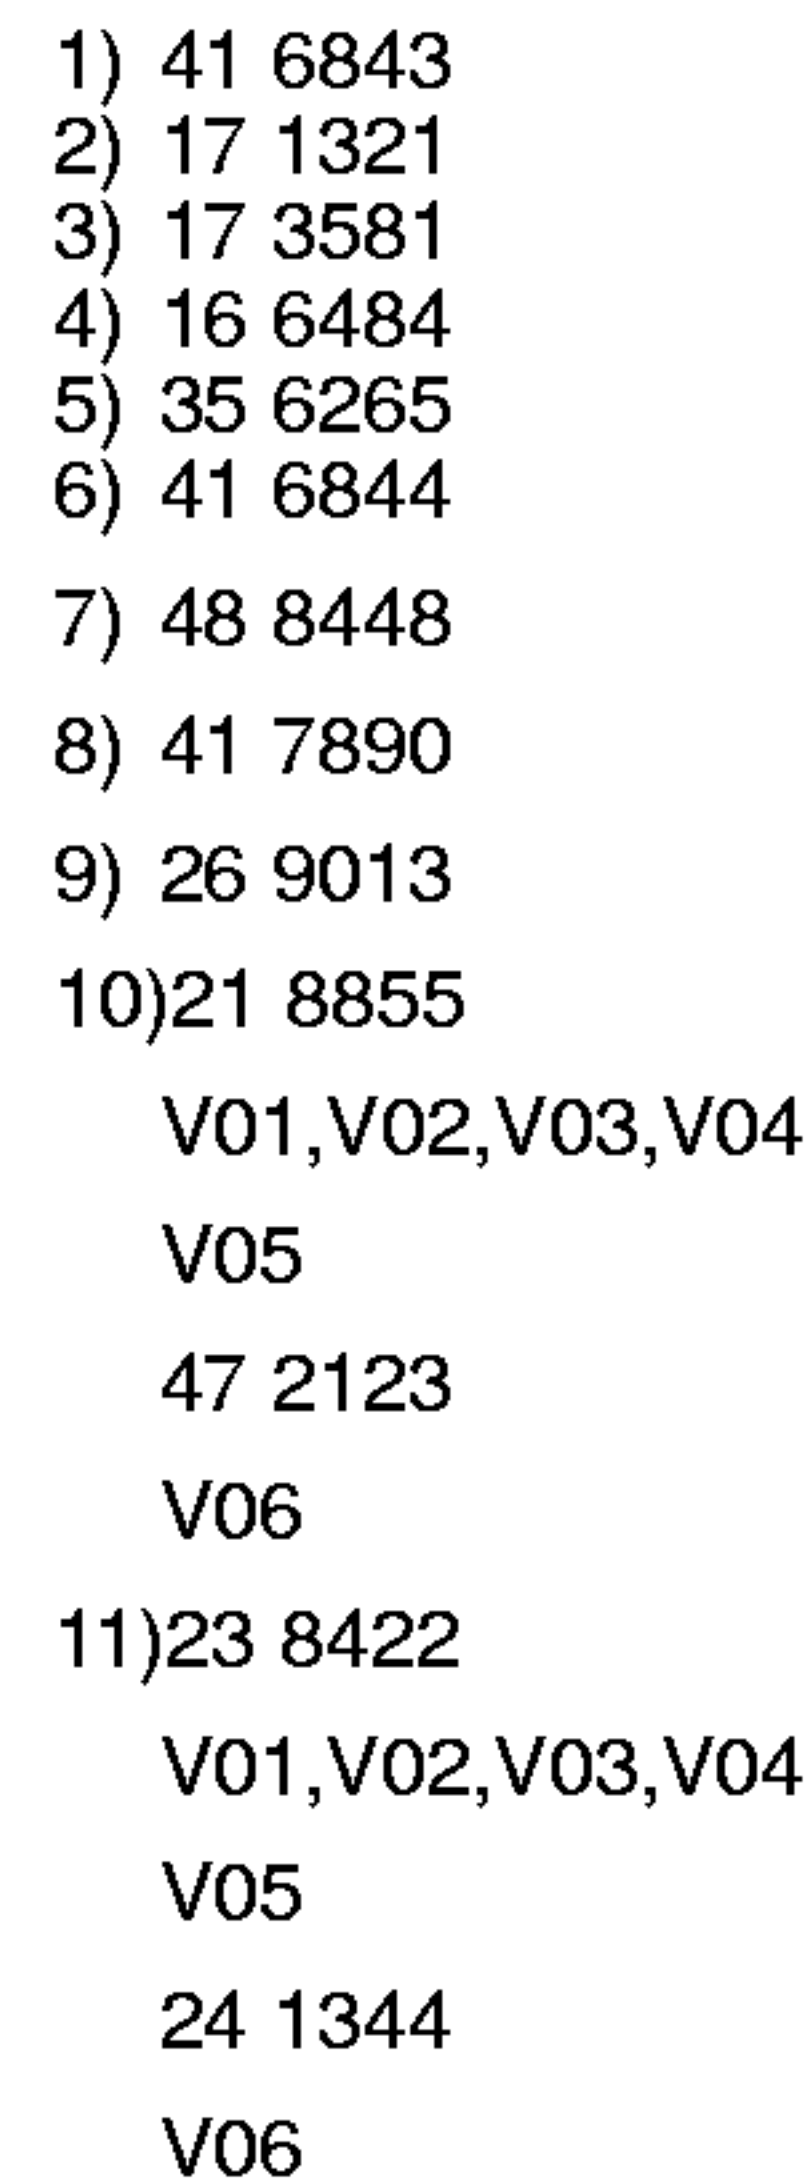



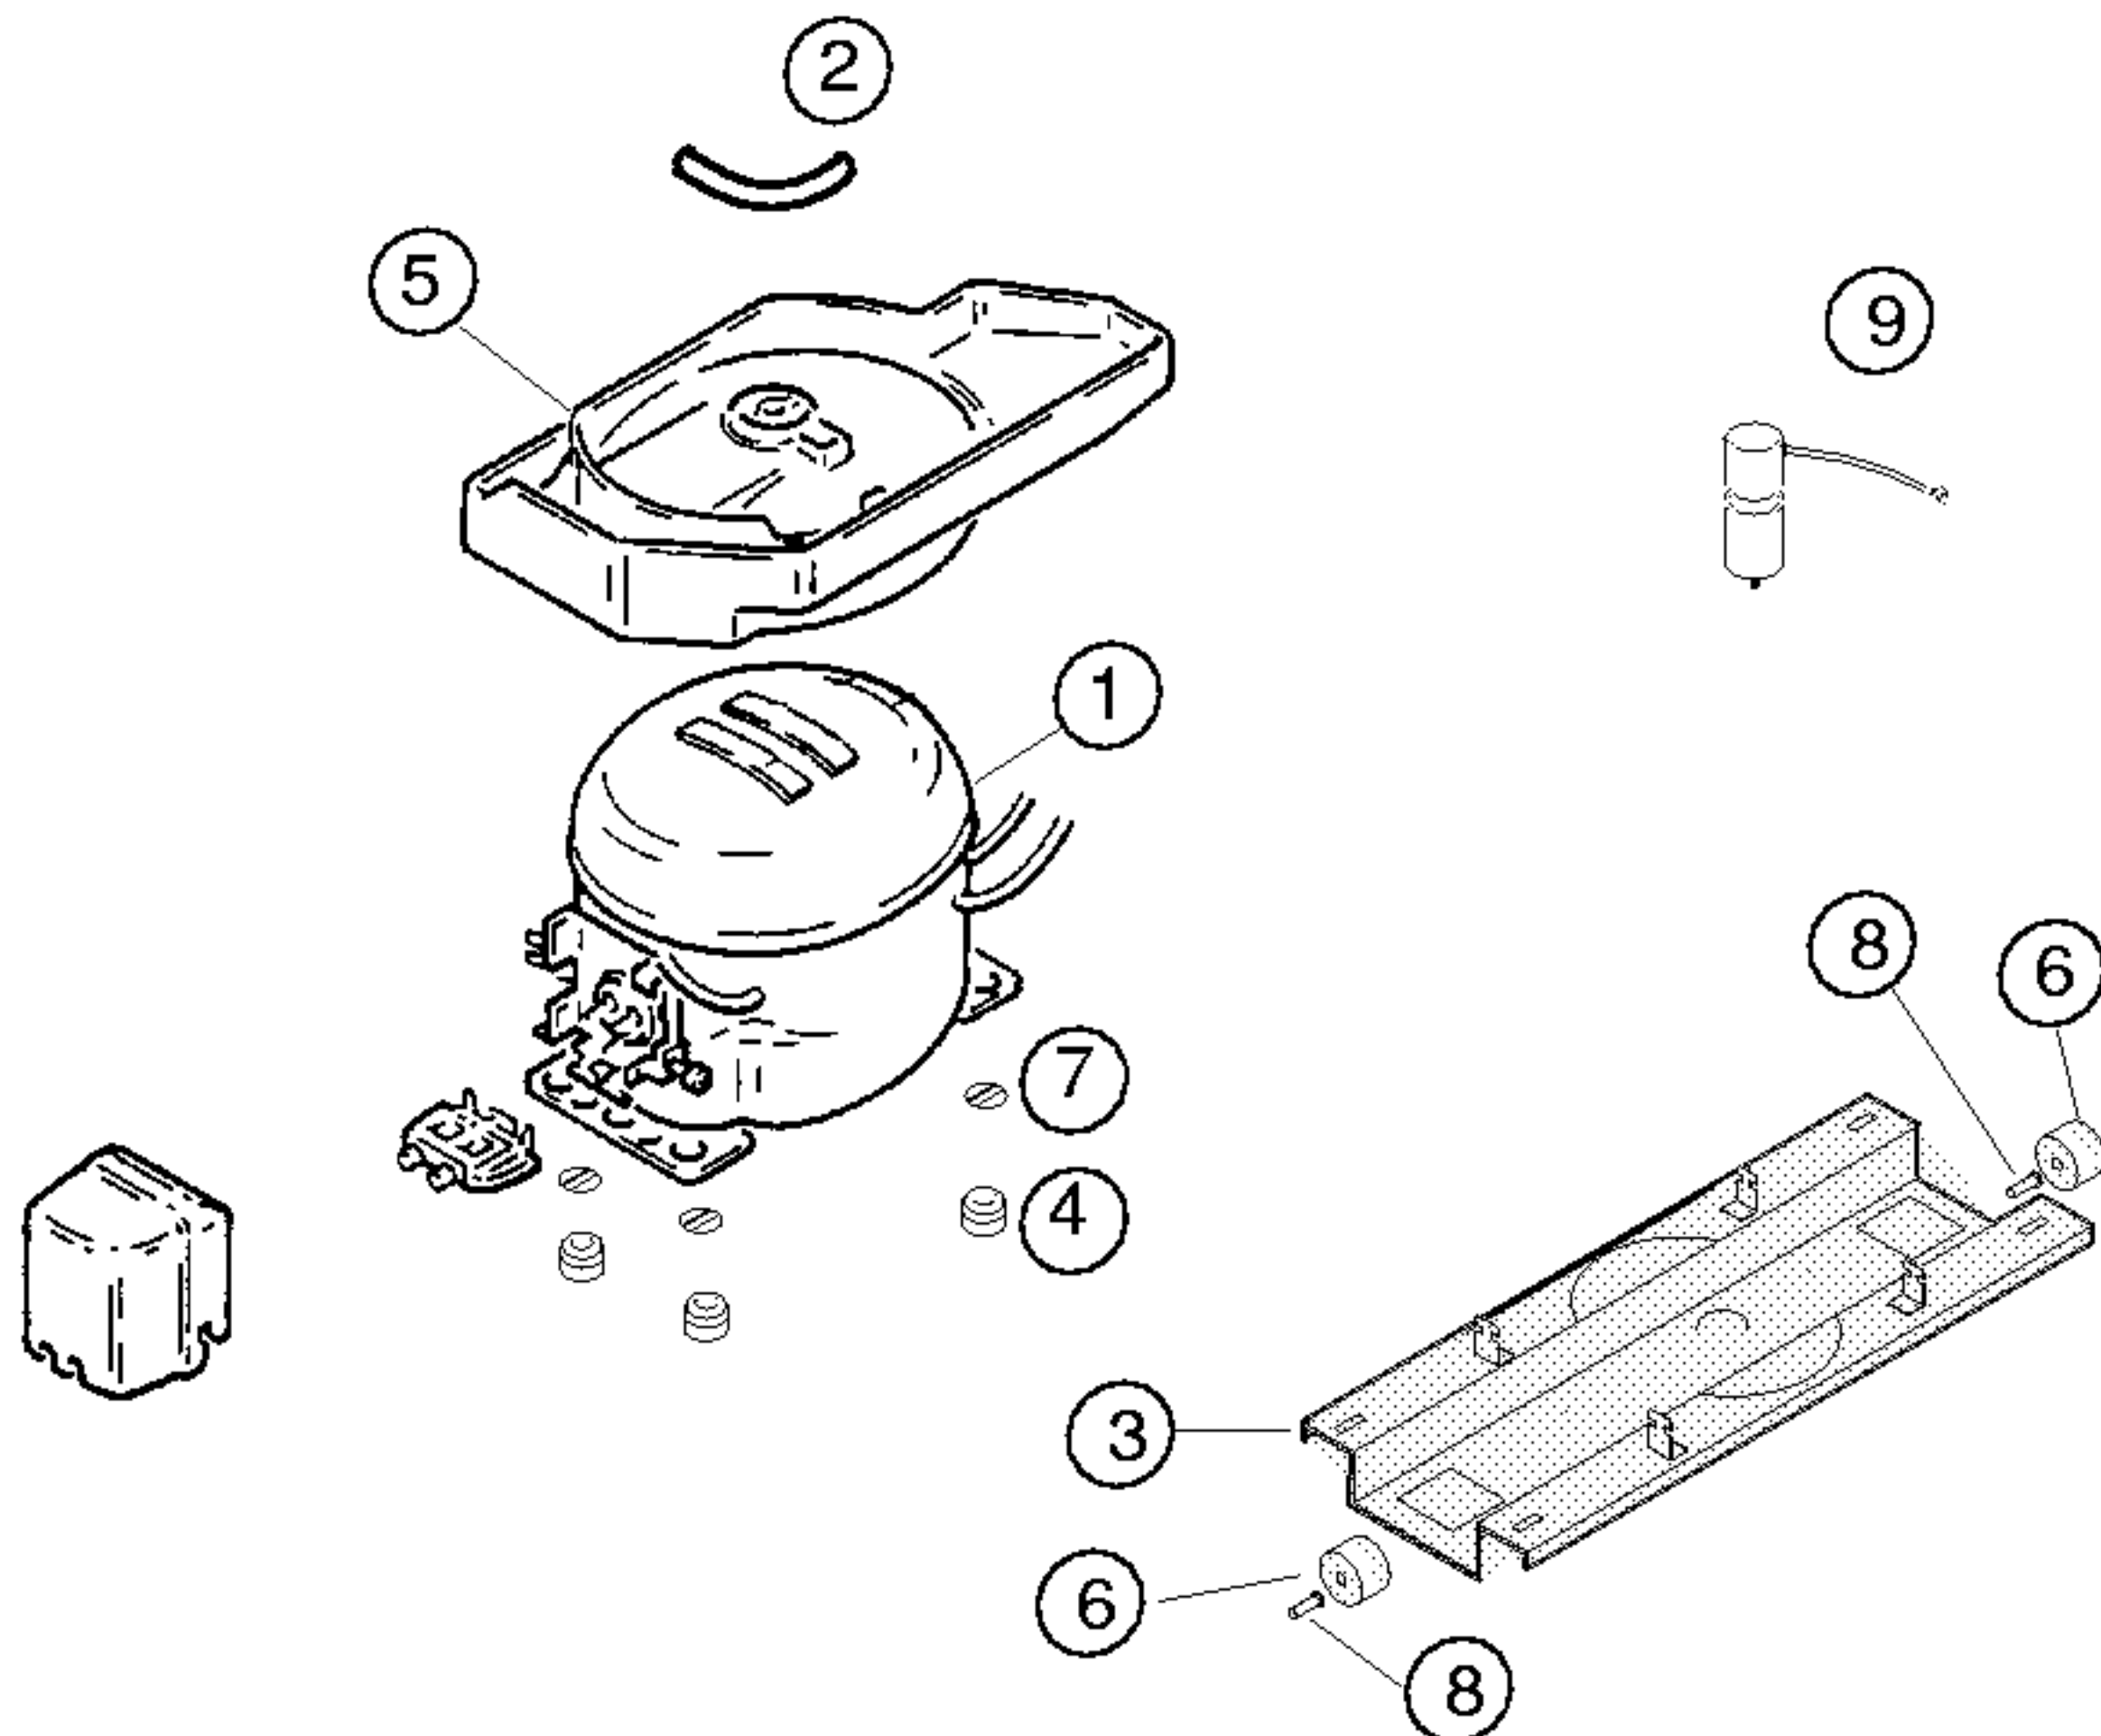

| Pos. | Asp.     |  |  |
|------|----------|--|--|
|      | NBT1116Y |  |  |
| 1    | 14 2193  |  |  |
| 2    | 42 0376  |  |  |
| 3    | 35 4158  |  |  |
| 4    | 16 3427  |  |  |
| 5    | 36 3166  |  |  |
| 6    | 17 1318  |  |  |
| 7    | 17 1519  |  |  |
| 8    | 18 1014  |  |  |
| 9    | 17 4093  |  |  |
| 10   |          |  |  |
| 11   |          |  |  |
| 12   |          |  |  |

| TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER |  |               |            |             |
|-------------------------------------------------|--|---------------|------------|-------------|
| Verdichter/Compressor/Kompresör                 |  | Aspera        |            |             |
| Typ/Type/Tip                                    |  | NBT1116Y      |            |             |
| Förderleistung/Delivery/Verim/h                 |  |               |            |             |
| Anlaufstrom/Starting current/Giris akimi        |  | A             | 7          |             |
| Widerstand/Resistance/Rezistans Ha/             |  | Ω             | 13.2       |             |
| Hi/aux.                                         |  |               | 17.6       |             |
| Temp.Reyler/Thermostat/Termostat                |  | Elektronisch  |            |             |
| Typ/Type/Tip                                    |  |               |            |             |
| Reglerstellung/Position/Termostat pozisyonu     |  |               |            |             |
| Schaltwerte/Acma kapama degerleri               |  | ..ein/acma °C |            |             |
| Valeurs de commutation/Termostat degeri         |  | ..aus"/kapama |            |             |
| (..abtaven' od)                                 |  | ..alarm'      |            |             |
| Füllmenge/Fill. quantily/ Dolum miktari         |  | R600          | g          | *           |
| Anschlusswert/Comm. load/Giris gucu             |  | W             | 160        |             |
| Heizung/Heater/Rezistans                        |  | Ω             | Verdampfer | Ablaufrinne |
| Widerstand/Resistance/Direnc                    |  | W             | 212        | 64          |
| Leistung/Power/Guc                              |  |               |            | 4           |
| Ventilador/Blower/Vantilatör                    |  | Ω             |            |             |
| Widerstand/Resistance/Rezistans                 |  |               |            |             |
| Magnetventil/Magnetic valve/Manyetik valf       |  | Ω             |            |             |
| Widerstand/Resistance/Rezistans                 |  | V             |            |             |
| Spannung/Voltage/Gerilim                        |  |               |            |             |
| Temp.Reyler/Thermostat/Termostat                |  |               |            |             |

\* Siehe Typenschild/Mamul etiketine bakiniz