



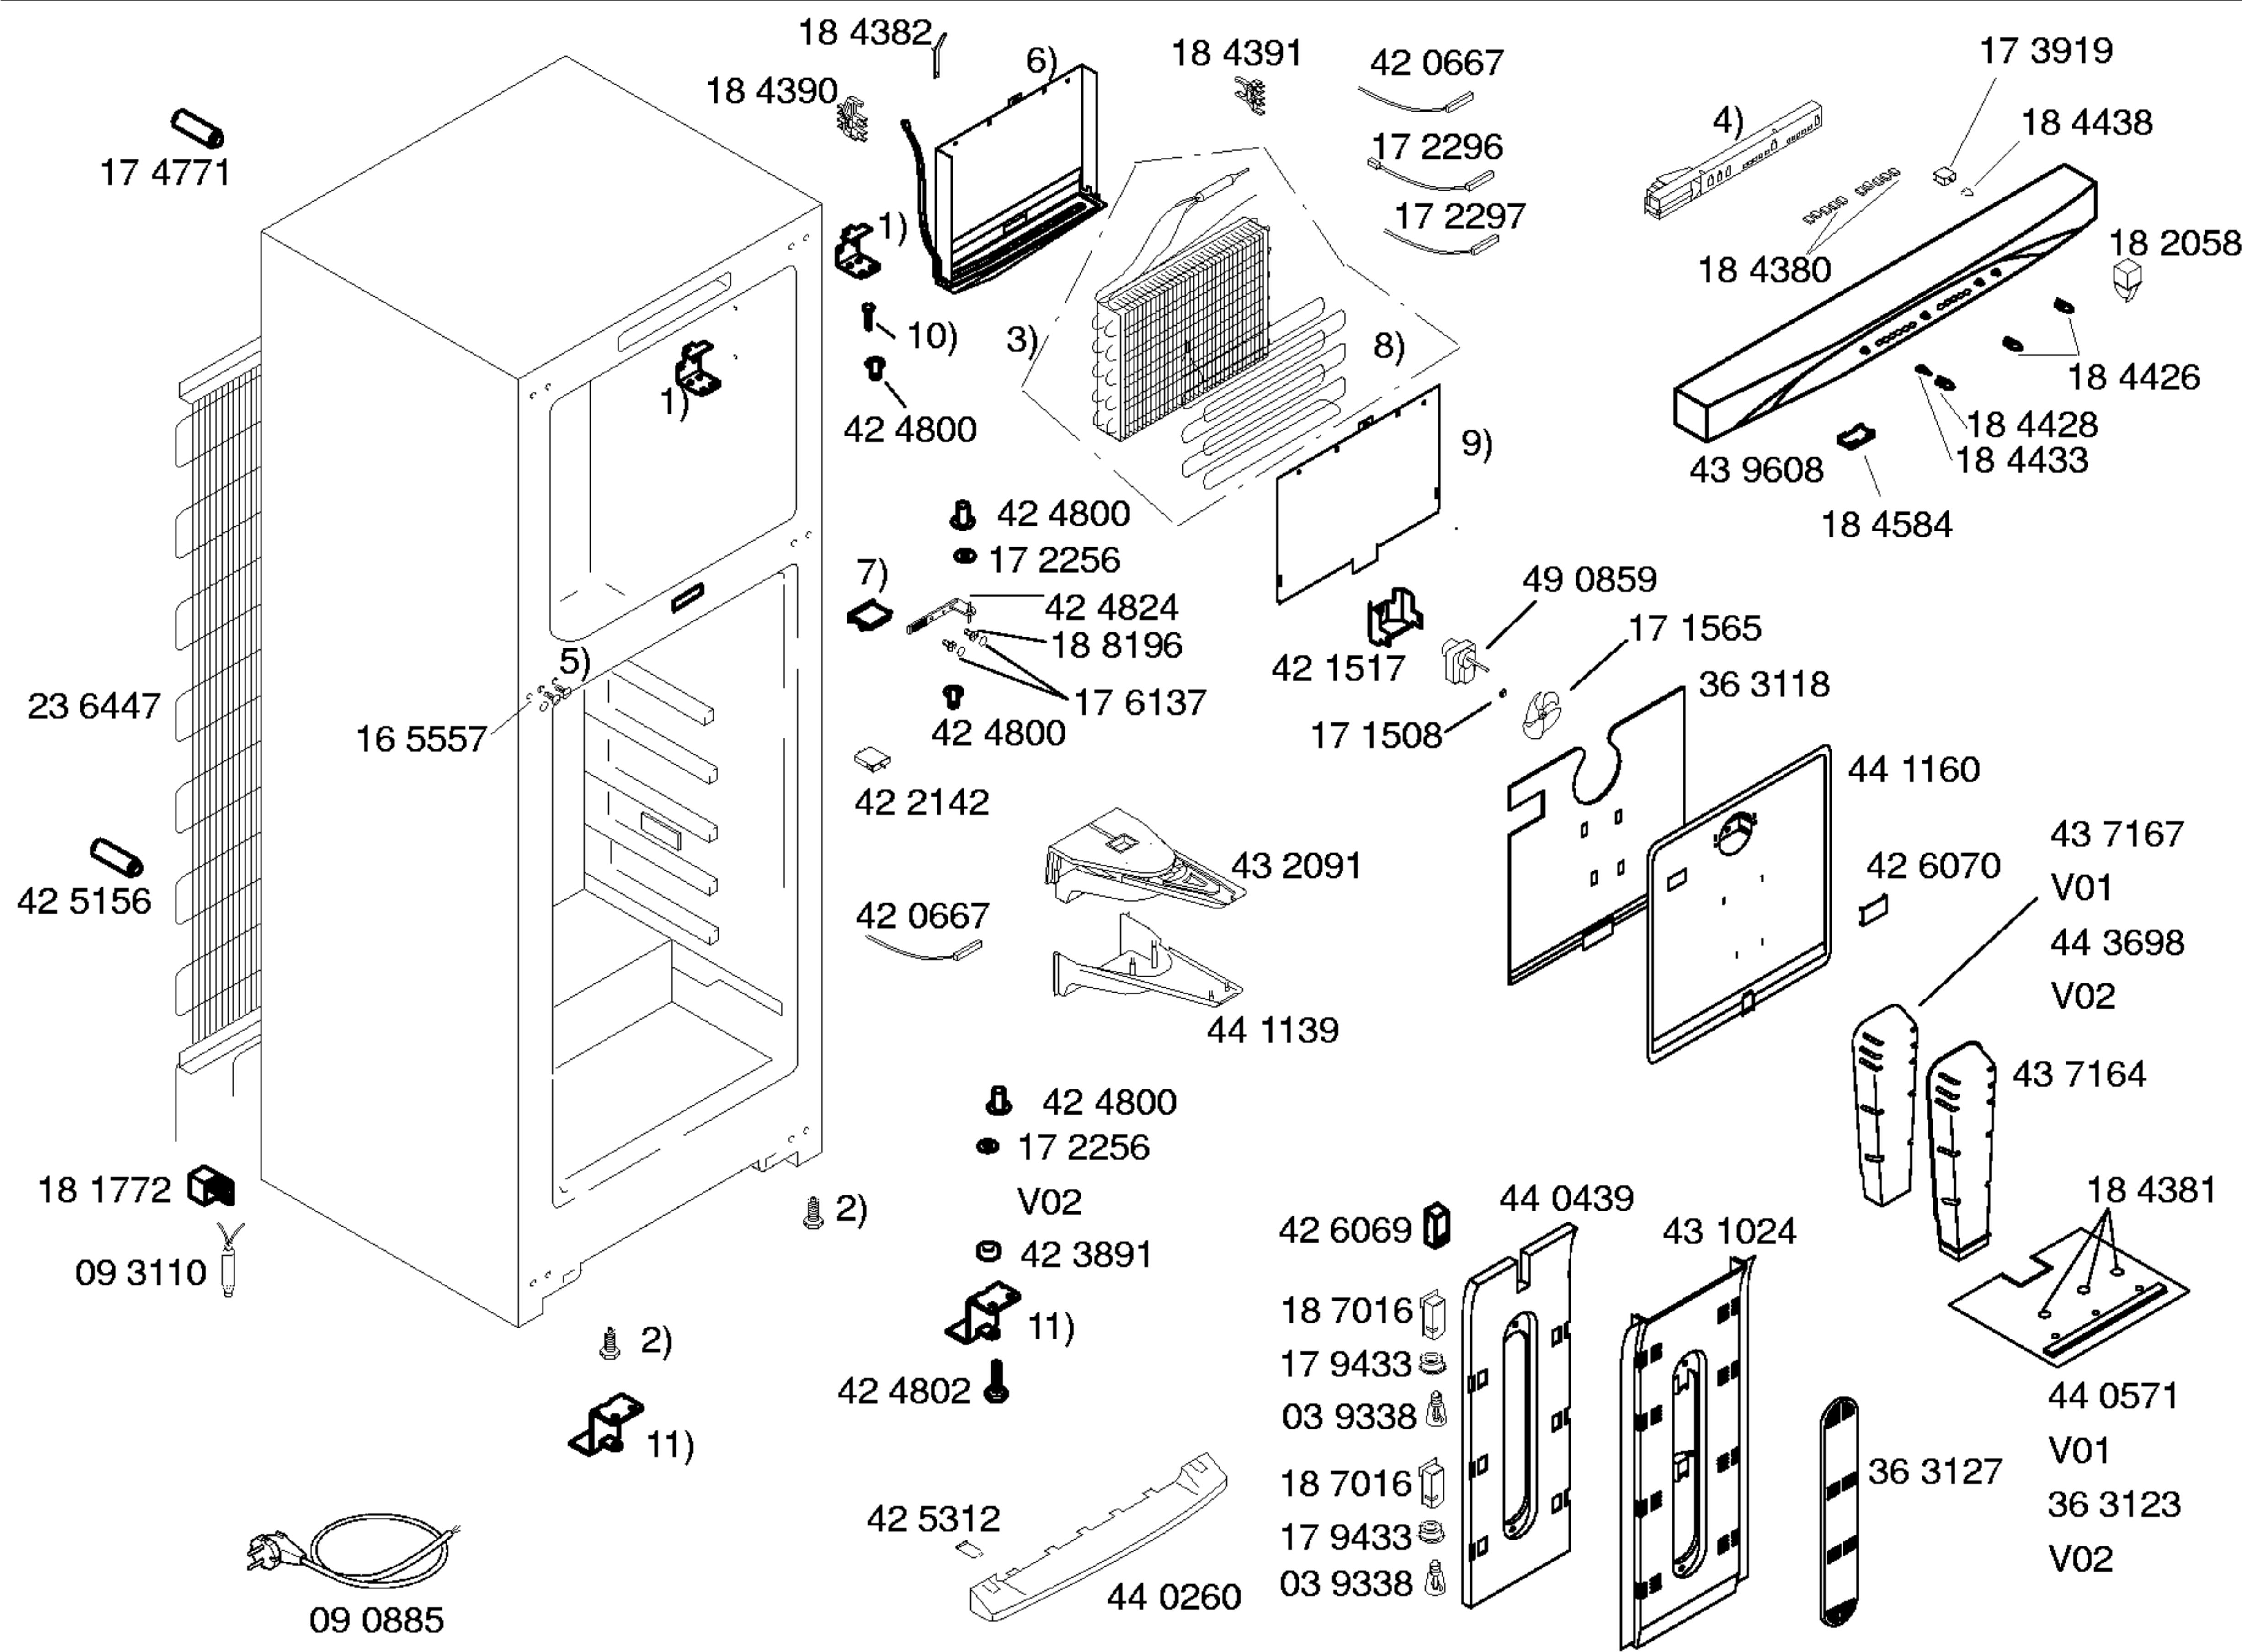

Mat. – Nr. – Konstante
3740


Gebrauchsanweisung
59 1021
(DE,GB,FR,IT,ES,PT
NL,RO)

- 1) 17 1312
- 2) 42 4340
- 3) 43 8723
- 4) 49 5511
- 5) 16 5552
- 6) 36 9906
- 7) 41 8128
- 8) 36 9820
- 9) 36 6905
- 10) 42 4398
- 11) 42 4801
- V01
- 42 8184
- V02

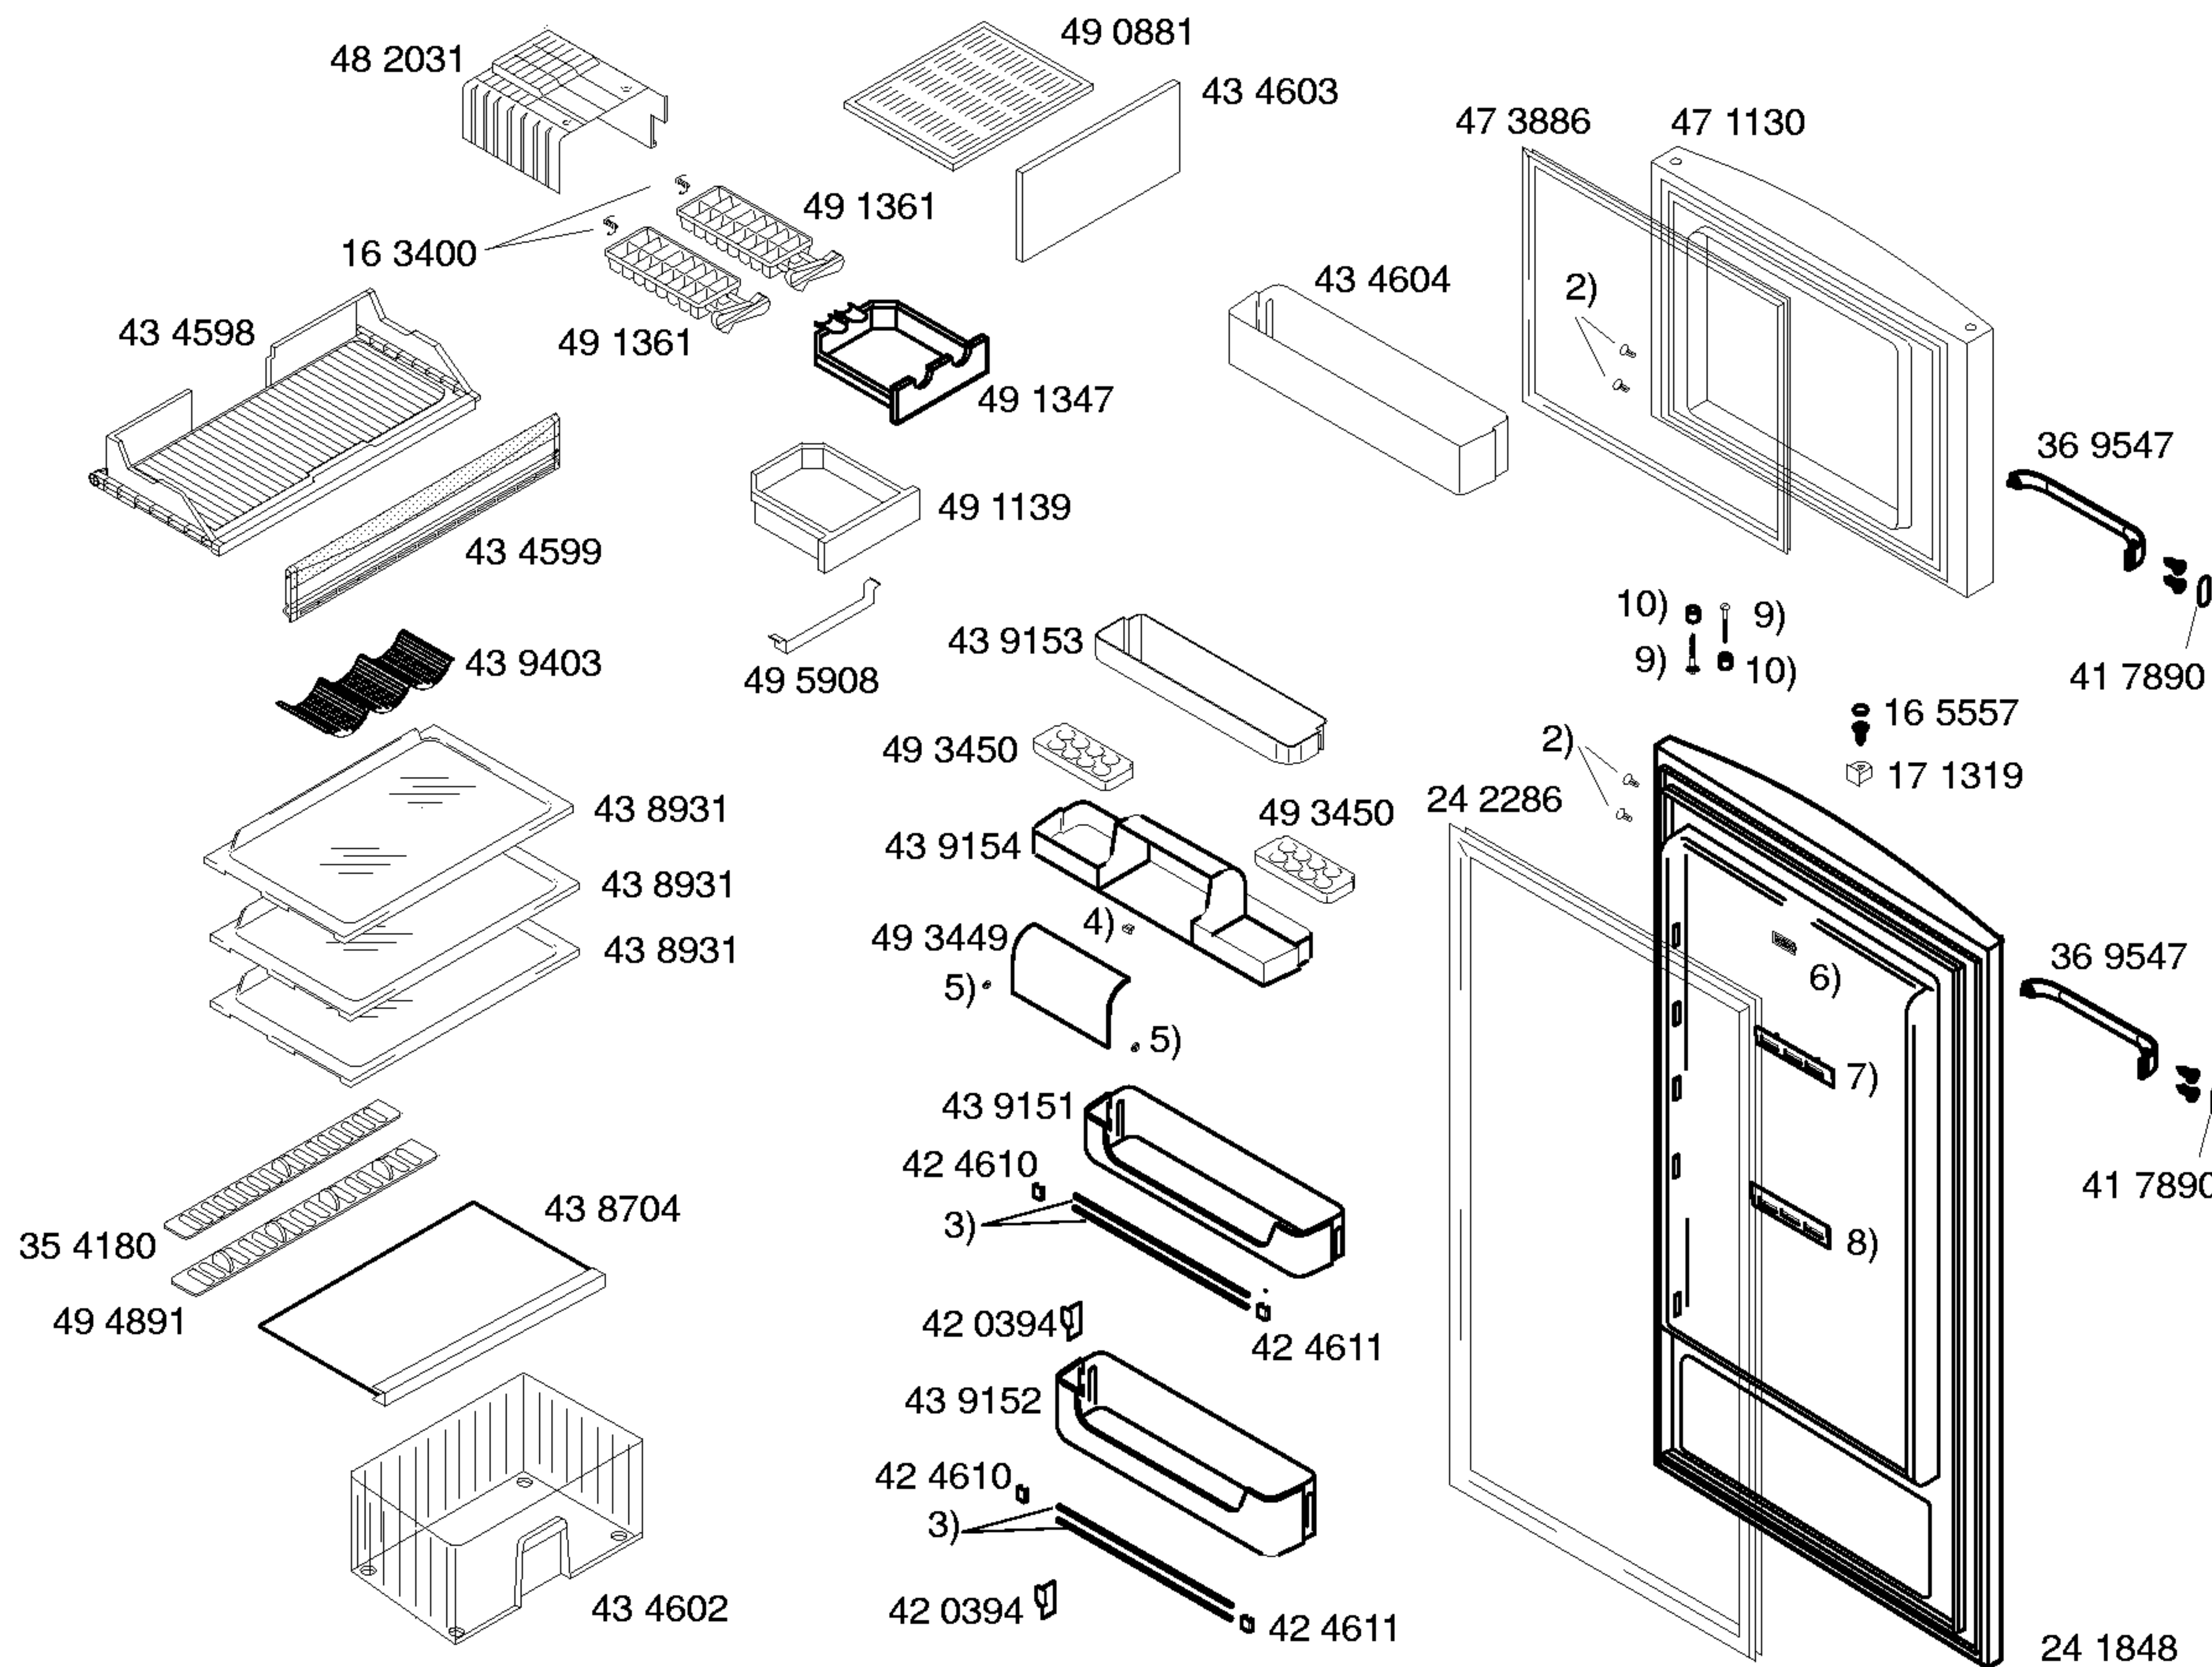

Mat. – Nr. – Konstante
3740

- 1) 41 7890
- 2) 06 0083
- V01
- 17 3747
- V02
- 3) 43 9159
- 4) 42 0751
- 5) 42 0568
- 6) 49 5014
- 7) 49 4865
- 8) 49 4864
- 9) 18 8194
- 10) 18 8188

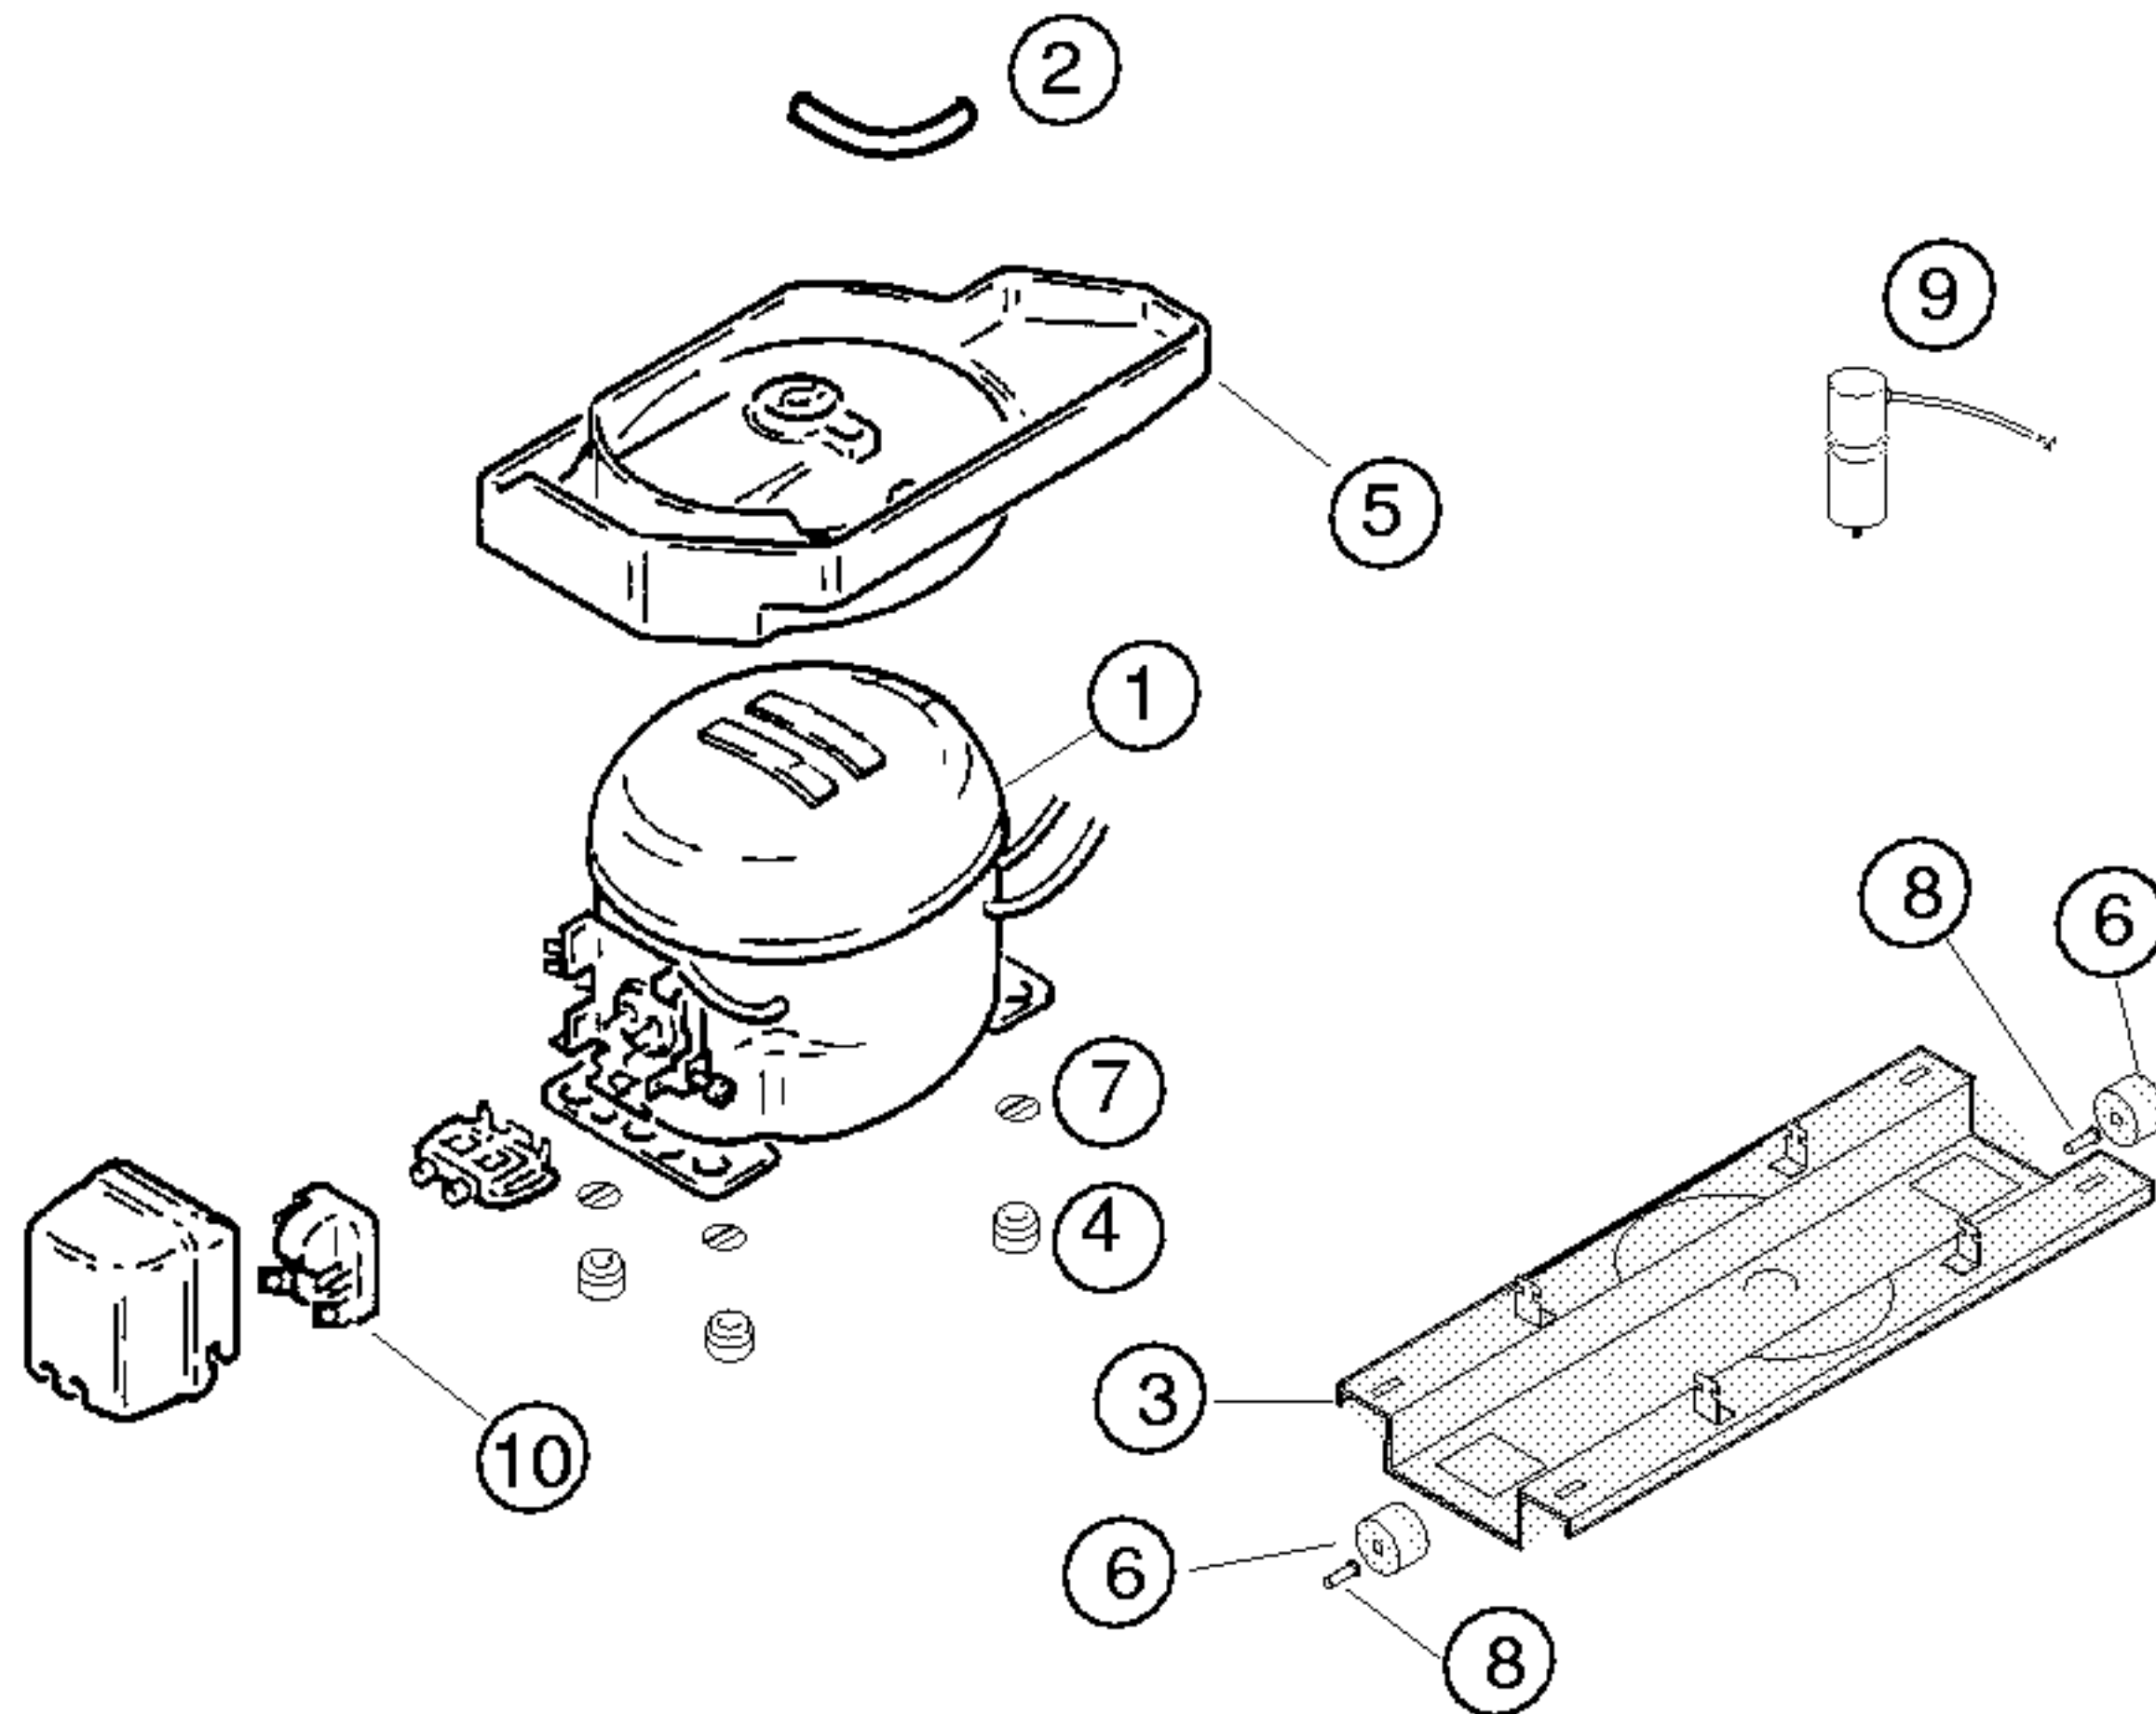

Pos.	Matsushita		
	DGX110E12TAW		
1	14 3524		
2	42 0376		
3	35 4158		
4	16 3427		
5	49 4670		
6	17 1318		
7	17 1519		
8	18 1014		
9	42 0857		
10	42 6071		
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER				
Verdichter/Compressor/Kompresör		Mats.		
Typ/Type/Tip		DGX110E12TAW		
Förderleistung/Delivery/Verim/h				
Anlaufstrom/Starting current/Giris akimi		A	7	
Widerstand/Resistance/Rezistans Ha/		Ω	13.2	
Hi/aux.			17.6	
Temp.Reyler/Thermostat/Termostat		Elektronisch		
Typ/Type/Tip				
Reglerstellung/Position/Termostat pozisyonu				
Schaltwerte/Acma kapama degerleri		..ein/acma °C		
Valeurs de commutation/Termostat degeri		..aus"/kapama		
(..abtaven' od)		..alarm'		
Füllmenge/Fill. quantily/ Dolum miktarı		R600	g	42
Anschlusswert/Comm. load/Giris gucu		W	150	
Heizung/Heater/Rezistans		Ω	Verdampfer	Ablaufrinne
Widerstand/Resistance/Direnc		W	147	64
Leistung/Power/Guc				4
Ventilador/Blower/Vantilatör		Ω		
Widerstand/Resistance/Rezistans				
Magnetventil/Magnetic valve/Manyetik valf		Ω		
Widerstand/Resistance/Rezistans		V		
Spannung/Voltage/Gerilim				
Temp.Reyler/Thermostat/Termostat				

* Siehe Typenschild/Mamul etiketine bakiniz