


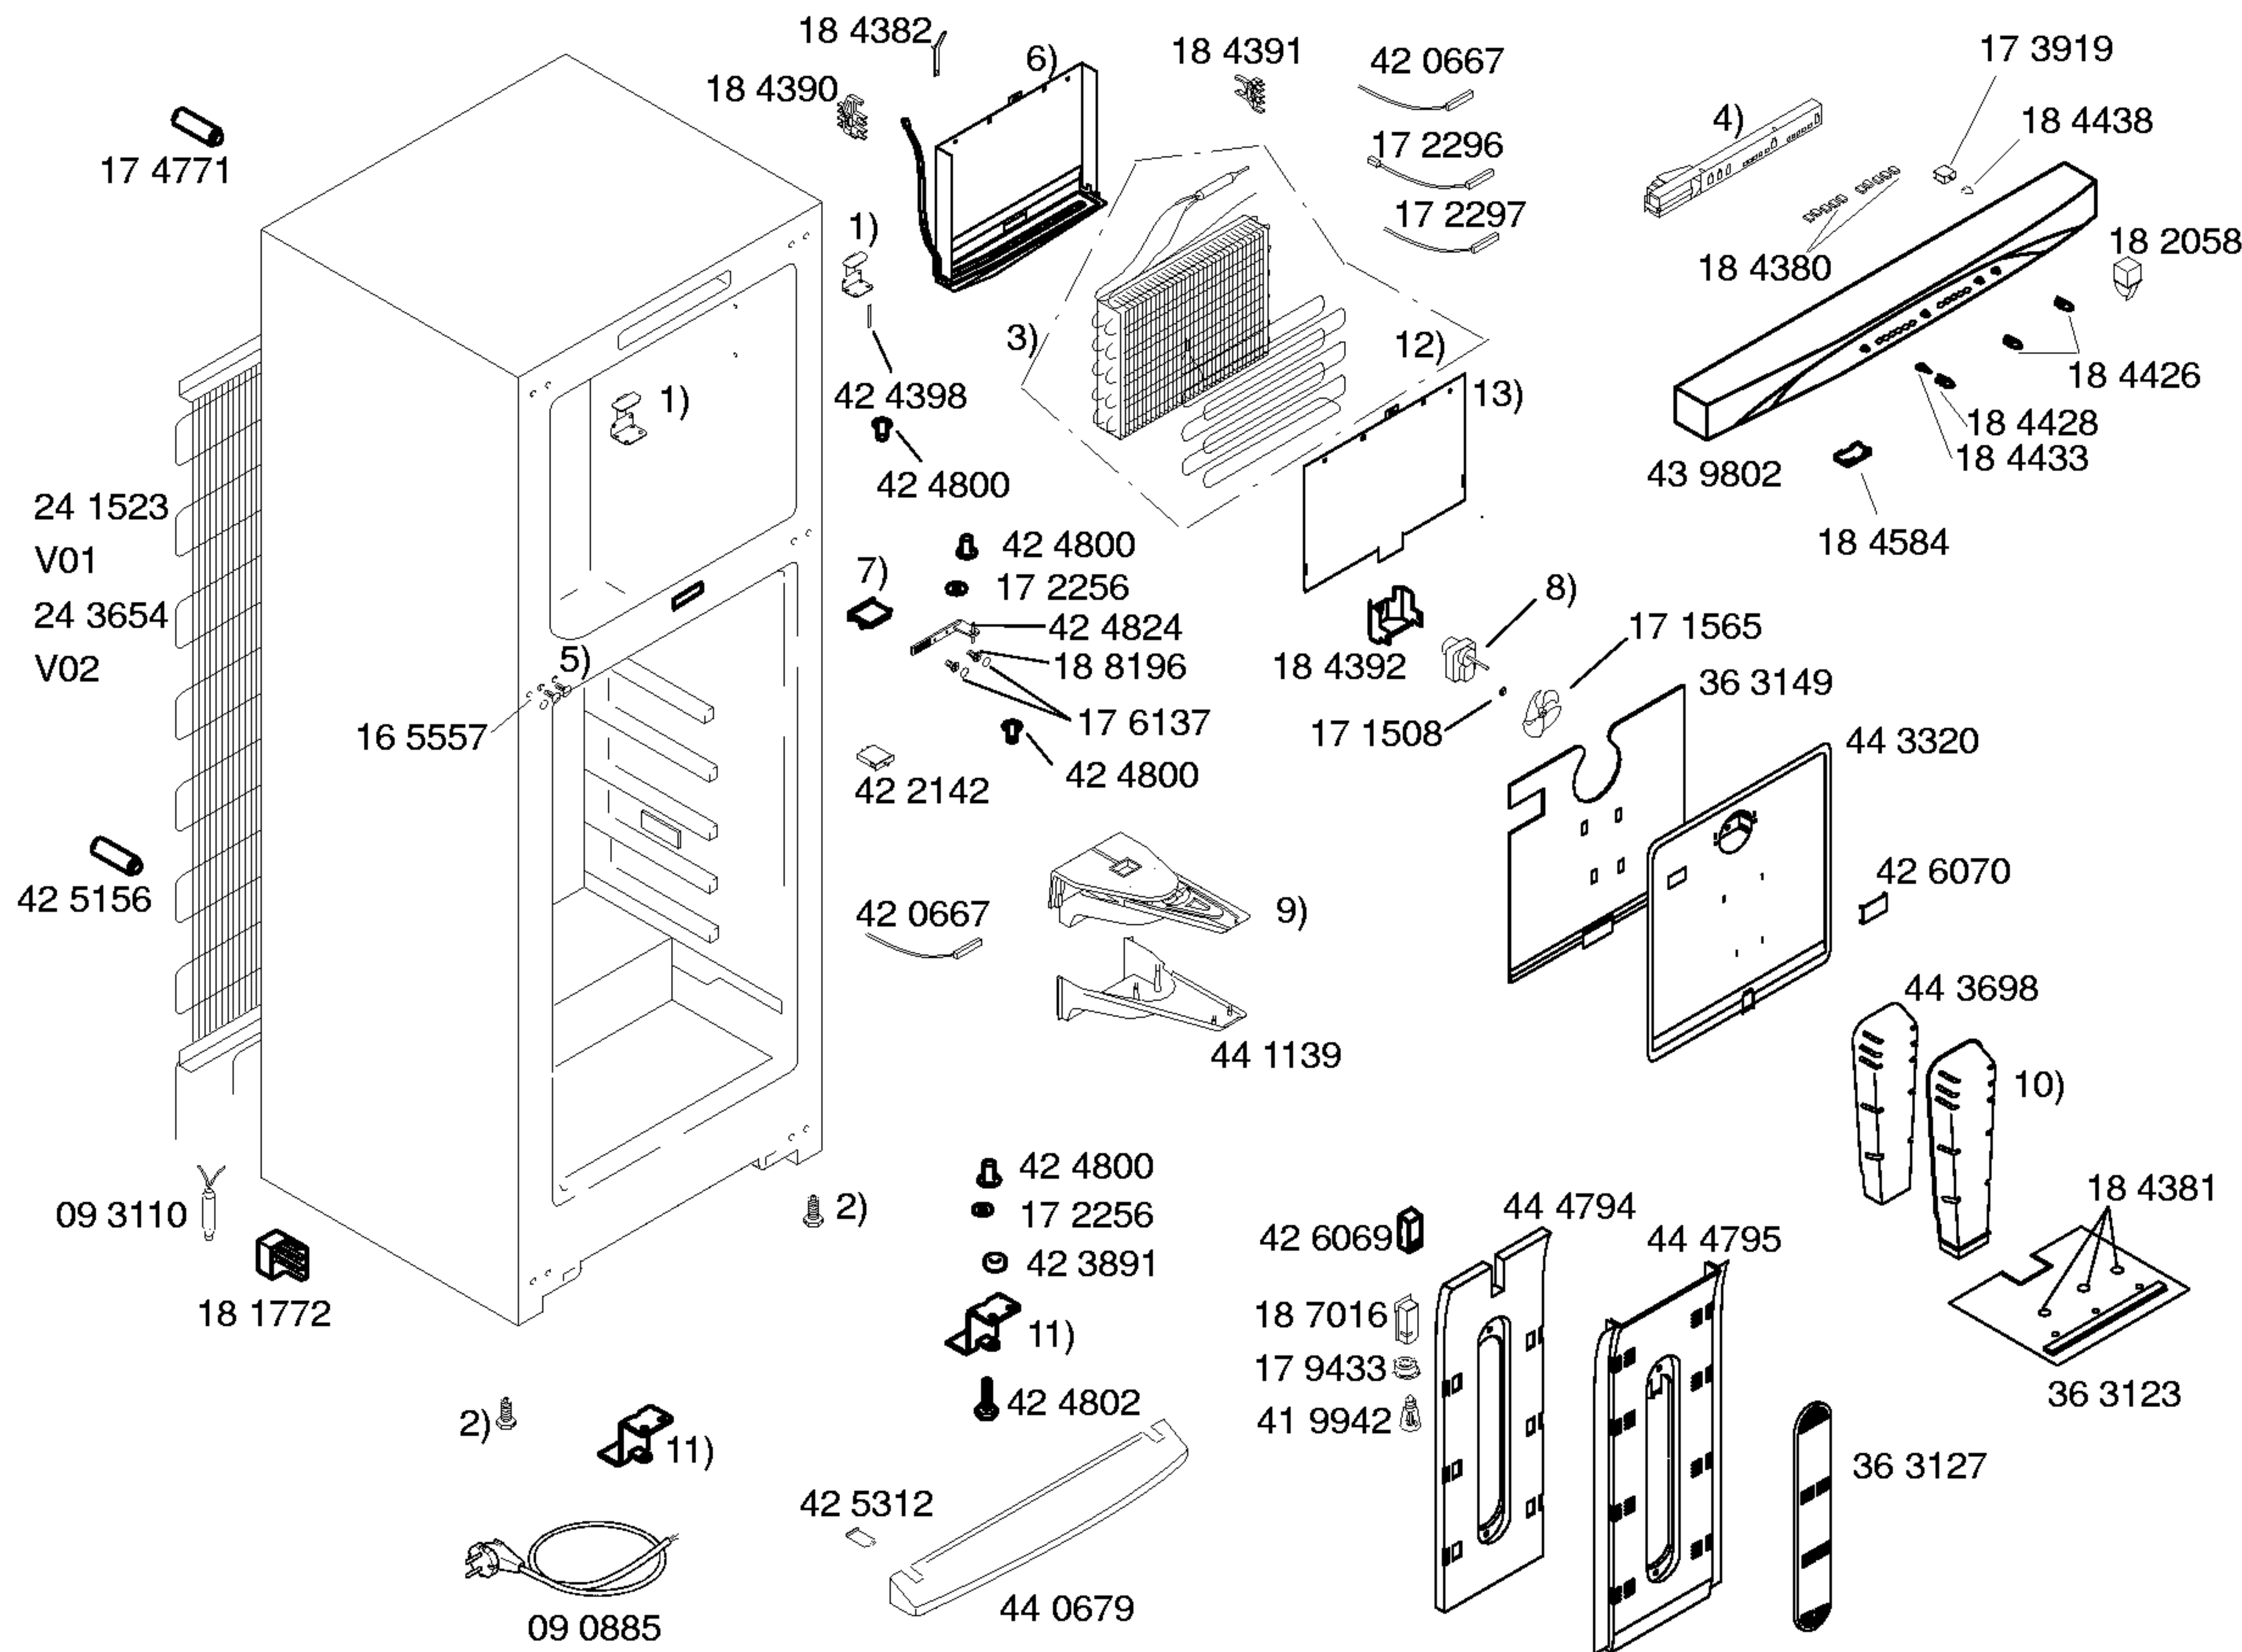


Mat. – Nr. – Konstante  
3740 . . . . .


Gebrauchsanweisung  
59 1145  
(DE,GB,FR,IT,ES,PT  
NL,RO,UK)

1) 17 1312  
2) 42 4340  
3) 43 8725  
4) 49 5511  
V01  
49 7503  
V02,V03

5) 16 5552  
6) 36 9509  
7) 41 8128  
8) 49 1665  
9) 43 2091  
V01  
44 4749  
V02,V03

10) 43 7164  
11) 42 8184  
12) 36 9822  
13) 36 6903  
V01  
44 6177  
V02,V03

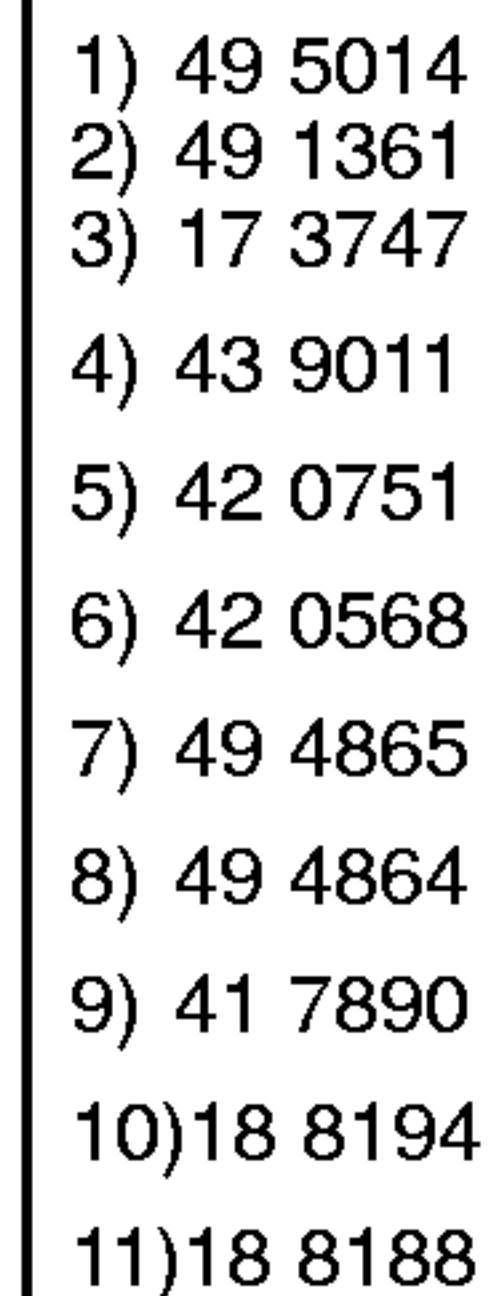

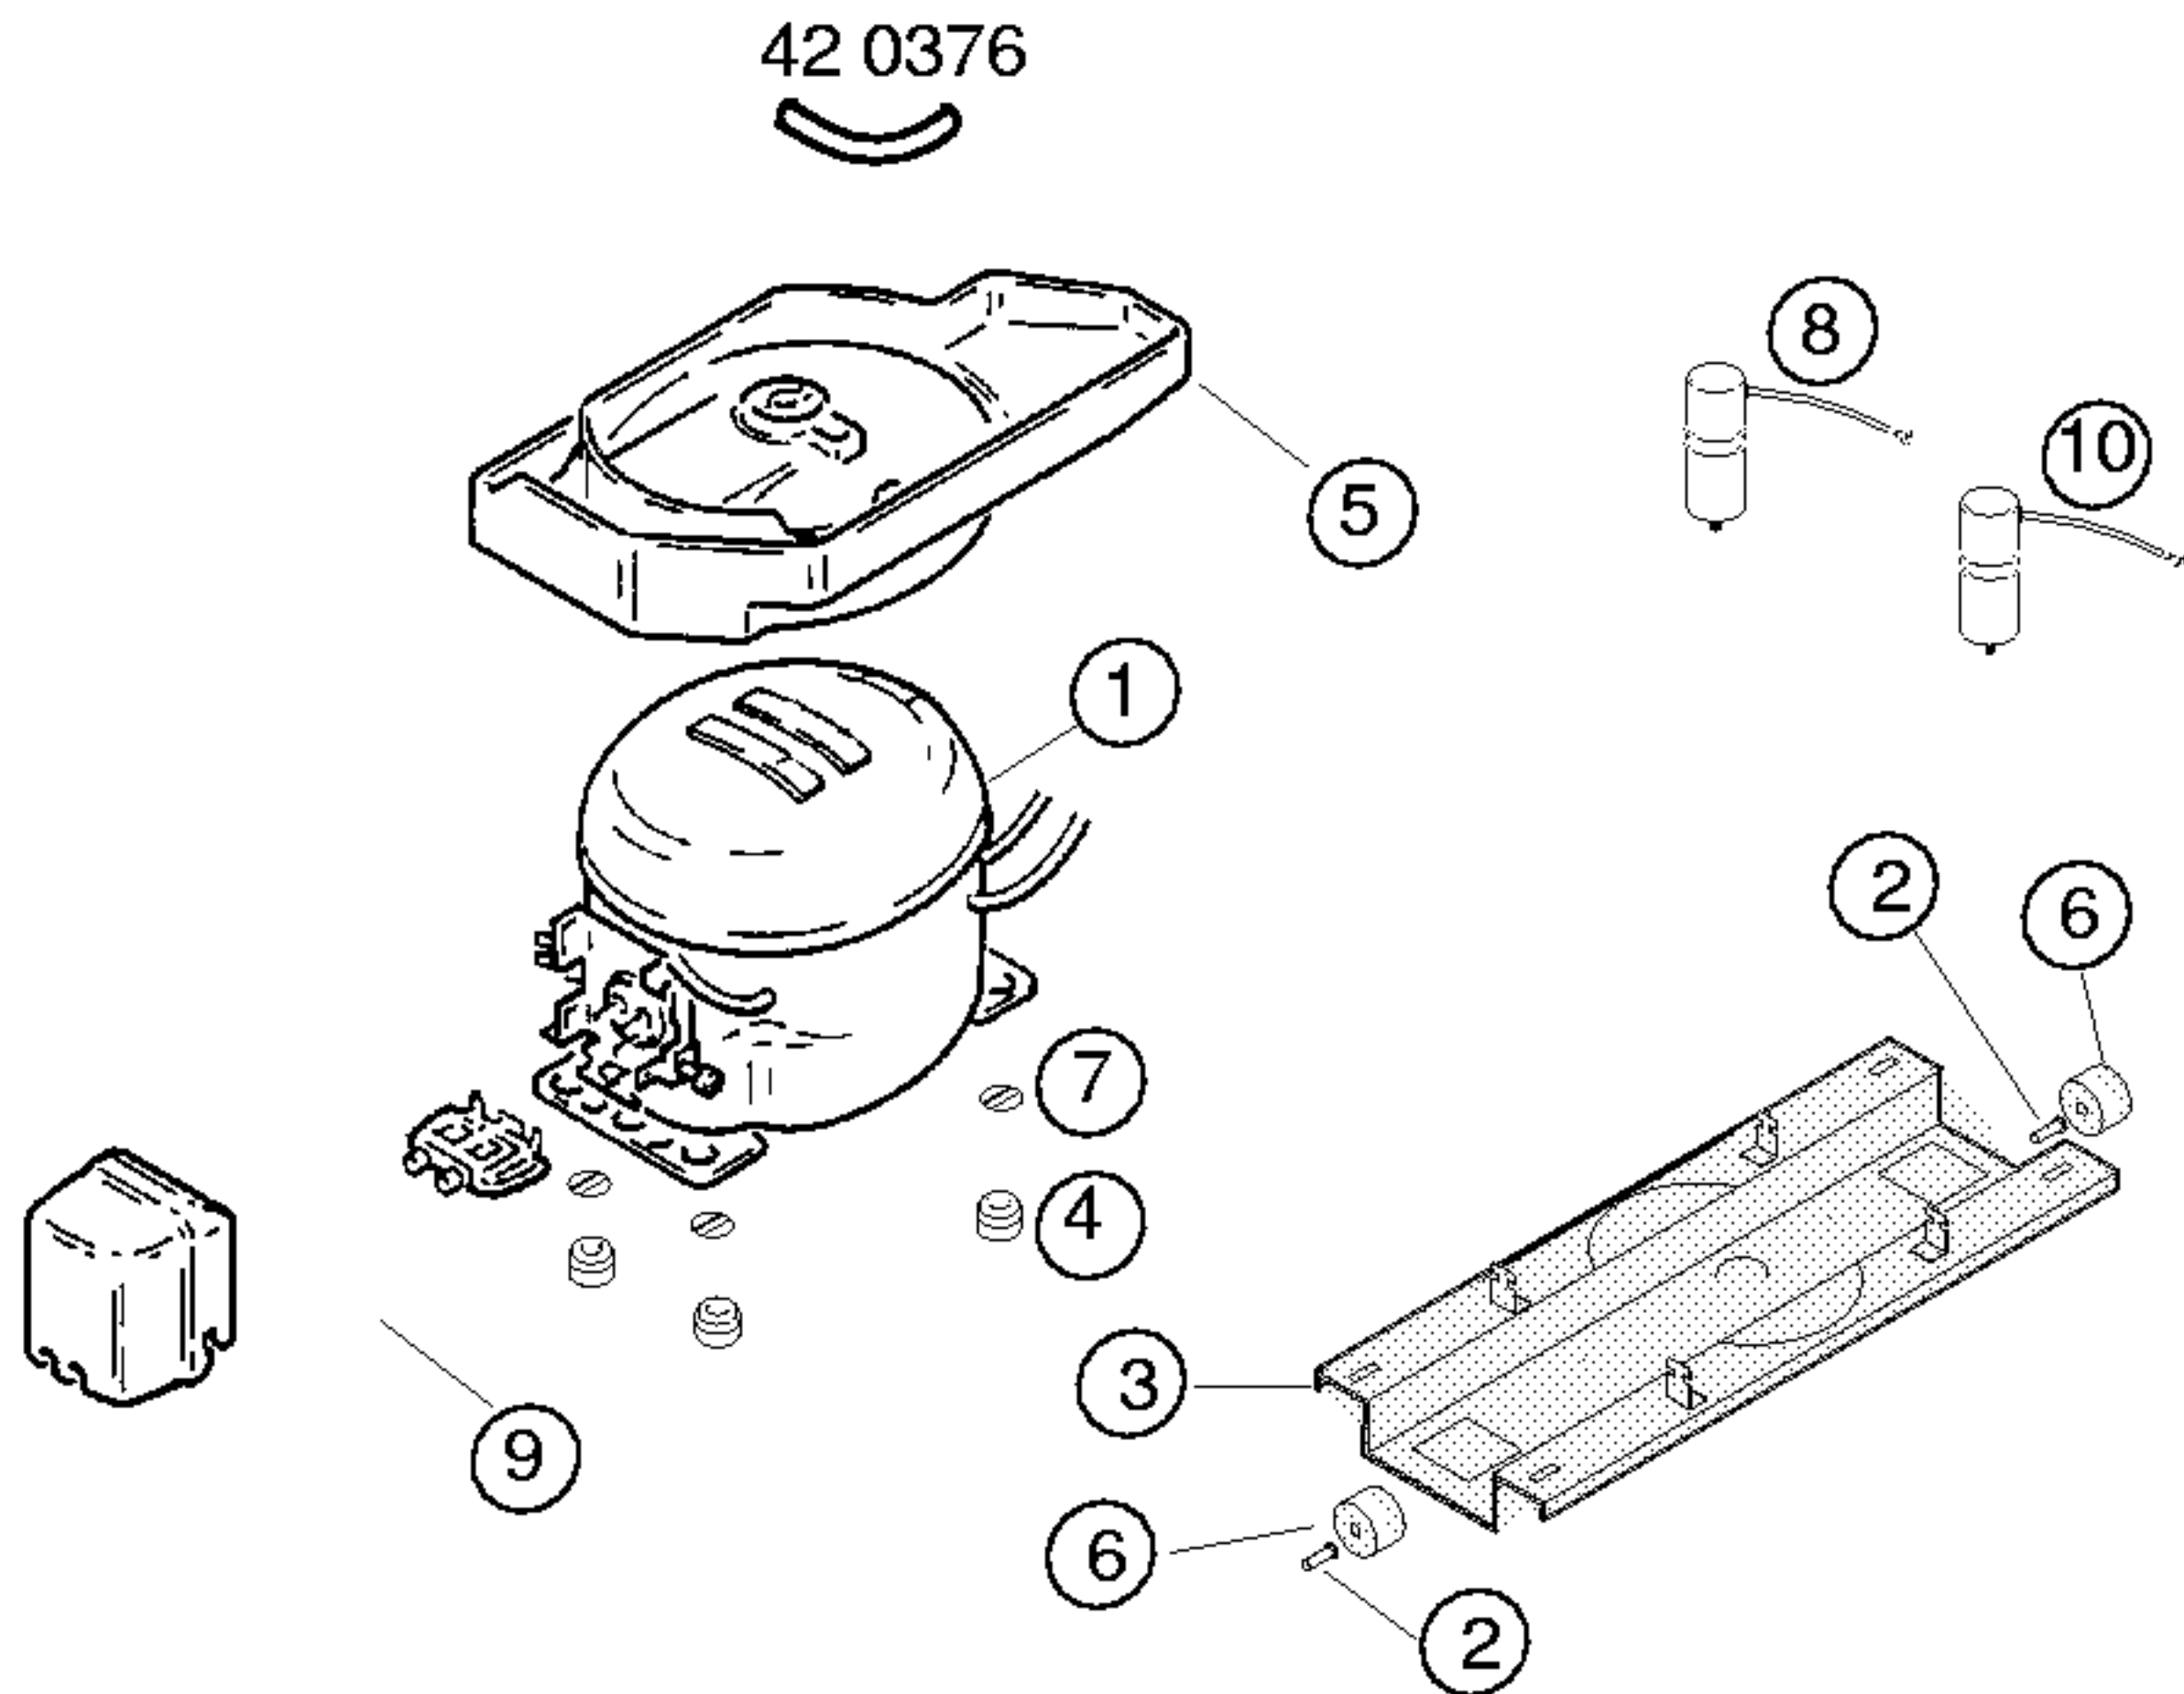

| Pos. | V01,V02     | V03     |  |
|------|-------------|---------|--|
|      | Mats.       | Danfoss |  |
|      | DGX11012TAW | NLX11KK |  |
| 1    | 14 3524     | 14 3930 |  |
| 2    | 18 1014     |         |  |
| 3    | 35 4583     |         |  |
| 4    | 16 3427     |         |  |
| 5    | 49 4670     | 49 4671 |  |
| 6    | 17 1318     |         |  |
| 7    | 17 1519     |         |  |
| 8    | 42 0857     | 17 4093 |  |
| 9    | 42 6071     | 16 5570 |  |
| 10   | 42 0827     | —       |  |
| 11   |             |         |  |
| 12   |             |         |  |

| TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER |               |         |    |
|-------------------------------------------------|---------------|---------|----|
|                                                 | V01,V02       | V02     |    |
| Verdichter/Compressor/Kompresör                 | Mats.         | Danfoss |    |
| Typ/Type/Tip                                    | DGX11012TAW   | NLX11KK |    |
| Förderleistung/Delivery/Verim/h                 |               |         |    |
| Anlaufstrom/Starting current/Giris akimi        | A             |         |    |
| Widerstand/Resistance/Rezistans Ha/Hi/aux.      | Ω             |         |    |
| Temp.Reyler/Thermostat/Termostat                |               |         |    |
| Typ/Type/Tip                                    |               |         |    |
| Reglerstellung/Position/Termostat pozisyonu     |               |         |    |
| Schaltwerte/Acma kapama degerleri               | ..ein/acma °C |         |    |
| Valeurs de commutation/Termostat degeri         | ..aus"/kapama |         |    |
| (..abtaven' od)                                 | ..alarm'      |         |    |
| Füllmenge/Fill. quantily/ Dolum miktarı         | R600 g        | 51      | 51 |
| Anschlusswert/Comm. load/Giris gucu             | W             |         |    |
| Heizung/Heater/Rezistans                        | Ω             |         |    |
| Widerstand/Resistance/Direnc                    | W             |         |    |
| Leistung/Power/Guc                              |               |         |    |
| Ventilador/Blower/Vantilatör                    | Ω             |         |    |
| Widerstand/Resistance/Rezistans                 |               |         |    |
| Magnetventil/Magnetic valve/Manyetik valf       | Ω             |         |    |
| Widerstand/Resistance/Rezistans                 | V             |         |    |
| Spannung/Voltage/Gerilim                        |               |         |    |
| Temp.Reyler/Thermostat/Termostat                |               |         |    |

\* Siehe Typenschild/Mamul etiketine bakiniz