



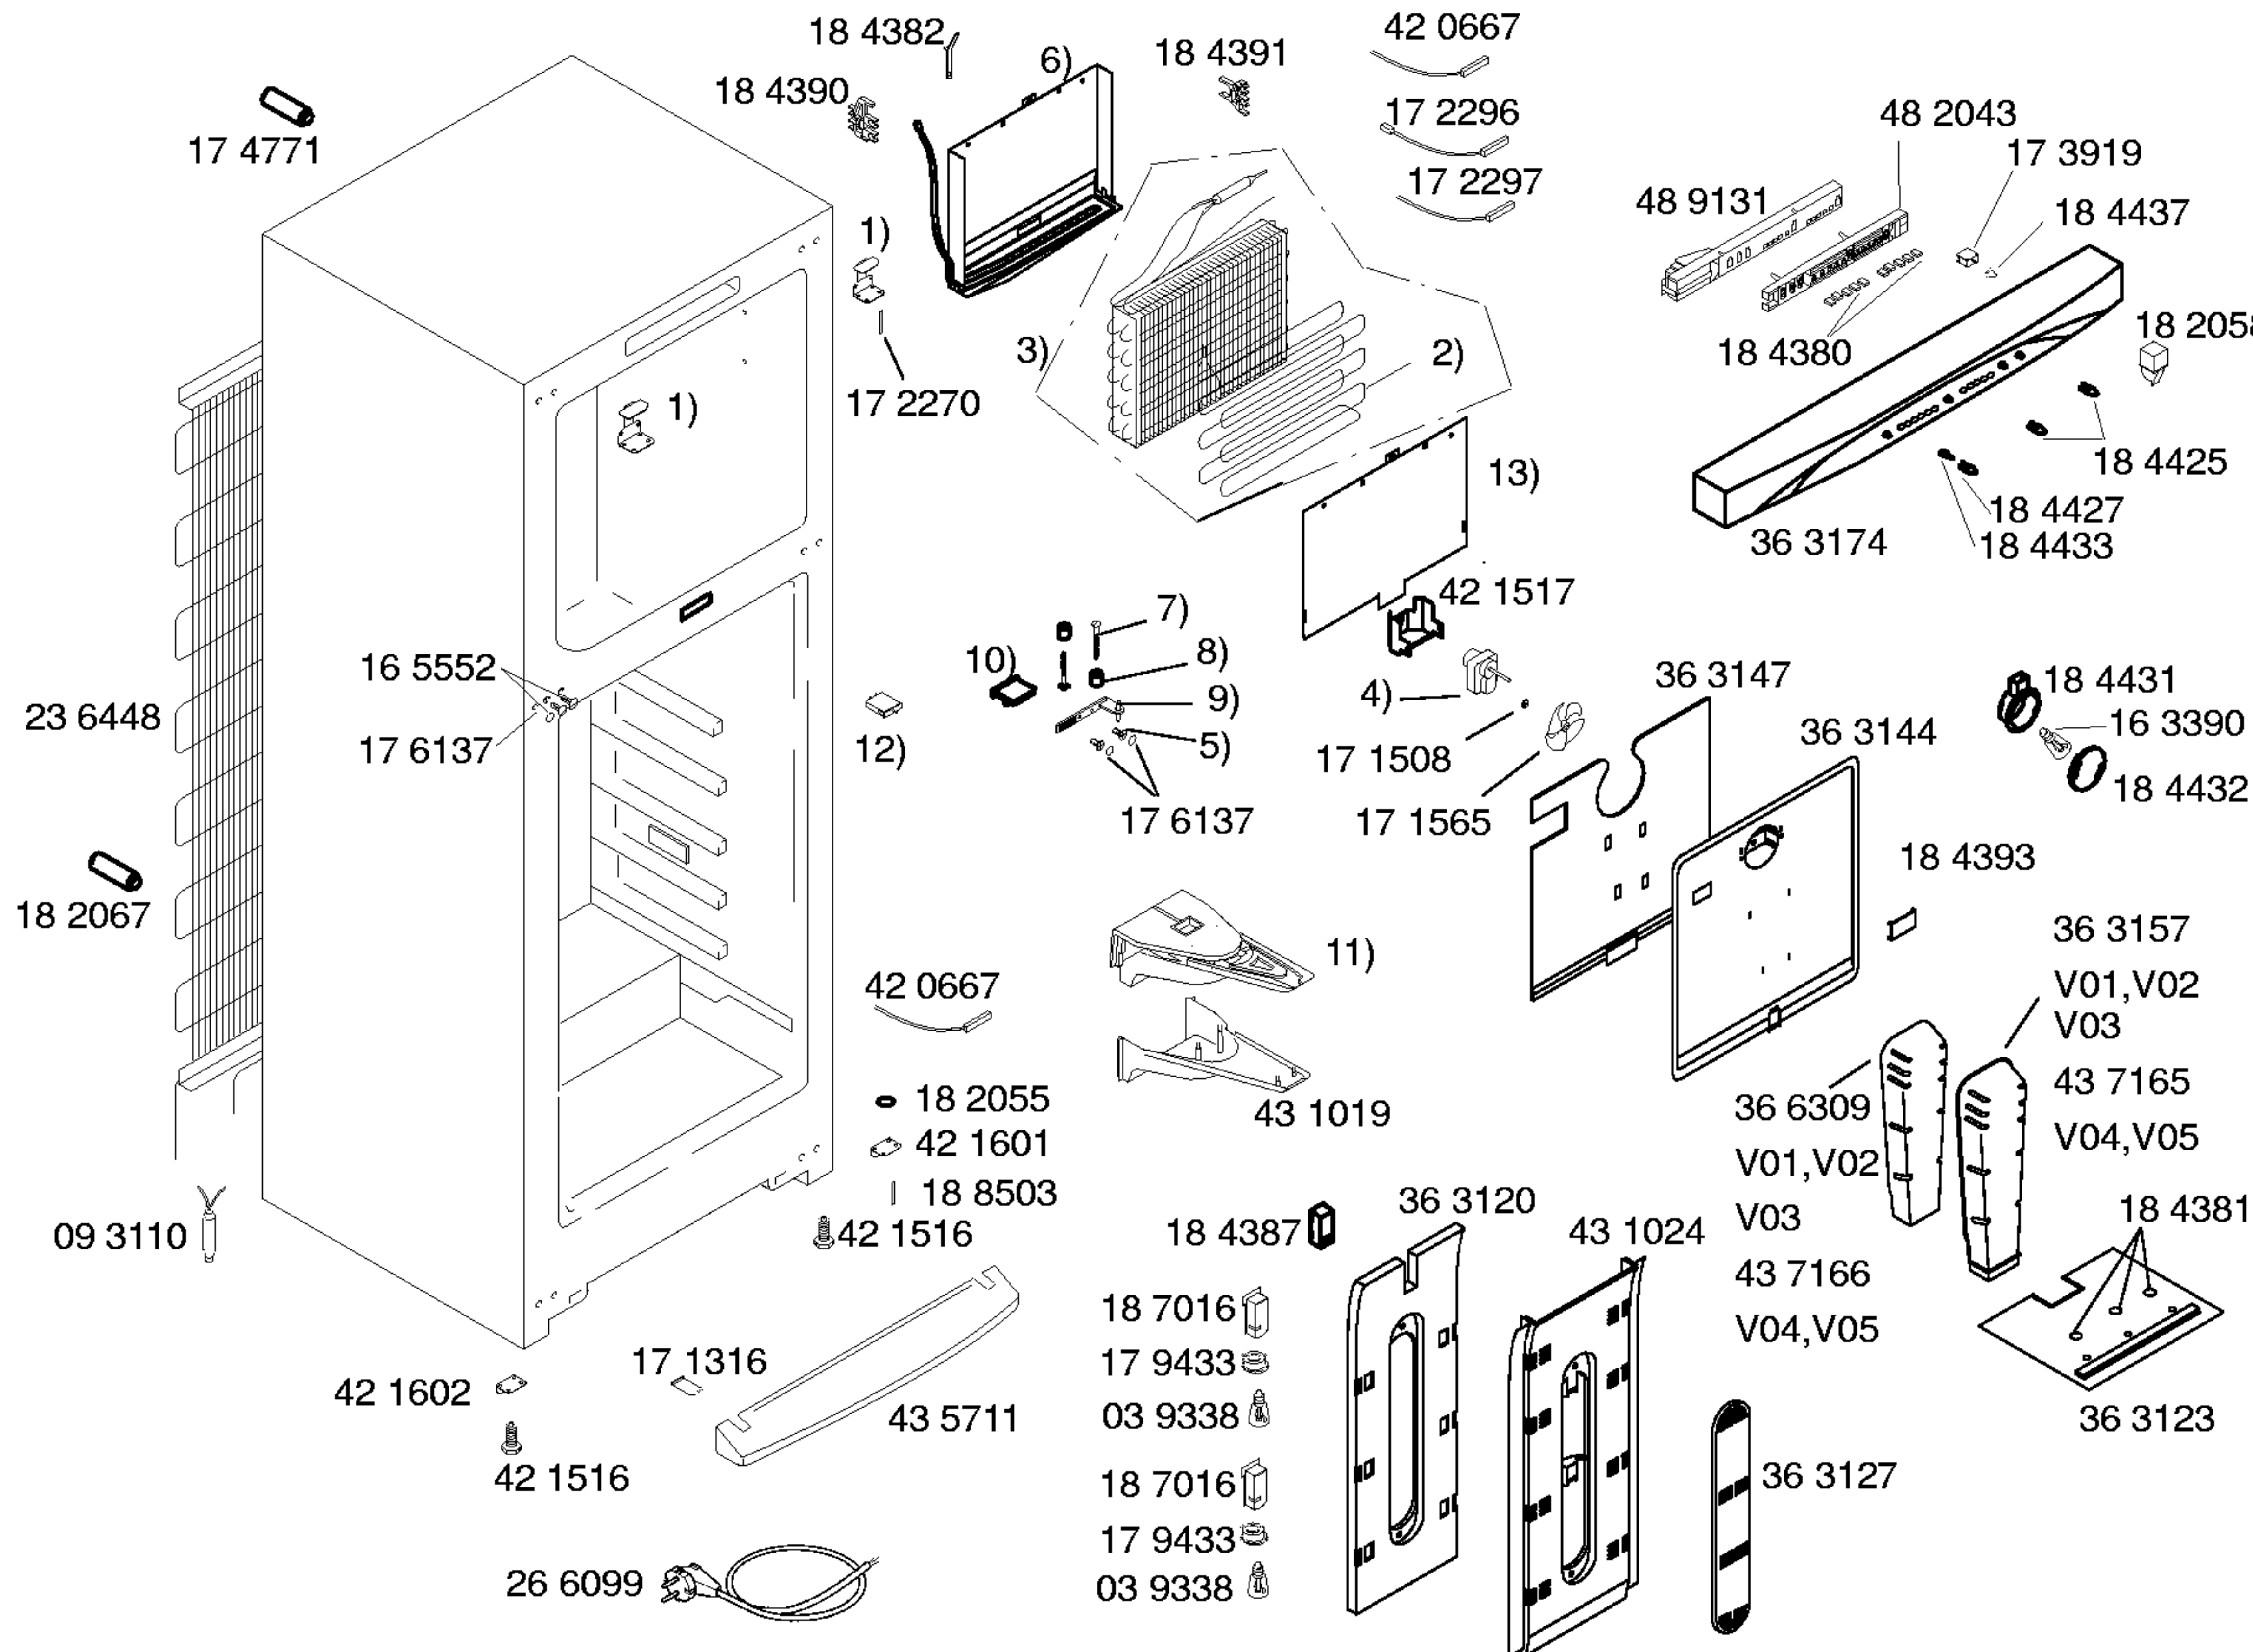


Mat. - Nr. - Konstante
3740
Gebrauchsanweisung
58 7169

- 1) 17 1312
- 2) 36 9816
V01,V02,V03,V04
- 3) 36 9815
V01,V02,V03,V04
43 8726
V05
- 4) 49 0859
- 5) 18 8196
- 6) 36 9905
- 7) 18 8194
- 8) 18 8188
- 9) 42 0644
- 10) 41 8128
- 11) 43 2092
- 12) 17 1307
V01
42 2142
V02,V03,V04,V04
- 13) 36 6902
V01,V02,V03,V04

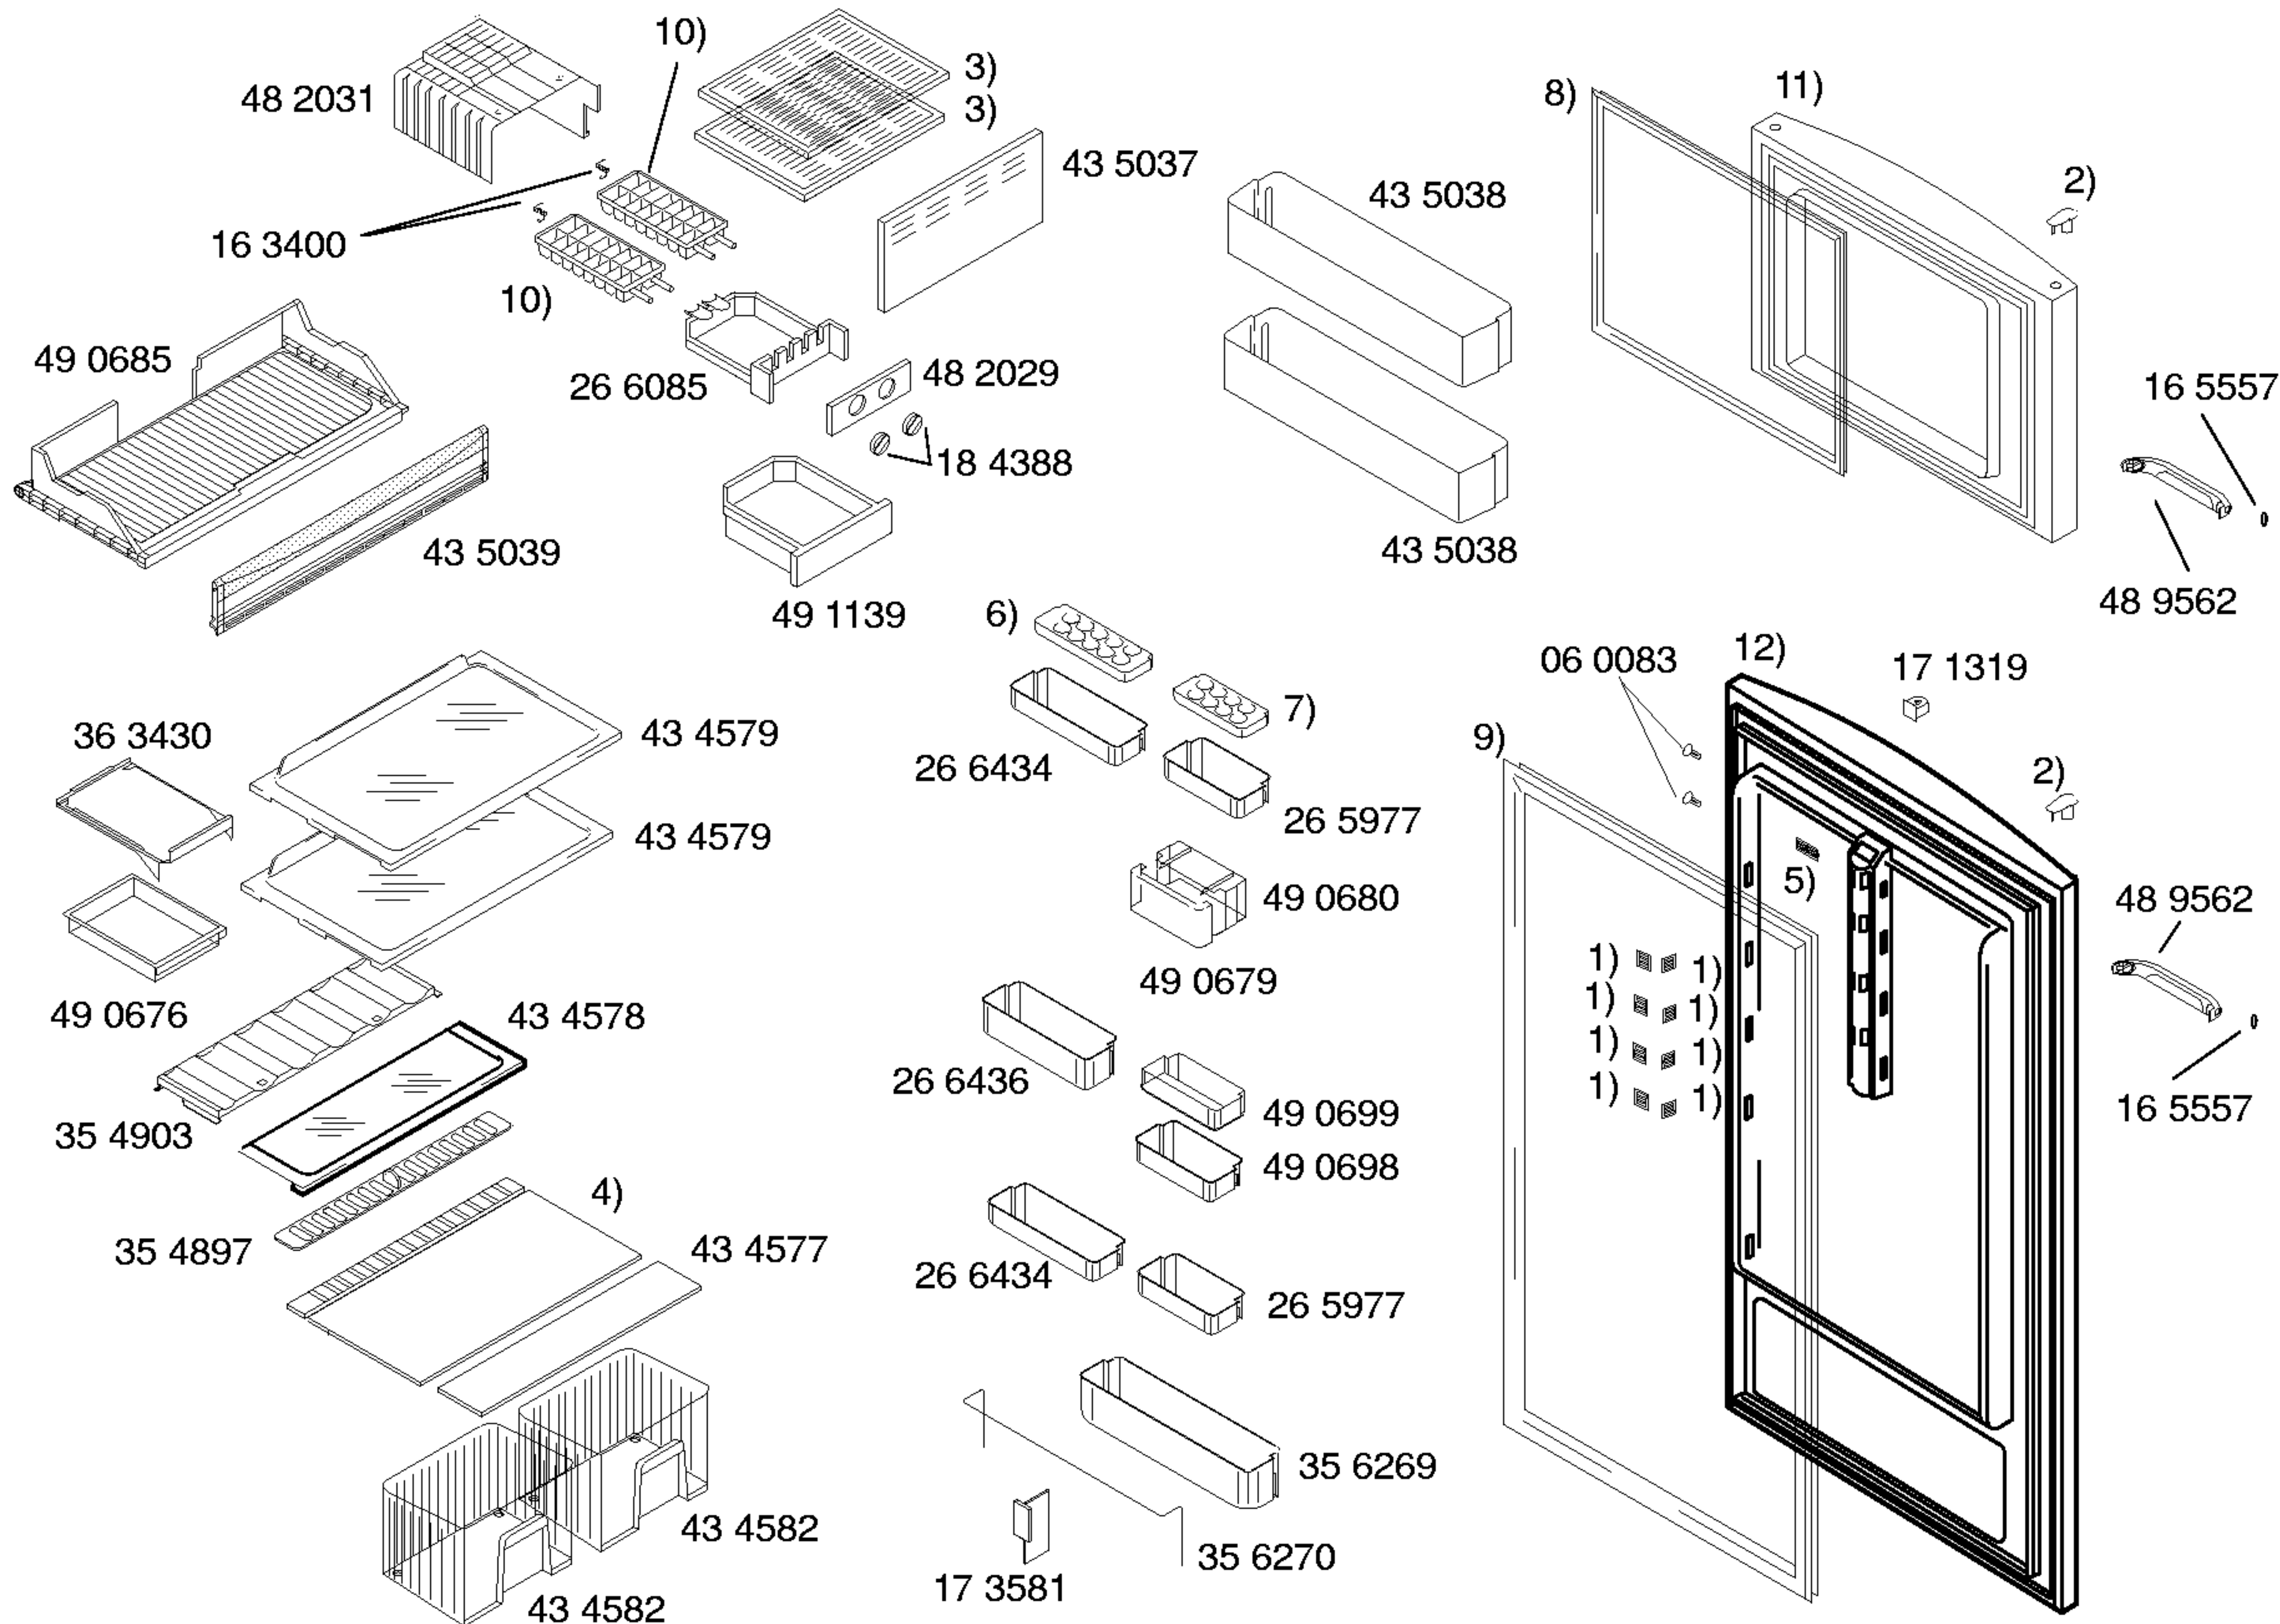

Mat. – Nr. – Konstante
3740

- 1) 41 6843
- 2) 17 1321
- 3) 49 0872
- 4) 36 1076
- 5) 41 6844
- 6) 26 7198
- 7) 26 7186
- 8) 21 8857
- V01,V02
- 47 1878
- V03,V04
- 9) 23 8423
- V01,V03
- 24 1272
- V03,V04
- 10)26 9013
- 11)47 1138
- 12)24 0695

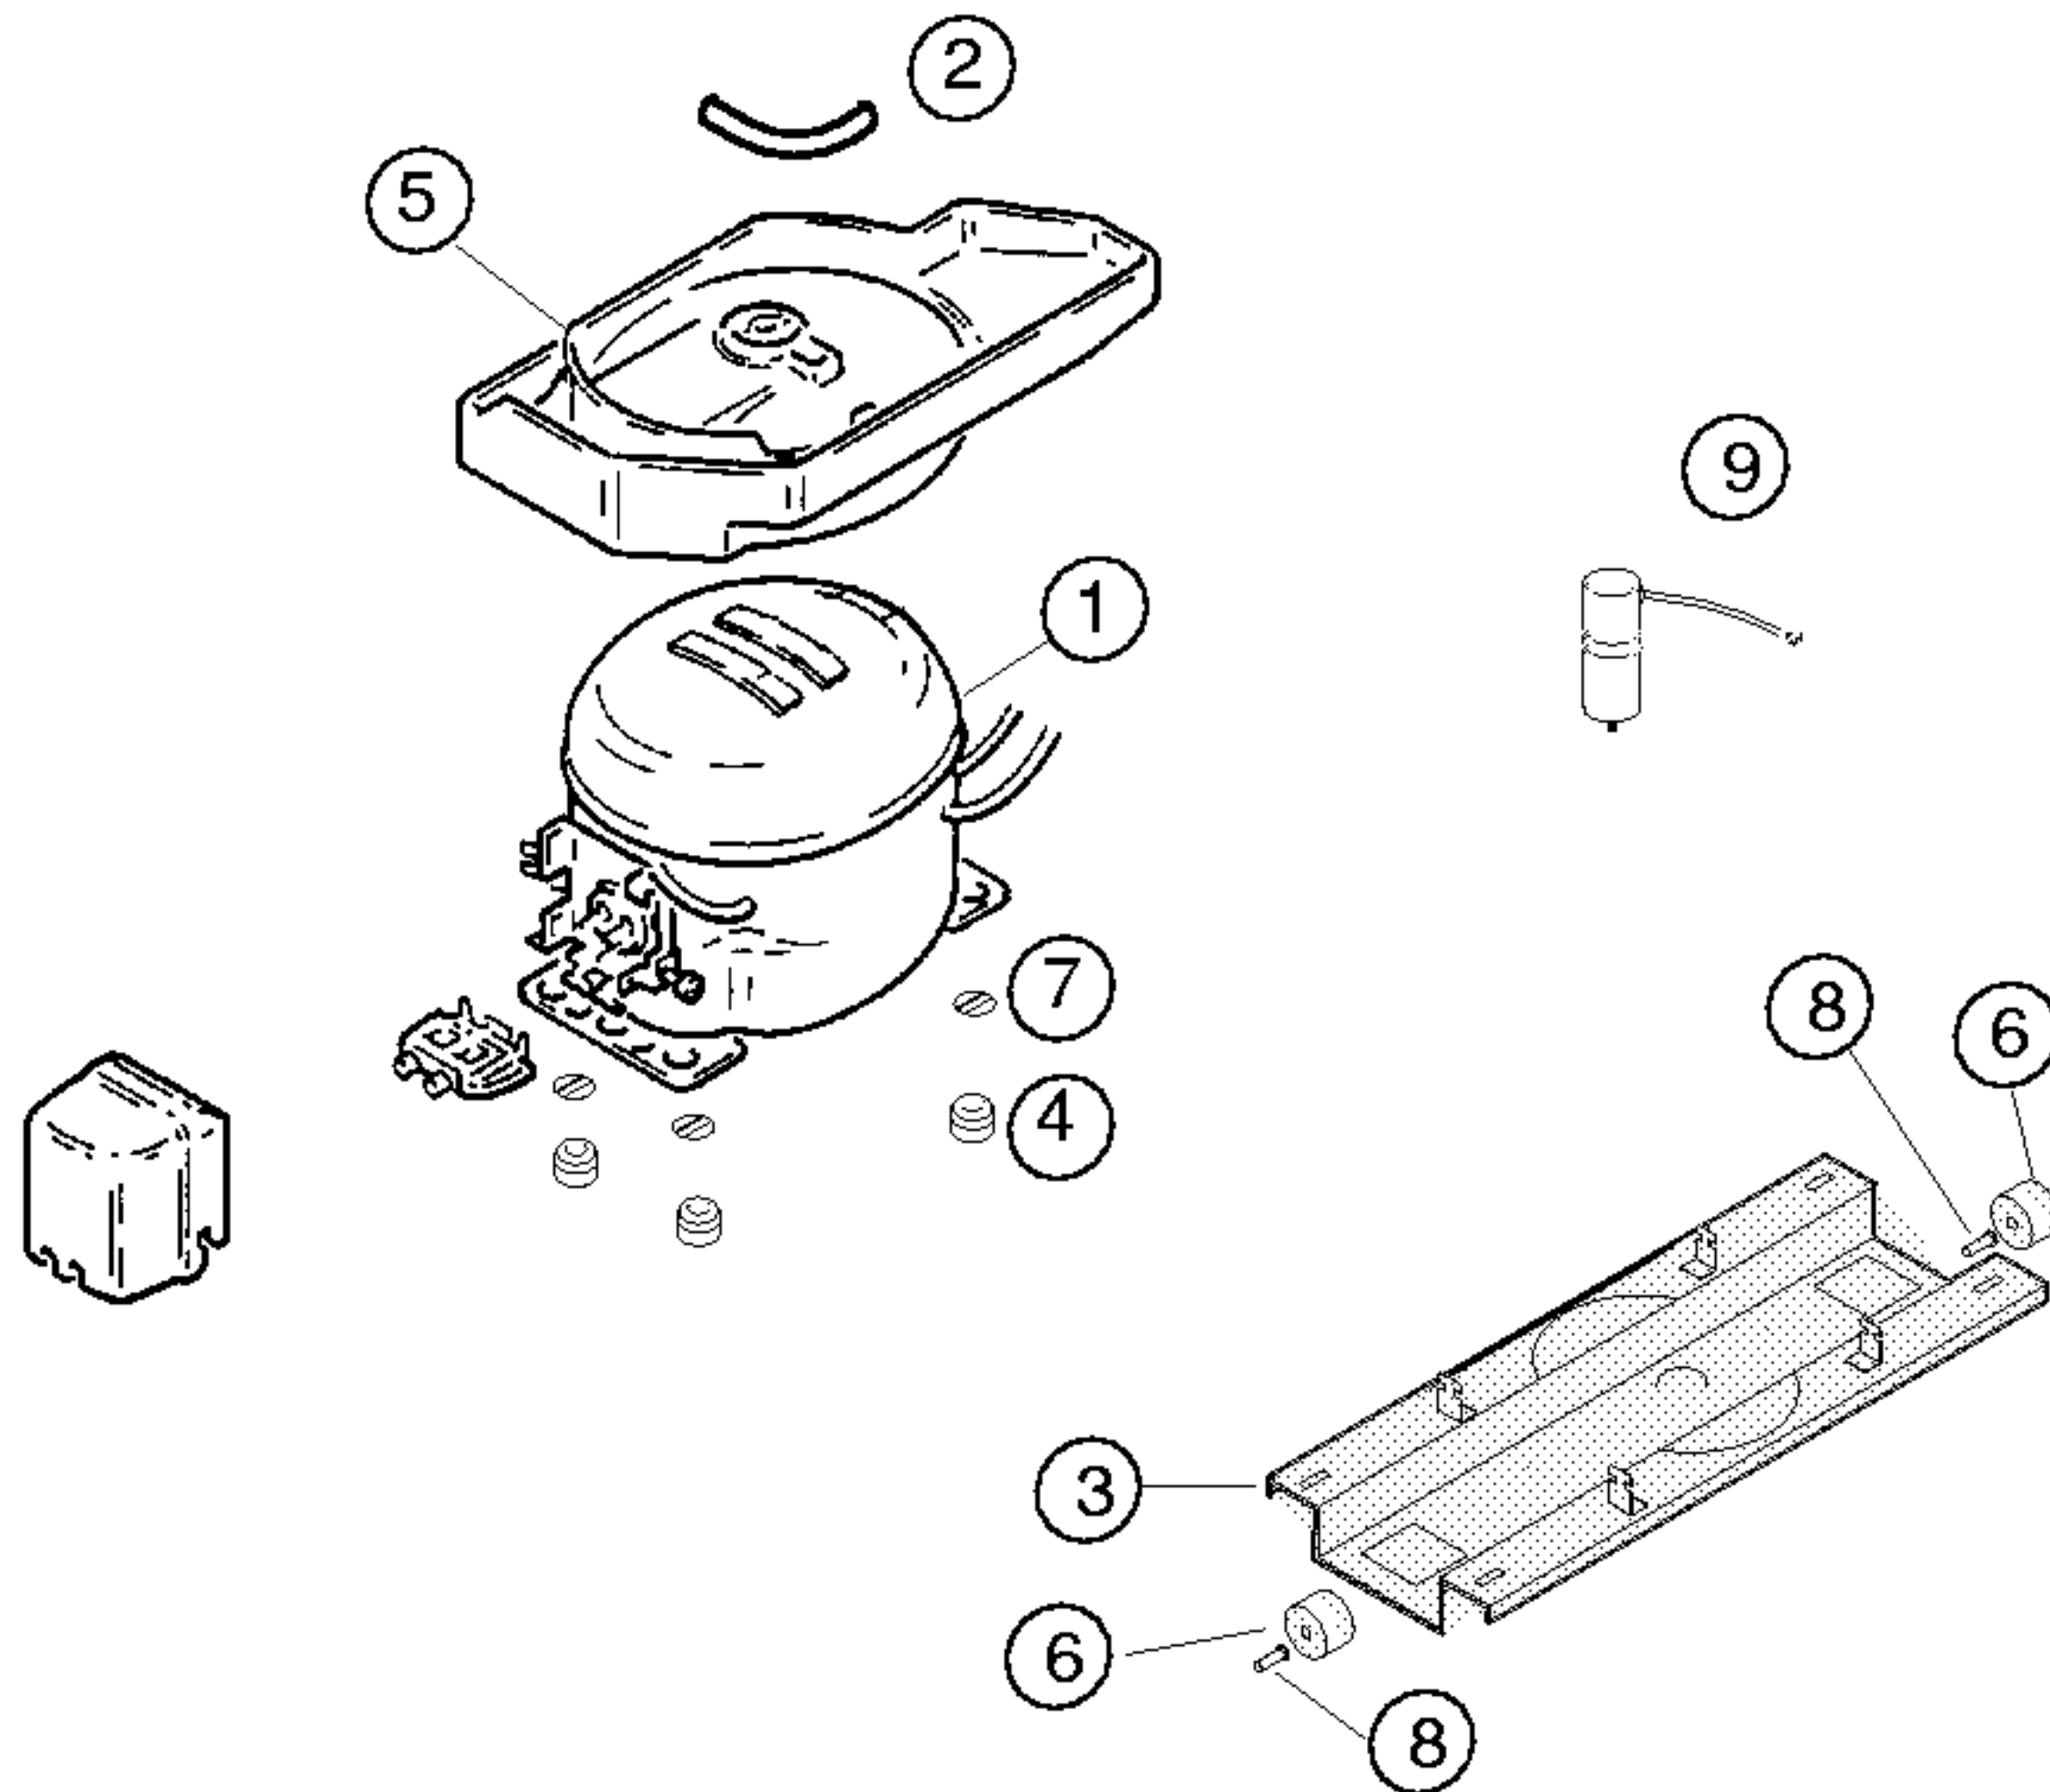

Pos.	Mats.		
	DGX125E		
1	14 3603		
2	42 0376		
3	35 4583		
4	16 3427		
5	49 1245		
6	17 1318		
7	17 1519		
8	18 1014		
9	42 0827		
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER		V01	V02,3,4,5,6,7	V08
Verdichter/Compressor/Kompresör Typ/Type/Tip Förderleistung/Delivery/Verim/h Anlaufstrom/Starting current/Giris akimi Widerstand/Resistance/Rezistans Ha/ Hi/aux.		Mats. DGX125E		
Temp.Reyler/Thermostat/Termostat Typ/Type/Tip Reglerstellung/Position/Termostat pozisyonu Schaltwerte/Actma kapama degerleri Valeurs de commutation/Termostat degeri (..abtaven' od)		Elektronisch		
Füllmenge/Fill quantity/ Dolum miktarı		R600a	g	*
Anschlusswert/Comm. load/Giris gucu		W		
Heizung/Heater/Rezistans Widerstand/Resistance/Direnc Leistung/Power/Guc (Min Annehmbare Werte in 220V)		K Ω W	Verdampfer 0,38 145/230	
Ventilador/Blower/Vantilatör Widerstand/Resistance/Rezistans		K Ω	Verdichter 0,61	
Magnetventil/Magnetic valve/Manyetik valjK Widerstand/Resistance/Rezistans Spannung/Voltage/Gerilim		K Ω V		
Temp.Reyler/Thermostat/Termostat				

* Siehe Typenschild/Mamul etiketine bakiniz