


CROLLS

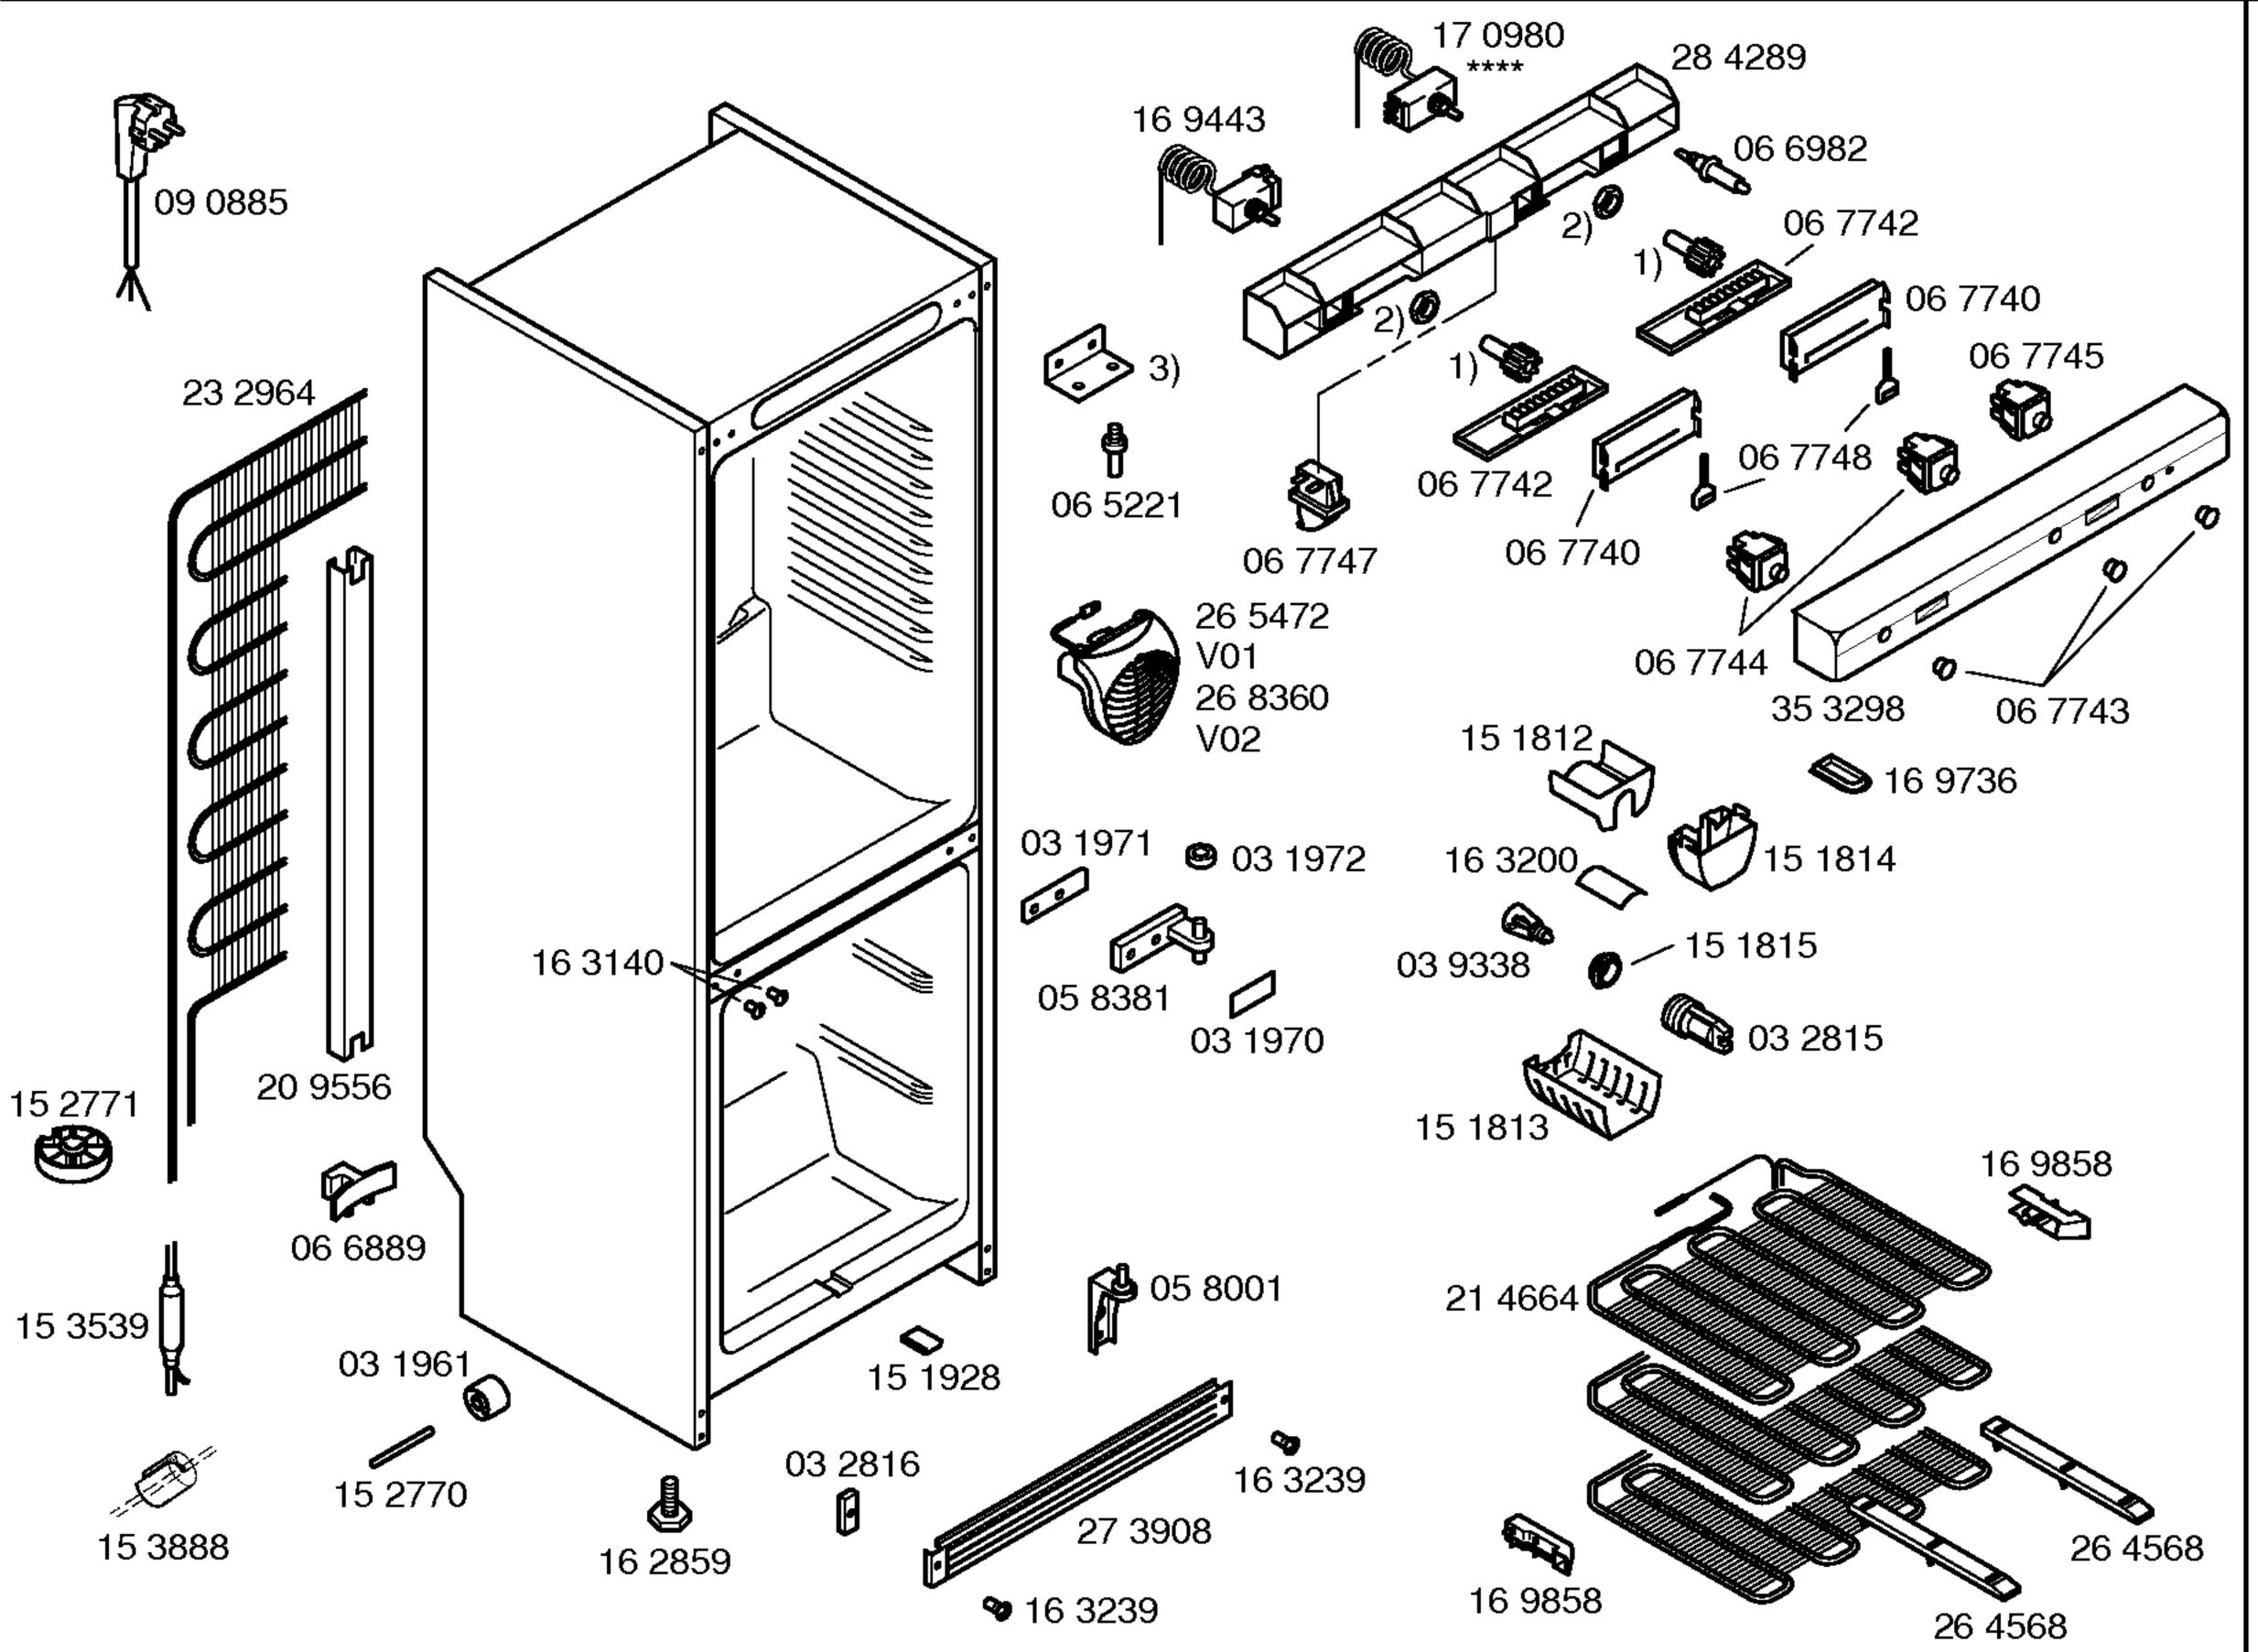

Libro de instrucciones 52 2191 (E,P,GB,F,NL,GR)

- 1) 06 7746
- 2) 03 3058
- 3) 05 8382

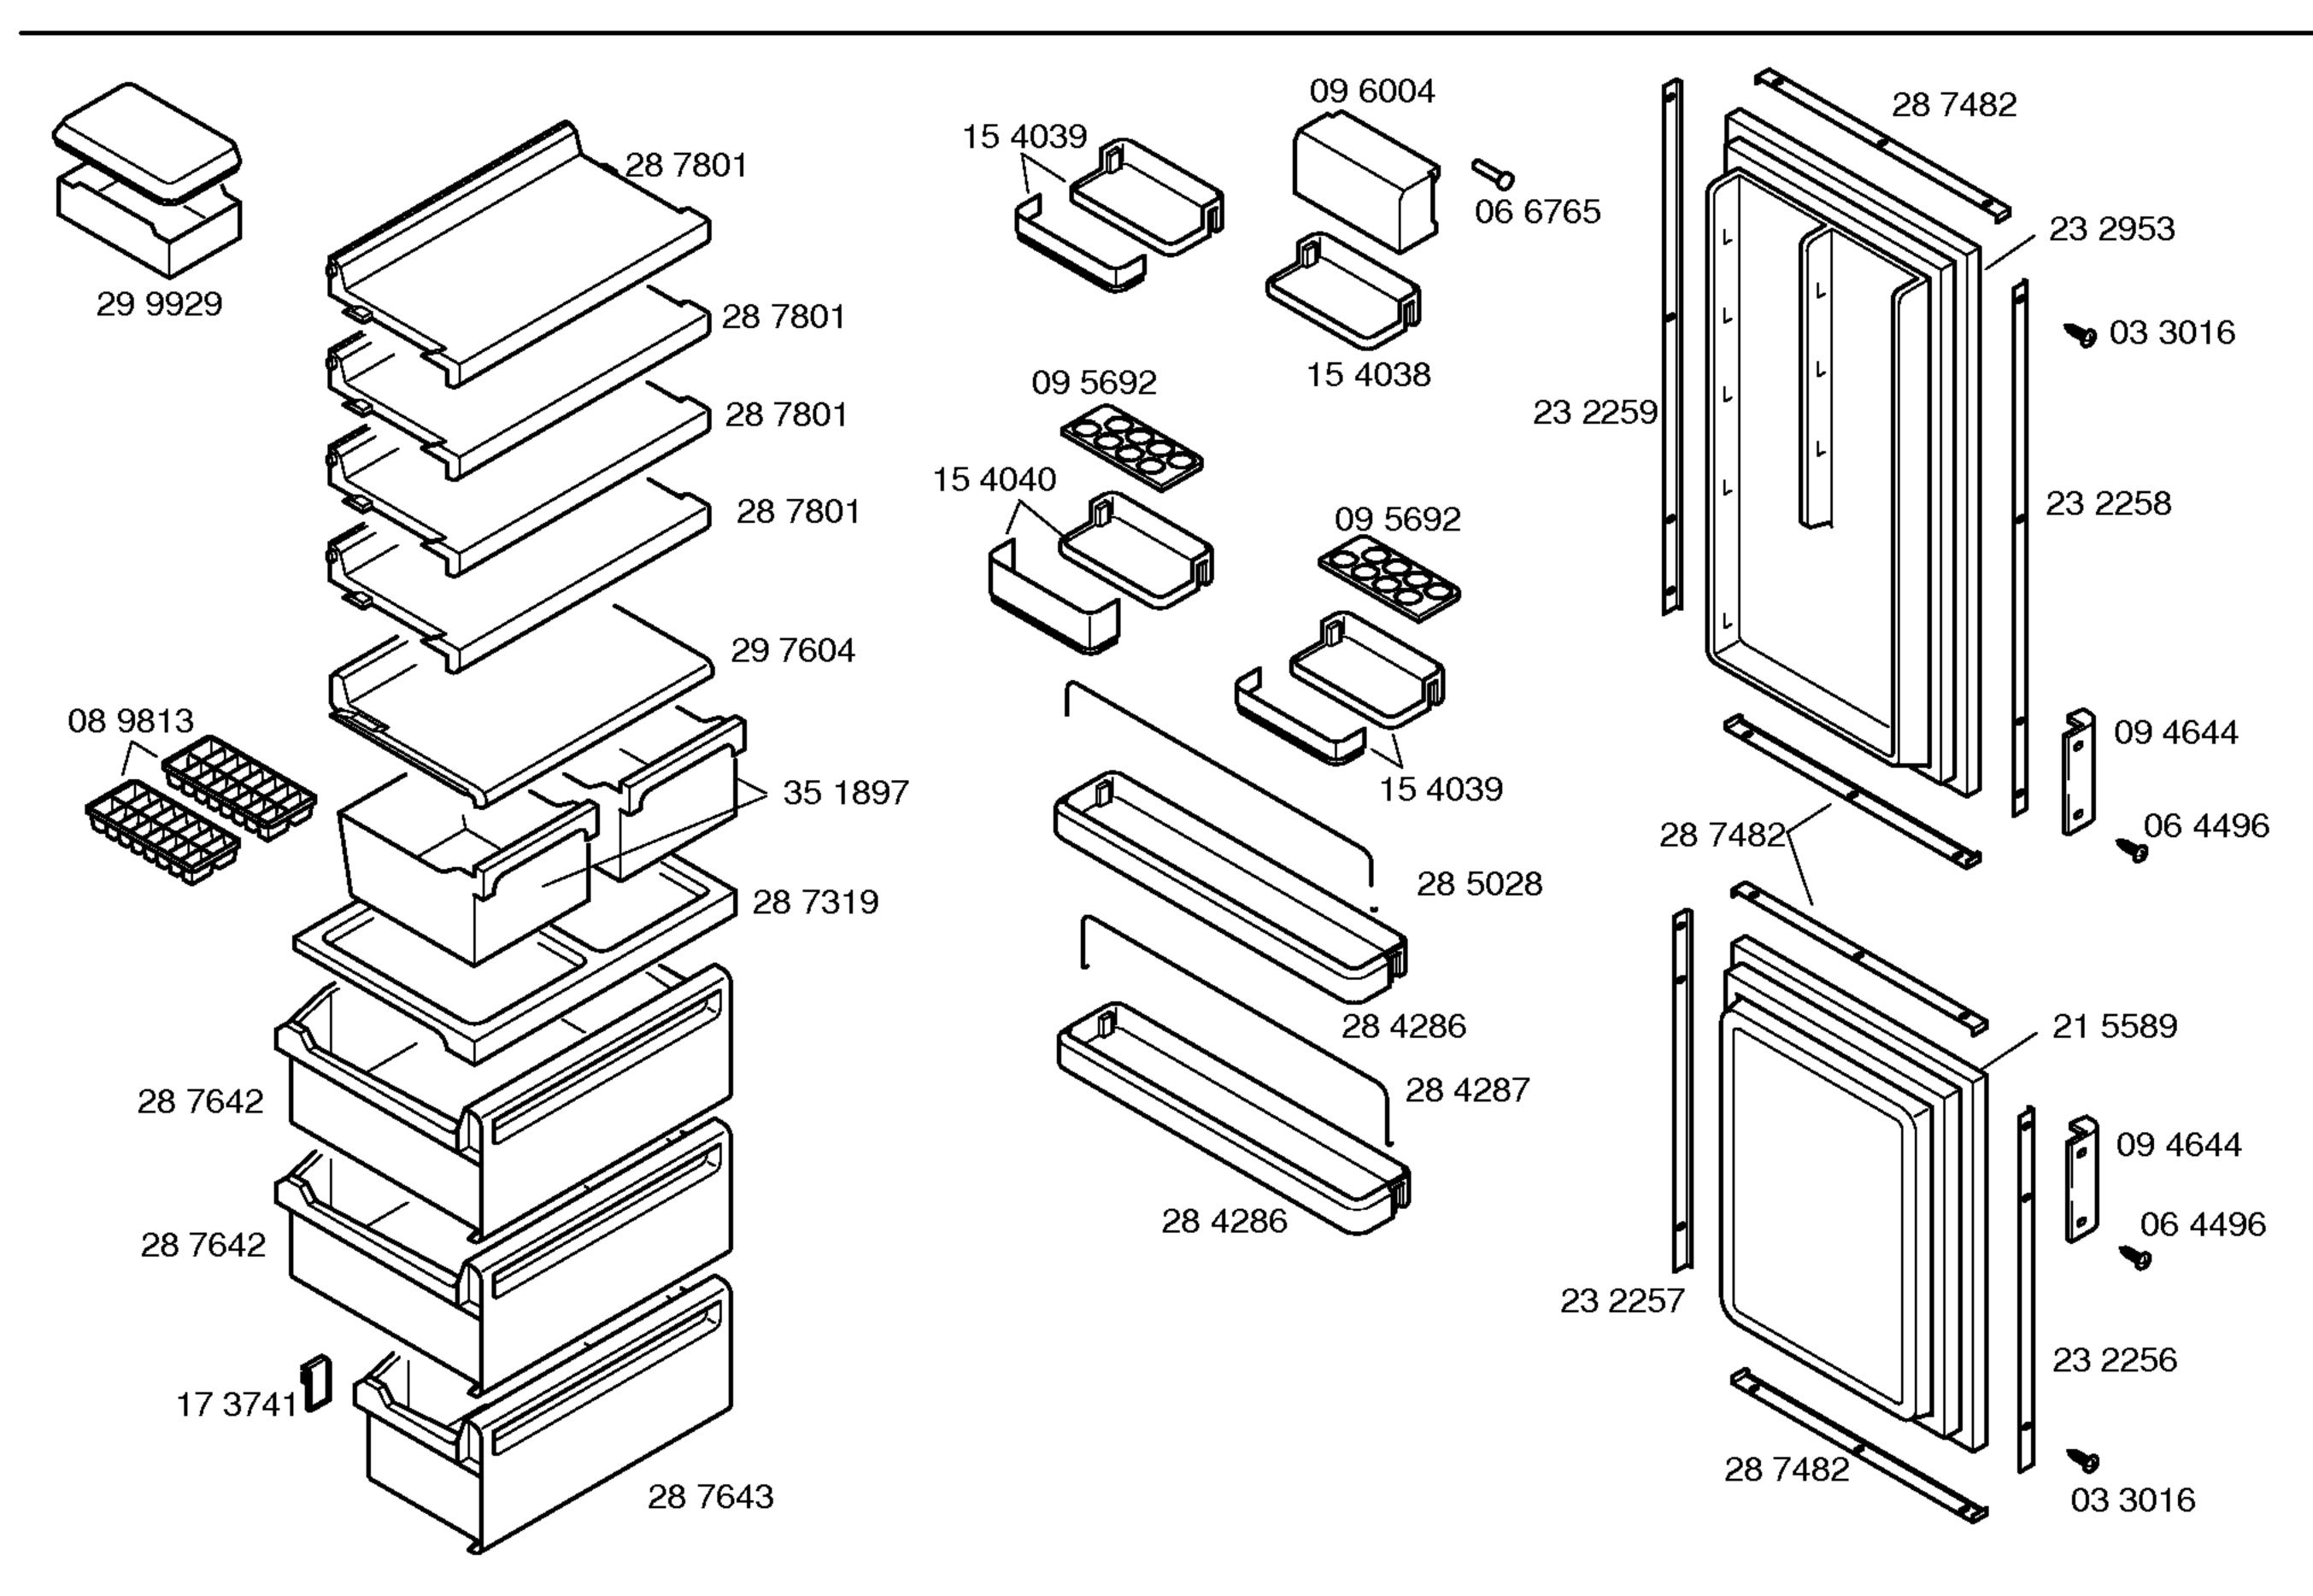

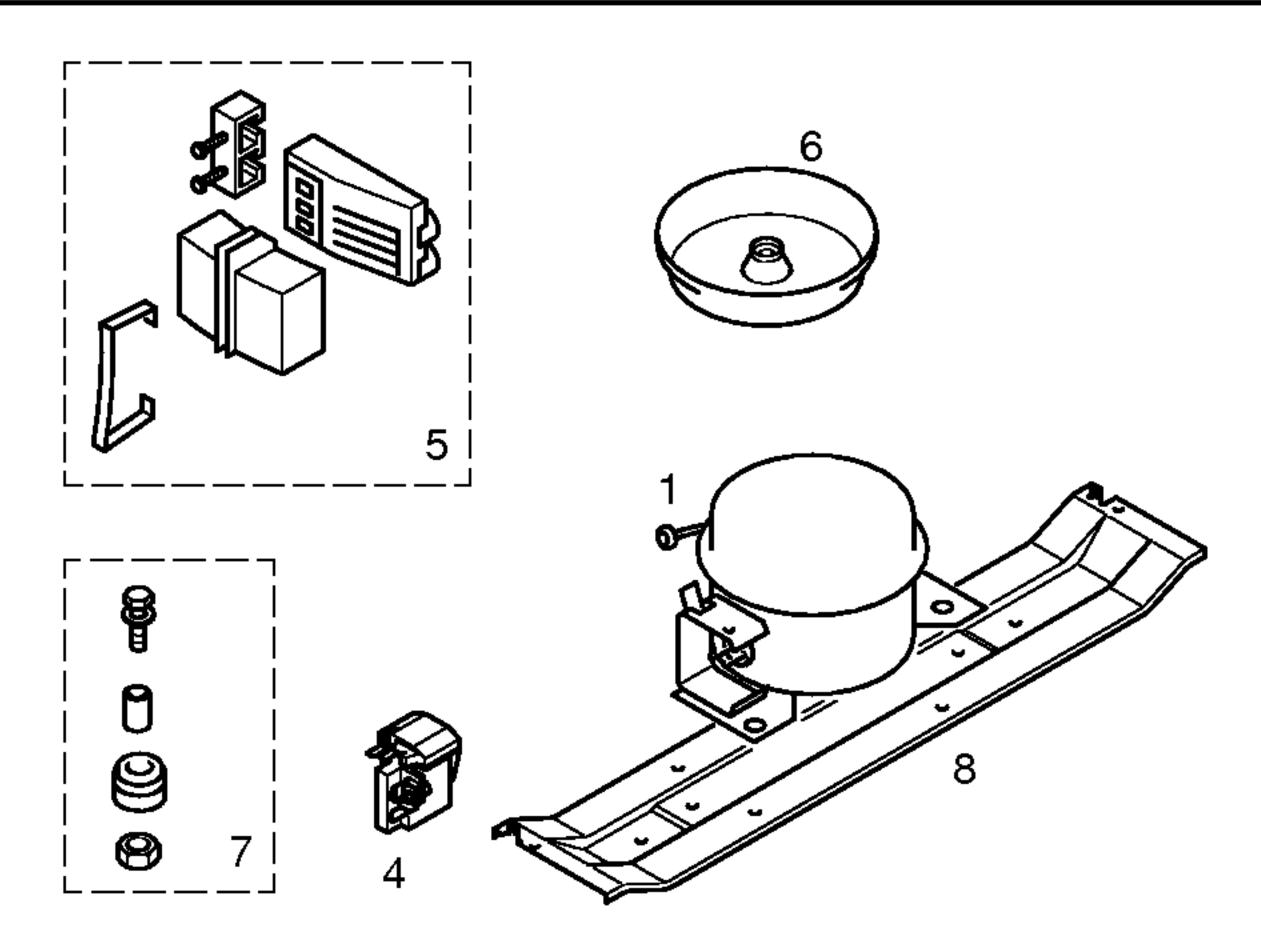

Pos.	Matsushita	Gold Star	
	SD65E80	ND69NAEG	
1	14 2003	14 2001	
2			
3			
4	16 5229	17 1011	
5			
6	09 5320		
7	05 0166	05 0166	
8	28 8253	28 8253	
9			
10			
11			
12			
13			

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECH	NICOES/DATC	****	
Verdichter/Compressor/Compresseur/Compresor Typ/Type/Tipo Förderleistung/Delivery/Debit/Aspiración I/h Anlaufstromm/Starting current/Cour.démarrage/Int.arranq. A Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm Hi/aux.	Matsushita SD65E80 5,76 22,50 31,80	Gold Star ND69NAEG	
Temp.Reyler/Thermostat/Termostato Typ/Type/Tipo Reglerstellung/Position/Conexión Schaltwerte/Switching values/ein/conex.ºC Valeurs de commutation/Desconexaus"/descon. (abtaven' od)alarm'	Ranco K59-L6050 MIN. MAX. +6° -11° -28°	Ranco K54–L2006 MIN. MAX. –14° –22° –20° –28° –10° –18°	
Fülmenge/Fill. quantily/Charge/Carga R600a g	*	*	
Anschlusswert/Comm. load/Puiss. Connect./Potenc. W	77	83	
Heizung/Heater/Chauflage/Resistenc.descong. Widerstand/Resistance/Resistencia Ohm Leistung/Power/Puissance/Potencia W			
Ventilador/Blower/Ventilateur/Ventilador Widerstand/Resistance/Resistencia Ohm			
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula Widerstand/Resistance/Resistencia Ohm Spannung/Voltage/Tension/Tensión V			
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador			

^{*} Siehe Typenschild / See identification plate / Voir plaquette de caractéristiques / Ver plaqueta de características