


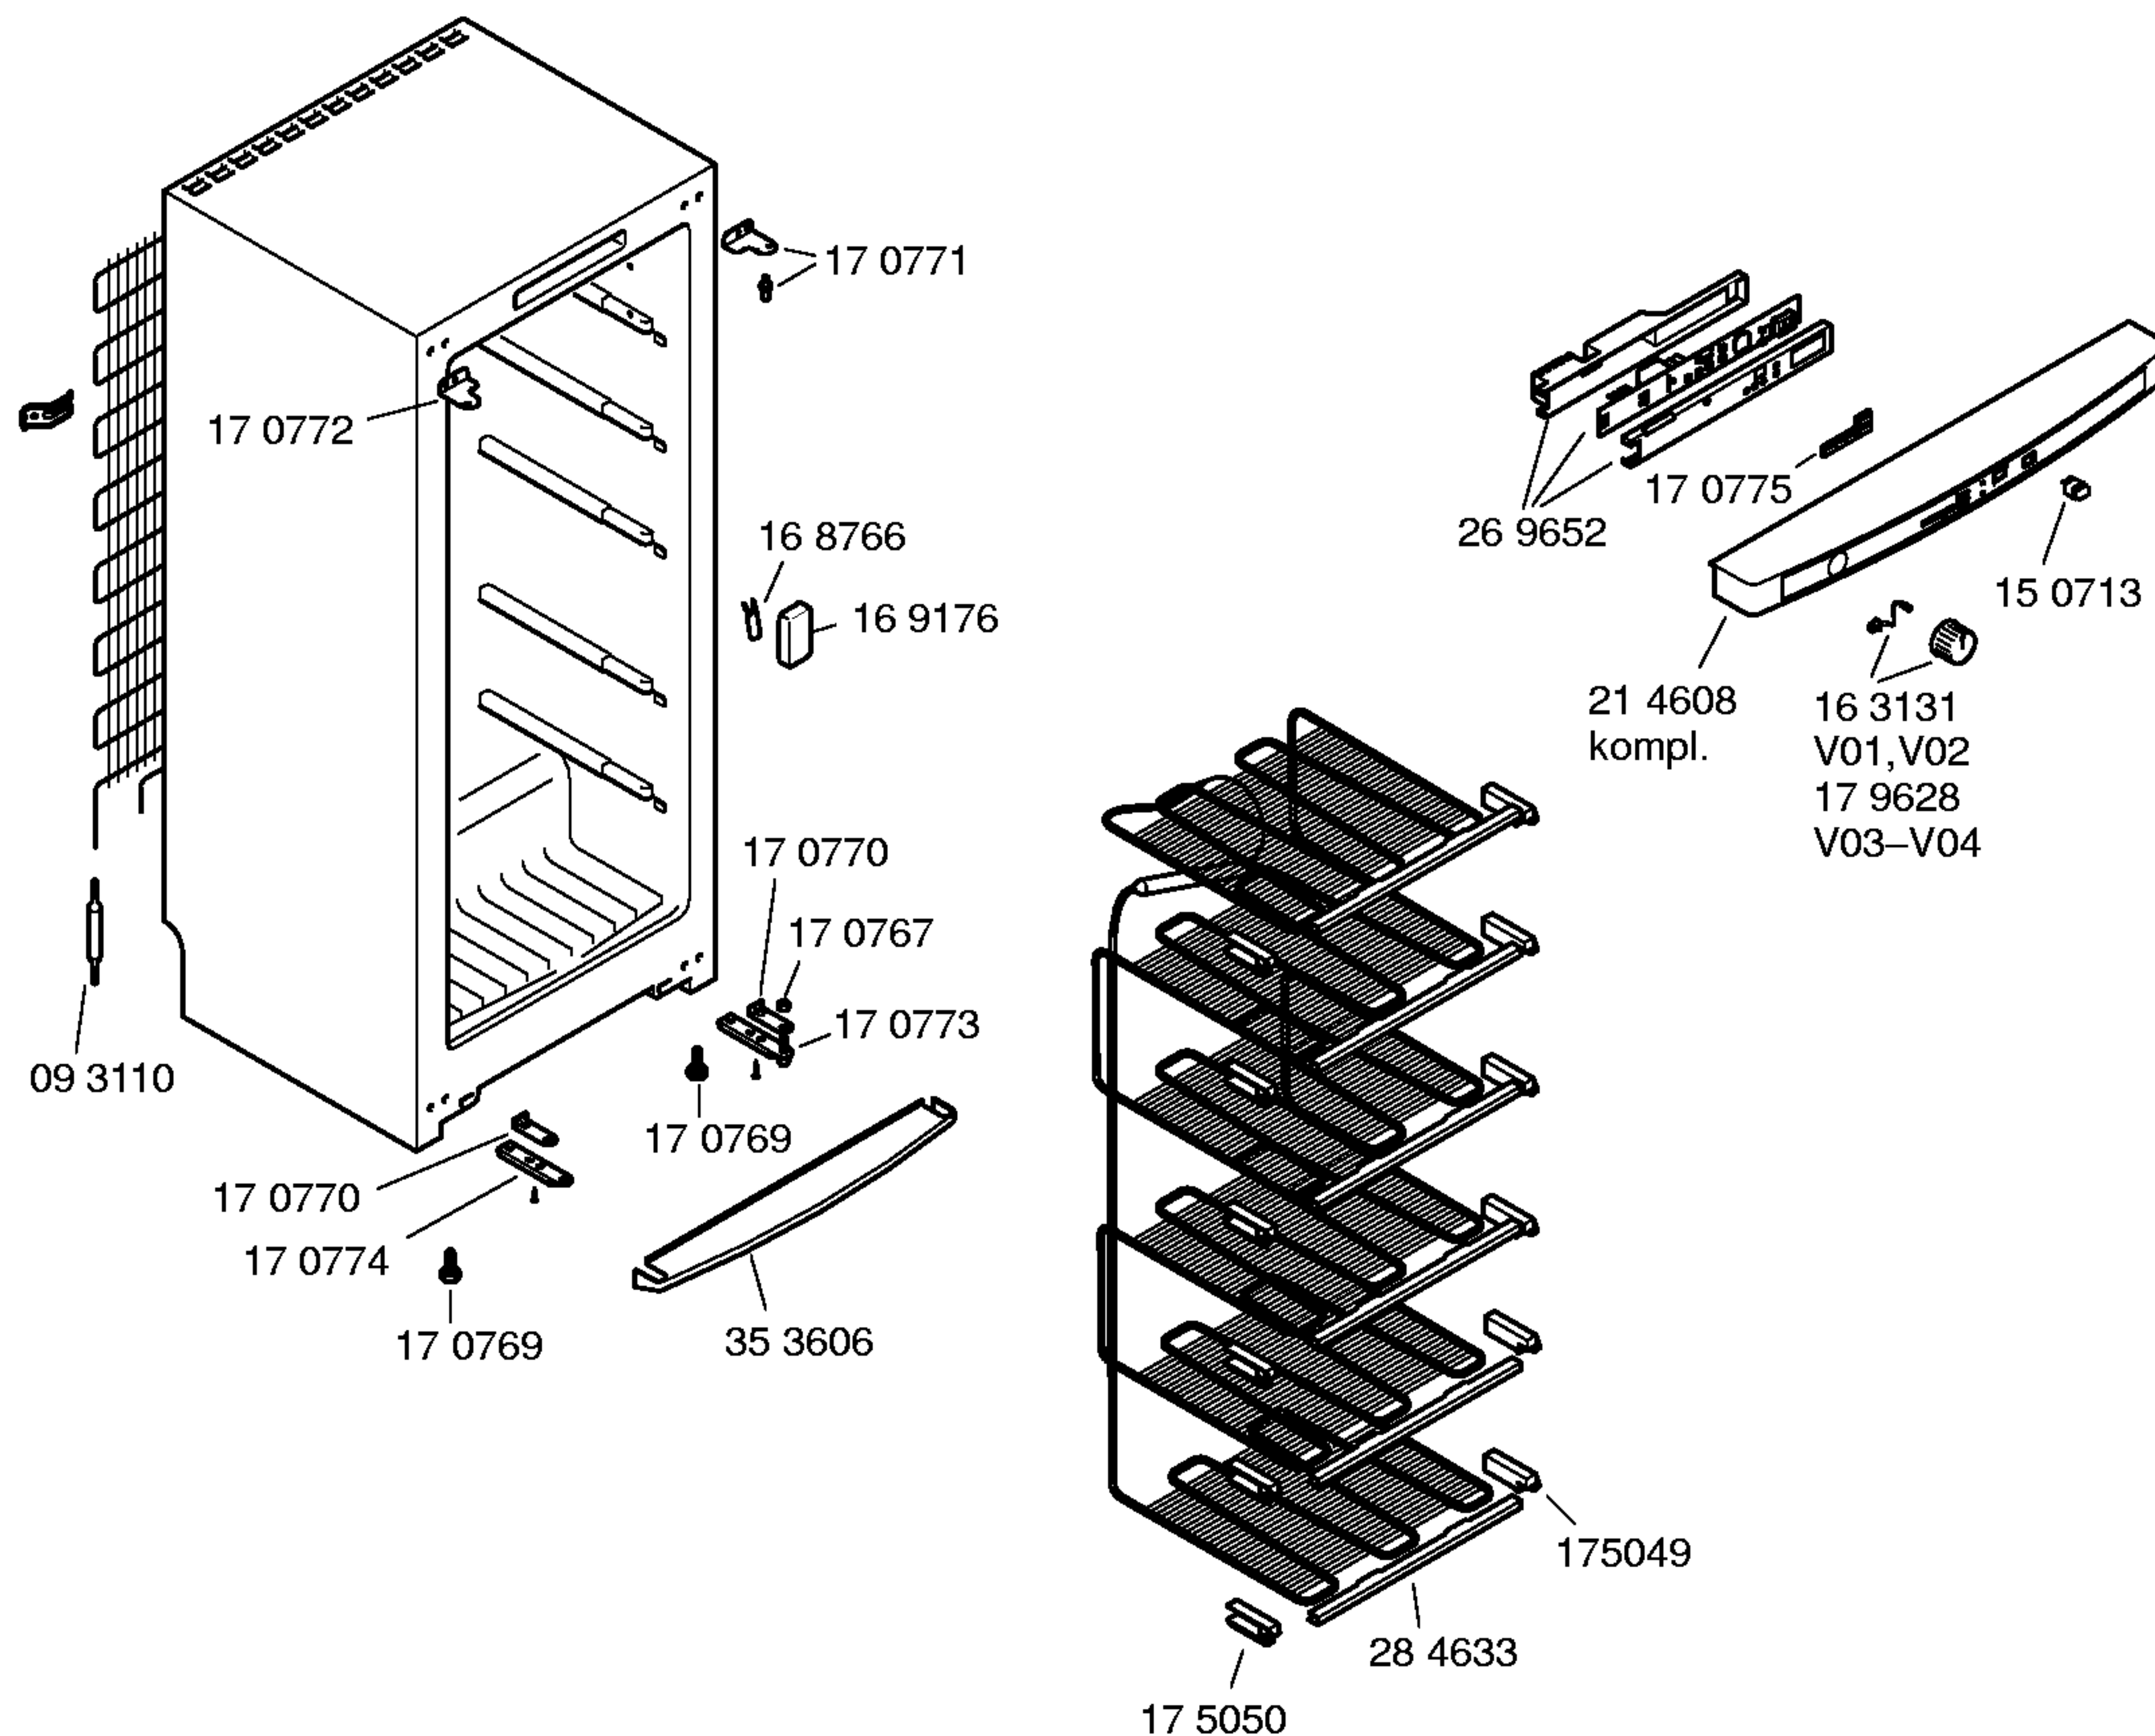



Gebrauchsanweisung
52 2770
(D,GB,F,I,NL)

Montageanleitung
52 2772
(D,GB,F,I,NL,DK,N,SF,SE,TR)

Beistellsatz
26 5629

Side by Side
Beistellsatz zu KSR/KSK
48 1044

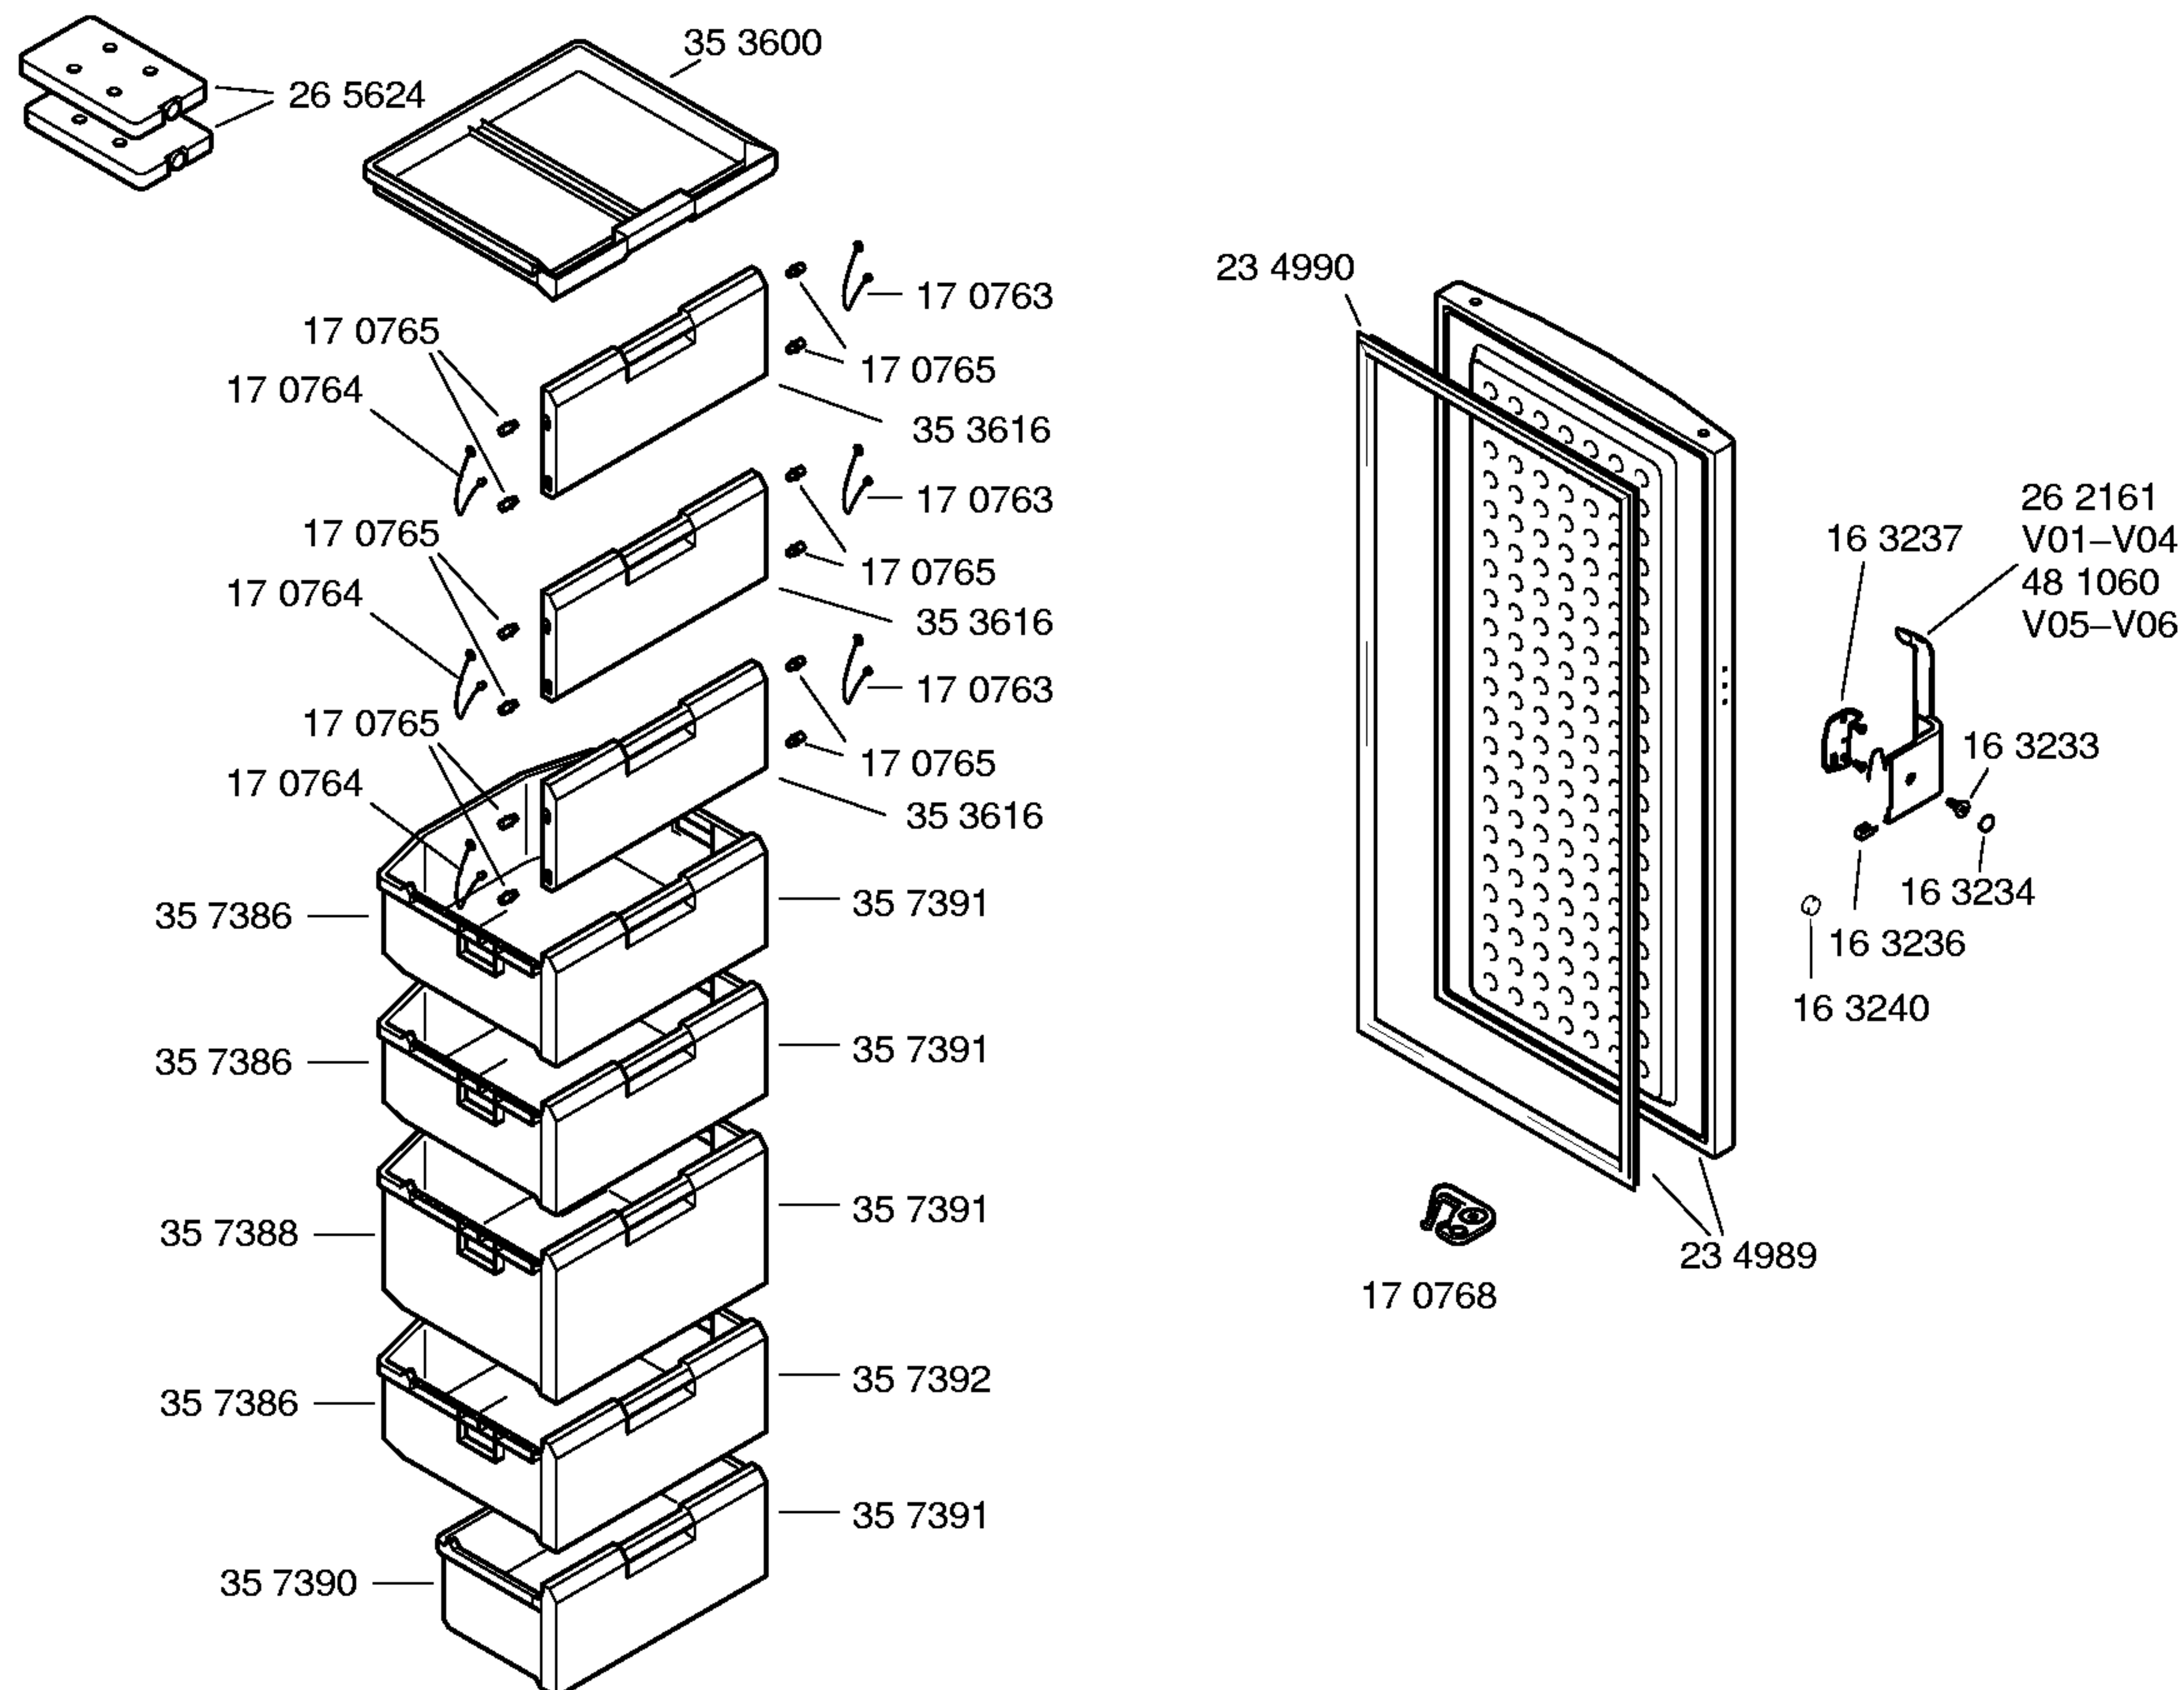

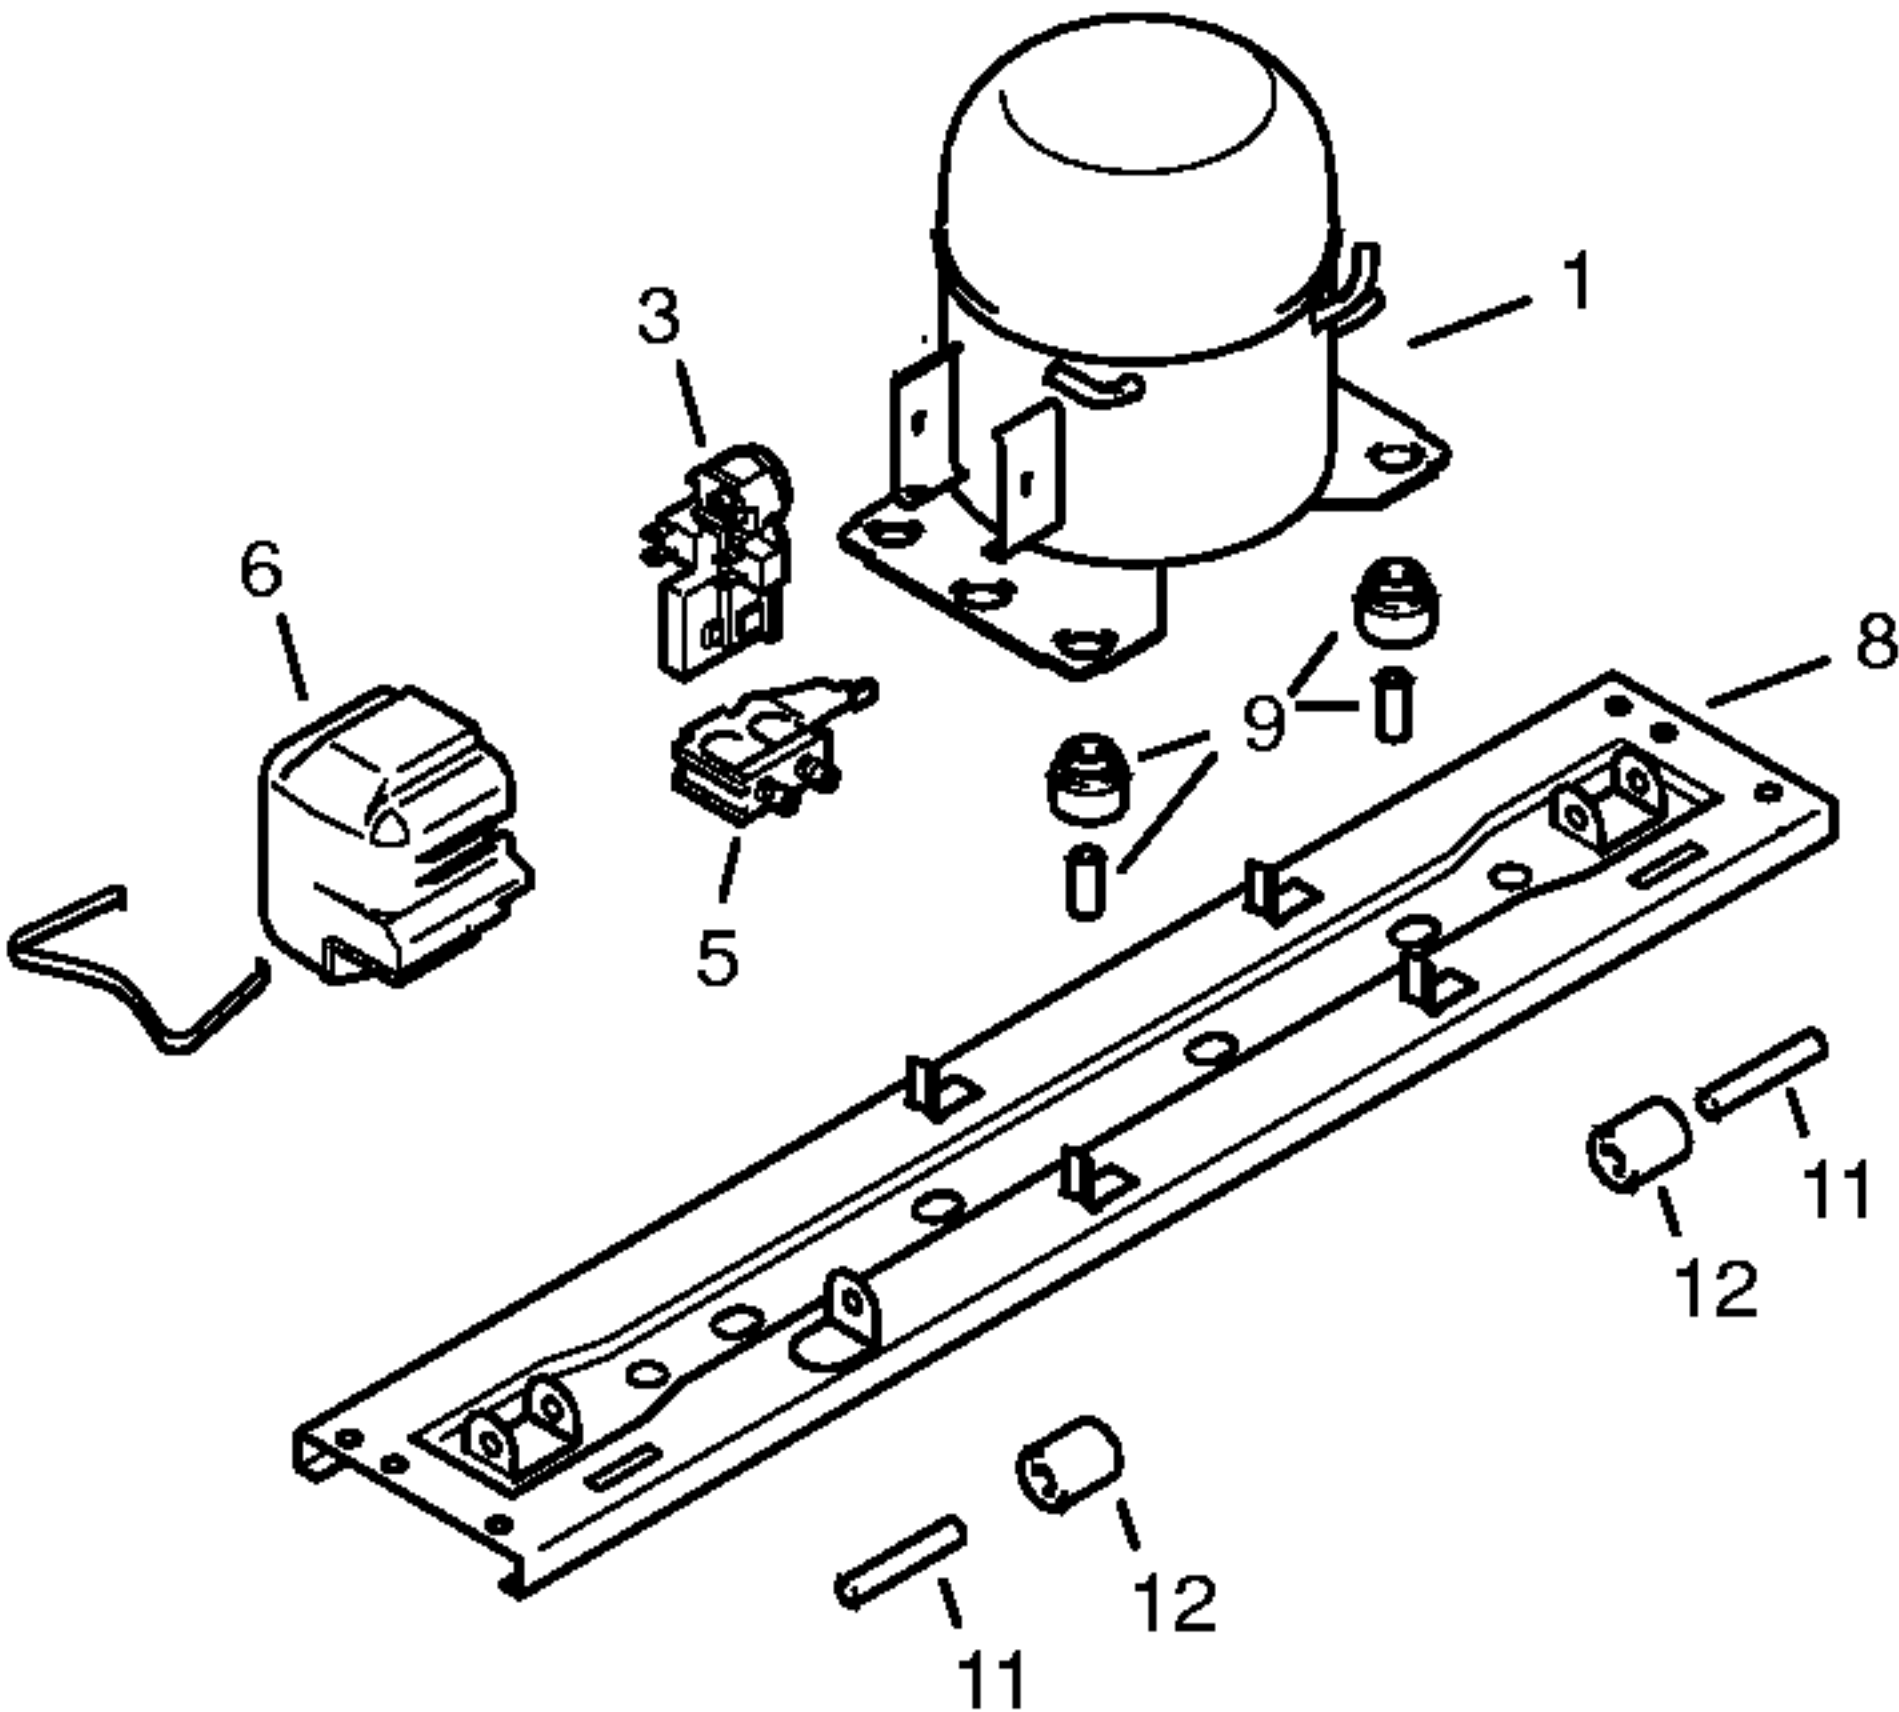

Pos.	V01,V03,V05	V02	V04,V06	
	Danfoss	Matsushita	Matsushita	
	NLY13 K	DC 125 E	DC 125 E	
1	14 1747	14 1965	14 2131	
2				
3	15 1055	17 2967	17 2967	
4				
5	15 0760	16 2549	16 2549	
6	15 1072	16 6782	16 6782	
7				
8	21 4604	21 4604	21 4604	
9	05 0166	05 0166	05 0166	
10				
11	01 9017	01 9017	01 9017	
12	01 9016	01 1916	01 1916	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		Matsushita
Typ/Type		NLY13K		DC 125 E
Förderleistung/Delivery/Débit		l/h	2394	2246
Anlaufstrom/Starting current/Cour de démarrage		A	11,3	9,2
Widerstand/Resistance/Résistance		Ha/main/prin	Ω 11,00	12,1
		Hi/aux	Ω 9,0	13,8
Temp.-Regler/Thermostat				
Typ/Type				
Regelstellung/Position				
Schaltwerte/Switching values				
Valeurs de commutation				
"warm"				
"kalt"				
"alarm"				
Füllmenge/Fill.quantity/Charge				
R600a				
Anschlußwert/Conn.load/Puiss. connectée		W	133	120
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
NTC-Fühler / Sensor				
		°C	kΩ	°C
		+10	9,95 ±0,18	-18 43,31 ±1,10
		+5	12,70 ±0,18	-22 54,66 ±1,59
		0	16,33 ±0,16	-26 69,42 ±2,29
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		