




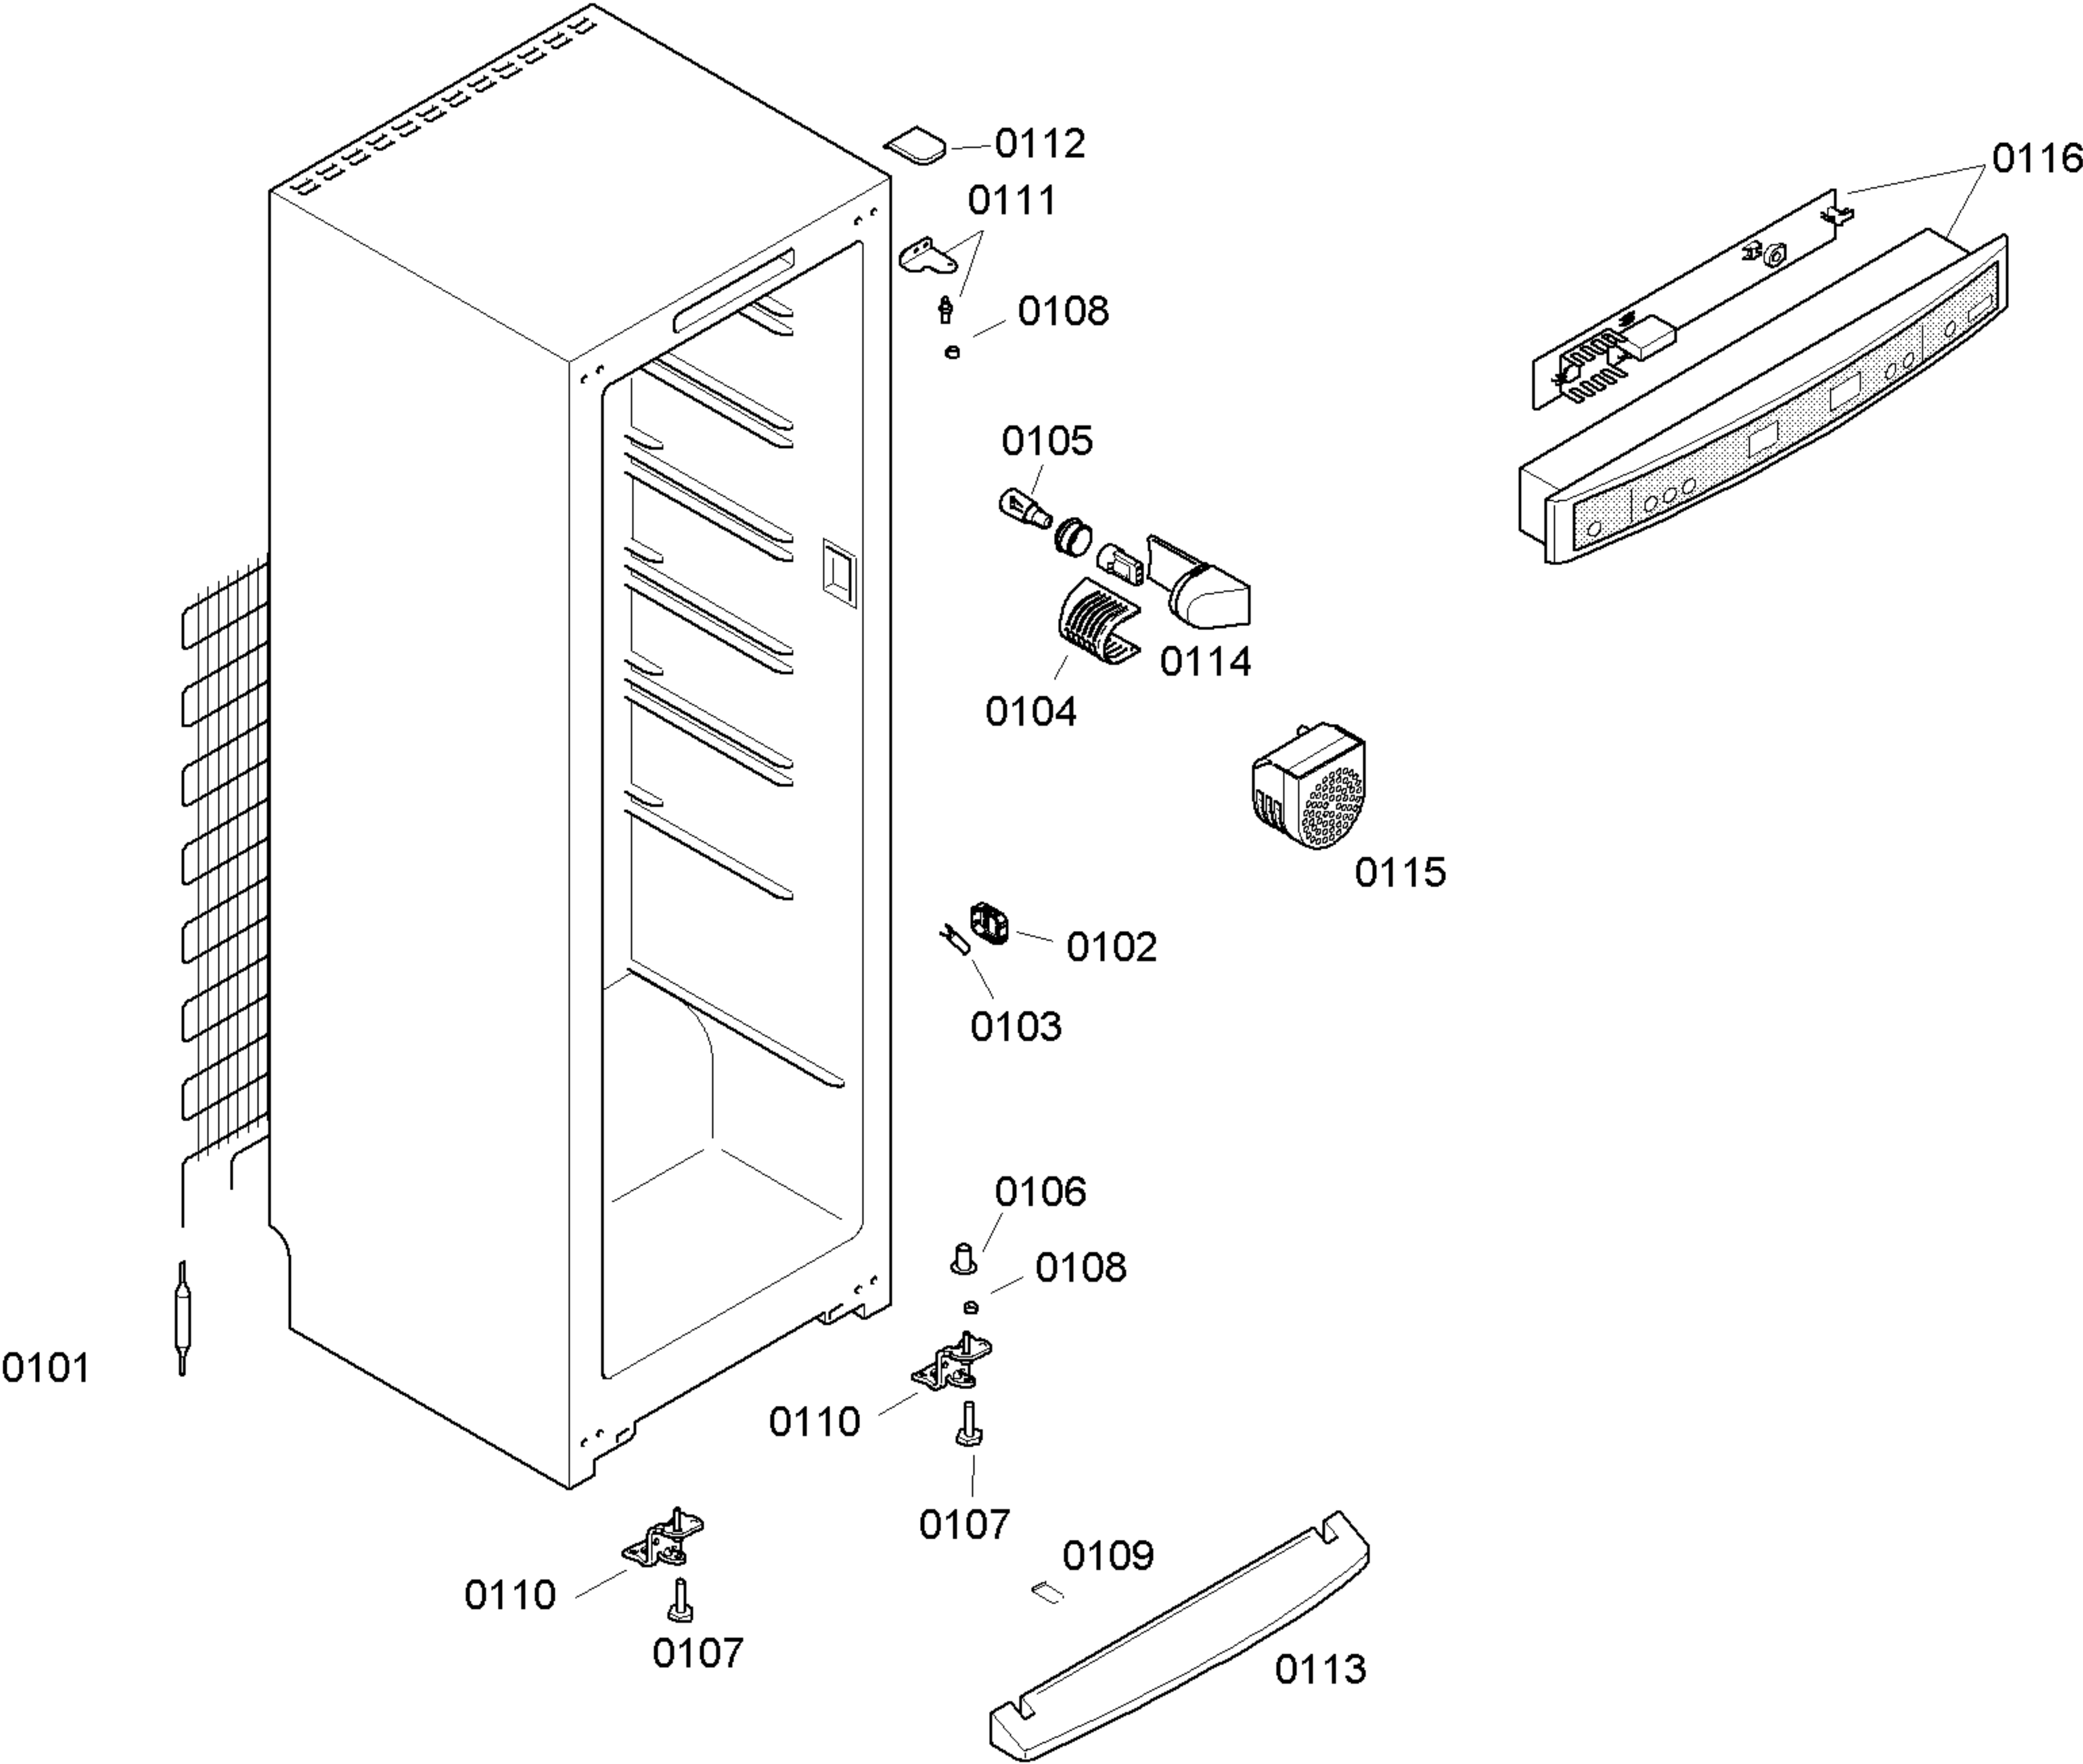

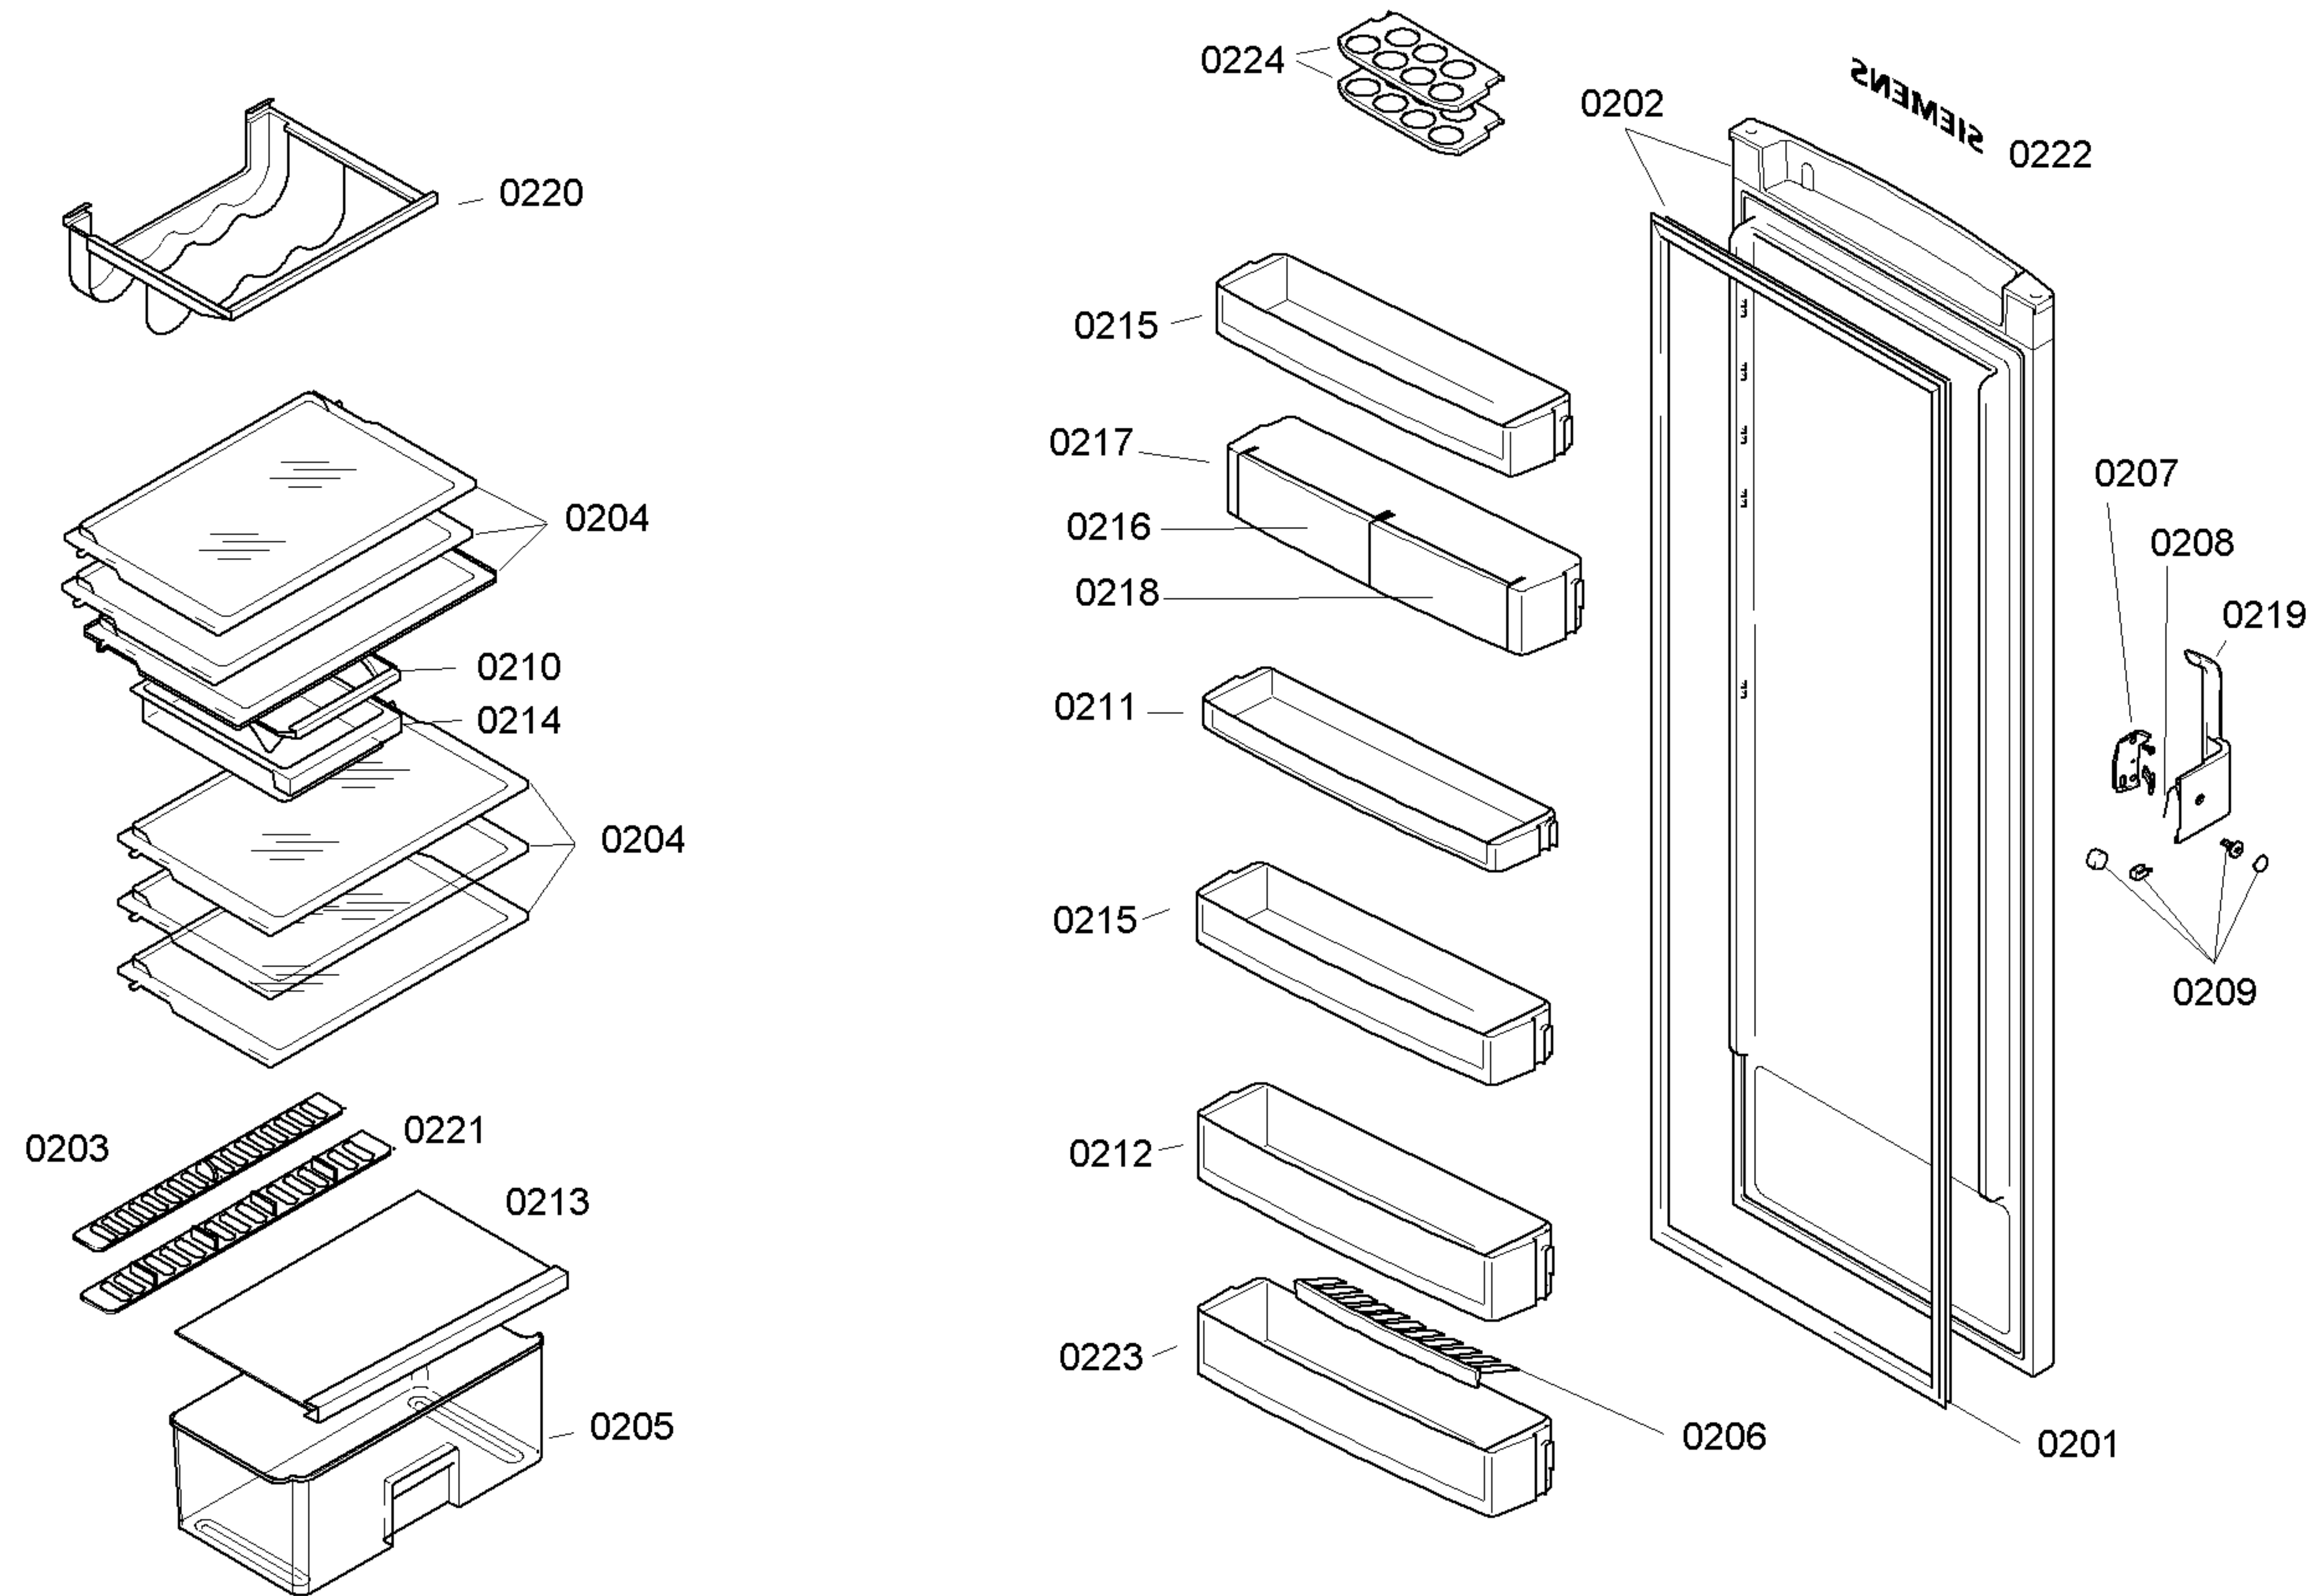

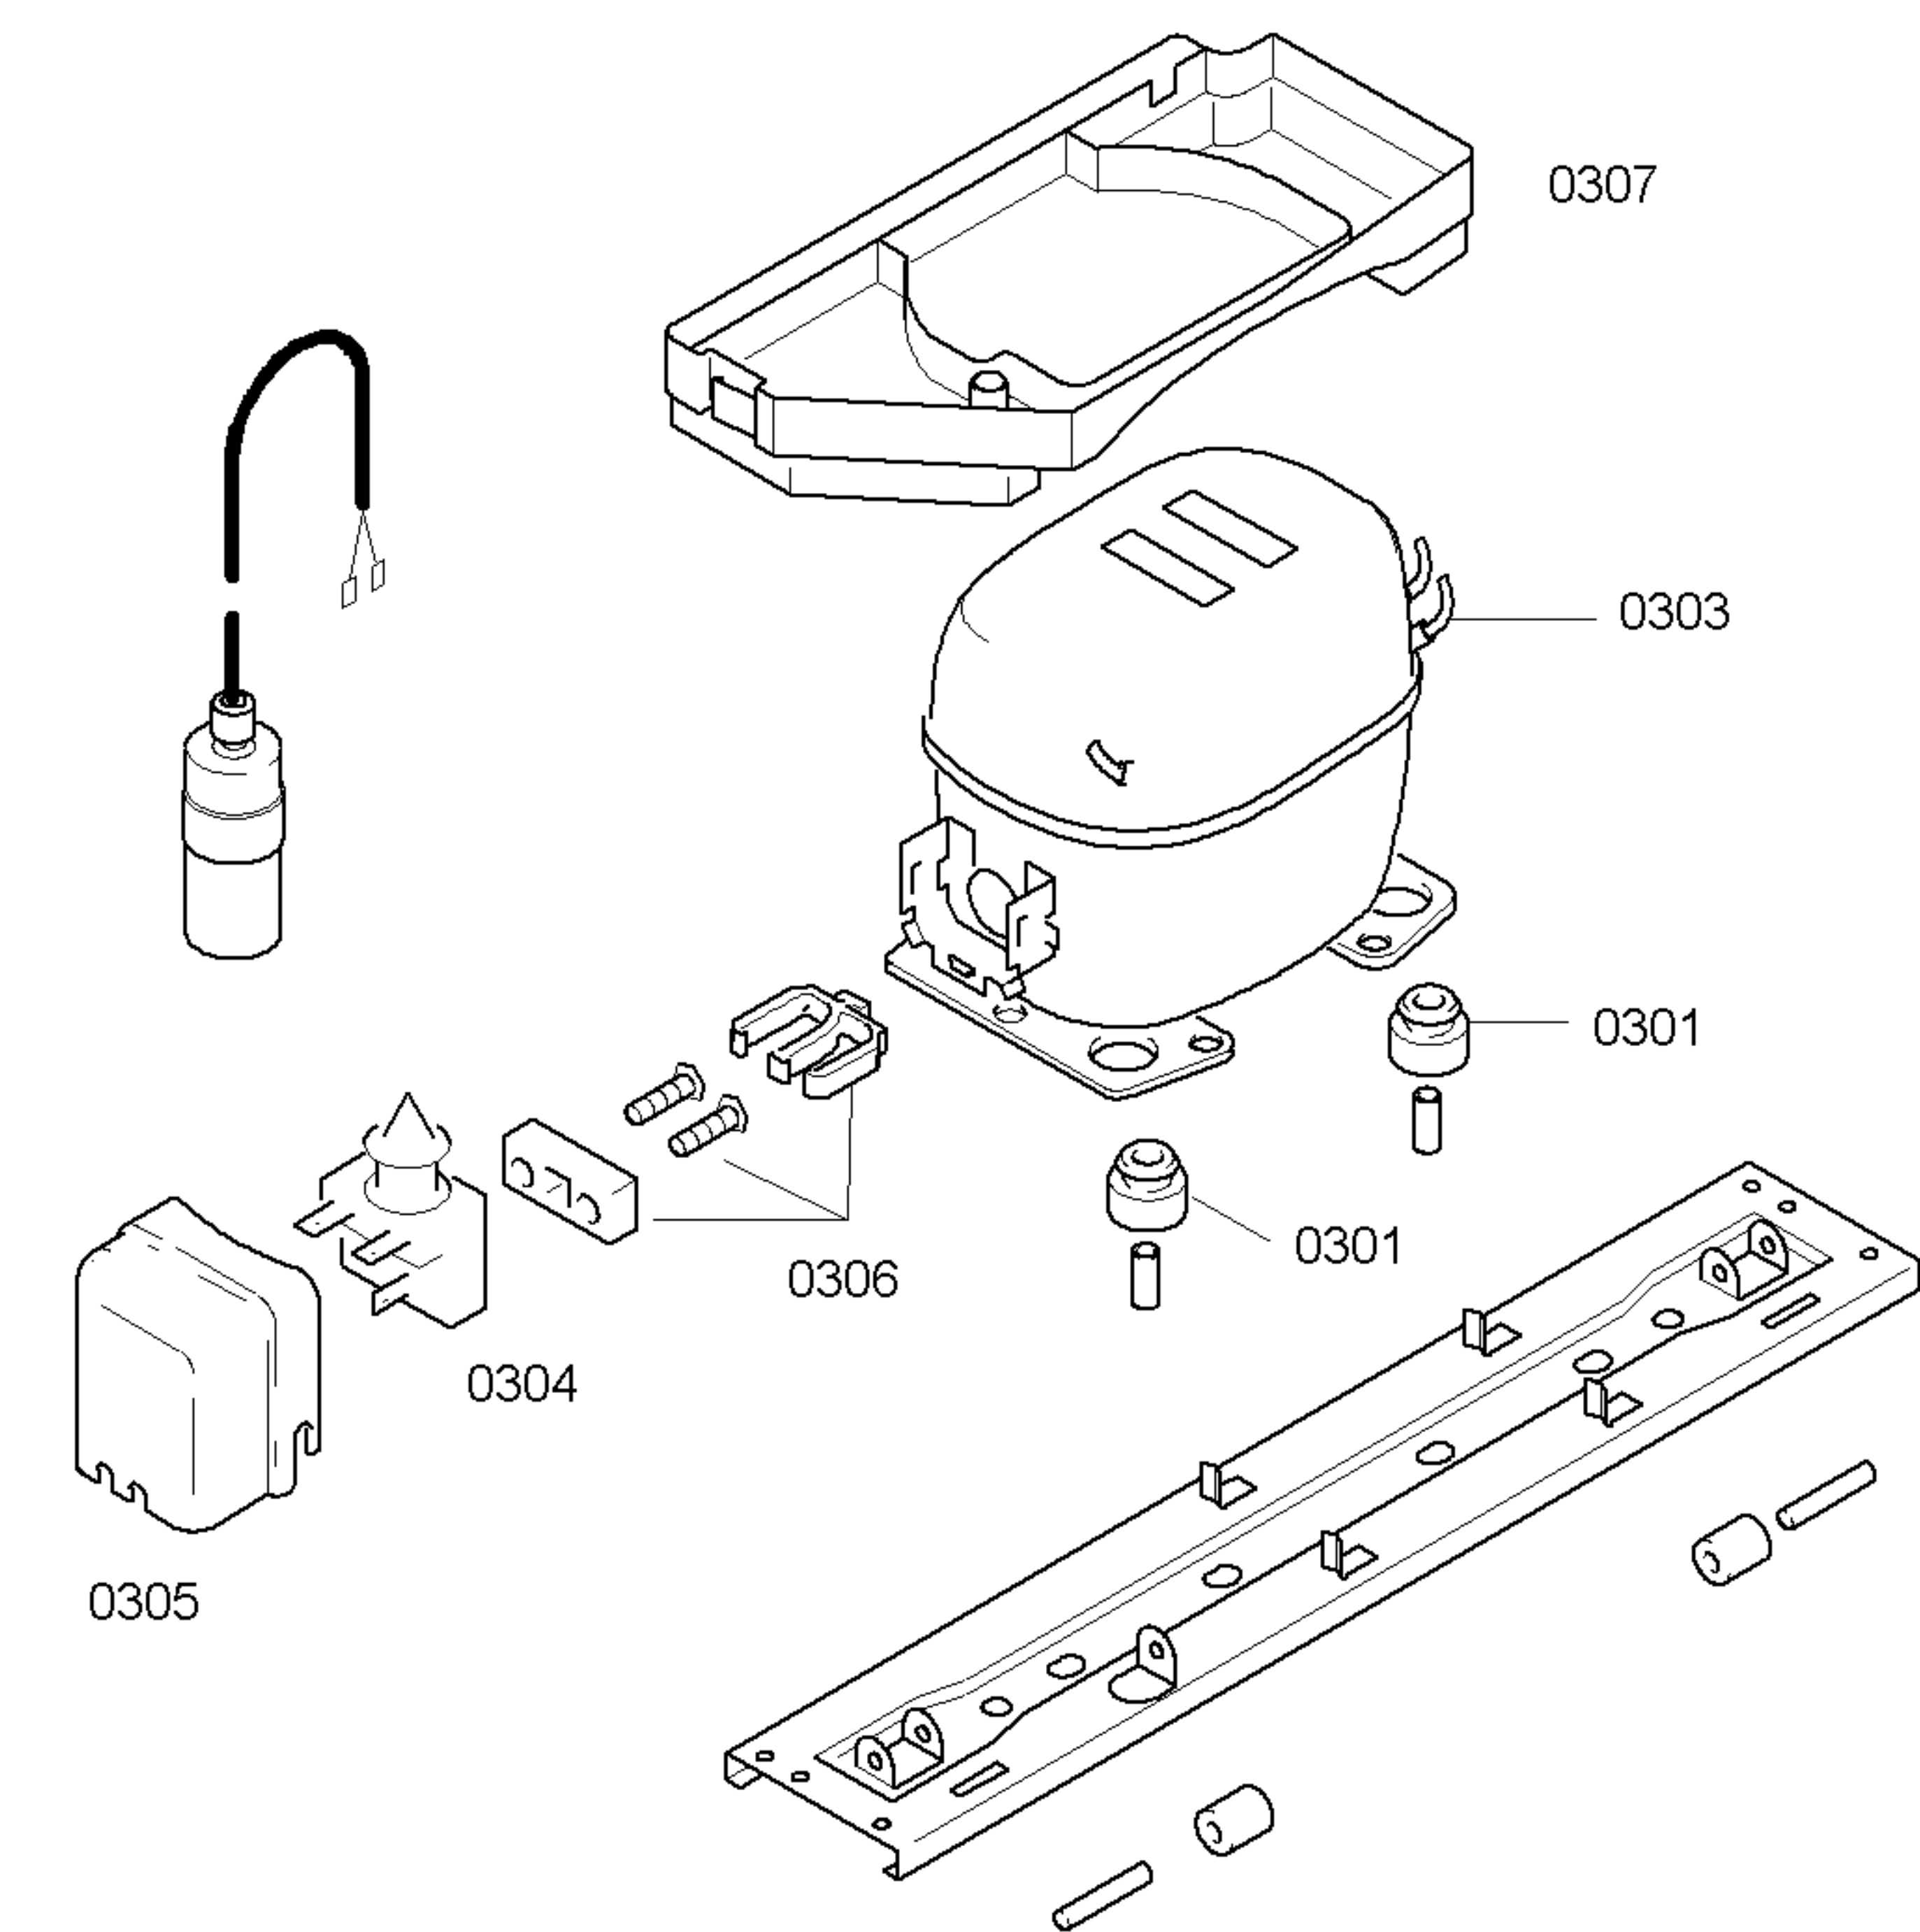

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Goldstar				
Typ/Type		NDA69NAEM				
Förderleistung/Delivery/Débit		I/h	0302			
Anlaufstrom/Starting current/Cour de démarrage		A				
Widerstand/Resistance/Résistance		W				
Ha/main/prin		W				
Hi/aux		W				
Temp.-Regler/Thermostat						
Typ/Type						
Regelstellung/Position						
Schaltwerte/Switching values		"warm"				
Valeurs de commutation		"kalt"				
		"alarm"				
Füllmenge/Fill.quantity/Charge		R600a	*			
Anschlußwert/Conn.load/Puiss. connectée		W	67			
Heizung/Heater/Chauffage						
Widerstand /Resistance/Résistance		W				
Leistung/Power/Puissance		W				
Ventilator/Blower/Ventilateur						
Widerstand /Resistance/Résistance		W				
NTC-Fühler / Sensor		° C	kW	° C	kW	
		+10	9,95 \$0,18	-18	43,31 \$1,10	
		+5	12,70 \$0,18	-22	54,66 \$1,59	
		0	16,33 \$0,16	-26	69,42 \$2,29	
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		W				
Spannung/Voltage/Tension		V				

* siehe Typenschild