

Service

Service

Service



Service Manual

This simple Service Manual is for " Exchange" Scenario

TABLE OF CONTENTS

	Page
• Instruction.....	2-1
• Software Upgrade	3-1
• Accessory list.....	4-1
• Revision List.....	5-1

© Copyright 2011 Philips Consumer Electronics B.V. Eindhoven, The Netherlands
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise without the prior permission of Philips.



How to remove the CD manually from the tray

1. Please do as below instruction in case the tray can not be open:

- I. Power off the DVD player.
- II. Please gently push the guider and wait until the tray comes out (Figure1).

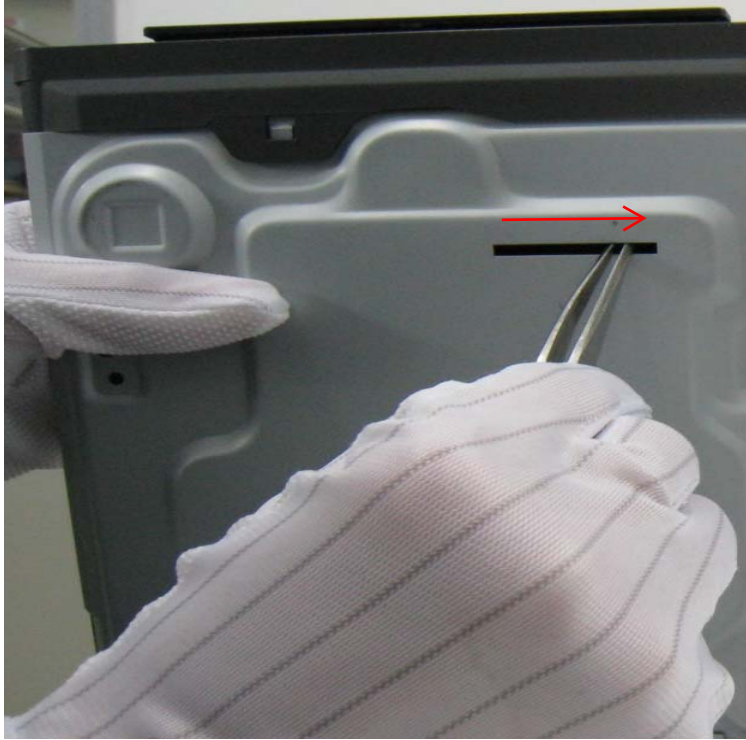


Figure 1

Software upgrade

Preparation to upgrade software

1) Start the CD Burning software and create a new CD project (Data Disc) with the following setting:

Label: DVP3XXX (No need the label name)

File Name: DVPXXXX_XX.BIN

Power on the set and open the tray, then press <option> to check the File Name.

Note: It is required capital letter for the File System name.

2) Burn the data onto a blank CDR

A. Procedure for software upgrade:

1) Power on the set and insert the prepared Upgrade CDR.

2) The set will starts reading disc & response with the following display TV screen:

Upgrade File DETECTED

Upgrade?

Press Play TO START.

3) Press <OK> button to confirm, then screen will display :

Files coping...

UPGRADING...

4) The upgraded tray will automatically open when files coping complete, then take out the disc.

5) About 1 minute later, the trace will automatically close when upgrading complete.

B. Read out the software versions to confirm upgrading

1) Power on the set and press <Setup> button on the remote control.

2) Press <Next><Next><Prev><Prev> button.

The software version and other information are display on the TV screen as follows:

Version XX.XX.XX.XX (Main version)

SUB-VER XX.XX.XX.XX (software version of application software)

8032 XX.XX.XX.XX

Servo XX.XX.XX.XX (software version of servo)

RIS XX.XX.XX.XX

DSP XX.XX.XX.XX

Region Code X

Caution: The set must not be power off during upgrading, Otherwise the Main board will be damaged entirely.

Accessories Spare Parts List

Item No.	12NC No.	Description
RC	996510040711	Remote control for DVP3990/05/12/58/51

Revision List

Version 1.0

* Initial Release for DVP3990/05/12/58/51