


EXPLODED VIEW

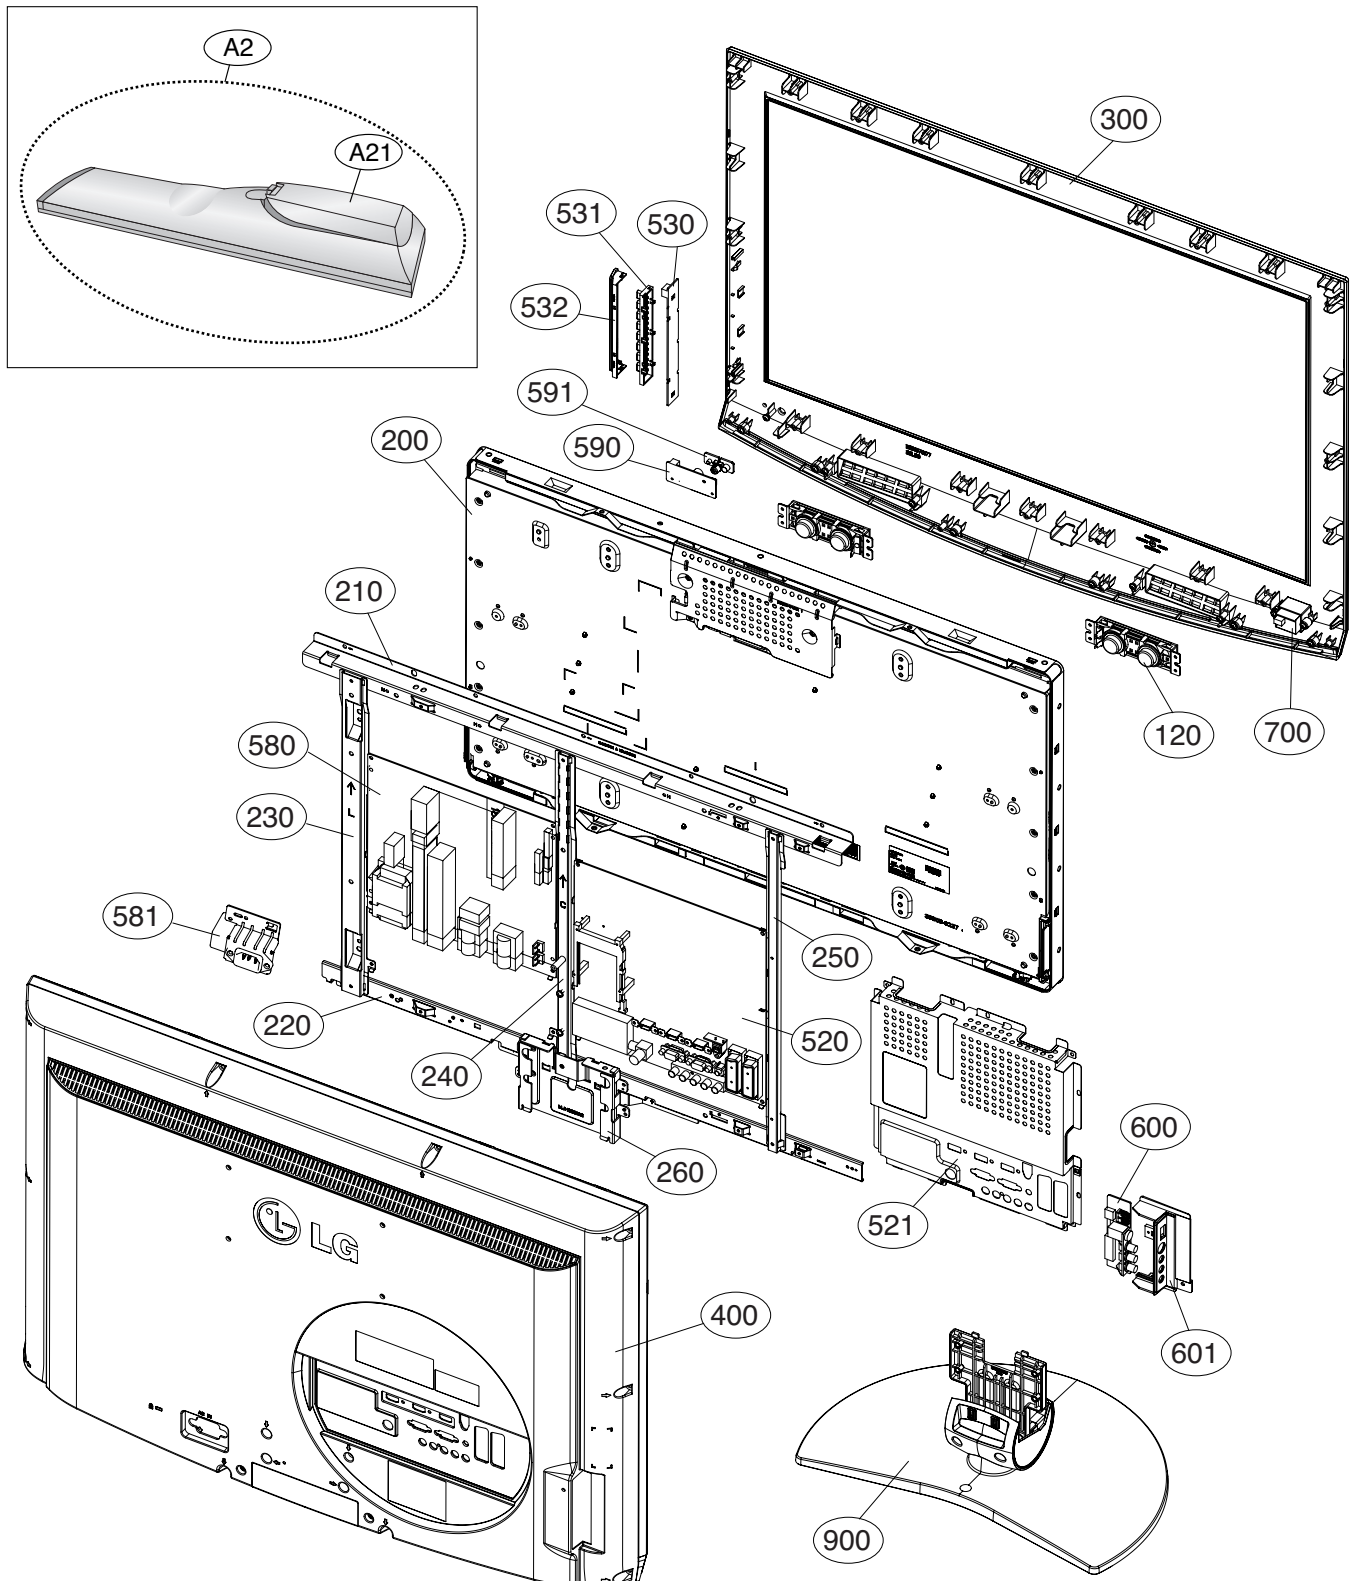

EXPLODED VIEW PARTS LIST

Loc. No.		PART NO.	DESCRIPTION
	120	EAB37526301	Speaker,Full Range C103A02K1400 ND 7W 8OHM 81DB 160HZ 122
△	200	EAJ37543301	LCD,Module-TFT LC320WX4-SLD2 WXGA 32INCH 1366X768 500CD LG PHILIPS LCD
	210	MJH38541204	Supporter PRESS EGI SECC Supporter EGI 32LB75-ZB , CSKD
	220	MJH38541305	Supporter PRESS EGI . Supporter EGI 32LB75-ZB , CSKD
	230	MJH32520503	Supporter PRESS EGI 1.0t GUIDE EGI METAL BAR, FOR POWER ,32LC4R-ZA C/SKD
	240	MJH32520606	Supporter PRESS EGI 1.0t GUIDE EGI METAL BAR, MIDDLE, 32LC4D EUROPASS3 C/SKD
	250	MJH32520704	Supporter PRESS EGI 1.0t GUIDE EGI .METAL BAR, 32LC4 EUROPASS3 C/SKD
	260	MJH38810201	SupporterPRESS SECC . Supporter SECC(EGI) STAND GUIDE (32LB9)
△	300	ABJ32936003	Cabinet Assembly 32LB9D-UA LA74A 32" CSKD
△	400	ACQ33839605	Cover Assembly,Rear 32LB75-ZB LD73C 32" 32LB9 (EUROPASS3, EUROPE) CSKD
	520	EBR37999802	PCB Assembly,Main T.T LD73C EUROPASS3 BASIC 3HDMI LB9 Separation-Tuner Main Total
	521	MJH32521116	Supporter PRESS SPTE 0.5t GUIDE ET 32LB75-ZB (EUROPASS3) CSKD
	530	EBR38032101	Hand Insert PCB Assembly,Sub SUB M.I LD73C 32LB75-ZA BASIC LB9 3HDMI CONTROL
	531	MEY37163001	Knob MOLD ABS SUB . 32LB9D , Control
	532	MAZ37056203	Bracket MOLD ABS CONTROL 32LB9 - ABS , 32LB9DS-AA
△	580	EAY38637401	Power Supply Assembly LGLP32SLP FREE Tornado_32inch(10000:1) LCD Yuyang, H&E Tornado
	581	EBT36115107	Chassis Assembly POWER(SMPS) LP78A 32" LCD Model AC-Inlet Assembly . LGEWR
	590	EBR35734601	PCB Assembly,Sub SUB T.T LD73A 42LC7D-ZA AEUVLHX IR/LED TOTAL
	591	MES36332301	Indicator MOLD ABS LED&PRE AMP 47LC7 PMMA 7 PHY NONE
	600	EBR38027001	Hand Insert PCB Assembly,Sub SUB M.I LD73C 32LB75-ZA BASIC LB9 3HDMI
	601	ABA33858201	Bracket Assembly SIDE AV 32LB75-ZD LD73C 32LB75-ZD
	700	6500VR0003E	Sensor,Ambient Light YGCA-T071C 12 HOUSING BK 26.4X20X26.4mm VOUT 5V(AT 80LUX)
△	900	AAN32984806	Base Assembly STAND 32LB9R-TB LP7BA RED , CKD
	A2	MKJ32022835	Remote Controller COMPLEX LD75A 47LB5DF-ZC Europass3 Chassis
	A21	3550V00590A	Cover MOLD BATTERY TN-50PY20 ABS 6710V0014

REPLACEMENT PARTS LIST

DATE: 2007. 06. 13.

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
CAPACITORS					
C1	0CH3104K566	0805B104K500CT 100nF 10% 50V X7R	C112	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C100	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C1120	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C100	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G	C1121	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C100	0CH5101K416	C2012C0G1H101JT 100pF 5% 50V C0G	C1123	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1001	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1125	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1002	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1128	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1003	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C113	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1004	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1133	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C1005	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1134	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C1006	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C114	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1007	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C115	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1008	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C116	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1009	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C117	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C101	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C118	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16M
C101	0CE476VF6DC	VGv476M016S0ANE010 47uF 20% 16V	C119	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C101	0CK103BH56A	C1005X7R1E103KT- 10nF 10% 25V X7	C120	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1010	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1205	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1011	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1206	0CK102CK56A	0603B102K500CT 1nF 10% 50V X7R -
C1012	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1207	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1013	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1208	0CK102CK56A	0603B102K500CT 1nF 10% 50V X7R -
C1014	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C121	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1015	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1217	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25M
C1016	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C122	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1017	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1225	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25M
C1018	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C123	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C102	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16M	C1232	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C102	0CE476VF6DC	VGv476M016S0ANE010 47uF 20% 16V	C1234	0CK102CK56A	0603B102K500CT 1nF 10% 50V X7R -
C103	0CE476VF6DC	VGv476M016S0ANE010 47uF 20% 16V	C1235	0CK102CK56A	0603B102K500CT 1nF 10% 50V X7R -
C103	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1236	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25M
C104	0CH5471K416	C2012C0G1H471JT 470pF 5% 50V C0G	C1237	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25M
C104	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C1239	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C105	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C124	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C106	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1244	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C107	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1246	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C108	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1247	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C109	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C125	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C110	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16M	C126	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1101	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0	C127	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1102	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0	C128	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1103	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C129	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1104	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C130	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1105	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1300	0CK105DH56A	C2012X7R105KFT 1uF 10% 25V X7R -
C1106	0CC120CK41A	C1608C0G1H120JT 12pF 5% 50V C0G	C1301	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1107	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1302	0CE108EH618	KMG5.0TP25VB1000M 1000uF 20% 25V
C1108	0CC120CK41A	C1608C0G1H120JT 12pF 5% 50V C0G	C1303	0CK105DH56A	C2012X7R105KFT 1uF 10% 25V X7R -
C111	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1304	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1112	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1305	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1116	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1306	0CK222CK56A	0603B222K500CT 2.2nF 10% 50V X7R
C1119	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1307	0CK682CK51A	C1608Y5P1H682KT 6.8nF 10% 50V Y5
			C1308	0CK682CK51A	C1608Y5P1H682KT 6.8nF 10% 50V Y5

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C1309	0CE475WK6DC	MVK5.0TP50VC4.7M 4.7uF 20% 50V 1	C1368	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C131	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1369	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1310	0CE475WK6DC	MVK5.0TP50VC4.7M 4.7uF 20% 50V 1	C137	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1311	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1370	0CK474EK66A	C3216X7R1H474MT 470nF 20% 50V X7
C1312	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1371	0CK474EK66A	C3216X7R1H474MT 470nF 20% 50V X7
C1313	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M	C1373	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1314	0CC030CK01A	0603N3R0C500LT 3pF 0.25PF 50V C0	C138	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1315	0CC030CK01A	0603N3R0C500LT 3pF 0.25PF 50V C0	C139	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1316	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C140	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1317	0CC560CK41A	C1608C0G1H560JT 56pF 5% 50V C0G	C1400	0CE475WK6DC	MVK5.0TP50VC4.7M 4.7uF 20% 50V 1
C1318	0CC560CK41A	C1608C0G1H560JT 56pF 5% 50V C0G	C1401	0CE475WK6DC	MVK5.0TP50VC4.7M 4.7uF 20% 50V 1
C1319	0CE335WK6D8	MVK4.0TP50VC3.3M 3.3uF 20% 50V 1	C1402	0CK682CK51A	C1608Y5P1H682KT 6.8nF 10% 50V Y5
C132	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1403	0CK682CK51A	C1608Y5P1H682KT 6.8nF 10% 50V Y5
C1320	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	C1404	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1321	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	C1407	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M
C1322	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1408	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C1325	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M	C1409	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1326	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	C141	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1327	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1410	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80M
C1329	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	C1411	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C133	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1412	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1330	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1413	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1332	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	C1418	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1333	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C1419	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1335	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	C142	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1338	0CK471CK56A	C1608X7R1H471KT 470pF 10% 50V X7	C1420	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5
C134	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1421	0CC820CK41A	C1608C0G1H820JT 82pF 5% 50V C0G
C1340	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C1422	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1341	0CE335WK6D8	MVK4.0TP50VC3.3M 3.3uF 20% 50V 1	C1423	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1342	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1426	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1343	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C1428	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5
C1344	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25M	C1429	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1345	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25M	C143	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1346	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	C1439	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1347	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	C144	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C135	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1440	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5
C1350	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16M	C1441	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1351	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1442	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5
C1352	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1444	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1353	0CK222CK56A	0603B222K500CT 2.2nF 10% 50V X7R	C1445	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5
C1354	0CC102CK41A	C1608C0G1H102JT 1nF 5% 50V C0G	C1447	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1355	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1448	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2
C1356	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C1449	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5
C1357	0CC221CK41A	C1608C0G1H221JT 220pF 5% 50V C0G	C145	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1358	0CH2122K516	0805B122K500CT 1.2nF 10% 50V Y5P	C1450	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1359	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1451	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C136	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1452	0CC150CK41A	C1608C0G1H150JT 15pF 5% 50V C0G
C1360	0CC331CK41A	C1608C0G1H331JT 330pF 5% 50V C0G	C1453	0CC150CK41A	C1608C0G1H150JT 15pF 5% 50V C0G
C1361	0CC331CK41A	C1608C0G1H331JT 330pF 5% 50V C0G	C146	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1362	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C147	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1363	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C148	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1364	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C149	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1365	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C150	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1366	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C151	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1367	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C152	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C153	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C197	0CK475CC94A	C1608Y5V0J475ZT 4.7uF -20TO+80%
C154	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C198	0CK475CC94A	C1608Y5V0J475ZT 4.7uF -20TO+80%
C155	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C199	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C156	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C200	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C157	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C201	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G
C158	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C202	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G
C159	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C203	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C160	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C204	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C161	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C206	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C162	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C207	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C163	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C209	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R
C164	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C210	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C165	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C212	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R
C166	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R	C213	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R
C167	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R	C216	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R
C168	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R	C218	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C169	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G	C219	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C170	0CC220CK41A	C1608C0G1H220JT 22pF 5% 50V C0G	C220	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1700	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C221	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1701	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C222	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1702	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C224	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1703	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C226	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C1704	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C227	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C1705	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C228	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1706	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C229	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1707	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C230	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1708	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M	C231	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1709	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C232	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C171	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C233	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C1710	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C234	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C172	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C235	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C173	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C236	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C174	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C237	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C175	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C238	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C176	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C239	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C177	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C240	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C178	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C241	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C179	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C242	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C180	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C243	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C181	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16M	C301	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C182	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C302	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C183	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C303	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C184	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C306	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C185	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C307	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C186	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C308	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C187	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C309	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C188	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C310	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C189	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C311	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C190	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C312	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C191	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C313	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C192	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C314	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C193	0CK822CK46A	0603B822J500CT 8.2nF 10% 50V X7R	C409	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C194	0CK822CK46A	0603B822J500CT 8.2nF 10% 50V X7R	C410	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C195	0CC220CK41A	C1608C0G1H220JT 22pF 5% 50V C0G	C411	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C196	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G	C412	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16M

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C413	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C624	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G
C414	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16M	C625	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C415	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C626	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C429	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C627	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C430	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C630	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C515	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C633	0CK106CC67A	C1608X5R0J106MT 10uF 20% 6.3V X5
C516	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C633	0CK475CC94A	C1608Y5V0J475ZT 4.7uF -20TO+80%
C517	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 8	C635	0CK472CK56A	0603B472K500CT 4.7nF 10% 50V X7R
C518	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C636	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C519	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C637	0CK472CK56A	0603B472K500CT 4.7nF 10% 50V X7R
C520	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C638	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C521	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C639	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C522	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C640	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C523	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C641	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G
C524	0CE477WF6DC	MVK10TP16VC470M 470uF 20% 16V 80	C642	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G
C525	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C643	0CK475DD57A	C2012X5R1A475KT 4.7uF 10% 10V X5
C526	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C700	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C527	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C701	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M
C528	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 8	C702	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C529	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C703	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C530	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C704	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C531	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C705	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M
C532	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C706	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C533	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C707	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C534	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 8	C708	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C535	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C709	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C537	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C710	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C539	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C711	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C540	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C712	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C541	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C713	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C542	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C714	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C543	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C715	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C544	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C716	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C548	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C717	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C549	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C718	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C550	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C721	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C551	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C722	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C553	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C723	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M
C554	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C724	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C555	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C725	0CC200CK41A	C1608C0G1H200JT 20pF 5% 50V C0G
C601	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C726	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C602	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C727	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M
C603	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C728	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C604	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G	C729	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C605	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C730	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C606	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C732	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C608	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C733	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C609	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C734	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C610	0CC271CK41A	C1608C0G1H271JT 270pF 5% 50V C0G	C736	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M
C611	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C737	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C612	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80M	C738	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C613	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	C739	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C615	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C740	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M
C616	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C741	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C623	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G	C742	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C743	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M	C798	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C744	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C799	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C745	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C800	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C746	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C801	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M
C747	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C802	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C748	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R	C803	0CK106EF56A	C3216X7R1C106KT 10uF 10% 16V X7R
C749	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C805	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C750	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C806	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C751	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C807	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C752	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C810	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C753	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C812	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C754	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C813	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C755	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C814	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C756	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C815	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C757	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C817	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C758	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M	C818	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C759	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C824	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C760	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C826	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C761	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C828	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C762	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C830	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C763	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C831	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C764	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C834	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C765	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80M	C835	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C766	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C836	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C767	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C838	0CK225DH94A	C2012Y5V225ZFT 2.2uF -20TO+80% 2
C768	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C840	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C769	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C841	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C770	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C844	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C771	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C846	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C772	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C847	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C773	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C850	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C774	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C851	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5
C775	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C852	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C776	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C853	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C777	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C854	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C778	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C855	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C779	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C856	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R
C780	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C857	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C781	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C859	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C782	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C860	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C783	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C861	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C784	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C862	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C785	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C863	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C786	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C864	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C787	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C865	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C788	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C866	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C789	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C867	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C790	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C868	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C791	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C869	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C792	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C870	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C793	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M	C875	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C794	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	C900	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C795	0CC220CK41A	C1608C0G1H220JT 22pF 5% 50V C0G	C901	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1
C796	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30M	C903	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80M
C797	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80M	C905	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C907	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	ZD101	0DZ560009DA	UDZS5.6B 5.6V 5.49TO5.73V 60OHM
C908	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	ZD102	0DZ560009DA	UDZS5.6B 5.6V 5.49TO5.73V 60OHM
C909	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	ZD1100	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C910	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1101	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C911	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	ZD1104	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C912	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80M	ZD1105	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C914	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1106	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C915	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	ZD1107	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C917	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1108	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C924	0CE107WH6DC	MVK8.0TP25VC100M 100uF 20% 25V 1	ZD1109	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C925	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 8	ZD1112	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C928	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 8	ZD1113	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C929	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 8	ZD1114	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C931	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1201	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C932	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1202	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C933	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1203	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C934	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1211	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C935	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1212	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C937	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	ZD1218	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C954	0CE477WF6DC	MVK10TP16VC470M 470uF 20% 16V 80	ZD1219	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C955	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	ZD1220	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C956	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 2	ZD1221	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C957	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	ZD1222	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C958	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	ZD1223	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C959	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	ZD1224	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C960	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1226	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W
C961	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1228	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C962	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1229	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C969	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	ZD1300	0DZRM00248A	RLZ8.2B 8.2V 7.78TO8.19V 80HM 50
C970	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	ICs		
C971	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	IC100	0IPRP00703B	STI5100GUC 3.3V 5u 27M PBGA TR 3
C972	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC1000	EAN35942401	TMDS341APFCR 3TO3.6V 10NSEC 10NS
C973	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC1002	0IMMRAL014D	AT24C02BN-10SU-1.8 2KBIT 256x8BI
C974	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC1003	0IMMRAL014D	AT24C02BN-10SU-1.8 2KBIT 256x8BI
C975	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 1	IC1004	0IMMRAL014D	AT24C02BN-10SU-1.8 2KBIT 256x8BI
C977	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC102	0ISTLPH026A	74LVC14APW 1.2TO3.6V 0.01mA SCHM
C980	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R	IC103	0IMP242560A	24LC256T-I/SM 256KBIT 256KX8BIT
C981	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80M	IC1100	0IMMRAL014D	AT24C02BN-10SU-1.8 2KBIT 256x8BI
DIODEs			IC1101	0IPH741400E	74HC14D 2TO6V 0.002mA SCHMITT TR
D100	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W	IC1102	0IPRP00009A	ICL3232CBNZ 3VTO5.5V - SSOP R/TP
D1001	0DD184009AA	KDS184 KDS184 TP KEC - 85V - - -	IC1104	0ITO741570C	TC74LCX157FT 2TO3.6V 0.01mA MULT
D1002	0DD184009AA	KDS184 KDS184 TP KEC - 85V - - -	IC1105	0IMCRFA018A	NC7SB3157P6X_NL 1.65TO5.5V 0.001
D1003	0DD184009AA	KDS184 KDS184 TP KEC - 85V - - -	IC1106	0IMCRFA018A	NC7SB3157P6X_NL 1.65TO5.5V 0.001
D101	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W	IC1301	0ILNR00261C	STA335BW 5TO26V 0 10% 20W 0W 80d
D102	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W	IC1302	0IMCRMN028F	MSP4450K-VK-E8-500 7.6TO8.7V_4.7
D103	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W	IC1400	0ISO206900A	CXA2069Q 8.5TO9.5V - - 1.3W QFP
D104	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W	IC1402	0IMCRMN028F	MSP4450K-VK-E8-500 7.6TO8.7V_4.7
D900	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 1	IC200	0IPMG78391A	SC2595STR 2.3TO5V 0 0W SOIC R/TP
D902	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 1	IC202	0IMMRIH038B	HYB25D(C)256160CE-5 256MBIT 4MX1
D903	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 1	IC300	0ISTLPH003B	74LVC541APW 1.2TO3.6V 0.01mA BUF
D904	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 1	IC301	0IMCRFA013A	74LCX244MTC 2TO3.6V 0.01mA BUF
D905	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 1	IC302	0ISTLPH003B	74LVC541APW 1.2TO3.6V 0.01mA BUF
D906	0DD100009AM	EU1ZV(1) 200V 2.5V 10UA 15A 400N	IC303	0IMCRFA013A	74LCX244MTC 2TO3.6V 0.01mA BUF

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
IC304	0ISTLPH048A	74LVC245APW 1.2TO3.6V 0.01mA TRA	Q503	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC305	0ISTL00083A	74LCX373MTC 2.0V to 3.6V 10uA LA	Q504	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V
IC306	0ISTL00083A	74LCX373MTC 2.0V to 3.6V 10uA LA	Q602	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V
IC402	0ITO740800C	TC74LCX08FT 2TO3.6V 10uA AND GAT	Q603	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC403	0IMCRPH015A	74LVC32AD 1.2TO3.6V 0.01mA OR GA	Q604	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC404	0ISTLPH026A	74LVC14APW 1.2TO3.6V 0.01mA SCHM	Q606	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V
IC410	0ITO741570C	TC74LCX157FT 2TO3.6V 0.01mA MULT	Q607	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V
IC500	0IMCRSJ001A	SC1565IST-1.8 2.2TO5.5V 1.8V 0W	Q608	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC501	0IPMG00027A	SC156515M-1.8TR 2.2TO5.5V 1.8V 0	Q609	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V
IC502	0IMCRSJ001B	SC1565IST-2.5TR 2.2TO5V 2.5V 0W	Q800	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC503	0IPMGKE030A	KIA78R05F 6TO12V 5V 8W DPAK R/TP	Q900	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC504	0IPMGKE031A	KIA78R33F 4TO10V 3.3V 8W DPAK R/	Q901	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC505	0IPMGKE031A	KIA78R33F 4TO10V 3.3V 8W DPAK R/	Q902	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC506	0ISTL00029A	MC33078DR2G +5TO+-18V 2mV 0.002	Q903	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC507	0IPMGKE030A	KIA78R05F 6TO12V 5V 8W DPAK R/TP	Q904	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC600	0IPRP00602A	TPS2010ADR 2.7TO5.5V 8.6MSEC 3.4	Q905	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150
IC700	EAN33595901	FLI8548H-LF-BE 300MVTO3.6V,300MV	RESISTORS		
IC701	0IMP242560A	24LC256T-I/SM 256KBIT 256KX8BIT	AR100	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC702	EAN34099701	M2404HEPROM 4KBIT 512 x 8bit 2.5	AR101	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC801	0IMMRIH038B	HYB25D(C)256160CE-5 256MBIT 4MX1	AR102	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC804	0IPMG78391A	SC2595STR 2.3TO5V 0 0W SOIC R/TP	AR103	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC900	0IPMGFA061A	FAN1587AD33X 4.8TO10.3V 3.3V 0W	AR104	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC901	0IPMGFA061A	FAN1587AD33X 4.8TO10.3V 3.3V 0W	AR105	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC902	0IPMG00107A	AZ1117H-2.5TR/E1 15V 2.5V 0W SOT	AR106	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC903	0IPMG00027A	SC156515M-1.8TR 2.2TO5.5V 1.8V 0	AR107	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC904	EAN32662801	KA7809ERTM 35V to 40V 9V 1W DPAK	AR108	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
TRANSISTORS & FETs			AR109	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
IC803	EBK32753101	SI4925BDY P-CHANNEL MOSFET -30V	AR110	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
Q100	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR111	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SM
Q1002	0TR830009BA	BSS83 N-CHANNEL MOSFET 10V 2 50M	AR200	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SM
Q101	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR201	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SM
Q1100	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR202	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SM
Q1200	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR203	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SM
Q1201	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR204	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SM
Q1202	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR205	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SM
Q1203	0TR102009AM	KRA102S PNP -30V 0V -50V -0.1A -	AR206	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SM
Q1204	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR303	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1300	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR304	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1301	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR305	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1302	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR306	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1303	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR307	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1304	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR308	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1305	0TR102009AM	KRA102S PNP -30V 0V -50V -0.1A -	AR309	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1400	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR310	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1401	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR311	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1402	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR312	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1403	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V	AR313	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q1404	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR314	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SM
Q400	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR701	0RZZH033273	MNR04M0ABJ330 33OHM 5% 1/16W 4 S
Q401	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR702	0RZZH033273	MNR04M0ABJ330 33OHM 5% 1/16W 4 S
Q402	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR704	EBC32260501	MNR04M0APJ000 0OHM 5% 1/16W 4 SM
Q500	0TR102009AM	KRA102S PNP -30V 0V -50V -0.1A -	AR706	0RZZH033273	MNR04M0ABJ330 33OHM 5% 1/16W 4 S
Q502	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150	AR708	0RZZH033273	MNR04M0ABJ330 33OHM 5% 1/16W 4 S

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
AR800	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R103	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
AR801	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R103	0RH1601D622	MCR10EZHJ162 1.6KOHM 5% 1/8W 201
AR802	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R103	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
AR803	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R103	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
AR804	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R1030	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
AR805	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R1031	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
AR806	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R1032	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
AR807	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R1033	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 160
AR808	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R1034	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 160
AR809	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R1035	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
AR810	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 S	R1036	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
C603	0RJ2702D677	MCR03EZPJ273 27KOHM 5% 1/10W 160	R1038	0RJ1800C678	MCR01MZPJ181 180OHM 5% 1/16W 100
L1205	0RJ0000G676	MCR18EZHJ00 0OHM 5% 1/4W 3216 R/	R1039	0RJ1800C678	MCR01MZPJ181 180OHM 5% 1/16W 100
L1215	0RJ0000G676	MCR18EZHJ00 0OHM 5% 1/4W 3216 R/	R104	0RH2002D622	MCR10EZHJ203 20KOHM 5% 1/8W 2012
L1218	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R104	0RH3000D622	MCR10EZHJ301 300OHM 5% 1/8W 2012
L1219	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R104	0RJ4700D677	MCR03EZPJ471 470OHM 5% 1/10W 160
L1220	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R1040	0RJ9101D477	MCR03EZPF912 9.1KOHM 1% 1/10W 16
R100	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R1041	0RJ9101D477	MCR03EZPF912 9.1KOHM 1% 1/10W 16
R100	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1043	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R1001	0RJ6800D677	MCR03EZPJ681 680OHM 5% 1/10W 160	R1044	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
R1002	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R1045	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
R1003	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R1046	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
R1004	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R105	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R1005	0RJ6800D677	MCR03EZPJ681 680OHM 5% 1/10W 160	R105	0RH1002D622	MCR10EZHJ103 10KOHM 5% 1/8W 2012
R1006	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R105	0RH2700D622	MCR10EZHJ271 270OHM 5% 1/8W 2012
R1007	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R105	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1008	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R105	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R1009	0RJ6800D677	MCR03EZPJ681 680OHM 5% 1/10W 160	R106	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R101	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R106	0RH4301D622	MCR10EZHJ432 4.3KOHM 5% 1/8W 201
R101	0RH1002D622	MCR10EZHJ103 10KOHM 5% 1/8W 2012	R106	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R101	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R106	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1010	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R107	0RH1601D622	MCR10EZHJ162 1.6KOHM 5% 1/8W 201
R1011	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R107	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1012	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R108	0RH3000D622	MCR10EZHJ301 300OHM 5% 1/8W 2012
R1013	0RJ1003D677	MCR03EZPJ104 100KOHM 5% 1/10W 16	R108	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1014	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R109	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1015	0RJ2702D677	MCR03EZPJ273 27KOHM 5% 1/10W 160	R110	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1016	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R110	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R1017	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 160	R1101	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R1018	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1102	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1019	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 160	R1103	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R102	0RH1302D622	MCR10EZHJ133 13KOHM 5% 1/8W 2012	R1104	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R102	0RH4301D622	MCR10EZHJ432 4.3KOHM 5% 1/8W 201	R1105	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R102	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1106	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R102	0RJ4700D677	MCR03EZPJ471 470OHM 5% 1/10W 160	R111	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R1020	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R111	0RJ7501D677	MCR03EZPJ752 7.5KOHM 5% 1/10W 16
R1021	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 160	R1113	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1022	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005	R1114	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1023	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 160	R1115	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1024	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 160	R1116	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1025	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005	R1117	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1026	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005	R1118	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1027	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005	R1119	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1028	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 160	R112	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R1029	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 160	R112	0RJ2002D677	MCR03EZPJ203 20KOHM 5% 1/10W 16

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1120	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R122	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1121	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1220	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1122	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R1221	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1123	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1222	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1124	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R1223	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1125	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R1224	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1126	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1225	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608
R1127	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1226	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608
R1128	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R1227	0RJ2201D477	MCR03EZPF222 2.2KOHM 1% 1/10W 16
R1129	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1228	0RJ2201D477	MCR03EZPF222 2.2KOHM 1% 1/10W 16
R113	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1229	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1130	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R123	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1131	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1230	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1133	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1231	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R1134	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1235	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16
R1135	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1236	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16
R1136	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1237	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608
R1137	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1238	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608
R1139	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1239	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R114	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R124	0RJ1200C678	MCR01MZPJ121 120OHM 5% 1/16W 100
R1140	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1240	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1141	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1241	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1148	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1242	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1150	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1243	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1151	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1244	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1152	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1245	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1157	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R125	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1158	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1259	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1161	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R126	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1162	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R1260	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608
R1164	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1261	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608
R1165	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1262	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1166	0RJ3301D677	MCR03EZPJ332 3.3KOHM 5% 1/10W 16	R1263	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1171	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1264	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1185	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R1270	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1186	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R1271	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R119	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1273	0RJ3301D677	MCR03EZPJ332 3.3KOHM 5% 1/10W 16
R120	0RJ1802D677	MCR03EZPJ183 18KOHM 5% 1/10W 160	R1274	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1200	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1275	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1201	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1276	0RJ3002D677	MCR03EZPJ303 30KOHM 5% 1/10W 160
R1202	0RJ0682D677	MCR03EZPJ680 68OHM 5% 1/10W 1608	R1277	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1203	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16	R1278	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1204	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 160	R1279	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 160
R1205	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16	R128	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1207	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16	R1280	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1209	0RJ3002D677	MCR03EZPJ303 30KOHM 5% 1/10W 160	R1281	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R121	0RJ1202D677	MCR03EZPJ123 12KOHM 5% 1/10W 160	R1282	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1210	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16	R1283	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16
R1211	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16	R1284	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R1212	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 16	R1285	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R1213	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16	R1286	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R1214	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1287	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R1215	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608	R1288	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R1216	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608	R1289	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R1219	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R129	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1290	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R136	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1291	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R1360	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1292	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R1361	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1293	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R1362	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1300	0RJ6202D677	MCR03EZPJ623 62KOHM 5% 1/10W 160	R1363	0RD3301A609	RDM92T1J3K30 3.3KOHM 5% 1/2W 6.5
R1301	0RJ2402D677	MCR03EZPJ243 24KOHM 5% 1/10W 160	R1364	0RJ7500D677	MCR03EZPJ751 750OHM 5% 1/10W 160
R1302	0RJ4700D677	MCR03EZPJ471 470OHM 5% 1/10W 160	R1365	0RJ7500D677	MCR03EZPJ751 750OHM 5% 1/10W 160
R1303	0RJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/10W 16	R1366	0RJ7500D677	MCR03EZPJ751 750OHM 5% 1/10W 160
R1304	0RJ0432D677	MCR03EZPJ430 43OHM 5% 1/10W 1608	R1367	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1305	0RJ0432D677	MCR03EZPJ430 43OHM 5% 1/10W 1608	R1367	0RJ0331D677	MCR03EZPJ3R3 3.3OHM 5% 1/10W 160
R1307	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1368	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1308	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1368	0RJ0331D677	MCR03EZPJ3R3 3.3OHM 5% 1/10W 160
R1309	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R137	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R131	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R138	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R1310	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R139	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1311	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R140	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1312	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1400	0RJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/10W 16
R1313	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1401	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R1314	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1402	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1315	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1403	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1316	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1404	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1317	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R1405	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1318	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R1406	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1319	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1407	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1320	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1408	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1321	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608	R1409	0RJ1500D677	MCR03EZPJ151 150OHM 5% 1/10W 160
R1322	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608	R1410	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1323	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16	R1411	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160
R1324	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16	R1412	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160
R1327	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1413	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1328	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160	R1414	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1329	0RJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W 1608	R1415	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160
R133	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1416	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160
R1330	0RJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W 1608	R1417	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1331	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1418	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1332	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160	R1419	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1333	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160	R142	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1334	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160	R1420	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1338	0RJ3901D677	MCR03EZPJ392 3.9KOHM 5% 1/10W 16	R1421	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R134	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1422	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1345	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R1423	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1346	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R1429	0RJ1001C678	MCR01MZPJ102 1KOHM 5% 1/16W 1005
R1347	0RJ0392D677	MCR03EZPJ390 39OHM 5% 1/10W 1608	R143	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 16
R1348	0RJ0392D677	MCR03EZPJ390 39OHM 5% 1/10W 1608	R1430	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 10
R1349	0RJ0392D677	MCR03EZPJ390 39OHM 5% 1/10W 1608	R1431	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 10
R1350	0RJ0392D677	MCR03EZPJ390 39OHM 5% 1/10W 1608	R1433	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100
R1351	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1436	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 10
R1352	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1438	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 10
R1353	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1439	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100
R1354	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R144	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1355	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R145	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 16
R1356	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1452	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1357	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1453	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16
R1358	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1454	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 16
R1359	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1455	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1456	0RJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/10W 16	R1732	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R146	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 16	R1733	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R1460	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R1734	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R1461	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R1735	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R1462	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R1736	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R1463	0RJ1003D677	MCR03EZPJ104 100KOHM 5% 1/10W 16	R1737	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R1465	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R1738	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R1466	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 10	R1739	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R1467	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1740	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R1468	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 10	R1741	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R147	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1742	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R148	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1743	0RJ1000D477	MCR03EZPF101 100OHM 1% 1/10W 160
R149	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 16	R1744	0RJ1500D477	MCR03EZPF151 150OHM 1% 1/10W 160
R150	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1745	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R151	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005	R1747	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R152	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1748	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R153	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005	R1749	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R154	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R175	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R155	0RJ3303D677	MCR03EZPJ334 330KOHM 5% 1/10W 16	R1750	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R157	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1751	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R1607	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1752	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R1608	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1753	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R1609	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1754	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 10
R162	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1758	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R163	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1759	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R164	0RJ1202D677	MCR03EZPJ123 12KOHM 5% 1/10W 160	R1760	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R165	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1761	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R166	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1762	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R167	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1763	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R168	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1764	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R169	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1765	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R170	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R1766	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R1703	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R1767	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R1704	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R1768	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R1706	0RJ0332C678	MCR01MZPJ330 33OHM 5% 1/16W 1005	R1769	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R1708	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R177	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1709	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1770	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R1710	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R1771	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R1713	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R1773	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R1715	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R1774	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R1716	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R1775	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1717	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R1776	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R1718	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R1777	0RJ2201C678	MCR01MZPJ222 2.2KOHM 5% 1/16W 10
R1719	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R1778	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R1720	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R178	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1721	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R1780	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R1722	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 16	R1784	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R1724	0RJ0332C678	MCR01MZPJ330 33OHM 5% 1/16W 1005	R1789	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
R1726	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R179	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1727	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R1792	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
R1728	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R1794	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
R1729	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R1796	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
R173	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R180	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1730	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R183	0RJ3300D677	MCR03EZPJ331 330OHM 5% 1/10W 160
R1731	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R184	0RJ3300D677	MCR03EZPJ331 330OHM 5% 1/10W 160

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R185	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005	R246	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R186	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005	R247	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R187	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005	R248	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R188	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R249	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R189	0RJ0000G676	MCR18EZHJ00 0OHM 5% 1/4W 3216 R/	R250	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R192	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R251	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R193	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R255	0RJ4701D477	MCR03EZPF472 4.7KOHM 1% 1/10W 16
R195	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R256	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R196	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R257	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R197	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R258	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R200	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R259	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R201	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R260	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R202	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R301	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R203	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R302	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R204	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R303	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R205	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R304	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R206	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R305	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R207	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R306	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R208	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R309	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R209	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R310	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R210	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R311	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R211	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R312	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R212	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R313	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R213	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R314	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R214	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R315	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R215	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R316	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R216	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R319	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R217	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R320	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R218	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R321	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R219	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R322	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R220	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R323	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R221	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R324	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R222	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R325	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R223	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R326	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R224	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R327	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R225	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R329	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R226	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R403	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R227	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R407	0RJ1202D677	MCR03EZPJ123 12KOHM 5% 1/10W 160
R228	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R412	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R229	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R413	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R230	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R414	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R231	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R415	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R232	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R416	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R233	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R417	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R234	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R421	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R235	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R422	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R236	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R437	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R237	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R438	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R238	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R439	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R239	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R441	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R241	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R446	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R242	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R448	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R243	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R521	EBC32306001	MCR03EZP5FX9100 910OHM 1% 1/10W
R244	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R522	0RJ9311D477	MCR03EZPF9311 9.31KOHM 1% 1/10W
R245	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R523	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R524	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R653	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R526	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608	R654	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R527	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608	R655	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R528	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R657	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R531	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R658	0RJ2201D677	MCR03EZPJ222 2.2KOHM 5% 1/10W 16
R534	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R659	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R536	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R662	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R537	0RJ1502D677	MCR03EZPJ153 15KOHM 5% 1/10W 160	R663	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R539	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R664	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R540	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R665	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R541	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R666	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R543	0RJ1502D677	MCR03EZPJ153 15KOHM 5% 1/10W 160	R667	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R544	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R668	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R547	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R669	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R548	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R670	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R550	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R671	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R554	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R672	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R555	0RJ2202D677	MCR03EZPJ223 22KOHM 5% 1/10W 160	R673	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R556	0RJ4302D677	MCR03EZPJ433 43KOHM 5% 1/10W 160	R674	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R557	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R675	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R558	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R676	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R600	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R677	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R603	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R678	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R604	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R679	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R605	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R680	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R606	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R681	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R607	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R682	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R608	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R684	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R609	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R685	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R610	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R686	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R611	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R687	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R612	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R688	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R
R613	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R701	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R624	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R702	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R625	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R703	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100
R626	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R704	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005
R627	0RJ1003D677	MCR03EZPJ104 100KOHM 5% 1/10W 16	R705	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100
R629	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R707	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100
R632	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R708	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R633	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R709	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100
R636	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R710	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100
R637	0RJ4700D677	MCR03EZPJ471 470OHM 5% 1/10W 160	R711	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100
R639	0RJ0822D677	MCR03EZPJ820 82OHM 5% 1/10W 1608	R712	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R640	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R713	0RJ0332C678	MCR01MZPJ330 33OHM 5% 1/16W 1005
R642	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R714	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R643	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R716	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R644	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R717	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100
R645	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R	R718	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160
R646	0RJ2700D677	MCR03EZPJ271 270OHM 5% 1/10W 160	R719	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R647	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 160	R720	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100
R648	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R722	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R649	0RJ1500D677	MCR03EZPJ151 150OHM 5% 1/10W 160	R723	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R650	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R724	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R651	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R725	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100
R652	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608	R726	0RJ3900C678	MCR01MZPJ391 390OHM 5% 1/16W 10

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R727	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R803	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R728	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R805	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R729	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R807	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R730	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R808	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R733	0RJ0562D677	MCR03EZPJ560 56OHM 5% 1/10W 1608	R810	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R734	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R811	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R735	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R812	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R737	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R813	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R739	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R816	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R740	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R818	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R741	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R821	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R743	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005	R822	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R744	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005	R823	0RJ2700C678	MCR01MZPJ271 270OHM 5% 1/16W 100
R745	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R825	0RJ2700C678	MCR01MZPJ271 270OHM 5% 1/16W 100
R746	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R826	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R747	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R827	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R748	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R829	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R751	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R843	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R754	0RJ0562D677	MCR03EZPJ560 56OHM 5% 1/10W 1608	R851	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R755	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100	R853	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R756	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R854	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R757	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R857	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R759	0RJ0562D677	MCR03EZPJ560 56OHM 5% 1/10W 1608	R859	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R760	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R860	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R762	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100	R877	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R764	0RJ0562D677	MCR03EZPJ560 56OHM 5% 1/10W 1608	R880	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R767	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R881	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R769	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R882	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R770	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R883	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R771	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R884	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R772	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R885	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R775	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R886	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R777	0RJ0332C678	MCR01MZPJ330 33OHM 5% 1/16W 1005	R888	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R778	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100	R891	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R779	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R892	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R780	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R893	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R781	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R894	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005
R782	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 160	R900	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R783	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100	R901	0RJ1002D477	MCR03EZPF103 10KOHM 1% 1/10W 160
R784	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R902	0RJ2002D477	MCR03EZPF203 20KOHM 1% 1/10W 160
R785	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R910	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608
R786	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160	R911	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R787	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R913	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R788	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R915	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R790	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R916	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R791	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R917	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R792	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R918	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R793	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100	R919	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R794	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 100	R920	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 160
R795	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R923	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R796	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R924	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R797	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 100	R925	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 160
R799	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16	R926	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 160
R800	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R927	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 16
R801	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608	R928	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
COILs & FILTERs & INDUCTORS					
FL901	EAM33010401	Filter,LCR MEM2012P25R0 EMI 25MHZ	L1311	6210TCE001S	Filter,Bead HU-1M2012-1211.25X1MM
FL902	EAM33010401	Filter,LCR MEM2012P25R0 EMI 25MHZ	L1312	6210TCE001S	Filter,Bead HU-1M2012-1211.25X1MM
FL903	EAM33010401	Filter,LCR MEM2012P25R0 EMI 25MHZ	L1314	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
FL904	EAM33010401	Filter,LCR MEM2012P25R0 EMI 25MHZ	L1315	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
FL905	EAM33010401	Filter,LCR MEM2012P25R0 EMI 25MHZ	L1401	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
FL906	EAM33010401	Filter,LCR MEM2012P25R0 EMI 25MHZ	L1402	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
FL907	EAM33010401	Filter,LCR MEM2012P25R0 EMI 25MHZ	L1403	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L100	0LC1032101A	Inductor,Multilayer,Chip FI-C3216-103KJT 10UH	L1412	6210TCE001E	Filter,Bead HB-1M2012-800JT(H:1mm)
L100	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L1413	6210TCE001E	Filter,Bead HB-1M2012-800JT(H:1mm)
L1001	6200J00005N	Filter,Bead HH-1M2012-121JT(H:1mm)	L400	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1003	6200J00005N	Filter,Bead HH-1M2012-121JT(H:1mm)	L600	0LCTA00003A	Inductor,Wire Wound,Chip LEMC3225T6R8M 6.8UH
L101	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L601	0LCTA00003A	Inductor,Wire Wound,Chip LEMC3225T6R8M 6.8UH
L102	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L604	0LC0233002A	Inductor,Multilayer,Chip FI-B2012-332KJT 3.3UH
L103	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L605	0LCTA00003A	Inductor,Wire Wound,Chip LEMC3225T6R8M 6.8UH
L104	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L606	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L105	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L607	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L106	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L700	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L108	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L701	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L109	0LC1032101A	Inductor,Multilayer,Chip FI-C3216-103KJT 10UH	L703	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1101	6210TCE001L	Filter,Bead HB-1T2012-102JT 1000OHM	L704	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1102	6210TCE001L	Filter,Bead HB-1T2012-102JT 1000OHM	L705	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1103	6210TCE001P	Filter,Bead HB-1S2012-121JT(H:1mm)	L706	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1104	6210TCE001P	Filter,Bead HB-1S2012-121JT(H:1mm)	L707	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1105	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	L800	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1106	6210TCE001P	Filter,Bead HB-1S2012-121JT(H:1mm)	L801	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1107	6210TCE001P	Filter,Bead HB-1S2012-121JT(H:1mm)	L900	6210TCE001X	Filter,Bead HU-1H4532-121JT 120OHM
L1108	6210TCE001P	Filter,Bead HB-1S2012-121JT(H:1mm)	L907	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1206	6210TCE001Z	Filter,Bead HH-1M2012-600JT 600HMMM	L909	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1207	6210TCE001Z	Filter,Bead HH-1M2012-600JT 600HMMM	L911	6210TCE001X	Filter,Bead HU-1H4532-121JT 120OHM
L1208	6210TCE001Z	Filter,Bead HH-1M2012-600JT 600HMMM	L912	6210TCE001X	Filter,Bead HU-1H4532-121JT 120OHM
L1209	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	L913	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1210	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	L918	6210TCE001X	Filter,Bead HU-1H4532-121JT 120OHM
L1211	6210TCE001L	Filter,Bead HB-1T2012-102JT 1000OHM	L919	6210TCE001X	Filter,Bead HU-1H4532-121JT 120OHM
L1212	6210TCE001L	Filter,Bead HB-1T2012-102JT 1000OHM	L923	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1213	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	L925	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM
L1214	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH		6210VH0001A	Filter,Ferrite Core 6210VH0001A 50OHM 25MM
L1216	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	CONNECTOR		
L1217	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	CN300	6630VE01269	91932-31169LF 68P 1.00MM 1R STRA
L1218	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	JK1100	6630G70016A	A03-7071-094 D-SUB 15P 2.29MM ST
L1219	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	JK1102	6630G70017A	A02-0915-101 D-SUB 9P 2.77MM STR
L1220	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	P100	6602T12005G	12505WR-08A00 8P 1.25MM 1R ANGLE
L1221	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	P100	6602T25008B	SMW250-03P 3P 2.50MM 1R STRAIGHT
L1222	0LCML00020G	Inductor,Multilayer,Chip MLI-201209-3R3K 3.3UH	P101	6602T20008N	SMW200-14P 14P 2.00MM 1R STRAIGH
L1300	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	P101	6602T20009C	SMAW200-04P 4P 2.00MM 1R ANGLE
L1301	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	P1103	6602T12005G	12505WR-08A00 8P 1.25MM 1R ANGLE
L1302	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	P1300	6602T25008B	SMW250-03P 3P 2.50MM 1R STRAIGHT
L1303	6210TCE001G	Filter,Bead HH-1M3216-501JT 500OHM	P1301	6602T25008C	SMW250-04P 4P 2.50MM 1R STRAIGHT
L1304	EAP32842806	Inductor,Wire Wound,Chip NR8040T220M 22UH	P1400	6602T20008N	SMW200-14P 14P 2.00MM 1R STRAIGH
L1305	EAP32842806	Inductor,Wire Wound,Chip NR8040T220M 22UH	P800	6630V90116A	FI-X30SSL-HF 30P 1.00MM 1R ANGLE
L1306	EAP32842806	Inductor,Wire Wound,Chip NR8040T220M 22UH	P900	6602T25008M	SMW250-13P 13P 2.50MM 1R STRAIGH
L1307	EAP32842806	Inductor,Wire Wound,Chip NR8040T220M 22UH	P901	6602T25008J	SMW250-10P 10P 2.50MM 1R ANGLE
L1309	6210TCE001S	Filter,Bead HU-1M2012-1211.25X1MM		6630V90142A	TPH254-R-1419-6A 6P 2.54MM 2R AN
L1310	6210TCE001S	Filter,Bead HU-1M2012-1211.25X1MM		6631900012C	SMH250 SMH250 200mM 2.50MM 10P

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
	6631900015R 6631900018K 6631900019Q 6631900027C 6631900048E EAD35683002 EAD35907801 EAD35907902 EAD35982901 EAD35983201 EAD36265201 EAD38067201	SMH250 SMH250 150mM 2.50MM 3P 3P(2.5MM) SMH250 TERMINAL 600mM SPK(1000MM) SMH250 TERMINAL 1000 SMH250 SMH250 200mM 2.50MM 13P U SMH200 SMH200 300mM 2.00MM 4P UL LVDS LPL STANDARD FI-X30HL(JAE) BDMR-02VS-2 35001HS-02L 250MM High Power(PVC TUBE) BDMR-02VS-2 12507HS-04L SMH200 350MM 12505HS 12505HS 600MM 1.25MM 8P 12505HS 12505HP 70MM 1.25MM 8P SMH200-14P_250mm SMH200-14P		EBL32961504	Tuner,Digital TDFC-G107P DVB-T/PAL
JACKs			ACCESSORY		
J100	6612J10033A	PMJ016-13 13P DIN/RCA 14MM ANGLE	A1	MFL34441603	Manual,Owners PRINTING USER
J1000	6612B00015B	DC1R019WDH SOCKET 21P STRAIGHT	A3	EAD36223101	Power Cord LP34A+LS60L LP-34A LS-60L 1.87M
J1001	6612B00015B	DC1R019WDH SOCKET 21P STRAIGHT	A3	EAD36430001	Power Cord LP-61L + LS-60L LP-61L LS-60L
J1002	6612B00015B	DC1R019WDH SOCKET 21P STRAIGHT	A4	SAC30033609	Title CD MANUAL
JK100	6612J10033A	PMJ016-13 13P DIN/RCA 14MM ANGLE	A5	6852TAZ010F	Cable,Assembly KCN-NS-0-0038 SMA CONNECTOR(M)
JK1000	6612B00015B	DC1R019WDH SOCKET 21P STRAIGHT	A6	ABA32985001	Bracket Assembly STAND 32LB9D-UA
JK1001	6612B00015B	DC1R019WDH SOCKET 21P STRAIGHT	A7	FAB30016415	Screw Assembly FAB30016415 MACHINE TYPE
JK1002	6612B00015B	DC1R019WDH SOCKET 21P STRAIGHT	A8	FAB30021301	Screw,Tapping 1TTG0403315 TH + 1 4MM 20MM
JK1101	6612F00099A	PEJ024-01 1P 4P STRAIGHT TR 3.6M			
JK1200	6612M00010A	PSC003-01 21P 21P/1C 3.81MM STRA			
JK1201	6612M00010A	PSC003-01 21P 21P/1C 3.81MM STRA			
JK1203	6612J10031B	PPJ209-01 14.0MM 1RX3C ANGLE BK			
	6612BBBH4D	TOTX177 3P TX 2.54MM ANGLE 15MBP			
	6612J10023A	KCN-BT-0-0053 10.5MM/11.5MM 1RX1			
SWITCHes					
SW100	EBF32593901	TMUE312GAB 1C1P 12VDC 0.5A VERTI			
SW101	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZONTAL			
SW102	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZONTAL			
SW103	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZONTAL			
SW104	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZONTAL			
SW105	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZONTAL			
SW106	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZONTAL			
SW107	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZONTAL			
SW108	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZONTAL			
SW700	EBF32593901	TMUE312GAB 1C1P 12VDC 0.5A VERTICAL			
OTHERs					
D100	0DLLT0110AA	LED,DIP LTL-1BEHJ-1 ROUND 3MM			
IC100	6712000013A	Receiver Module TSOP4438SO1 4.5TO5.5V 1.5MA			
IC201	SAA30310946	S/W,Firmware 4.16 F715 EUROPE FLASHROM			
IC802	SAA30310828	S/W,Firmware 5.10 8E90 EUROPE FLASHROM			
JK400	68719ST996A	PCB Assembly,Sub SUB T.T LD61A 32LC2D-EC			
P300	EAG34998901	Socket,PCI 10074998-118MCALF 68P 1.27MM			
X100	6212AC2002B	Crystal 9H03200164 32.768KHZ 20PPM 12.5p			
X101	6212AB2883A	Crystal HC-49SM 27.00000MHZ 27MHZ 30PPM			
X1300	156-A02R	Crystal EUA18.4320F16E33L 18.432MHZ 30PP			
X700	6212AB2015J	Crystal HC-49SM 19.66080HZ 19.6608HZ 30P			